Osptek Display

2415 长方形音腔喇叭

Model No:


2415B-H5.5-L140-1.25-02

1	产品概要/PRODUCT OUTLINE	
	1-1 适用范围/SCOPE	This specification is applied to tablet
	1-2 尺寸/DIMENSIONS	As shown in fig (3)
	1-3 喇叭大小/SIZE	24±0.2 mm/ 15±0.2 mm/5.5±0.2 mm
	1-4 重量/NET WEIGHT	APPROX.3.1±0.5g
2	标准试验状态 Standard Test Condition	一般规格试验状态（特殊要求除外） 常温 5～35℃，常湿 45%～85%，气压 860～1060hPa 但判定上有疑问时，试验状态为： 温度 20±2℃，相对湿度 60%～70%，气压 860～1060hPa
		The test conditions unless otherwise specified should be Normal temperature 5 to 35℃,Normal humidity 45 to 85% And normal atmospheric pressure 860 to 1060hPa However,if there arises a doubt in judgement,the test conditions shall be as follows: Temperature 20±2℃ Humidity 60%～70% Atmosphere 860～1060hPa

osptek®

3	电气规格/ELECTRICAL SPECIFICATIONS	
	3-1 输出音压位准 SOUND PRESSURE LEVEL	97±3dB at 2.83Vrms/10cm at 1kHz
	3-2 阻抗 IMPEDANCE	DCR: 6.8±15% Ohm ACR: 8.0±15% Ohm (at1KHz,2.83V)
	3-3 频宽回应 FREQUENCY RESPONSE	As shown in fig(2)
	3-4 额定输入功率(in 1cc closed box) Rate Input Power	1.0W
	3-5 最大输入功率(in 1cc closed box) Max Input Power	1.2W
	3-6 单体异常音测试 Buzzes & Rattles	Must be free audible noise (From 300 Hz to 3.4KHz frequency range,Input:1.2V)
	3-7 最低共振频率 LOWEST RESONANCE FREQUENCY	1120±20%Hz
	3-8 有效频宽 FREQUENCY RANGE	F0～20KHz
	3-9 工作温度 OPERATING TEMPERATURE	-20□C to +40□C
	3-10 贮存温度 STORE TEMPERATURE	-30□C to +85□C

osptek®

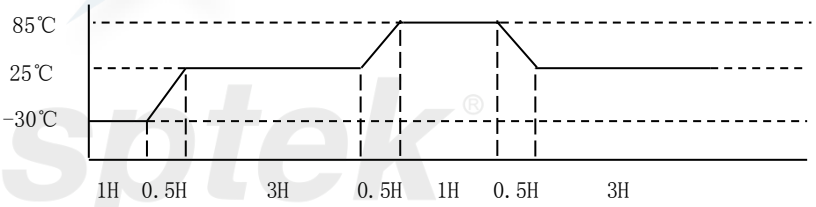
4	信赖性试验/RELIABLE TEST	
	4-1 概述 GENERAL	After any following tests the response at 1 KHz shall not deviate more than □3 dB from the initial value
	4-2 负载试验 LOAD TEST	输入电压 / Input Power : 2.83V 输入信号 / Input Signal : white noise 时 间 / Duration : 48 hours 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃
	4-3 湿度试验 HUMIDITY TEST	温 度 / Temperature : +40℃□3□C 相对湿度 / Relative Humidity : 90%~95% R.H. 时 间 / Duration : 96 hours 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃
	4-4 低温试验 LOW TEMPERATURE TEST	温 度 / Temperature : -30□C□3□C 时 间 / Duration : 96 hours 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃
	4-5 高温试验 HIGH TEMPERATURE TEST	温 度 / Temperature : +85□C□3□C 时 间 / Duration : 96 hours 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃
	4-6 温度循环试验 TEMPERATURE CYCLES TEST	TEMPERTURE:  循环次数 / Cycles : 10 Cycles 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃
	4-7 落地试验 TEST DROP TEST	落下方向 / Direction : 1 corner,3 sides,6 faces 落下回数 / Times : Once in each directions 高 度 / Height : From 0.7m(on the concrete) 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃ 依包装实体一角三棱六面作自由落体试验后,实体外观需正常
	4-8 振动试验 VIBRATION TEST	振 动 / Vibration : 10-55Hz 振 幅 / Amplitude : 1.5mm 时 间 / Times : 1 hour in each of 3axes 试验后放置时间 / Duration of Recovery : 4hrs of conditions at 20℃

osptek®


ELECTRICAL AND ACOUSTICAL MEASURING CONDITION (fig.1)

5


1. MEASUREMENT

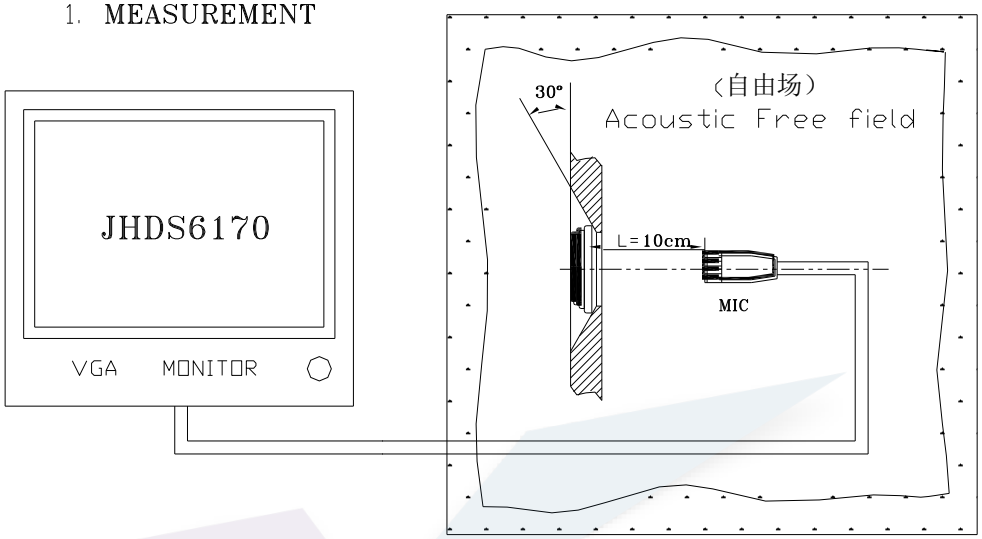


2.Measurement Board(IEC-268-5)

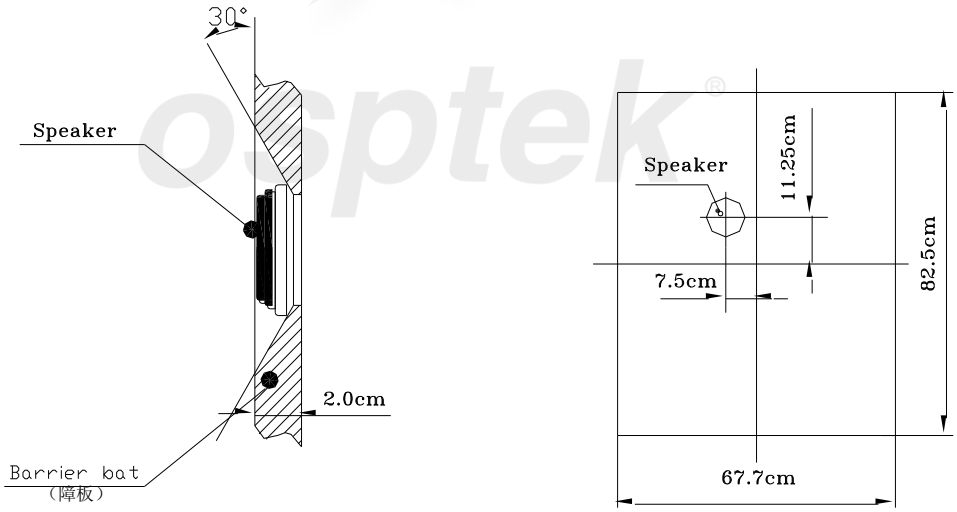

osptek®

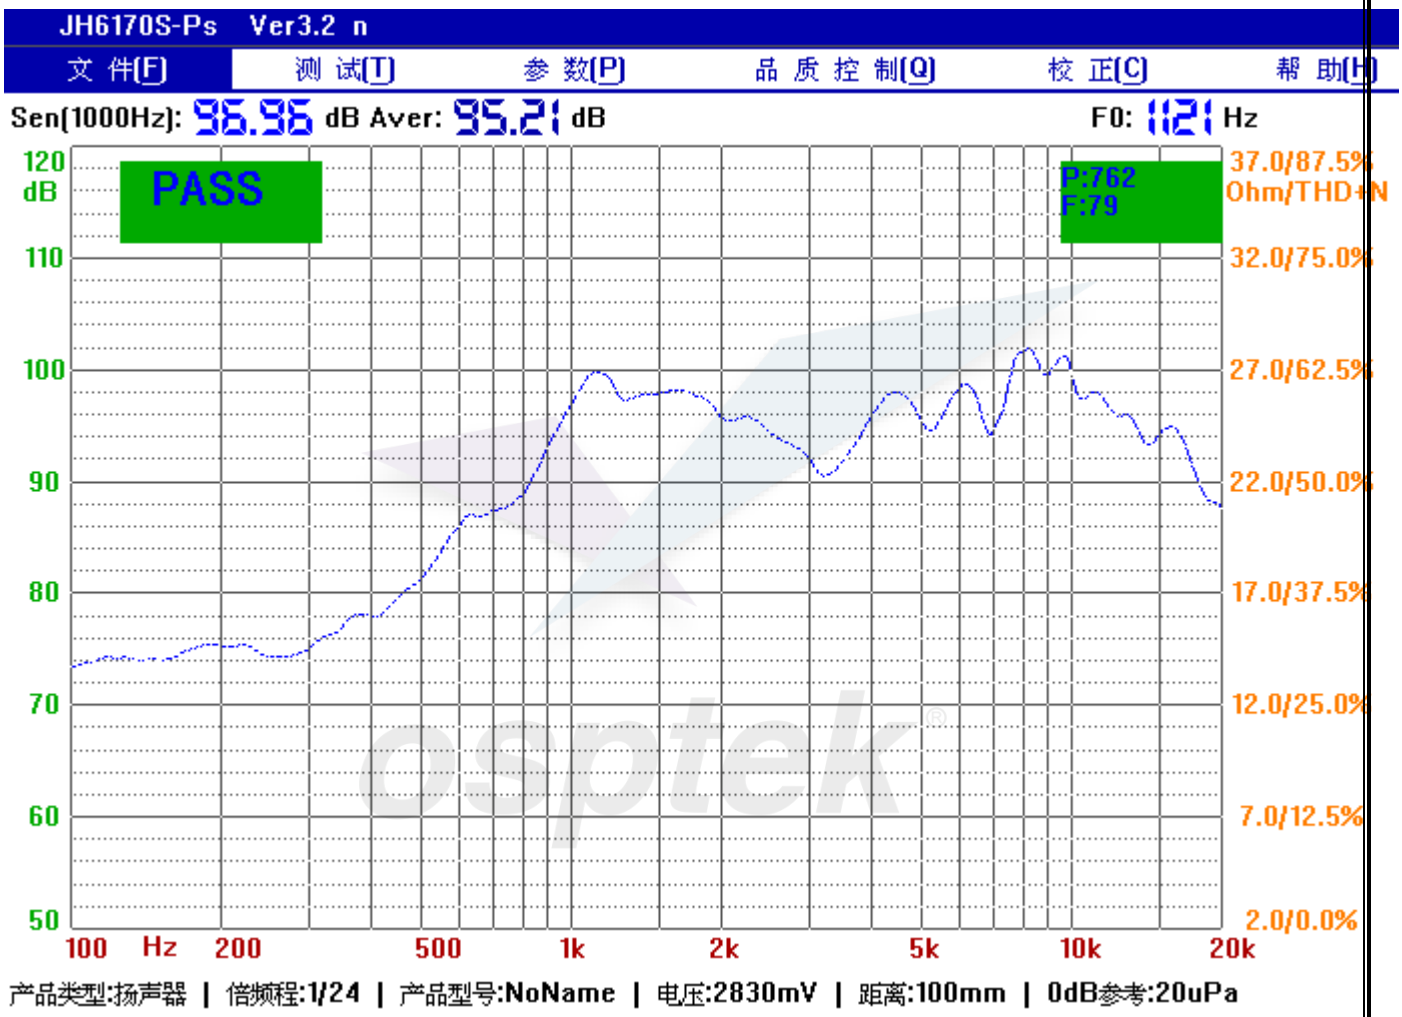6	FREQUENCY RESPONSE （fig.2） MYLAR SPEAKER EFFICIENCY97±3dB (0dB=20.0μPa)at S.P.L  Efficiency Source Impedance Zs=0 Ohms Open-Circuit Level 1W/10cm

DIMENSIONS（fig.3） 示意图

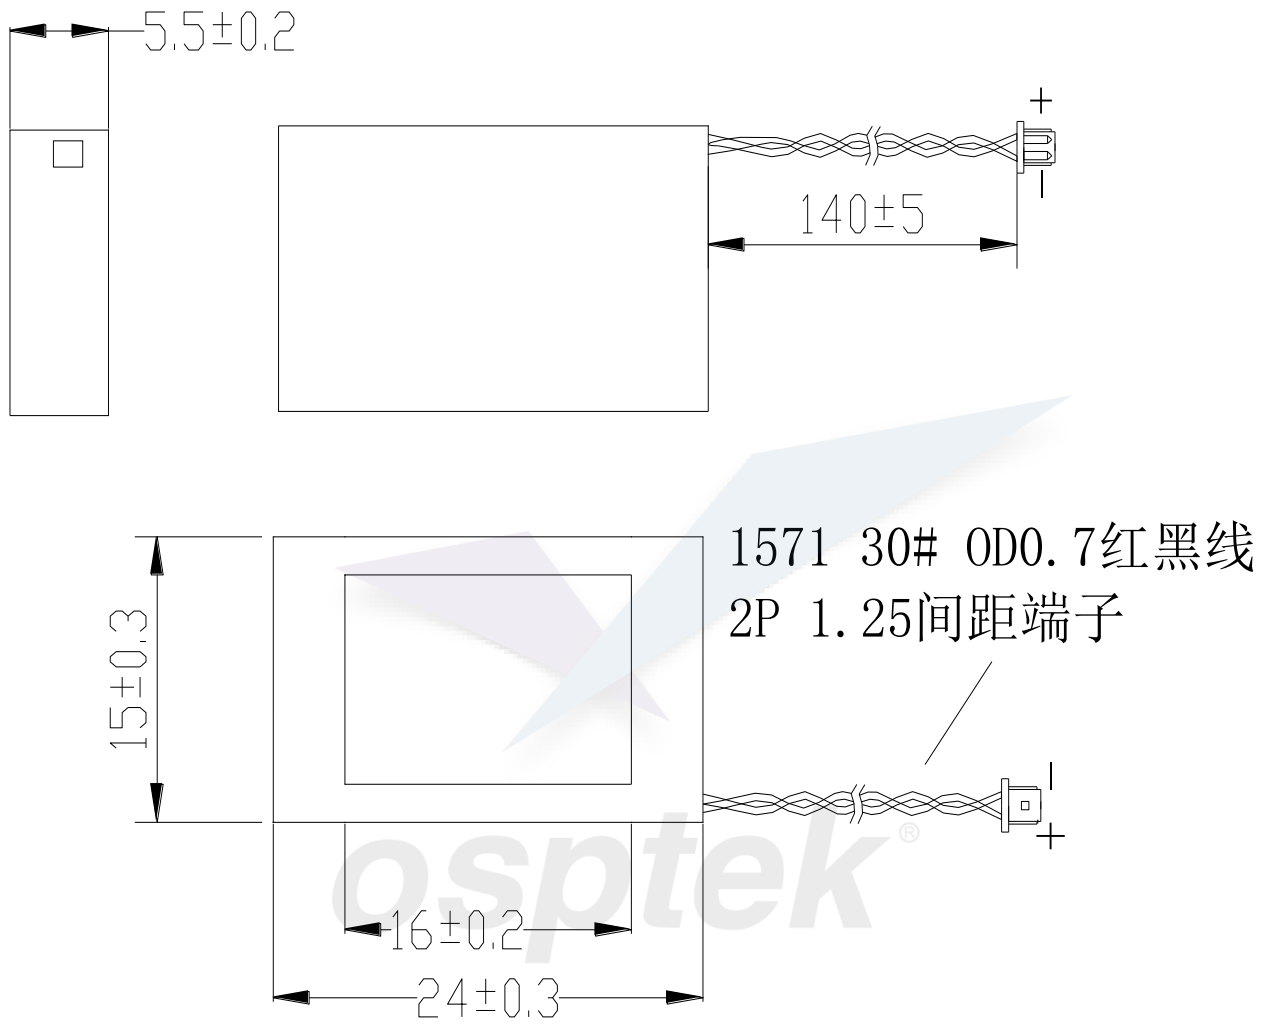

Bill of Material

ITEM	DESCRIPTIONS	REMARK	QTY	REMARK
7	FRONT CAP	SUS	1	
6	DIAPHRAGM	PEEK	1	
5	VOICE COIL	Cu	1	
4	WASHER	SPCC Zn PLATED	1	
3	MAGNET	Nd-Fe-B	1	
2	YOKE	SPCC Zn PLATED	1	
1	FRAME	PBT	1	