



| REV | ECN NO | DRA | APPD | DATE |
|---|---|---|---|---|
| A | FIRST RELEASE | George Gao | Human Zhou | 2013.09.12 |
| | | | | |
| | | | | |

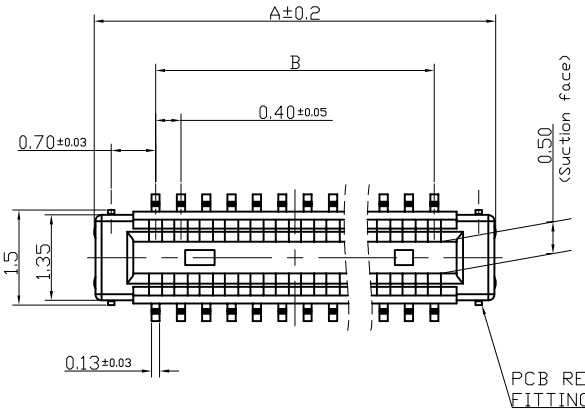






MATING SECTION


Specifications:
1) Material:
1-1.Molded portion: LCP resin ( UL94 V-0)
1-2.Contact and Post: Copper alloy.
2) Surface treatment:
2-1.Terminal portion: Base: Ni plating Surface:Ni 50-90u" ;
Au plating (except the terminal tips):Contact area:Au 4u"min,Solder area:Au 3u"Min ;
Exposed nickel portions.
2-2.Metal clips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base: Ni plating Surface: Sn flash plating (except the terminal tips)
3) Characteristics:
3-1. Rated voltage: 60V AC/DC
3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
3-3. Insulation resistance: Min. 1000MΩ (initial)
3-4. Breakdown voltage: 150V AC for 1 min.
3-5.Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min.100MΩ, contact resistance max. 90mΩ
3-6. Contact resistance: Max. 90mΩ
3-7. Ambient temperature: -55℃-+85℃
3-8. Storage temperature: -55℃-+85℃ (product only); -40℃-+50℃ (emboss packing)
3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
3-10. Composite removal force: Min. 0.165N/contacts X contacts
3-11. Post holding force: Min. 0.49N/contacts
3-12. Insertion and removal life: 50 times

TABLE:
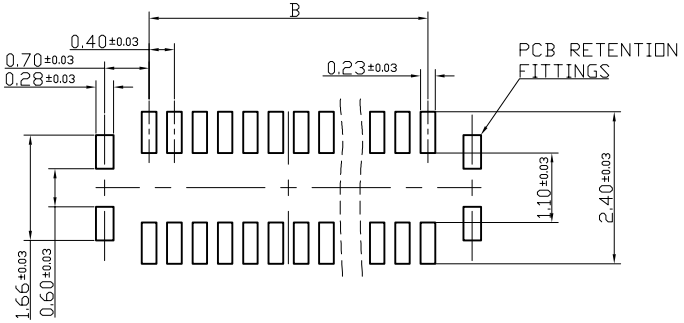
| NUMBER OF CONTACTS | A | B |
|---|---|---|
| 40 | 9.54 | 7.60 |
| 34 | 8.34 | 6.40 |
| 30 | 7.54 | 5.60 |
| 24 | 6.34 | 4.40 |
| 16 | 4.74 | 2.80 |
| 10 | 3.54 | 1.60 |





RECOMMENDED PCB LAYOUT

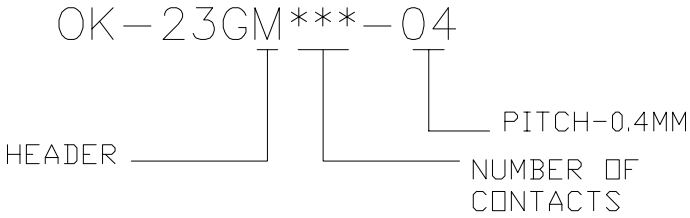


| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| DIMENTION IN mm | | | OCN TECHNOLOGY | | | | | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | APPD: | TITLE: 0.4MM BTB (MATING HEIGHT 0.8H) | | | | |
| . ±0.20 | . ±2° | | CHKD: | DWG NO: OK−23GM***−04 | | | | |
| .0 ±0.10 | .0 ±1° | | | PROJ | Q'TY | SIZE | SHEET | SCALE | REV |
| .00 ±0.05 | .00±0.5° | DRA: George Gao 2013.10.12 | | | -- | A4 | 1/1 | 1:1 | A |
| .000±0.03 | .000±0.3° | | | | | | | | |

| REV | ECN NO | DRA | APPD | DATE |
|---|---|---|---|---|
| A | FIRST RELEASE | George Gao | Human zhou | 2013.09.12 |
| | | | | |
| | | | | |

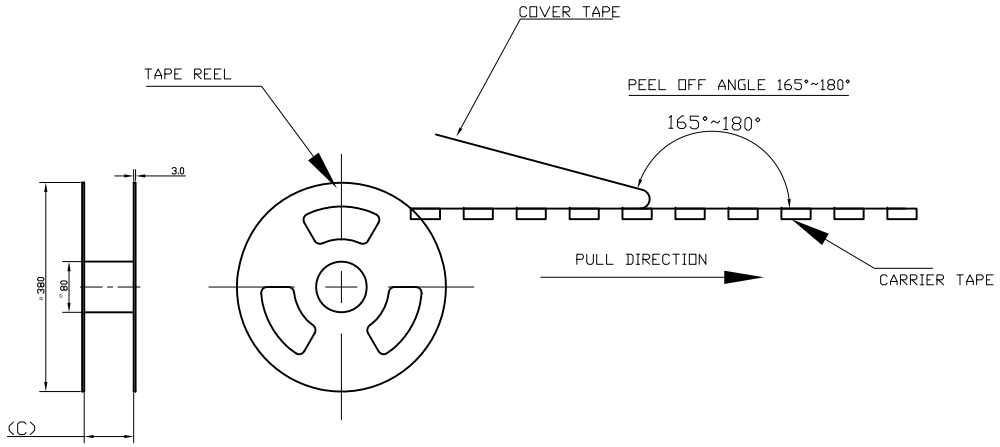





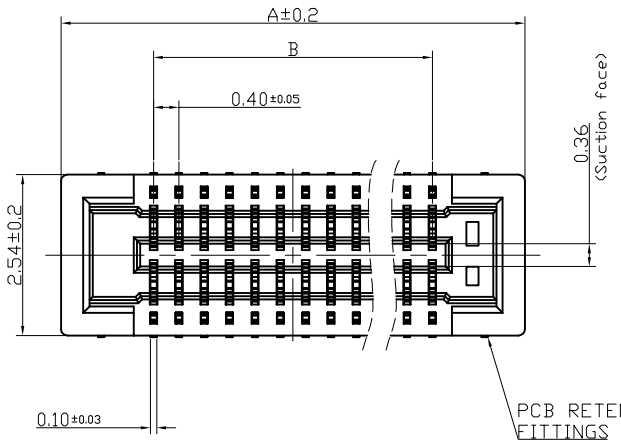

TABLE:


| | | | | |
|---|---|---|---|---|
| 40 | 24.00 | 11.50 | 25.4 | 20000 |
| 34 | | | | |
| 30 | 16.00 | 7.50 | 17.4 | |
| 24 | | | | |
| 16 | | | | |
| 10 | | | | |
| NUMBER OF CONTACTS | A | B | C | QTY/REEL |


| DIMENTION IN mm | | | | | |
|---|---|---|---|---|---|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | | | |
| . ±0.20 | . ±2° | APPD: | TITLE: 0.4MM BTB (MATING HEIGHT 0.8H) | | |
| .0 ±0.10 | .0 ±1° | CHKD: | DWG NO: OK-23GM***-04 | | |
| .00 ±0.05 | .00±0.5° | DRA: George Gao 2013.10.12 | PROJ | Q'TY | SIZE / SHEET / SCALE / REV |
| .000±0.03 | .000±0.3° | | | -- | A4 / 1/1 / 1:1 / A |


OCN TECHNOLOGY
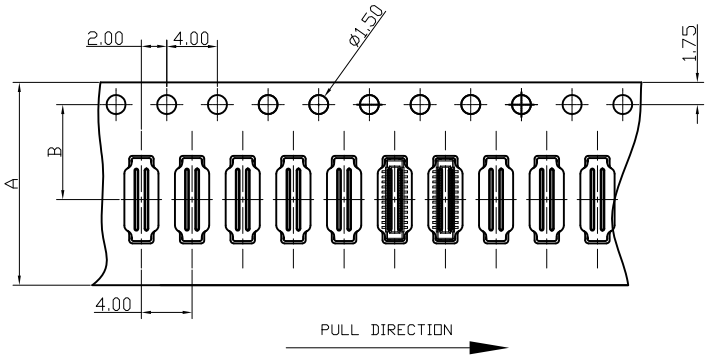
| REV | ECN NO | DRA | APPD | DATE |
|---|---|---|---|---|
| A | FIRST RELEASE | George Gao | Human Zhou | 2013.09.18 |
| | | | | |
| | | | | |




MATING SECTION

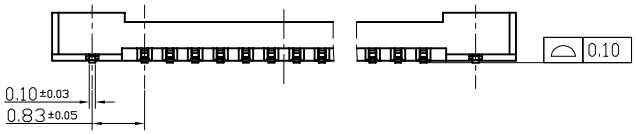
Specifications:
1) Material:
- 1-1.Molded portion: LCP resin ( UL94 V-0)
- 1-2.Contact and Post: Copper alloy.

2) Surface treatment:
- 2-1.Terminal portion: Base: Ni plating Surface:Ni 50-90u" ;
  Au plating (except the terminal tips):Contact area:Au 4u"min,Solder area:Au 3u"Min ;
  Exposed nickel portions.
- 2-2.Metal clips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base: Ni plating Surface: Sn flash plating (except the terminal tips)

3) Characteristics:
- 3-1. Rated voltage: 60V AC/DC
- 3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
- 3-3. Insulation resistance: Min. 1000MΩ (initial)
- 3-4. Breakdown voltage: 150V AC for 1 min.
- 3-5.Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min.100MΩ, contact resistance max. 90mΩ
- 3-6. Contact resistance: Max. 90mΩ
- 3-7. Ambient temperature: -55℃-+85℃
- 3-8. Storage temperature: -55℃-+85℃ (product only); -40℃-+50℃ (emboss packing)
- 3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
- 3-10. Composite removal force: Min. 0.165N/contacts X contacts
- 3-11. Post holding force: Min. 0.49N/contacts
- 3-12. Insertion and removal life: 50 times

TABLE:

| | | |
|---|---|---|
| 40 | 10.52 | 7.60 |
| 34 | 9.32 | 6.40 |
| 30 | 8.52 | 5.60 |
| 24 | 7.32 | 4.40 |
| 16 | 5.72 | 2.80 |
| 10 | 4.52 | 1.60 |
| NUMBER OF CONTACTS | A | B |

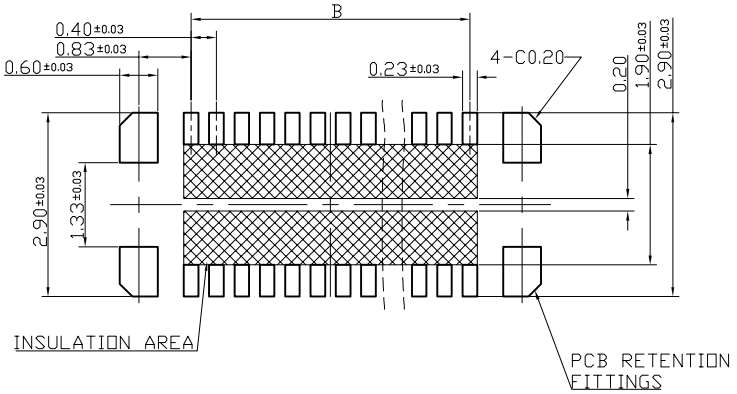


RECOMMENDED PCB LAYOUT

OK-23GF***-04

SOCKET — NUMBER OF CONTACTS — PITCH-0.4MM

| | | | |
|---|---|---|---|
| DIMENTION IN mm | | OCN TECHNOLOGY | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | APPD: | TITLE: 0.4MM BTB (MATING HEIGHT 0.8H) |
| . ±0.20 | . ±2° | CHKD: | DWG NO: OK-23GF***-04 |
| .0 ±0.10 | .0 ±1° | | |
| .00 ±0.05 | .00±0.5° | DRA: George Gao 2013.10.18 | PROJ / Q'TY / SIZE / SHEET / SCALE / REV |
| .000±0.03 | .000±0.3° | | -- / A4 / 1/1 / 1:1 / A |

| REV | ECN NO | DRA | APPD | DATE |
|---|---|---|---|---|
| A | FIRST RELEASE | George Gao | Human zhou | 2013.09.12 |
| | | | | |
| | | | | |

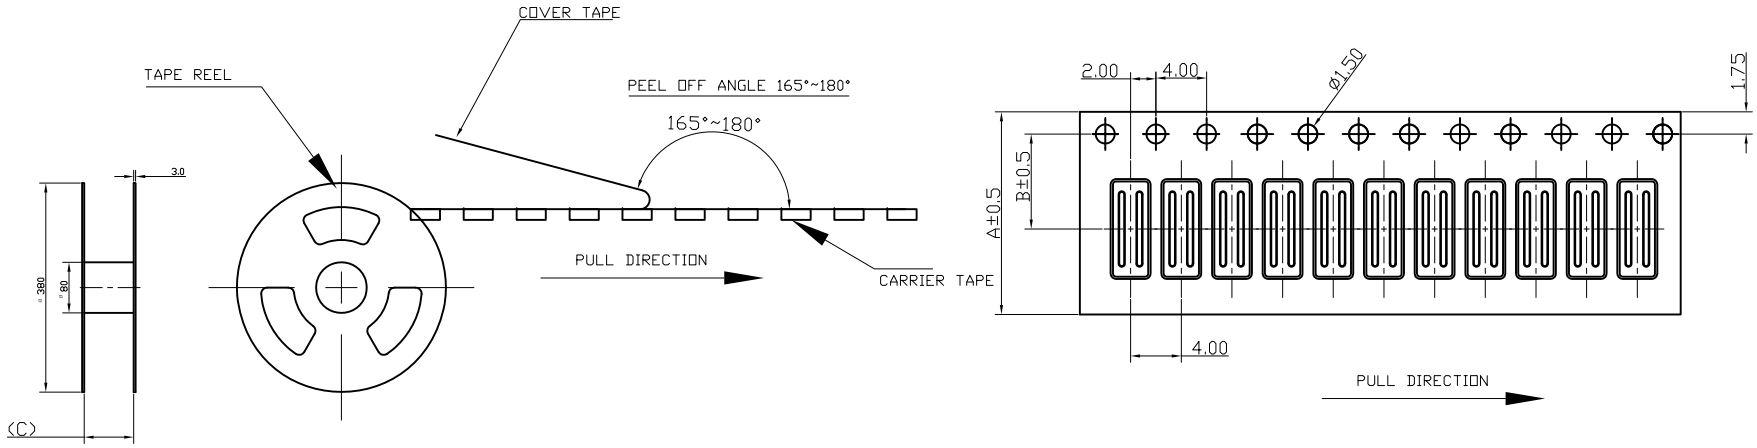



TABLE:

| | | | | |
|---|---|---|---|---|
| 40 | 24.00 | 11.50 | 25.4 | 20000 |
| 34 | | | | |
| 30 | 16.00 | 7.50 | 17.4 | |
| 24 | | | | |
| 16 | | | | |
| 10 | | | | |
| NUMBER OF CONTACTS | A | B | C | QTY/REEL |

DIMENTION IN mm

TOLERANCE UNLESS OTHERWISE SPECIFIED

| | |
|---|---|
| . ±0.20 | . ±2° |
| .0 ±0.10 | .0 ±1° |
| .00 ±0.05 | .00±0.5° |
| .000±0.03 | .000±0.3° |

OCN TECHNOLOGY

APPD:

CHKD:

DRA: George Gao 2013.10.18

TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)

DWG NO: OK-23GF***-04

| PROJ | Q'TY | SIZE | SHEET | SCALE | REV |
|---|---|---|---|---|---|
| | -- | A4 | 1/1 | 1:1 | A |