
Item	Date	Remark
A	20230726	Original Drawing

PIN	DESCRIPTION
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	GND
7	D/C
8	CS
9	SCL
10	SDA
11	RESET
12	GND

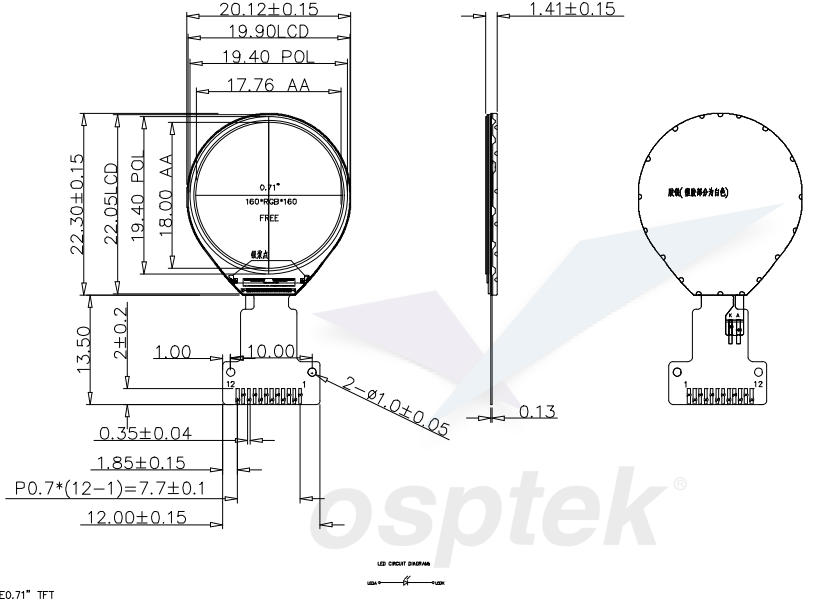

NOTES:

1. DISPLAY TYPE: BOE0.71" TFT
2. VIEWING DIRECTION: All
3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
4. DRIVER IC: GC9D01
5. OPERATING TEMP.: -20℃~70℃
6. STORAGE TEMP.: -30℃~80℃
7. BACK LIGHT: 1CHIP-WHITE LED; 20MA,3.0V
8. LCM Luminance: 350 CD/M2(TYP)
9. UNMARKED TOLERANCE: ±0.2
10.
11.

LED CIRCUIT DIAGRAM:

Customer Approval Signature	Shenzhen Osprey Optoelectronics Technology Co., Ltd.						Drawing Number		Rev.
							0.71"TFT		A
	Unless Otherwise Specified		Title	YDP071B001-V2			Material		
	Unit	mm					Soda Lime / Polyimide		
	General Roughness								
	Tolerance			Drawn	E.E.	Panel / E.	P.M.		
	Dimension	±0.3	By	Jesen				Scale	Sheet	Size
	Angle	±1	Date	20230726				1:1	1 of 1	A3

osptek®