LCM+CG 总 成 图

深圳市鱼鹰光电科技有限公司

1.基本规格 General Specification	
DISPLAY TYPE	10.1" IPS TFT
	NORMALLY BLACK INCELL
	TRANSMISSIVE
RESOLUTION	800*(RGB)*1280
LCD Driver IC	JD9366TC
Viewing Angle(U/D/L/R)	ALL(80/80/80/80)TYP
TFT POWER SUPPLY(VDD)	MIN 3.0 TYP 3.3 MAX 3.6
TP Transmittance	≥90%
LCD Transmittance	6.04% TYP
Interface	MIPI
OPERATING TEMP	-20℃~+70℃
STORAGE TEMP	-30℃~+80℃
FLATNESS	≤0.30


2.光学要求 Optical Requirements

Item	Min	Typ	Max	Unit
Luminance(LCM+盖板) (中心点)	250	300	--	cd/m²
Uniformity W	70	80	--	%
X轴中心色度 (Center Chromatics X)	0.24	0.29	0.34	
Y轴中心色度 (Center Chromatics Y)	0.26	0.31	0.36	

3.电性要求 Electronic Requirement(Ta=25℃)


Item	Min	Typ	Max	Unit
LED driver current	--	80	--	mA
LED driver voltage	21.6	24.0	25.6	V

4.LED电路图 LED CIRCUIT DIAGRAM

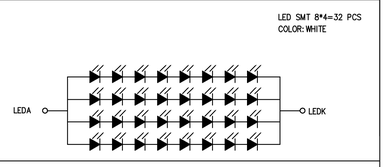


5.Notes:
1.Unit: mm
2.Do not scale drawing
3.All radii without dimension R0.20mm
4. ⚠n Modification rev.number
5. "▲" FOR SAFETY CHARACTERISTIC(安全特性).
"●" FOR SPECIAL DIMENSION; CPK≥1.33
"*" FOR CRITICAL DIMENSION(重要管控尺寸)
"()" FOR REFERENCE DIMENSION(参考尺寸)
6.Genral Tolerance: ±0.30mm
7.Mark mold cavity indentification in recess approximately where indicated
8. RoHs must be complied.

正视图

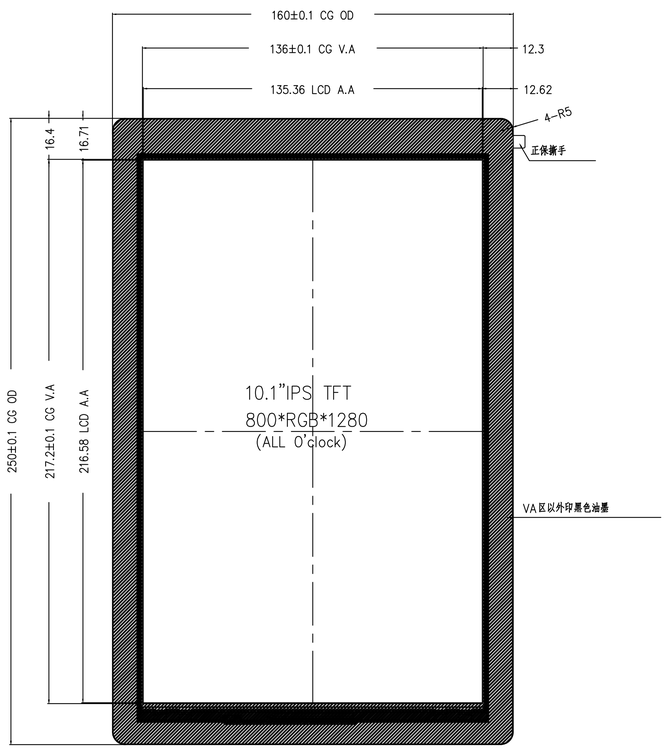


侧视图

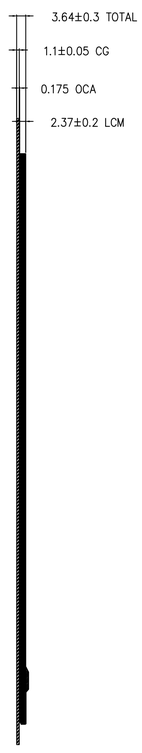

背视图

弯折出货

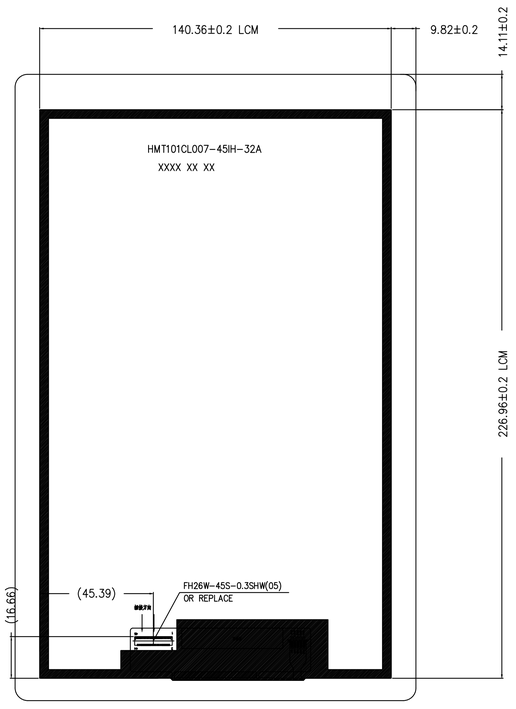


6.CG Technical parameters:
1.玻璃材质: 超硝子 T=1.1mm
2.表面硬度: ≥7H(750gf)
3.CG表面应力CS≥450Mpa 强化深度DOL≥12um B10 4BP≥600Mpa
4.跌落要求: 30cm高度,64g的钢球, 可视区中心一次无破碎
5.透光率: ≥90%,
6.翘曲度≤0.35mm
7.盖板背面油墨及FILM达因值≥32dyn·
8.工作温湿度范围: -20℃~+70℃,45%~85%RH
储存温湿度范围: -30℃~+80℃,55~95%RH
9.未标注公差 : ±0.20,盖板默认倒角C0.15
10.所有的材料符合ROHS标准
11.印刷厚度: 黑色≤12UM,LOGO不可有缺失; 二道黑色油墨单边外扩0.5mm ;
12.附着力百格测试: 3M600#胶带 , 成90度角瞬间拉起5次 , 不能有丝印脱落 ;

7.LCM PIN DESCRIPTION	
1	GND
2	GND
3	AVDD
4	AVDD
5	NC
6	AVEE
7	AVEE
8	GND
9	GND
10	D3N-
11	D3P+
12	GND
13	D0N-
14	D0P+
15	GND
16	CLKN-
17	CLKP+
18	GND
19	D1N-
20	D1P+
21	GND
22	D2N-
23	D2P+
24	GND
25	GND
26	IDO
27	ID1
28	LED PWM
29	TE
30	RESET
31	VDD1.8
32	VDD1.8
33	GND
34	TP-SCL
35	TP-SDA
36	TP-INT
37	TP-RST
38	GND
39	LEDK1-
40	LEDK2-
41	LEDK3-
42	LEDK4-
43	NC
44	LEDA+
45	LEDA+

REV 修改	DATE 日期	DESCRIPTION 修 改 内 容	REVISER 修 改 者
⚠V1.0	25/06/04	First Edition Issued	ZHU

7.MODULE Luminnous Test Point

1.Environment Luminance(环境亮度): ≤0.1cd/m²
2.Test Instrument(测试仪器): BM-7A
3.Test Distance(测试距离): 500 mm
4.Aperture Diameter(光圈直径): ø7.7(1°)



NAME	10.1" IPS TFT	MODEL NO. 模 组 号	YDP1010BT005-V1		
CUSTOMER'S NO. 客户料号		THIRD ANGLE PROJECTION 第三角法		REV 修订版	V1.0
DESIGNED 设 计 者		DATE 日 期	25.06.04	SCALE 比 例	1:1
CHECK 核 对		DATE 日 期		UNIT 单 位	mm
APPROVED 承 认		DATE 日 期		PAGE 页 次	1