Osptek Display

TFT LCD SPECIFICATION

Model No:

YDP500B004-V1

Revision Record 修改记录

Rev No 版本号	Date 时间	Description 内容
V.0	2026-05-27	First release

osptek®

CONTENTS 目录

Revision Record

Contents

ITEM	PAGE
1. General Specifications 基本规格	4
2. Pin Assignments 接口定义描述	5
3. Electrical Specification 电气特性	6
3.1 Absolute Maximum Ratings 极限参数	6
3.2 Typical Operation Conditions 典型工作条件	6
3.3 Backlight Circuit Characteristics 背光电气特性	7
4. Optical Specification 光学规格	8
4.1 LCM Optical Characteristics 液晶模组光学特性	8
4.2 Measurement system 测量系统	9
5. Mechanical Drawing 模组图	10
6. Reliability Test Items 可靠性测试项目	11
7. Packing and Storage Specification (Reference only) 包装规格（仅供参考）	11 13
8. Announcements 注意事项	14

osptek®

1.General Specifications 基本规格

No.	Item 项目	Specification 规格	Unit 单位	Remark
1	LCD Size 液晶面板尺寸	5.0 ”	inch	-
2	Panel Type 面板类型	IPS	-	-
3	Resolution 分辨率	720xRGBx 1280	Pixel	-
4	Display Mod e 显示模式	Normally Black	-	-
5	Number of Colors 颜色数量	16.7M	-	-
6	Viewing Direction 使用视角	All	-	Note1
7	NTSC 色彩饱和度	50%	-	Typ.
8	Contrast Ratio 对比度	1000	-	
9	Luminance 亮度	TBD	cd/m2	Typ.
10	Module Size 模组尺寸	66.4(H)x 120.05(V)x 1.67(D)	mm	Note1
11	Panel Activ e Area 可视区域	61.78X109.85	mm	Note1
12	Pixel Pitch 像素尺寸	0.0858x0.0 858	mm	-
13	Pixel Arrangement 像素排列	RGB-stripe		-
14	Weight 重量	TBD	g	-
15	Driver IC 驱动芯片	JD9365	-	-
16	Driver IC RAM Size 记忆体	RAM less	bit	-
17	Light Source 背光源	4*3 LED light	-	-
18	Interface 接口方式	MIPI DSI	-	-
19	Operating Temperature 工作温度	-20~+70	℃	-
20	Storage Temperature 存储温度	-30~+80	℃	-

2.Pin Assignments 接口定义

Pin No.	Symbol 符号	Function 功能描述
1	TP-GND	Ground
2	CTP_SCL	I2C interface clock pin
3	CTP_SDA	I2C interface data pin
4	CTP_INT	Touch screen interrupt
5	CTP_RST	External reset for TP
6	CTP_VDD	Power Supply for TP
7	GND	Ground
8-9	LEDA	Backlight anode
10-11	LEDK	Backlight cathode
12	TE	Tearing effect signal is used to synchronize MCU
13	RESET	LCM reset signal
14	ID	
15	GND	Ground
16	VCC18	Digit Power Supply for LCM
17	VCC28	Analog Power Supply for LCM
18-19	GND	Ground
20	D2N	MIPI DSI data lane2-
21	D2P	MIPI DSI data lane2+
22	GND	Ground
23	D1N	MIPI DSI data lane1-
24	D1P	MIPI DSI data lane1+
25	GND	Ground
26	D0N	MIPI DSI data lane0-
27	D0P	MIPI DSI data lane0+
28	GND	Ground
29	CLKN	MIPI DSI clock lane-
30	CLKP	MIPI DSI clock lane-

3. Electrical Specification 电气特性

3.1 Absolute Maximum Ratings 极限参数

Item 项目	Symbol	Value	Unit	Remark
Analog Power Supply Voltage 模拟供电电压	VDD	-0.3~+4.6	V	-
Logic Input Voltage Range	VIN	-0.3~VDDI+0.3	V	-
Logic Output Voltage Range	VO	-0.3~VDDI+0.3	V	-

3.2 Typical Operation Conditions 典型工作条件

Item 项目	Symbol	Min.最小	Typ.典型	Max.最大	Unit
Supply Voltage 供电电压	VDD	3.0	3.3	3.6	V
Input High Voltage 输入高电平	V_{IH}	0.7*VDD	-	VDD	V
Input Low Voltage 输入低电平	V_{IL}	DGND	-	0.3*VDD	V
Output High Voltage 输出高电平	V_{OH}	VDD-0.4	-	VDD	V
Output Low Voltage 输出低电平	V_{OL}	DGND	-	DGND+0.4	V

Osptek®

3.3 Backlight Circuit Characteristics 背光功耗

Item	Symbol	Min.	Typ.	Max.	Unit
LED Current 背光电流	I_B	-	40	-	mA
LED Voltage 背光电压	Vf	-	18	-	V
Power Consumption 功耗	P_{BL}	-	720	-	mW

3.4 LCD Current Consumption 液晶面板功耗

Item	Symbol	Typ.	Max.	Unit
Full Mode 正常模式	VCI	-	-	mW
测试条件：VCI=2.8V，IOVCC=1.8V； Interface 驱动类型：行翻转或者列翻转； TN Type=>All Black Pattern. TN型液晶面板=>黑色画面； IPS Type=>All White Pattern. IPS型液晶面板=>白色画面； Temperature：25℃；温度：室温25摄氏度；				
Sleep Mode 休眠模式	VCI	-	-	mW
测试条件：VCI=2.8V，IOVCC=2.8V； DC/DC converter is enabled. Internal oscillator is started and panel scanning is started. 除IC内部晶振和面板扫描外，其他功能都暂停工作； Temperature：25℃；温度：室温25摄氏度；				

4.Optical Specification 光学参数


4.1 LCM Optical Characteristics 液晶模组光学特性

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	70	80	-	Deg.	Note 1
		Θ_9		70	80	-	Deg.	
	Vertical	Θ_{12}		70	80	-	Deg.	
		Θ_6		70	80	-	Deg.	
Contrast ratio		CR		800	1000	-		Note 2
Transmittance		Tr		3.9	4.6	-	%	Base on C Light Note 3
White Chromaticity		x_w		0.275	0.30	0.325		Note 4
		y_w		0.295	0.32	0.345		
Reproduction of color (C light)	Red	R_x	Θ = 0°	0.625	0.64	0.655		
		R_y		0.315	0.33	0.345		
	Green	G_x		0.285	0.30	0.315		
		G_y		0.595	0.61	0.625		
	Blue	B_x		0.135	0.15	0.165		
		B_y		0.045	0.06	0.075		
Response Time (Rising + Falling)		$T_r + T_f$	Ta= 25° C Θ = 0°	-	30	35	ms	Note 5

ospotek


4.2 Measurement system 测量系统

4.2.1 LCM Viewing Angle

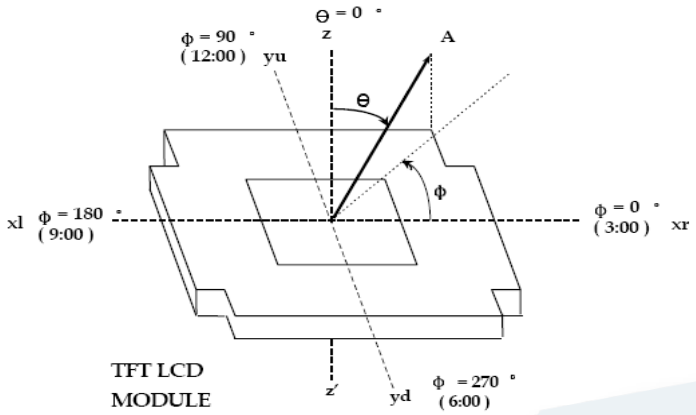

Viewing angle is the angle at which the contrast ratio is greater than 10.The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

4.2.2 Response time

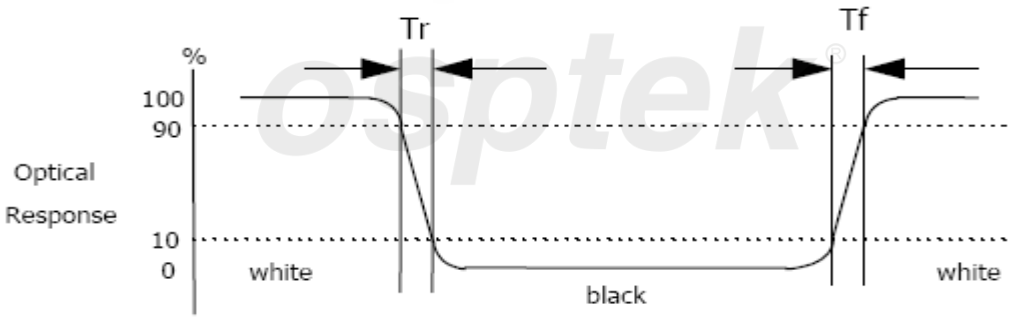

Response time is the time required for the display to transition from white to black (Rising time, Tr) and from black to white (Falling time, Tf) for additional information.


4.2.3 Contrast Ratio (CR)

Contrast Ratio (CR) is defined mathematically as:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.

5. Mechanical Drawing 模组图

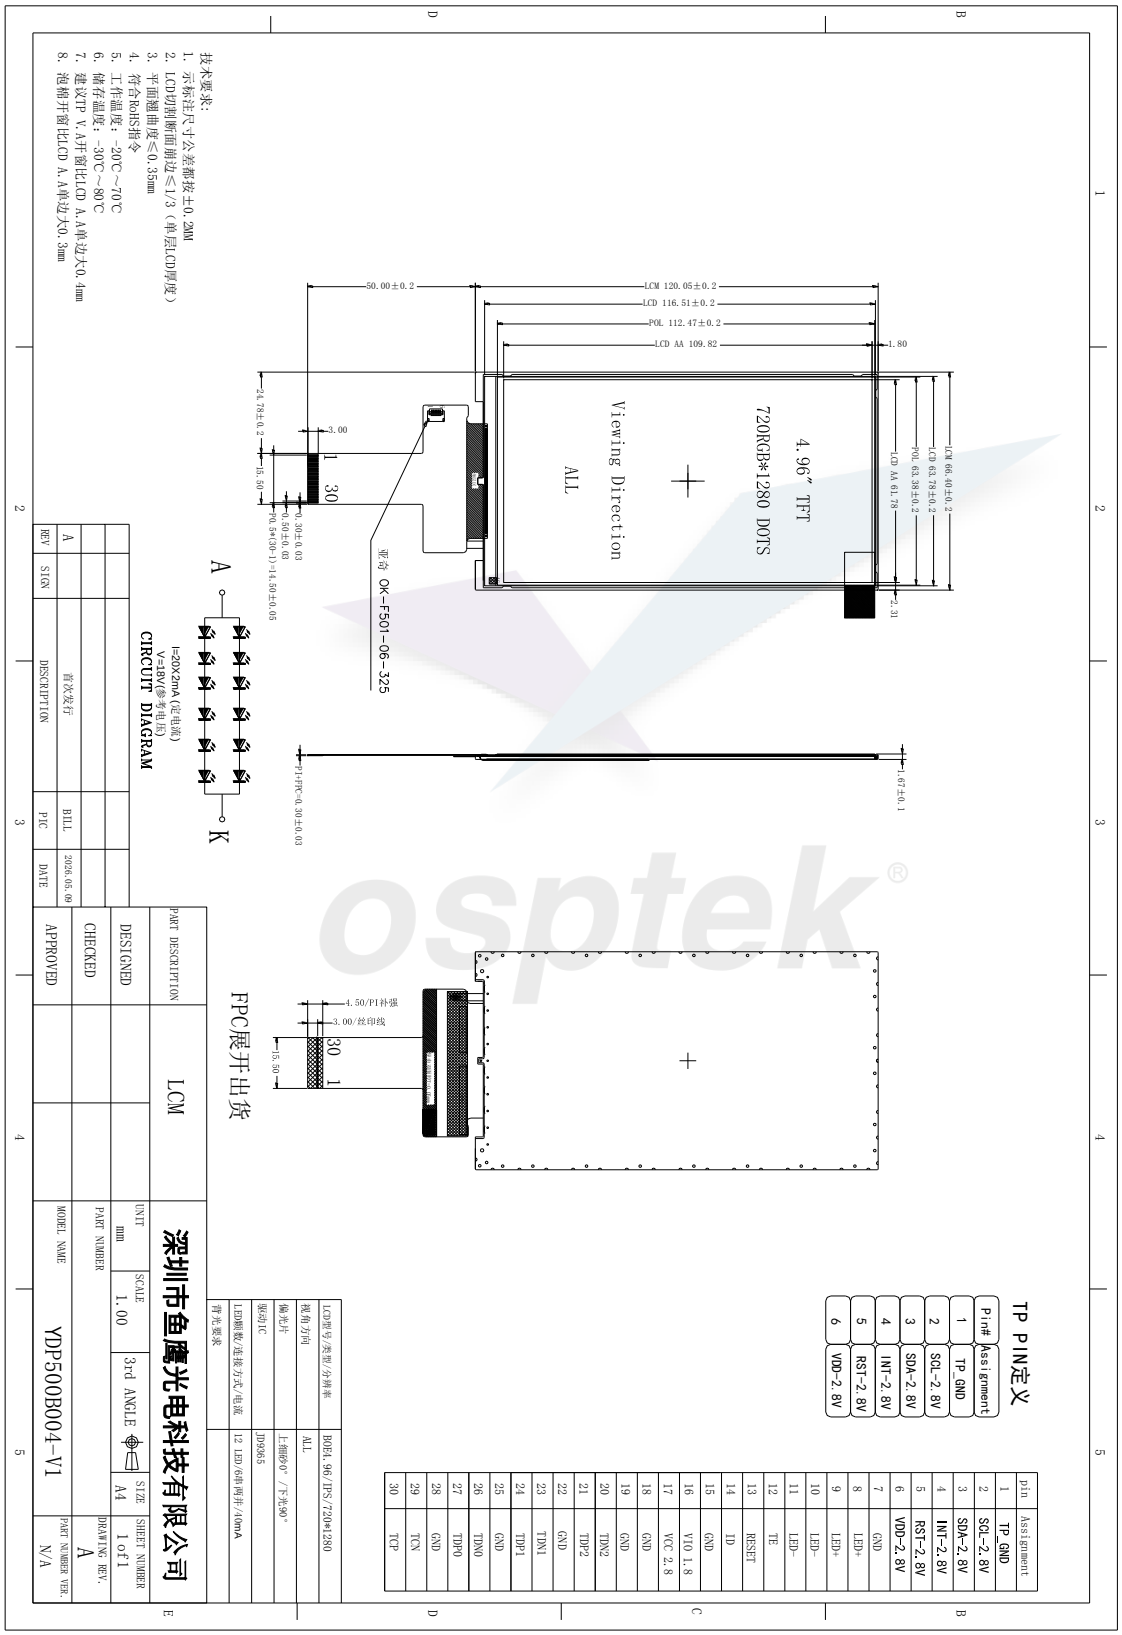

pin	Assignment
1	TP_GND
2	SCL-2.8V
3	SDA-2.8V
4	INT-2.8V
5	RST-2.8V
6	VDD-2.8V
7	GND
8	LED+
9	LED+
10	LED-
11	LED-
12	TE
13	RESET
14	ID
15	GND
16	VIO 1.8
17	VCC 2.8
18	GND
19	GND
20	TDN2
21	TDP2
22	GND
23	TDN1
24	TDP1
25	GND
26	TDN0
27	TDP0
28	GND
29	TCN
30	TCP

Pin#	Assignment
1	TP_GND
2	SCL-2.8V
3	SDA-2.8V
4	INT-2.8V
5	RST-2.8V
6	VDD-2.8V

技术要求:
1. 示标注尺寸公差都按±0.20M
2. LCD切割断面崩边≤1/3（单层LCD厚度）
3. 平面翘曲度≤0.35mm
4. 符合RoHS指令
5. 工作温度：-20℃～70℃
6. 储存温度：-30℃～80℃
7. 建议TP V.A开窗比LCD A.A单边大0.4mm
8. 油桶开窗比LCD A.A单边大0.2mm

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	BILL	2026.05.08

LCD型号/类型/分辨率	BOE4.96/IPS/720*1280
视角方向	ALL
偏光片	上细砂0° / 下光泡90°
驱动IC	JD9365
LED颗数/连接方式/电流	12 LED/6并两串/40mA
背光要求	

PART DESCRIPTION	LCM		
DESIGNED		UNIT mm	SCALE 1.00
CHECKED		PART NUMBER	3rd ANGLE
APPROVED		MODEL NAME YDP500B004-V1	SIZE A4 / SHEET NUMBER 1 of 1 / DRAWING REV. A / PART NUMBER VER. N/A

osptek®

6. Reliability Test Items 可靠性测试项目

Test Item 测试项目	Test Condition 测试条件	Test result determinant gist 实验结果判定
High temperature storage 高温存储	80±3℃，24H；	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 试验结束后,已测试的LCD样品必须在室内正常温湿度环境下放置2~4个小时以上才能进行功能和外观检查 ,样品不允许有以下缺陷： 1.Air bubble in the LCD; 模块中有气泡； 2.Non-display; 不显示； 3.Glass crack; 玻璃破碎； 4. The electrical characteristics requirements shall be satisfied. 需要满足模块电气性能。
Low temperature storage 低温存储	-30±3℃，24H；	
High temperature operation 高温运行测试	70±3℃，24H；	
Low temperature operation 低温运行测试	-20±3℃，24H；	
High temperature /humidity 高温高湿	60℃±3℃,90%±3%RH，24H；	
Thermal Shock 冷热冲击	-30℃/0.5h~+80℃/0.5h for a total 24 cycles；	
Vibration Test 振动测试	Frequency 10Hz~55Hz~10Hz Amplitude：1.5mm, X，Y，Z direction for total 1H； (Packing condition)	
ESD test 静电测试	±2KV, Human Body Mode, 150pF/330Ω； ±8KV, Air Mode, 150pF/330Ω；	


Remark: 注意：

1. The test samples should be applied to only one test item.
   每个被测试的模块只能用于其中的一个测试项目。
2. Sample size for each test item is 2pcs.
   每个测试项目的样品数量为2片。
3. Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.
   故障判断标准:基本规格,电气特性,机械特性,光电特性。


7. Packing and Storage Specification(Reference Only) 包装存储

7.1 Packing Method 包装方法


(1)

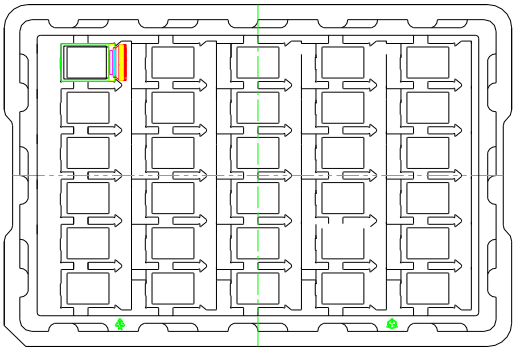


(2)

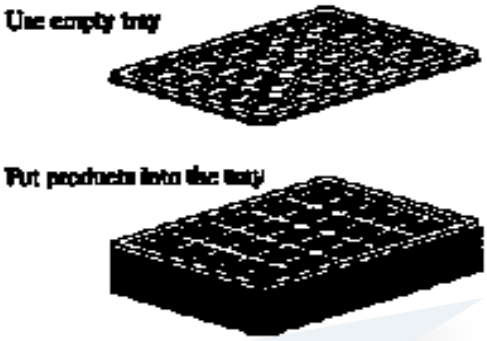


(3)

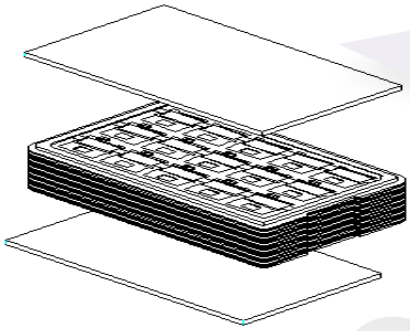


(4)

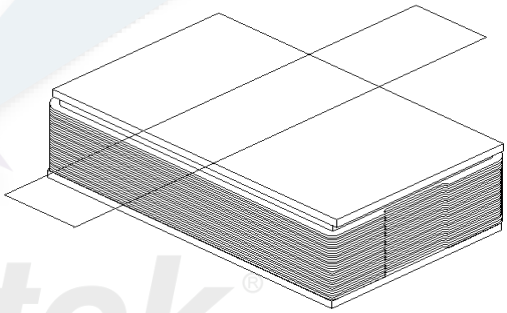

(5)

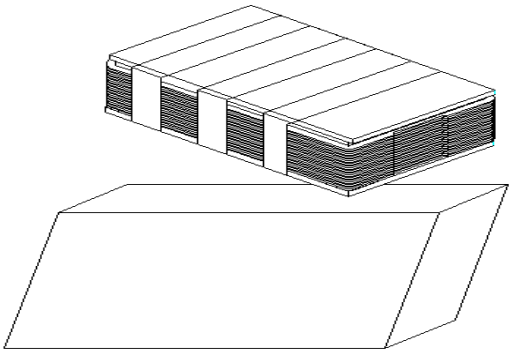

(6)

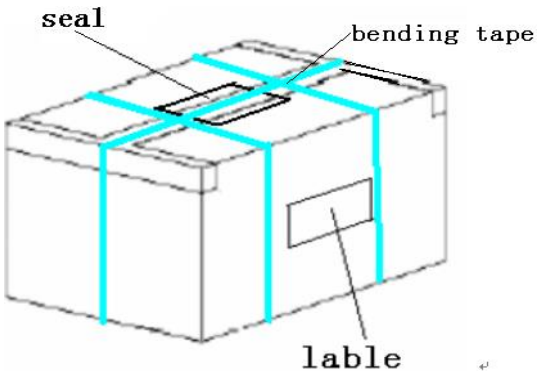

1. Put module into tray cavity. 把模块放进托盘.
2. Tray stacking. 托盘叠装.
3. Put 1 foam under the tray stack and 1 foam above. 在托盘上下放卡板.
4. Fix the cardboard to the tray stack with adhesive tape. 绑胶带.
5. Put the tray stack into carton. 把邦好的托盘放进纸箱.
6. Carton sealing with adhesive tape. 封纸箱.

7.2 Storage Method 存储方法

1. Store in an ambient temperature of 23°C±5°C, and in a relative humidity of 55%±15%. Don't exceed 12 months and expose to sunlight or fluorescent light.

   存储环境温度为 23±5°C，相对湿度为 55%±15%，存储不能超过 12 个月，不要长时间暴晒。
2. Store in a clean environment, free from dust, active gas, and solvent.

   存储在一个干净的环境，不受灰尘，活性气体和溶剂污染。
3. Store in antistatic container.

   存储在防静电环境。

osptek®

8. Announcements 注意事项

1. Do not attempt to disassemble or process the LCD module.
   请勿拆卸液晶显示模块。
2. Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached。
   不要在印制电路板上钻额外的孔，修改形状或更改印制线路板上元件的位置。
3. Except for soldering the interface, do not make any alterations or modifications with a soldering iron; Ensure welding temperature at 320 ° C to 350 ° C, the welding time control within the 10 s, welding note don't stay too long in the same place to avoid scald FPC.
   除焊接接口外，不要用烙铁做任何更改；焊接温度保证在 320°C-350°C，焊接时间控制在 10S 以内，焊接时注意不要在同一处停留时间太久以免烫伤 FPC。
4. Other matters in not clear before use, please contact our staff to guide.
   其他事项在不清楚使用之前，请联系我司人员指导进行。

osptek®