Osptek Display

TFT LCD SPECIFICATION

Model No:

YDP686B002-V1

Revision Record 修改记录

Rev No 版本号	Date 时间	Description 内容
V.0	2026-11-11	首次发行

osptek®

CONTENTS 目录

1. General Specifications 基本规格

2. Pin Assignments 接口定义描述

3. Electrical Specification 电气特性

3.1 Absolute Maximum Ratings 极限参数

3.2 Typical Operation Conditions 典型工作条件

3.3 Backlight Circuit Characteristics 背光电气特性

3.4 LCD Current Consumption 液晶面板功耗

4. Optical Specification 光学规格

4.1 LCM Optical Characteristics 液晶模组光学特性

4.2 Measurement system 测量系统

5. Mechanical Drawing 模组图

6. Reliability Test Items 可靠性测试项目

7. Packing and Storage Specification (Reference only)

包装规格（仅供参考）

8. Announcements 注意事项

1.General Specifications 基本规格

No.	Item 项目	Specification 规格	Unit 单位	Remark
1	LCD Size 液晶面板尺寸	6.86	inch	-
2	Panel Type 面板类型	IPS	-	-
3	Resolution 分辨率	480xRGBx1280	Pixel	-
4	Display Mode 显示模式	Normally Black		-
5	Number of Colors 颜色数量	16.7M	-	-
6	Viewing Direction 使用视角	ALL	-	Note1
7	NTSC 色彩饱和度	70%	-	Typ.
8	Contrast Ratio 对比度	1500	-	Typ.
9	Luminance 亮度	1000	cd/m2	Typ.
10	Module Size 模组尺寸	72.42(H)x173.79(V)x6.5 (D)	mm	Note1
11	Panel Active Area 可视区域	60.192*160.512	mm	Note1
12	Pixel Pitch 像素尺寸	41.8(H) x3x125.4(V)	mm	-
13	Pixel Arrangement 像素排列	RGB Vertical stripe		-
14	Weight 重量	TBD	g	-
15	Driver IC 驱动芯片	ST7703I-G5-DP	-	-
16	Driver IC RAM Size 记忆体		bit	-
17	Light Source 背光源	12 LEDS light	-	-
18	Interface 接口方式	MIPI	-	-
19	Operating Temperature 工作温度	-20~+70	℃	-
20	Storage Temperature 存储温度	-30~+80	℃	-

Note 1: Please refer to the mechanical drawing; 注 1：请参照模组图;

2.Pin Assignments 接口定义

Pin No. Pin 序号	Symbol 符号	Function 功能描述
1	GND	System Ground
2	VCI	Operation voltage
3	VCI	Operation voltage
4	VCI	Operation voltage
5	GND	System Ground
6	RESET	Reset signal
7	TE	Tearing effect signal is used to synchronize MCU to frame memory writing.
8	GND	System Ground
9	GND	System Ground
10	D3N	MIPI DSI data lane3-
11	D3P	MIPI DSI data lane3+
12	GND	System Ground
13	D2N	MIPI DSI data lane2-
14	D2P	MIPI DSI data lane2+
15	GND	System Ground
16	CLKN	MIPI DSI data lane-
17	CLKP	MIPI DSI data lane+
18	GND	System Ground
19	D1N	MIPI DSI data lane1-
20	D1P	MIPI DSI data lane1+
21	GND	System Ground
22	D0N	MIPI DSI data lane0-
23	D0P	MIPI DSI data lane0+
24	GND	System Ground
25	NC	Not connect
26	NC	Not connect
27	LEDK	Backlight power supply negative
28	LEDK	Backlight power supply negative
29	LEDA	Backlight power supply positive
30	LEDA	Backlight power supply positive

3. Electrical Specification 电气特性

3.1 Absolute Maximum Ratings 极限参数

Item	Symbol	Unit	Spec.		
			Min.	Typ.	Max.
Power Supply Voltage 1	IOVCC~VSSD	V	-0.3	-	+5.5
Power Supply Voltage 2	VCI ~ VSSA	V	-0.3	-	+6.6
Power Supply Voltage 3	VSP ~ VSSA	V	-0.3	-	+6.6
Power Supply Voltage 4	VSSA ~ VSN	V	-0.3	-	+6.6
Power Supply Voltage 5	VGH ~ VGL	V	-0.3	-	+35
Logic Input Voltage	V_{IN}	V	-0.3	-	IOVCC+0.3
Logic Output Voltage	Vo	V	-0.3	-	IOVCC+0.3
Differential Input Voltage	DSI_CP/DSI_CN DSI_D0P/DSI_D0P, DSI_D1P/DSI_D1N	V	-0.3	-	2.0
Operating Temperature	Topr	°C	-40	-	+85
Storage Temperature	Tstg	°C	-55	-	+110

Table 7.1: Absolute Maximum Ratings

3.2 Typical Operation Conditions 典型工作条件

Parameter	Symbol	Conditions	Spec.			Unit
			Min.	Typ.	Max.	
Power & Operating Voltages						
Logic Operating voltage	IOVCC	I/O supply voltage	1.6	1.8	3.6	V
Analog Operating voltage	VCI	Operation voltage	2.5	-	6.2	
Input / Output						
Logic High level input voltage	VIH	-	0.7IOVCC	-	IOVCC	V
Logic Ligh level input voltage	VIL	-	VSSD	-	0.3IOVCC	
Logic High level output voltage	VOH	IOH = -1.0mA	0.8IOVCC	-	IOVCC	
Logic Low level output voltage	VOL	IOL = +1.0mA	VSSD	-	0.2IOVCC	
Input leakage current	IIL	-	-1	-	1	µA
DC/D& Converter Operation						
VSP booster voltage	VSP	IVSP=1mA	4.3		3.2	V
VSN booster voltage	VSN	IVSN=-1mA	-3.2		-4.5	
VGH booster voltage	VGH	Ivgh=1mA	-10		20	
VGH booster voltage	VGL	Ivgl=-1mA	-14		-7.5	
VGH and VGL difference	[VGH-VGL]	-	-	-	32	
Oscillator tolerance	OSC	25°C	-3		3	%
Source Drivet						
Gamma reference voltage	VSPR	-	3.3		5.6	V
	VSNR	-	-3.6		-3.3	
Output voltage deviation	DVOS	VSSD+1.0 ~ VSPROUT-1.0	-	-	+/- 20	mV
		VSSD+0.1V ~ VSSD+1.0 VSPR-1.0 ~ VSPR-0.1V	-	-	+/- 50	mV
Output offset voltage	Voff	-		-	+/-50	mV
Standby Mode Current Cunsumption - 3 Power Mode						
Sleep In Mode	VSP	Ta=25°C VSP=5.4V VSN=-6.4V IOVCC=1.8V	-	50	-	µA
	VSN		-	50	-	
	IOVCC		-	35	-	

3.3 Backlight Circuit Characteristics 背光功耗

Item	Symbol	Min.	Typ.	Max.	Unit
LED Current 背光电流	I_B	-	480	-	mA
LED Voltage 背光电压	Vf	-	6	-	V
Power Consumption 功耗	P_{BL}	-	-	-	mW

3.4 LCD Current Consumption 液晶面板功耗

Item	Symbol	Typ.	Max.	Unit
Full Mode 正常模式	VCI	-	-	mA
测试条件：VCI=2.8V，IOVCC=2.8V； Interface 驱动类型：行翻转或者列翻转； TN Type=>All Black Pattern. TN型液晶面板=>黑色画面； IPS Type=>All White Pattern. IPS型液晶面板=>白色画面； Temperature：25℃；温度：室温25摄氏度；				
Sleep Mode 休眠模式	VCI	-	-	uA
测试条件：VCI=2.8V，IOVCC=2.8V； DC/DC converter is enabled. Internal oscillator is started and panel scanning is started. 除IC内部晶振和面板扫描外，其他功能都暂停工作； Temperature：25℃；温度：室温25摄氏度；				

4.Optical Specification 光学参数


4.1 LCM Optical Characteristics 液晶模组光学特性

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ_3	CR > 10	75	85	-	Deg.	Note 4.1
		Θ_9		75	85	-	Deg.	
	Vertical	Θ_{12}		75	85	-	Deg.	
		Θ_6		75	85	-	Deg.	
Contrast Ratio		CR	Θ = 0°	1000	1500	-		APF Note 4.2/4.3
Cell Transmittance		Tr		3.74	4.4	-	%	
Reproduction of color		Rx	Θ = 0°	0.627	0.656	0.687		With BLU @C Light Note 4.4
		Ry		0.288	0.318	0.338		
		Gx		0.225	0.255	0.385		
		Gy		0.546	0.576	0.606		
		Bx		0.107	0.137	0.168		
		By		0.068	0.098	0.128		
		Wx		0.263	0.293	0.323		
		Wy		0.292	0.322	0.352		
Color Gamut			Θ = 0°	65	70	-	%	
Response Time		Tr	Ta= 25°C Θ = 0°	-	16	21	ms	Note 4.5
		Tf		-	14	19	ms	
		Tgray		-	30	40	ms	

4.2 Measurement system 测量系统


4.2.1 LCM Viewing Angle

Figure1 Measurement Set Up

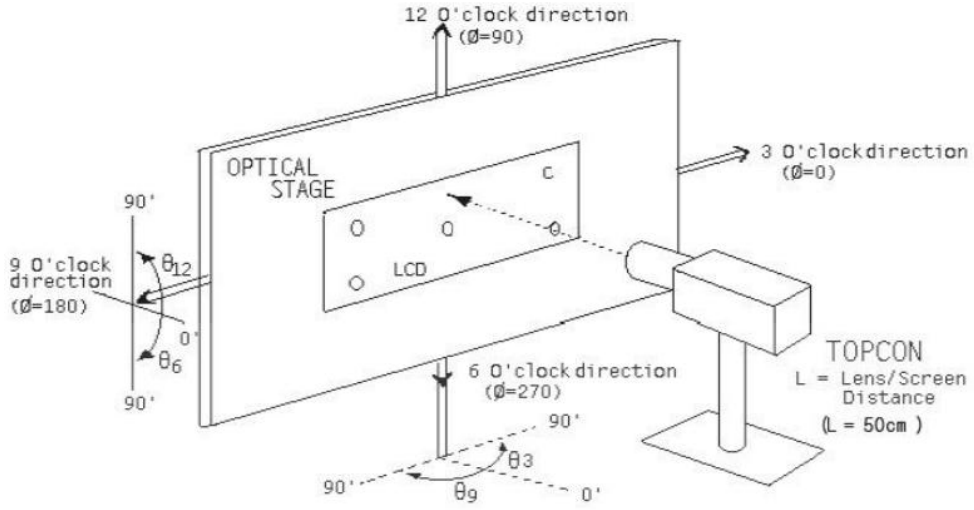

Viewing angle is the angle at which the contrast ratio is greater than 10.The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

4.2.2 Response time

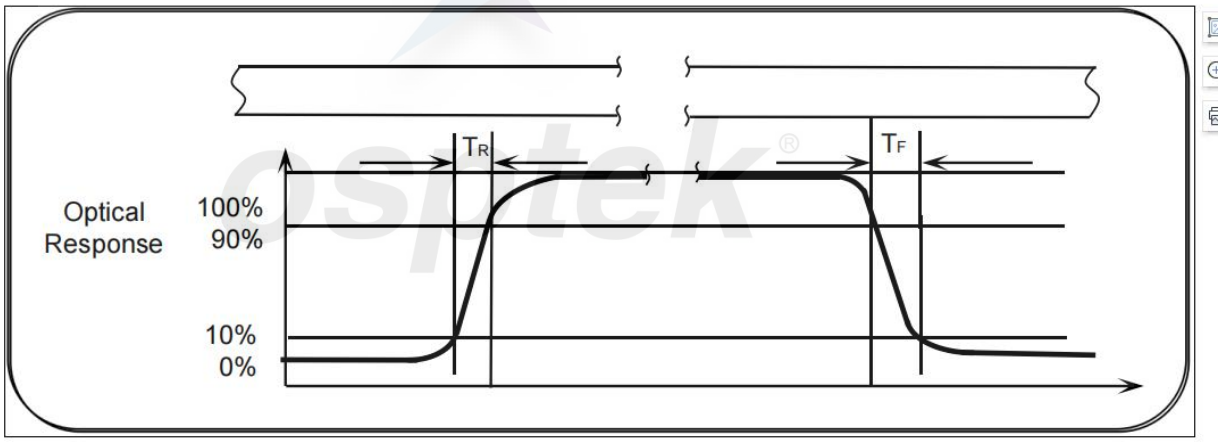

Response time is the time required for the display to transition from white to black (Rising time, Tr) and from black to white (Falling time, Tf) for additional information.

4.2.3 Contrast Ratio (CR)


Contrast Ratio (CR) is defined mathematically as:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.

osptek®

5. Mechanical Drawing 模组图

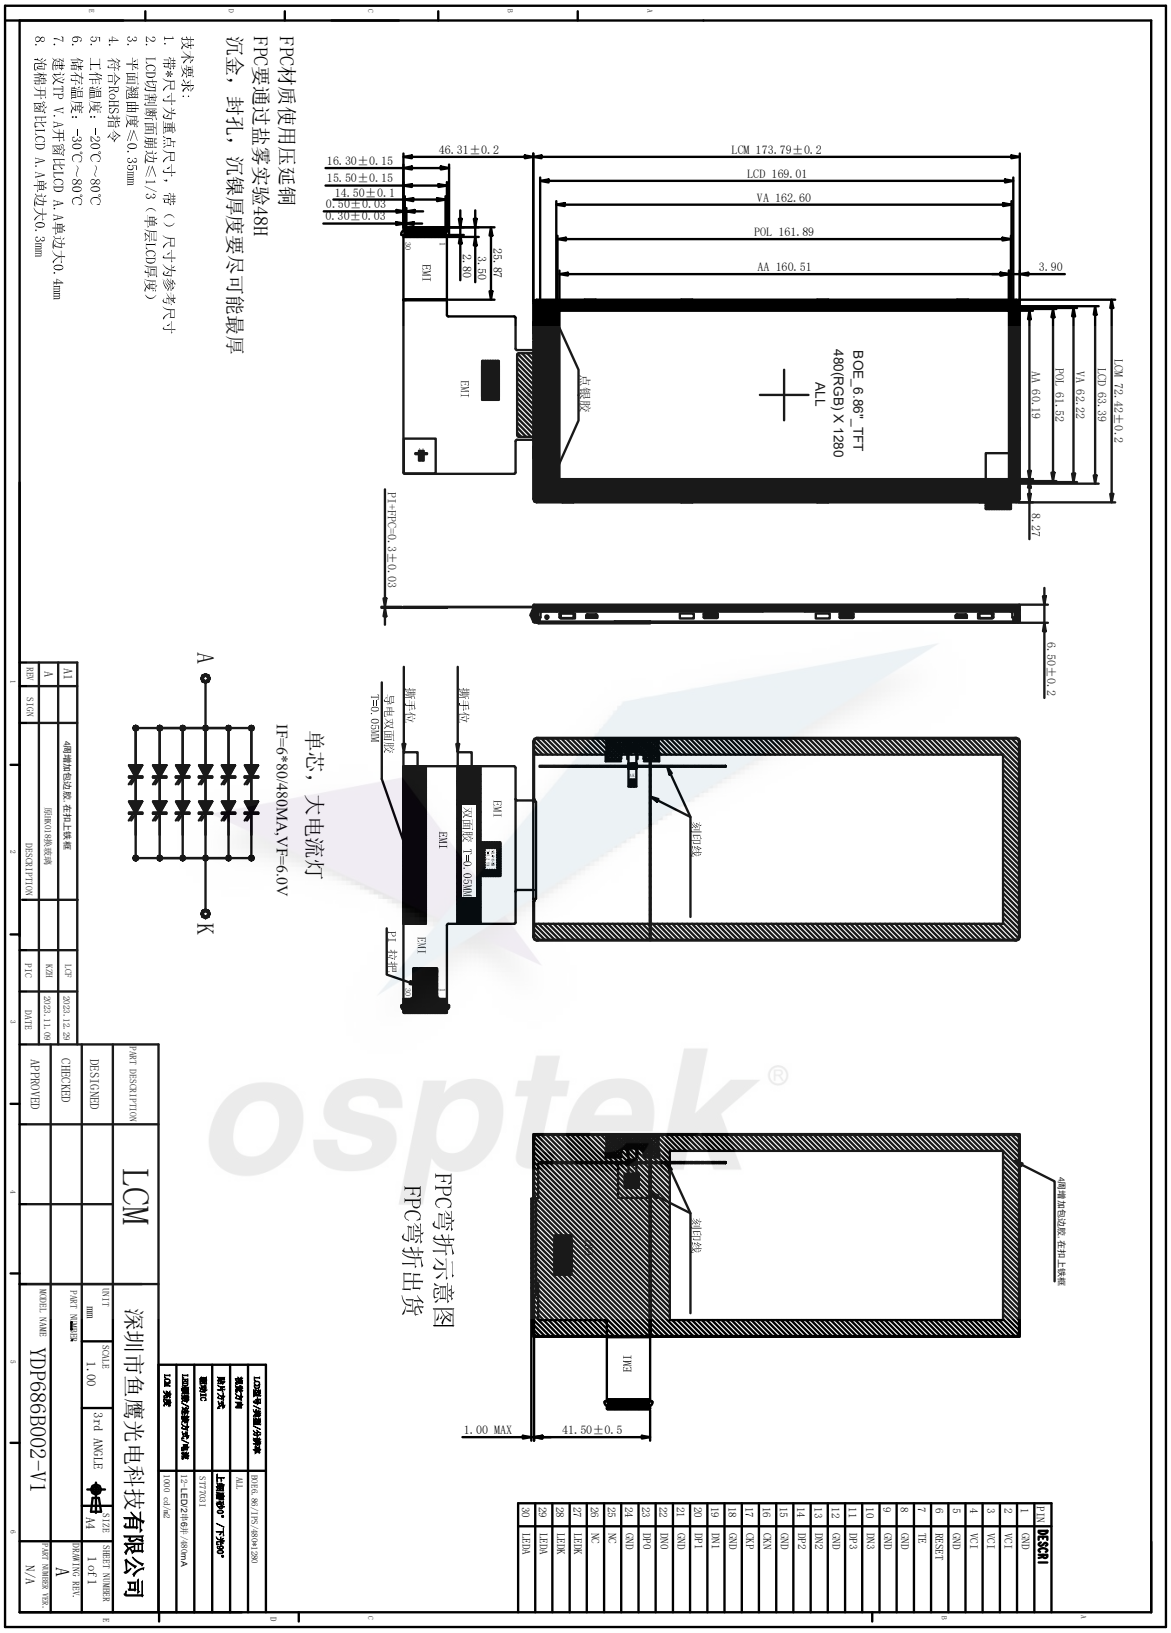

osptek®

6. Reliability Test Items 可靠性测试项目

Test Item 测试项目	Test Condition 测试条件	Test result determinant gist 实验结果判定
High temperature storage 高温存储	80℃，24H；	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 试验结束后,已测试的LCD样品必须在室内正常温湿度环境下放置2~4个小时以上才能进行功能和外观检查，样品不允许有以下缺陷: 1.Air bubble in the LCD; 模块中有气泡; 2.Non-display; 不显示; 3.Glass crack; 玻璃破碎; 4. The electrical characteristics requirements shall be satisfied. 需要满足模块电气性能。
Low temperature storage 低温存储	-30℃，24H；	
High temperature operation 高温运行测试	70℃，24H；	
Low temperature operation 低温运行测试	-20℃，24H；	
High temperature /humidity 高温高湿	60℃,90%RH，24H；	
Thermal Shock 冷热冲击	-10℃/0.5h~+60℃/0.5h for a total 24 cycles；	
Vibration Test 振动测试	Frequency 10Hz~55Hz~10Hz Amplitude: 1.5mm, X，Y，Z direction for total 1H; (Packing condition)	
ESD test 静电测试	±2KV, Human Body Mode, 150pF/330Ω; ±8KV, Air Mode, 150pF/330Ω;	

Remark: 注意:

1. The test samples should be applied to only one test item.
每个被测试的模块只能用于其中的一个测试项目。
2. Sample size for each test item is 2pcs.
每个测试项目的样品数量为2片。
3. Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.
故障判断标准:基本规格,电气特性,机械特性,光电特性。


7. Packing and Storage Specification(Reference Only) 包装存储


7.1 Packing Method 包装方法

(1) 每片产品会套上静电袋放入泡棉格.


每盘泡棉有 10 格，每格装 2PCS 产品，共放 20PCS

（2）一个纸箱放 2 个泡棉盘，一箱装 40PCS。

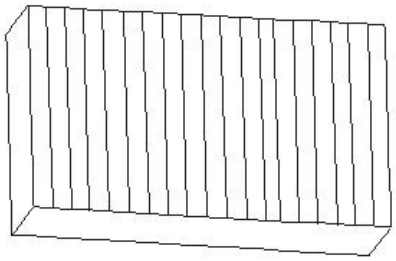





(3)

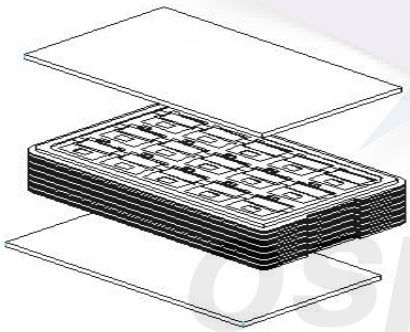


(4)

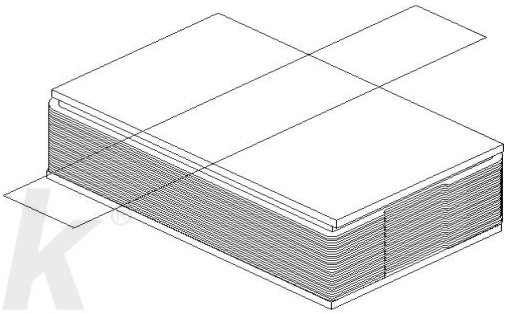

(5)

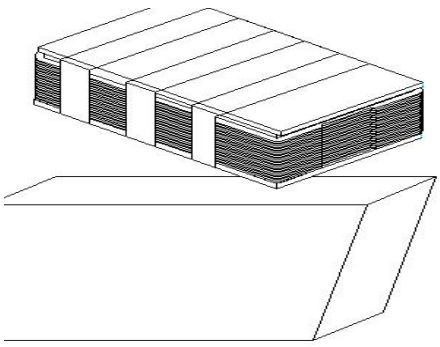

(6)

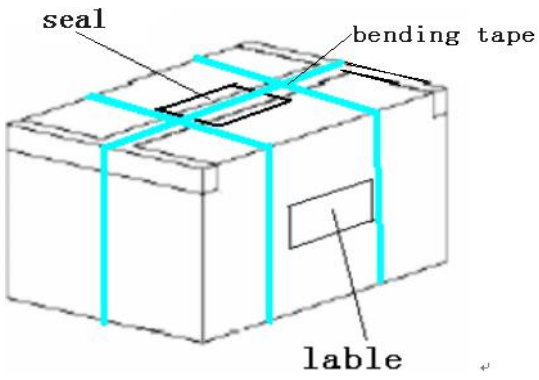

1. 每片产品会套上静电袋放如泡棉盘.每盘泡棉盘装 20PCS 产品

7.2 Storage Method 存储方法

1. Store in an ambient temperature of 23°C±5°C, and in a relative humidity of 55%±15%. Don't exceed 12 months and expose to sunlight or fluorescent light.
   存储环境温度为 23±5°C，相对湿度为 55%±15%，存储不能超过 12 个月，不要长时间暴晒。
2. Store in a clean environment, free from dust, active gas, and solvent.
   存储在一个干净的环境，不受灰尘，活性气体和溶剂污染。
3. Store in antistatic container.
   存储在防静电环境。

osptek®

8. Announcements 注意事项

1. Do not attempt to disassemble or process the LCD module.
   请勿拆卸液晶显示模块。
2. Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached。
   不要在印制电路板上钻额外的孔，修改形状或更改印制线路板上元件的位置。
3. Except for soldering the interface, do not make any alterations or modifications with a soldering iron; Ensure welding temperature at 320 ° C to 350 ° C, the welding time control within the 10 s, welding note don't stay too long in the same place to avoid scald FPC.
   除焊接接口外，不要用烙铁做任何更改；焊接温度保证在 320°C-350°C，焊接时间控制在 10S 以内，焊接时注意不要在同一处停留时间太久以免烫伤 FPC。
4. Other matters in not clear before use, please contact our staff to guide.
   其他事项在不清楚使用之前，请联系我司人员指导进行。

osptek®