



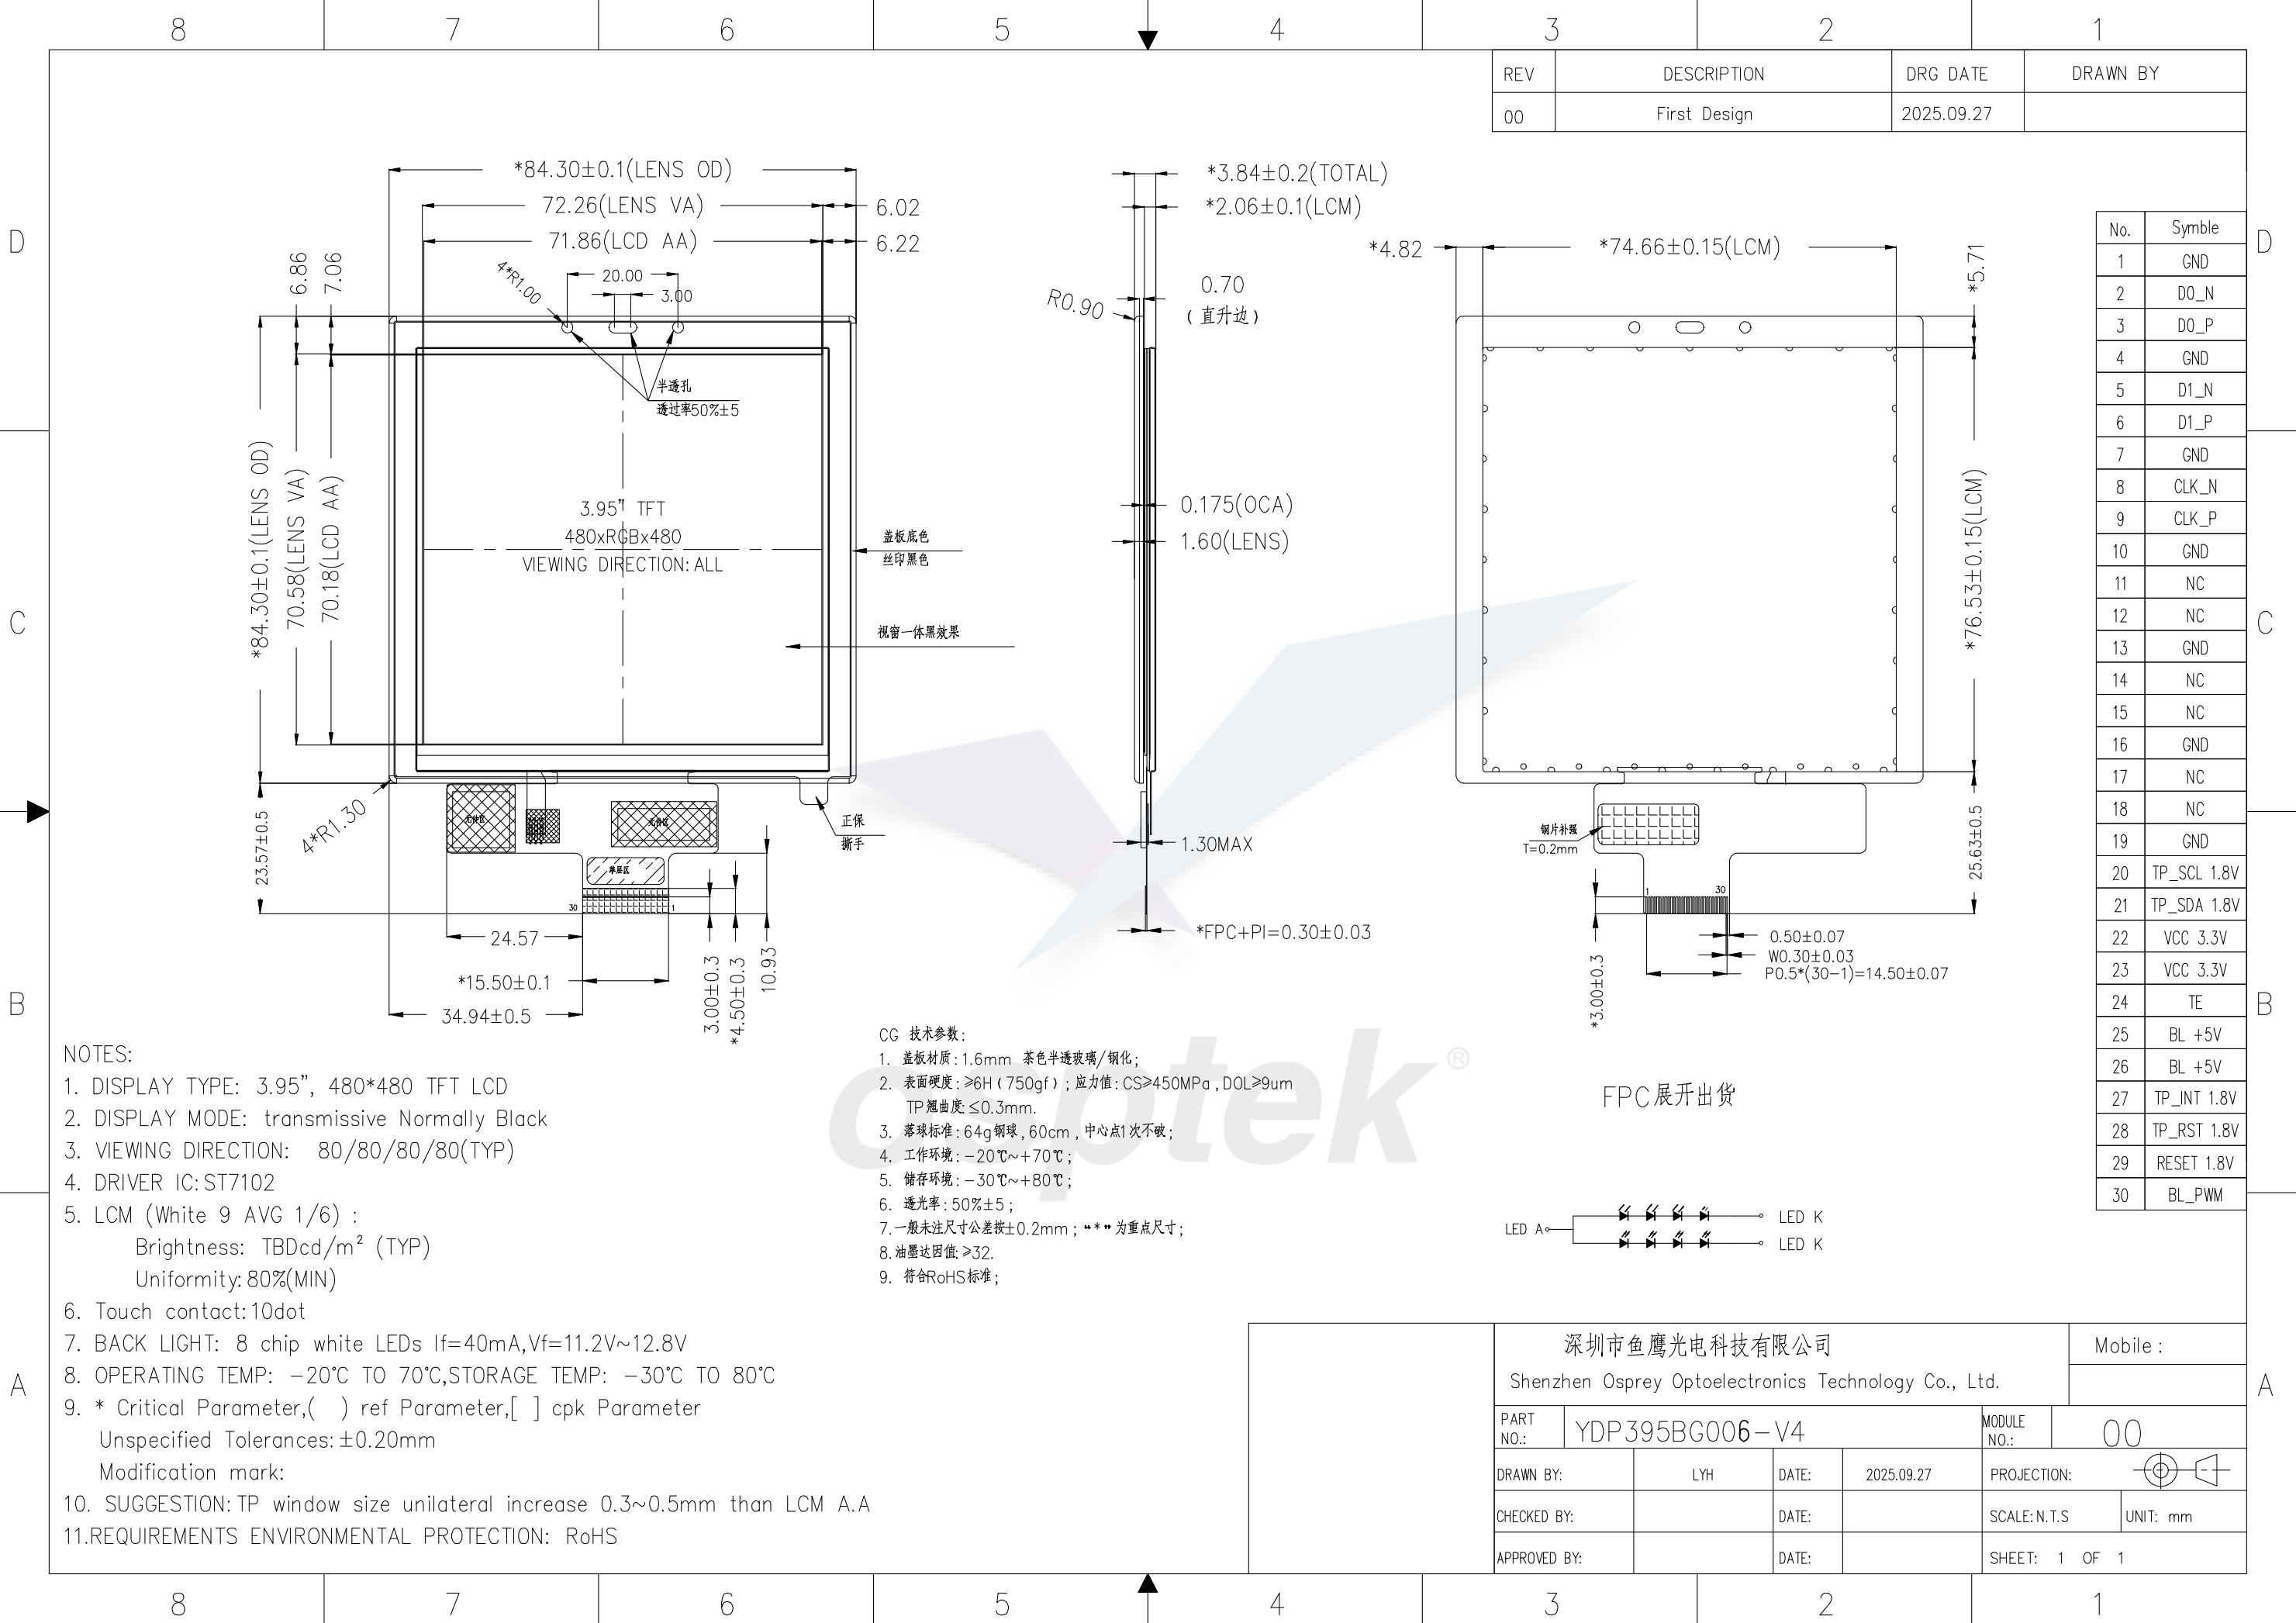

NOTES:

- DISPLAY TYPE: 3.95", 480*480 TFT LCD
- DISPLAY MODE: transmissive Normally Black
- VIEWING DIRECTION: 80/80/80/80(TYP)
- DRIVER IC: ST7102
- LCM (White 9 AVG 1/6) :
Brightness: TBDcd/m² (TYP)
Uniformity: 80%(MIN)
- Touch contact:10dot
- BACK LIGHT: 8 chip white LEDs If=40mA,Vf=11.2V~12.8V
- OPERATING TEMP: -20℃ TO 70℃,STORAGE TEMP: -30℃ TO 80℃
- * Critical Parameter,() ref Parameter,[] cpk Parameter
Unspecified Tolerances: ±0.20mm
Modification mark:
- SUGGESTION:TP window size unilateral increase 0.3~0.5mm than LCM A.A
- REQUIREMENTS ENVIRONMENTAL PROTECTION: RoHS

- CG 技术参数:
- 盖板材质: 1.6mm 茶色半透玻璃/钢化;
 - 表面硬度: ≥6H (750gf) ; 应力值: CS>450MPa , DOL>9um
TP 翘曲度: ≤0.3mm.
 - 落球标准: 64g 钢球, 60cm , 中心点1次不破;
 - 工作环境: -20℃~+70℃;
 - 储存环境: -30℃~+80℃;
 - 透光率: 50%±5;
 - 一般未注尺寸公差按±0.2mm ; **为重要尺寸;
 - 油墨达因值: >32.
 - 符合RoHS标准;



FPC展开出货

No.	Symble
1	GND
2	D0_N
3	D0_P
4	GND
5	D1_N
6	D1_P
7	GND
8	CLK_N
9	CLK_P
10	GND
11	NC
12	NC
13	GND
14	NC
15	NC
16	GND
17	NC
18	NC
19	GND
20	TP_SCL 1.8V
21	TP_SDA 1.8V
22	VCC 3.3V
23	VCC 3.3V
24	TE
25	BL +5V
26	BL +5V
27	TP_INT 1.8V
28	TP_RST 1.8V
29	RESET 1.8V
30	BL_PWM

深圳市鱼鹰光电科技有限公司				Mobile :	
Shenzhen Osprey Optoelectronics Technology Co., Ltd.					
PART NO.:	YDP395BG006-V4			MODULE NO.:	00
DRAWN BY:	LYH	DATE:	2025.09.27	PROJECTION:	
CHECKED BY:		DATE:		SCALE: N.T.S	UNIT: mm
APPROVED BY:		DATE:		SHEET: 1 OF 1	