


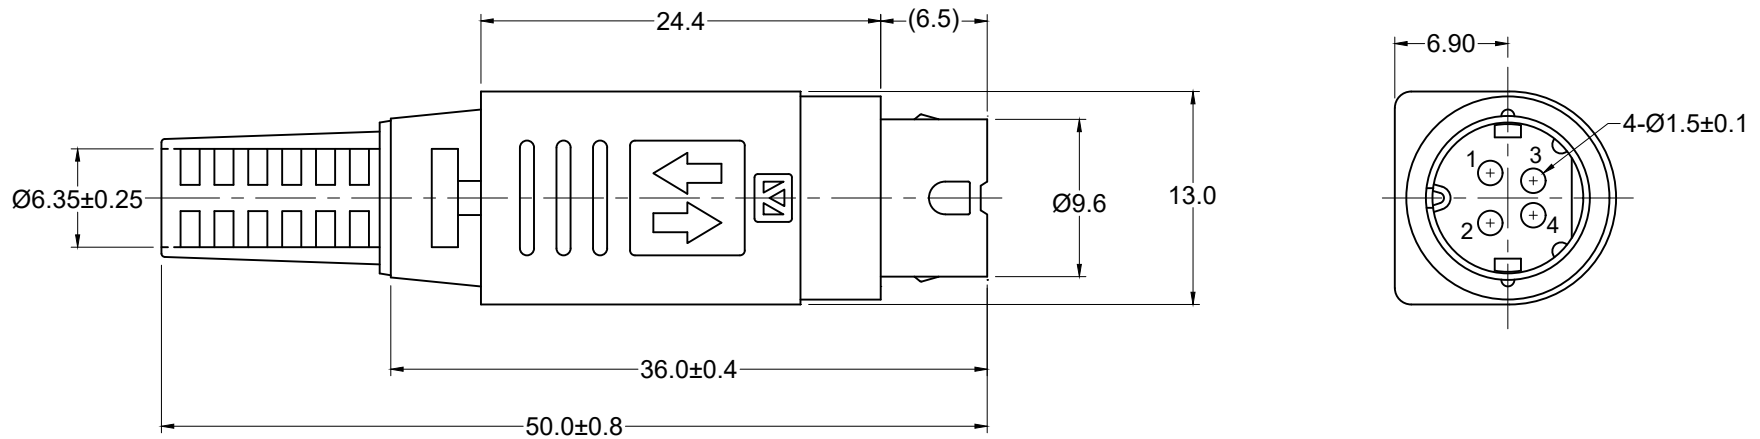

Material and Finish

Body: ABS Thermoplastic
UL94 HB Rated
Color: Black

Inner Shield: Copper Alloy,
Nickel Plated

Insert: Nylon, Black Color
UL94 V-2 Rated

Contacts: Brass

Contacts Plating Options:
Silver Plating

Operating Temperature:
-40°C to +85°C

Electrical Characteristics

Contact Rating (Per Pin):
7.5A Max. @ 48V DC

Insulation Resistance:
50 Megohms Min. at 250V DC

Dielectric Withstanding Voltage:
500 V AC RMS for 1 Minute

Contact Resistance:
30 milliohms Max.

Recommended Wire AWG.
18 AWG. for Power Wire

Tolerances

X.X $\pm$ 0.35
X.XX $\pm$ 0.25
Unless Stated
Otherwise

RoHS COMPLIANT

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A12	01/08/15	ECO #15-003	W. Cook	H. MA	R. Aguirre	06/30/05
A13	02/29/16	ECO #16-005	C. Kelleher	W. Cook		
A14	04/10/17	Remove 30u" option	H. MA	N/A		UNITS
A15	10/03/18	ECO #18-050	G. Serrato	D. Shehan		mm
A16	05/21/25	ECO #25-045	K.Wang	C.Kelleher		
A17	05/29/25	Add Kycon Logo	K.Wang	C.Kelleher		

KPPX-4P

Power Plug, Cable Mount

Snap and Lock, RoHS Compliant

