

Manipulator Robot Development and Analysis of Motion planning libraries through ROS2 and MoveIt2 *

Shivam Vishwakarma¹[0009-0001-0875-7353],
Chandan Singh²[0009-0007-9962-6669],
Dr Vijay Bhaskar Semwal³[0000-0003-0767-6057],
Dr Deepak Kumar⁴[0000-0001-9048-8828], and
Dr M. taufik⁵[0000-0002-8706-8942]

¹ Department of Mechanical Engineering, Maulana Azad National Institute of
Technology Bhopal, India shivam361v@gmail.com

² Department of Mechanical Engineering, Maulana Azad National Institute of
Technology Bhopal, India chandansinghrec@gmail.com

³ Department of Computer Science and Engineering, Maulana Azad National
Institute of Technology Bhopal, India vsemwal@gmail.com

⁴ Department of Mechanical Engineering, Maulana Azad National Institute of
Technology Bhopal, India deepakkumaromre@manit.ac.in

⁵ Department of Mechanical Engineering, Maulana Azad National Institute of
Technology Bhopal, India taufikmohd86@gmail.com

Abstract. This paper presents two key research areas, manipulator robot development, and motion planning analysis, that aim to improve robot ability in various aspects like autonomy, efficiency, and safety. These are key areas for improvement with an objective to do complex operations, navigation in dynamic environments, and interaction with humans or machines. Developing a robot model involves designing, building, and programming to achieve ergonomics. Motion planning involves information about the motion of each joint of the robot to reach our target without colliding with the obstacle that comes in the path of the robot. It requires real-time calculation and understanding of non-linear environments for safe, efficient, and robust robot navigation. In addition, robotics also possesses abundant structured resources for learning and development. One primary concern in motion planning is managing libraries that guide robots in reaching specified targets without colliding with obstacles. This paper presents a comprehensive analysis on the process of developing a manipulator robot and motion planning through moveIt2, which would manage motion planning libraries. The motion planning is carried out using a parallel motion planning setup, which results in OMPL having a 66 percent higher chance of solving a given configuration of a 3DOF manipulator robot when compared to a STOMP motion planning library within a 1.5-second time constraint.

Keywords: Fusion360 · URDF · Motion Planning · Gazebo · ROS2 · MoveIt2.

* Dept. of Mechanical Engg, MANIT, Bhopal, India.

1 Introduction

Robot development is a multidisciplinary approach that requires knowledge of different fields, such as mechanical, electronics, and computer science. Therefore, it is difficult for anyone to master all these areas. Hence, the Robot Operating System(ROS) came into the picture, simplifying robotic software development by providing a standard platform that can be utilized for any robot, irrespective of the functionality [7]. By leveraging ROS, a developer can migrate their existing project without the need to relearn about the platform, which would lead to the focus on the core features. ROS is an meta-operating system, which act as an middleware framework, that provides communication tools and plug-and-play libraries. It is also a growing community of researchers from universities, independent developers, and numerous companies, indicating market validation for the platform. It is an essential tool for managing various sensors and actuators commonly used in robots. it allows for quick prototyping and complete applications. Knowing ROS can save a very significant amount of time by creating prototype software for any mobile robot or robotics arm. Path planning is fundamental aspect of robot motion, which guides vehicles or robots in navigating complex environments without colliding with obstacles. Over the years, motion planning algorithms have significantly developed, from collision-free paths and applying controls to handling multiple degrees of freedom robots in the nonlinear environment [12].

Around 2007, Stanford University along with Willow Garage Robot Company came together to overcome the inconvenience of robot trajectory planning. After a series of research and experiments, in 2010, they came up with MoveIt function package to solve robot motion planning libraries [3]. The Open Motion Planning Library(OMPL) can provide different computing methods according to the KDL computing algorithm that could adapt motion calculation of various complex algorithms and calculate results with very high accuracy, saving a lot of computing power at robot trajectory planning [9]. Covariant Hamiltonian Optimization for Motion Planning(CHOMP) is an novel strategy for trajectory generation and optimization for the robotic system. A new motion planning approach that could deal with general constraints [8]. Stochastic Trajectory Optimization for Motion Planning(STOMP) is series of trajectories with noise. In each iteration, such trajectories are generated as well as simulated to evaluate the cost, which could be used to update candidate solution [4]. Since no gradient information is required for this process, which would lead to general constraints and additional non-smooth costs, it can be optimized [11].

2 Literature Review

Manipulator robot development undergoes transformation, with existing advancements in recent years. A key objective is to enhance robot perception through advanced sensors, particularly vision systems. This allows robots to grasp objects effectively, even in the cluttered environment [10]. Additionally, a

sensor fusion technique is developed, which allows the integration of data from multiple sensors, creating a richer understanding of their surroundings and leading to more accurate manipulation. However, learning-based methods are emerging as a new trend for high dimensions and dynamic environments. Reinforcement learning methods promise to enable robots to learn through trial and error. Researchers are also exploring a hybrid approach to combine traditional planning with learning-based methods, leveraging both strengths to achieve efficient planning while adapting to the unforeseen environment. However, robot development has significantly improved, and we are providing a structured procedure for developing manipulator robots through CAD hardware design. Thereafter, implementing the model in the Unified Robot Description Format (URDF) to define constraints into it. In the case of motion planning libraries, we are comparing OMPL, CHOMP, and STOMP libraries, which are integrated with the MoveIt motion planning toolkit.

3 Virtual model development

CAD models for manipulator robots can be created using Fusion360. Researchers can analyze the robot's behavior and optimize its performance by simulating the CAD model in a nonlinear environment. The proposed method includes creating a simulation using Gazebo to validate the model and control of nonlinear systems. Additionally, the CAD design allows for the robot's dynamic behavior simulation by implementing a controller.

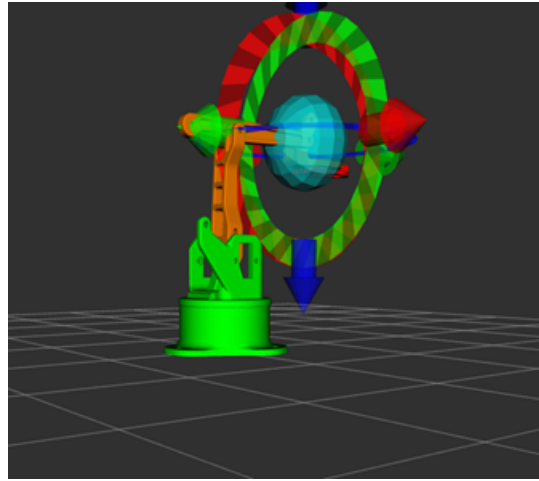


Fig. 1. URDF model of Manipulator Robot in RVIZ

Generally, robots are typically modeled as interconnected rigid bodies, also known as links or joints, as defined in the URDF format. This format uses

Extensible Markup Language(XML) to describe robots, including link geometry, joint types, and visual appearance. To use URDF designs, it is necessary to extract this information by identifying the links, joints, and their properties. The benefits of using URDF include standardization, modularity, scalability, and the ability to use analytical tools for robot simulations[1]. Virtual models (URDF) in robotics act as digital twins, enabling safe testing of movements, control strategies, and robot interactions in simulated environments before real-world deployment.

4 Motion Planning Architecture with MoveIt2

A novel planning interface built into the parallel motion planning architecture simplifies the application of several motion planning algorithms to address a problem at once. This feature streamlines the planning algorithm selection process by enabling the user to select the optimal solution based on a user-defined callback[13].

Robotics mobility planning is challenging because a suitable planning algorithm to find a path in a high-dimensional space that meets specific criteria needs to be selected[2]. A good planning algorithm should be fast, generate very high-quality pathways, and cease planning after a reasonable period of time if no solution can be identified. OMPL, CHOMP, and PILZ/STOMP are just a few planning libraries that MoveIt2 currently supports. An overview of the benefits and drawbacks of these libraries may be found in Table 1.

Table 1. Motion planning libraries comparison :

Motion Planning Libraries	Merit	Demerit
OMPL	Open source, versatile with many sampling-based planners, probabilistically complete (finds solution if exists)	Can get stuck in local minima, may not guarantee finding optimal solution
CHOMP	Likely domain-specific for industrial robots, potentially efficient for common tasks	May be closed-source or limited functionality outside industrial robotics
STOMP/PILZ	Effective in avoiding local minima due to stochastic nature	Not as widely applicable as OMPL, might require more tuning for specific problems

The movie-cpp interface is improved by the MoveIt2 parallel planning interface. Each generated MotionPlanResponse is gathered in thread-safe storage. When a stopping requirement is satisfied, the current MotionPlanResponses are fed into a system that selects the optimal choice. Numerous quality variables, such as trajectory smoothness, path length, clearance from collision objects,

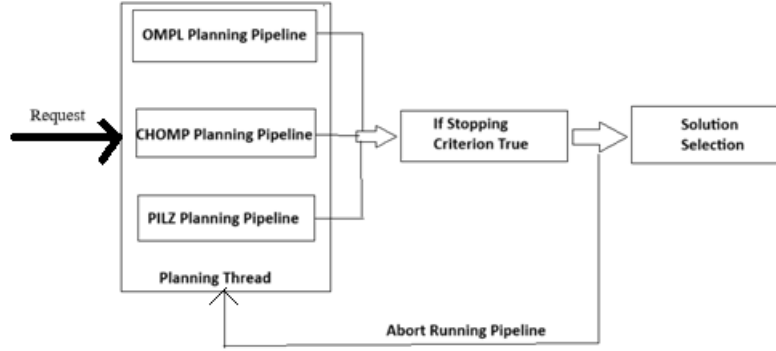


Fig. 2. Parallel motion planning setup

planning time, and execution time, can be used to identify the best solution to the planning problem[6].

Time-saving measures include stopping other pipelines if one discovers a solution and it appears likely that the best solution is among the available solutions. As an example of a heuristic for a stopping criterion, one pipeline could identify a solution and then stop the other planning pipelines. Though some planners concentrate more on feasibility, others generate excellent solutions. The user may wait for a better solution from another planner for up to a predetermined amount of time if a workable solution is found, although planning can be terminated immediately if an optimal solution is found. An illustration can be found below in Figure 3.

The parallel planning interface is advantageous. A robot arm is moved to different locations in an environment to imitate pick and place operation in real-world situations, and the results are compared between motion planning libraries. Figure 4 shows two resolved positional configurations, each with a combination of more straightforward and more difficult target poses. We use a 1.5-second time constraint for each query to solve the configuration 50 times for each query. The optimal option is determined by taking the shortest path possible. We have chosen OMPL, CHOMP, and STOMP as separate planning pipelines. The parallel planner selects the shortest path, which uses all three planners with the same configuration. An outcome is summarized in Table 2.

Although OMPL can solve almost all configurations of the motion planning problems, it seems to outperform the parallel planner at first glance. As a result, for every query, the parallel planning interface produces the average shortest pathways. Parallel motion planning can assist in determining the optimal solution. It can be beneficial when you're unsure which planner will suit you the best or when you need a fallback if your first choice doesn't work out. However, When

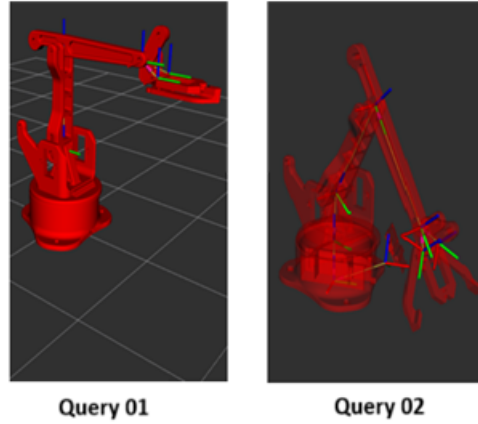


Fig. 3. Robot positional configuration

using parallel planning, adjusting the halting criterion and solution selection is essential to ensure optimal results. If you want to use MoveIt parallel planning interface, it is recommended that you modify these parameters according to the specific problem at hand.

5 Result

- The parallel motion planner discovered the shortest paths on average for all evaluated queries across 50 runs, each with a 1.5-second time limit. This implies that the chance of finding an outcome for a given problem is 66 percent higher in OMPL compared to PILZ/STOMP, as shown in Table 2.
- STOMP was only able to solve 60 percent of the issues in the successful cases, it found even shorter paths than OMPL. This means STOMP could be a good fit in some situations where it performs exceptionally well.

Table 2. Motion Planning Success rate of all queries :

Planners	Percentage solved from 50 queries
OMPL	100
CHOMP	72
STOMP/PILZ	60

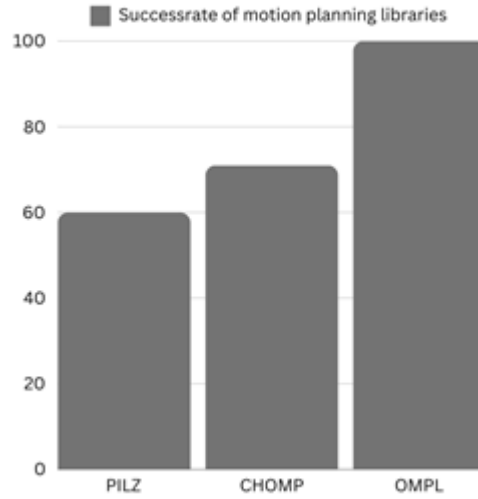


Fig. 4. Comparison of motion planning libraries

The experiment was performed for a parallel motion planning interface that utilized the CHOMP, OMPL, and PILZ/STOMP planners to replicate pick-and-place operations.

6 Conclusion

We have presented an overview of the development process of a manipulator robot and motion planning through moveit2. Which would manage motion planning libraries. we have designed a manipulator robot from scratch, starting with CAD modeling and creating a URDF model. In addition, we have successfully applied control to the robot. Furthermore, we have analyzed a parallel motion planner that yielded results for the given configuration problem to the manipulator robot OMPL, which performed better than CHOMP and STOMP/PILZ regarding the total volume of solving the given configuration problem. The resource for my experiment contains the procedure and source code - <https://github.com/shivam361v/arduino-bot-ws.git>.

7 Future Scope

Moreover, we aim to incorporate object detection technology to enable the autonomous manipulator robot to carry out tasks without the need for direct human intervention[5]. Additionally, we seek to enhance and optimize the algorithm and controller utilized in the operation of the manipulator.

References

1. P. Anggraeni, I. Rokhim, and R. M. Salam. Design and development of multiple mobile manipulator robots using gazebo-ros. In *2020 International Conference on Applied Science and Technology (iCAST)*, pages 672–676, 2020.
2. Sachin Chitta, Ioan Sucan, and Steve Cousins. Moveit! [ros topics]. *IEEE Robotics Automation Magazine*, 19(1):18–19, 2012.
3. Sergio Hernandez-Mendez, Carolina Maldonado-Mendez, Antonio Marin-Hernandez, Homero Vladimir Rios-Figueroa, Hector Vazquez-Leal, and Elvia R. Palacios-Hernandez. Design and implementation of a robotic arm using ros and moveit! In *2017 IEEE International Autumn Meeting on Power, Electronics and Computing (ROPEC)*, pages 1–6, 2017.
4. Mrinal Kalakrishnan, Sachin Chitta, Evangelos Theodorou, Peter Pastor, and Stefan Schaal. Stomp: Stochastic trajectory optimization for motion planning. In *2011 IEEE International Conference on Robotics and Automation*, pages 4569–4574, 2011.
5. Mohd Mahmeen, Raul David Dominguez Sanchez, Michael Friebe, Maciej Pech, and Sultan Haider. Collision avoidance route planning for autonomous medical devices using multiple depth cameras. *IEEE Access*, 10:29903–29915, 2022.
6. Èric Pairat, Constantinos Chamzas, Yvan Petillot, and Lydia E. Kavraki. Path planning for manipulation using experience-driven random trees. *IEEE Robotics and Automation Letters*, 6(2):3295–3302, 2021.
7. Dongning Rao, Guodong Hu, and Zhihua Jiang. Probplan: A framework of integrating probabilistic planning into ros. *IEEE Access*, 8:106516–106530, 2020.
8. Nathan Ratliff, Matt Zucker, J. Andrew Bagnell, and Siddhartha Srinivasa. Chomp: Gradient optimization techniques for efficient motion planning. In *2009 IEEE International Conference on Robotics and Automation*, pages 489–494, 2009.
9. Ioan A. Sucan, Mark Moll, and Lydia E. Kavraki. The open motion planning library. *IEEE Robotics Automation Magazine*, 19(4):72–82, 2012.
10. Federico Thomas. Approaching dual quaternions from matrix algebra. *IEEE Transactions on Robotics*, 30(5):1037–1048, 2014.
11. Bingqing Wang, Rui Wang, and Houbing Song. Toward the trustworthiness of industrial robotics using differential fuzz testing. *IEEE Transactions on Industrial Informatics*, 19(3):2782–2791, 2023.
12. Teng-Yi Wang and Chia-Der Chang. Hybrid fuzzy pid controller design for a mobile robot. In *2018 IEEE International Conference on Applied System Invention (ICASI)*, pages 650–653, 2018.
13. Dina Youakim, Pere Ridao, Narcis Palomeras, Francesco Spadafora, David Ribas, and Maurizio Muzzupappa. Moveit!: Autonomous underwater free-floating manipulation. *IEEE Robotics Automation Magazine*, 24(3):41–51, 2017.