

Pos.	Menge/Qty	Bezeichnung/Description	Hersteller/Manufacturer	Art.-Nr.	Voltage Rating	Temperature	Brennbarkeit/Flammability	UL-File
1	1	Stecker/Connector Housing	Souriau	UTS6JC128S	300V	105°C	94V-0	E169916
2	4	Kontakt/ Connector Contact female AWG20..16/0.5..1.5mm² Insulation <3.2mm dia.	Souriau	RC16M23K	n/a	n/a	n/a	n/a
3	7.5m	Kabel/Cable ÖLFLEX 150 Multinorm 2*1.5mm²	Lappkabel	0015302	300V	70°C	IEC 60332-1-2	E63634
4	2	Aderhülse/Wire Ferrule AWG20..18, 1.5mm²	Vogt*	440406.47	n/a	n/a	n/a	n/a

RoHS-REACH-CFM Richtlinie gem. COMET Dokument:



RoHS-Reach-CFM Directive acc. to COMET document:

"Comet IXT Generic Regulatory Requirements about RoHS-REACH-CFM_SAP Doc-Nr. 50043710"

* Kann unter Einhaltung den technischen Mindestanforderungen geändert werden. Die UL-Zulassung (falls gegeben) muss zwingend eingehalten werden.

** Can be modified in compliance with the minimum technical requirements. UL approval (if given) must be strictly adhered to.*

Wire Nr.	Souriau Pin	Signal Name
1	A	Power Supply Main +
2	E	Power Supply Main -

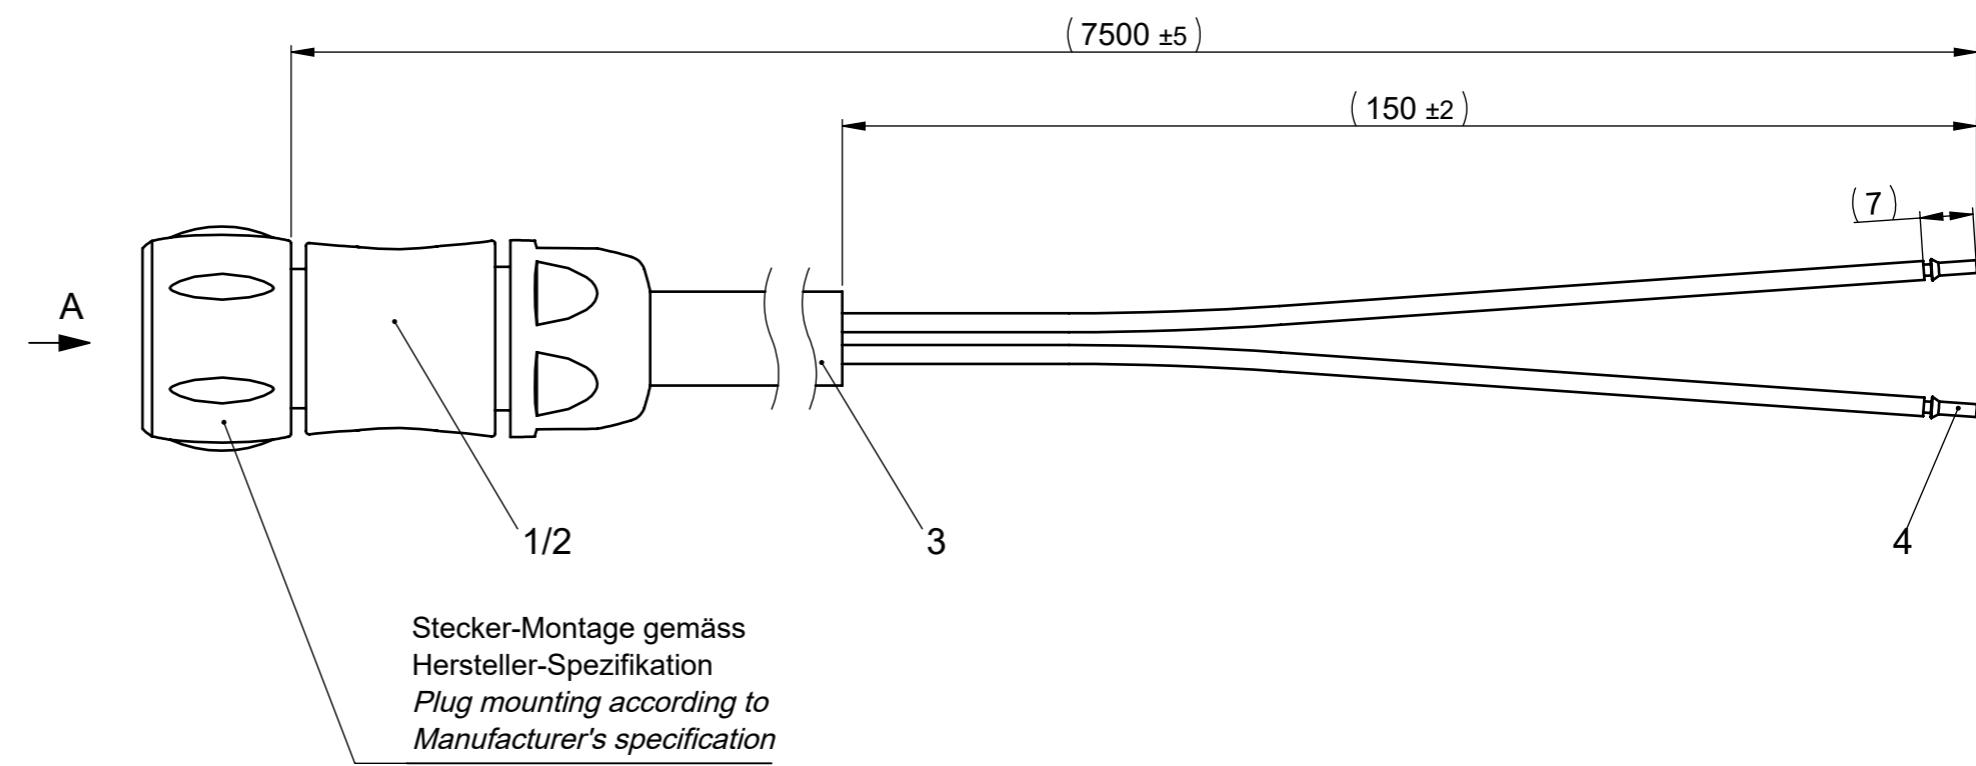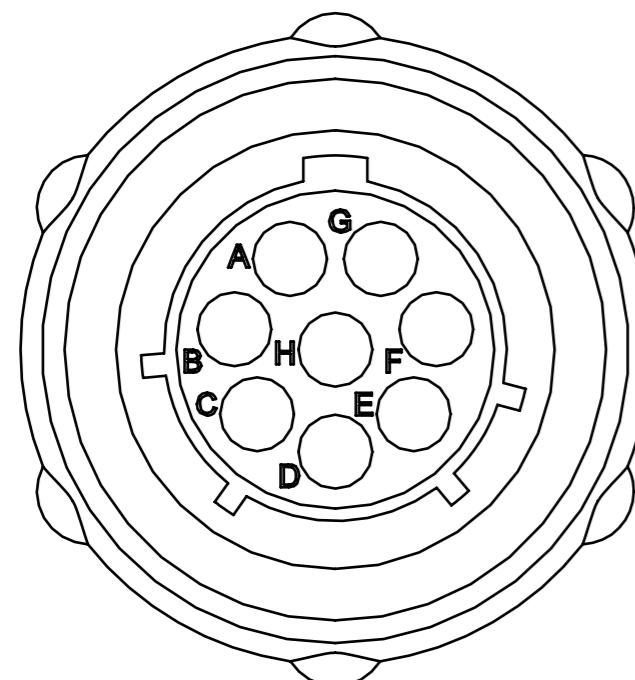

All related COMET specifications must be considered

General tolerances: keine

Raw Material Item				Qty.	Raw Material Code		Raw Mat No	
Revision History	00	-	-				Doc. No.	40133297
	-	-	-				Doc. Part No.	000
	-	-	-				Units	mm
Material Name			Scale			Drawn		
X2 Cable DC Main Supply 2p 7.5m			1:1			31.10.2022		
Material No			Checked			21.11.2022		
20133410			Approved			08.12.2022		