



33" top-/undermount single-bowl workstation kitchen

sink

K-80084-1PC

Features

- 36" (914 mm) minimum base cabinet width
- Single bowl
- Single faucet hole
- 9" (229 mm) depth provides generous workspace
- Tightly angled fabricated corners maximize bowl space
- Two-piece colander set offers convenience while rinsing and draining (dishwasher-safe)
- Durable bamboo cutting board with silicone bumpers for added stability
- Accessories stack and slide to enhance food prep
- Dishwasher-safe silicone sink mat helps protect the sink as well as fragile dishes
- Sink strainer keeps large items from passing into the drain

Material

- Premium 18-gauge stainless steel
- KOHLER stainless steel sinks resist corrosion and tarnishing

Installation

- Top-mount or undermount
- Accessories slide on sink ledges when sink is top-mounted
- Cutting board slides across countertop when sink is undermounted

Recommended Products/Accessories

K-23726 Drain treatment K-23729 Stainless steel cleaner

Optional Products/Accessories

K-9000 P-Trap

K-21616 Stainless steel sink rack

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-11352 Disposal Flange with Stopper

Included Components

K-21613 Bamboo cutting board K-21614 Colander set 7400 Stainless Steel Sink Drain and Strainer K-78956 Silicone sink mat



Codes/Standards

ASME A112.19.3/CSA B45.4 IAPMO Certification

KOHLER® Stainless Steel Sinks Lifetime Limited Warranty


See website for detailed warranty information.







33" top-/undermount single-bowl workstation kitchen sink

K-80084-1PC

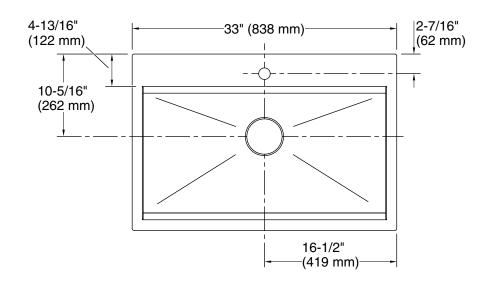

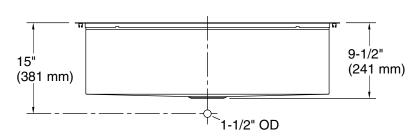



Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Min. base cabinet 36" (914 mm)

width:

Bowl area (Only): Length: 30-1/4" (768 mm)

Width: 14-15/16" (379 mm)

Bowl depth: 9-3/16" (233 mm)

Number of deck

holes:

Faucet hole(s): 1-7/16" (37 mm)
Drain hole: 3-5/8" (92 mm)

Template: Top-mount/Undermount, 1130821-7,

required, included

Notes

Install this product according to the installation instructions.

