## **Composed®**

# KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-73060-4

### **Features**

- Two lever handles offer separate control of hot and cold
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- 5-15/16" (151 mm) spout reach
- UltraGlide® valves with dry-stem technology are designed to eliminate common leak paths and provide smooth, effortless control
- Includes pop-up drain with 1-1/4" (32 mm) tailpiece
- Coordinates with Composed faucets, accessories, and showering components to complete your bathroom

#### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

### Installation

- For 8" 16" (203 406 mm) centers
- Handles are preassembled on valves to simplify installation
- Quick-connect fittings make installation easy

### Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

K-73141 18" Towel Bar

K-73142 24" Towel Bar

K-73144 24" Double Towel Bar

K-73145 towel arm

K-73146 Double Robe Hook

K-73147 Pivoting toilet paper holder

K-73148 Vertical toilet paper holder







### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material

regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

IAPMO Certification

### **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	2MB	Vibrant® Brushed Moderne
		Brass
	TT	Vibrant Titanium



## **Composed®**

## KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm K-73060-4

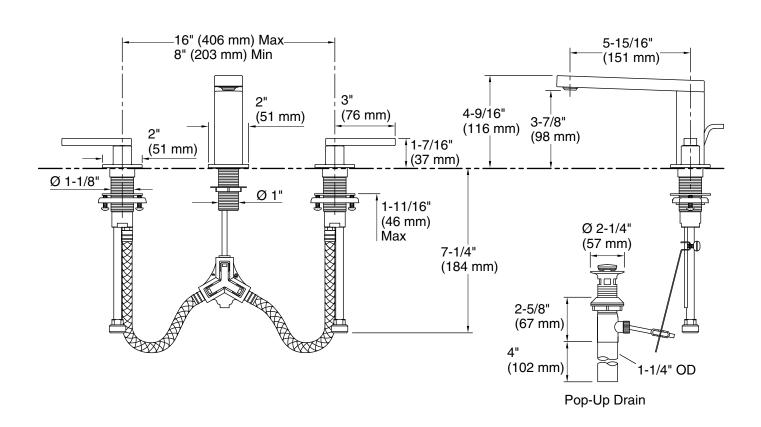

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

60 psi (4.1 bar) Pressure:

Drain included: Yes Drain with overflow: Yes

Spout:

Spout reach: 5-15/16" (151 mm)

### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

