Cantilever: ORIGINAL SOLID KEPT

original SOLID part kept: shifted grid: floors violated (K/K0 0.9988226716444734, P/P0 2.4559964174586035 against 1.0, 1.0; σ_PN0/σ_PN 0.9991299578900434 against 1.0, λ_B/λ_B0 2.4622090646402026 against 1.0; failed {'K': False, 'P': True, 'S': True, 'B': True}; governing buckling)


mass target 63.38 g final 63.38 g error 2.6264e-07
optimiser grid J 0.4486 (weighted) ln K/K0 -6.9429e-04 K/K0 0.9993 P/P0 2.455 governing buckling feasible True (accept: J > ln 1.02 = 0.0198, K/K0 >= 1, P/P0 >= 1, sigPN0/sigPN >= 1, lamB/lamB0 >= 1)
shifted grid J 0.4487 (weighted) ln K/K0 -0.001178 K/K0 0.9988 P/P0 2.456 governing buckling feasible False (accept: J > ln 1.02 = 0.0198, K/K0 >= 1, P/P0 >= 1, sigPN0/sigPN >= 1, lamB/lamB0 >= 1)

export h 0.2 mm faces 3360836 watertight True volume 6.094e+04 mm3 material bodies 1 shells 1 enclosed voids 1 escape holes 2
wall [mm] min 1.505 p05 1.555 median 2.169 max 41.54
closed_area_frac 0.1012
hollow_area_frac 0.597


optimiser: {'method': 'mma', 'starts': ['solid'], 'max_iter': [60, 80, 40], 'move': 0.1, 'tol_x': 0.005, 'tol_f': 0.0001, 'mass_tol': 0.0001, 'sliver_weight': [0.0, [0.0, 0.05], 0.1], 'seed': 0}
grid: {'phases': [{'h_e': 0.8, 'h_g': 0.2}, {'h_e': 0.4, 'h_g': 0.1}], 'export_h_mm': 0.05, 'rho_min': 1e-06, 'tessellation_mm': 0.02, 'active_margin_mm': 0.5, 'geometry_device': 'auto', 'geometry_offload': True}
growth: {'enabled': True, 'phase': 0, 'tol': 0.001, 'patience': None, 'quantiles': [0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0], 'step_tol': 0.0001, 'max_iters_per_step': 25, 'min_iters_per_step': 2, 'samples': 16}
objective: {'type': 'weighted', 'constraints': [], 'constraint_scale': 0.01, 'feasibility_tol': 0.001, 'w_stiffness': 0.5, 'w_capacity': 0.5, 'min_gain': 0.02, 'floor_stiffness': 1.0, 'floor_capacity': 1.0, 'floor_strength': 1.0, 'floor_buckling': 1.0, 'floors_as_constraints': True}
export cfg: {'h_mm': 0.2, 'device': 'gpu', 'closed_thr': 0.9, 'escape_holes': True}

Cantilever: supports (blue, all DOF fixed; 4 patches) and loads (orange faces; 1 red arrow, one per loaded patch at its area centroid, length and label = its share of the total 200 N). Faces read from bc_faces.npz (as analysed).


isometric

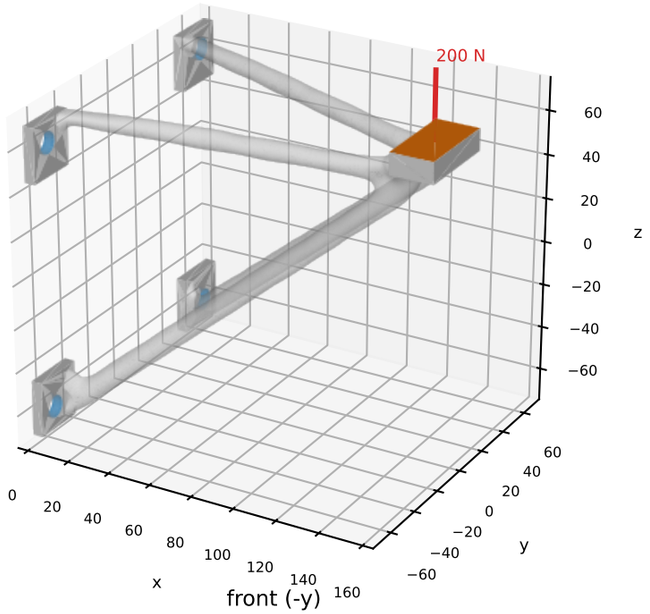


top (+z)

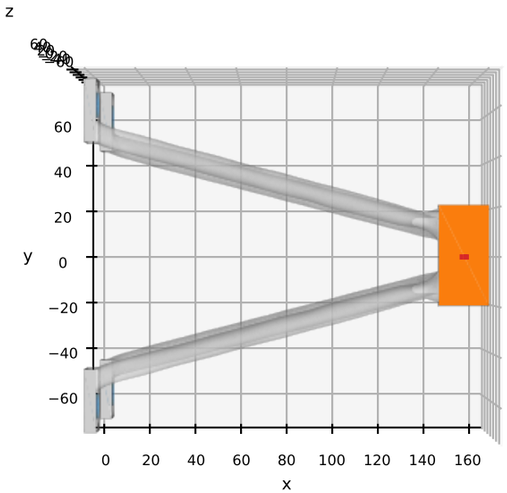

front (-y)

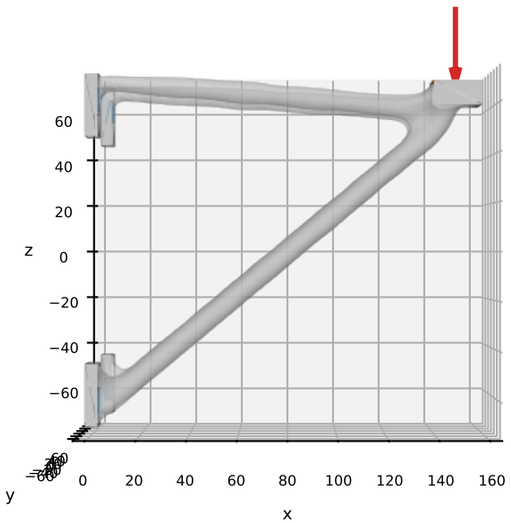


rear isometric

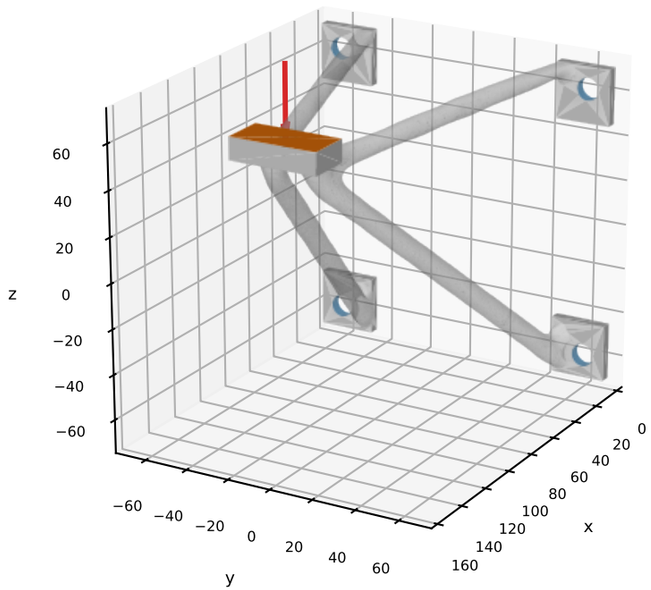


Cantilever: final design (STL 3,360,836 faces, shown decimated to 169,942; wall thickness from fields.vtp)


isometric

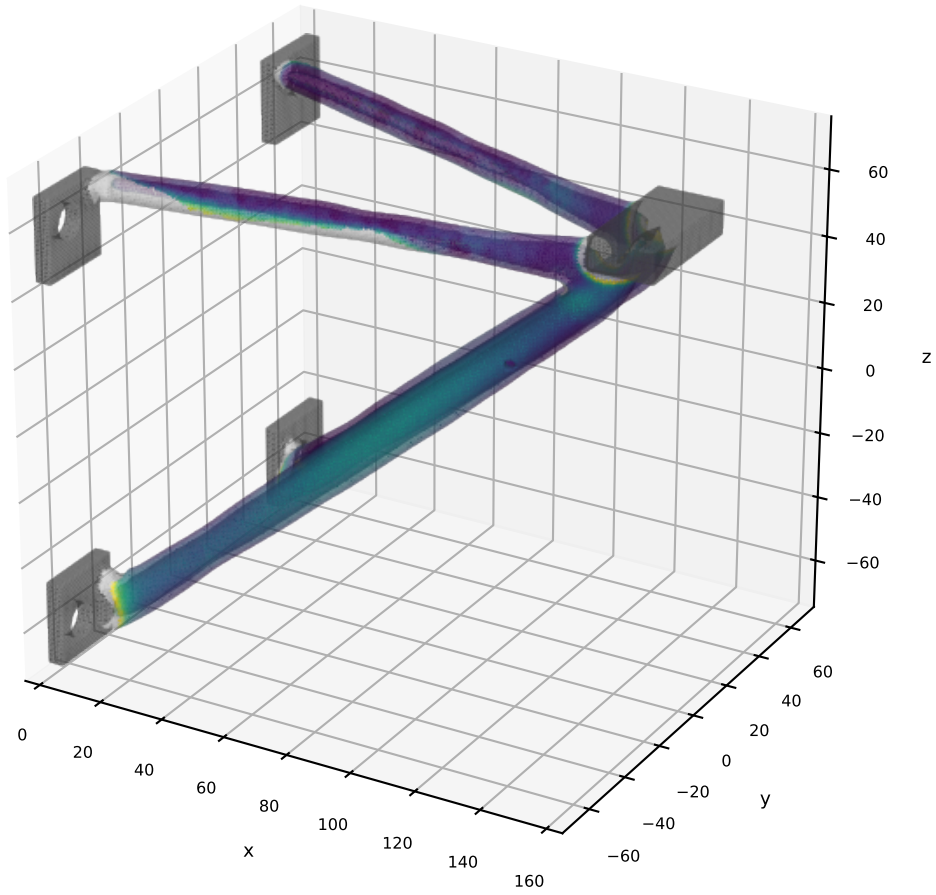


top (+z)

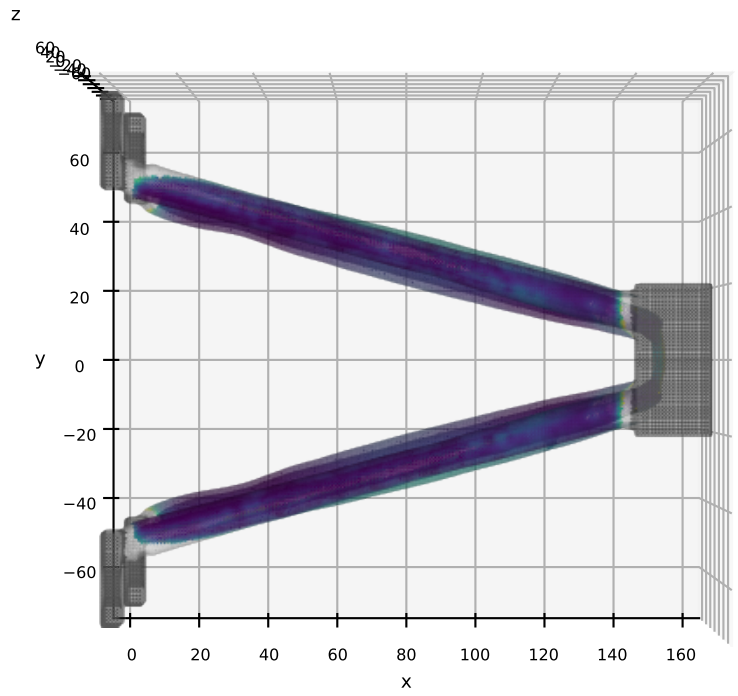


front (-y)

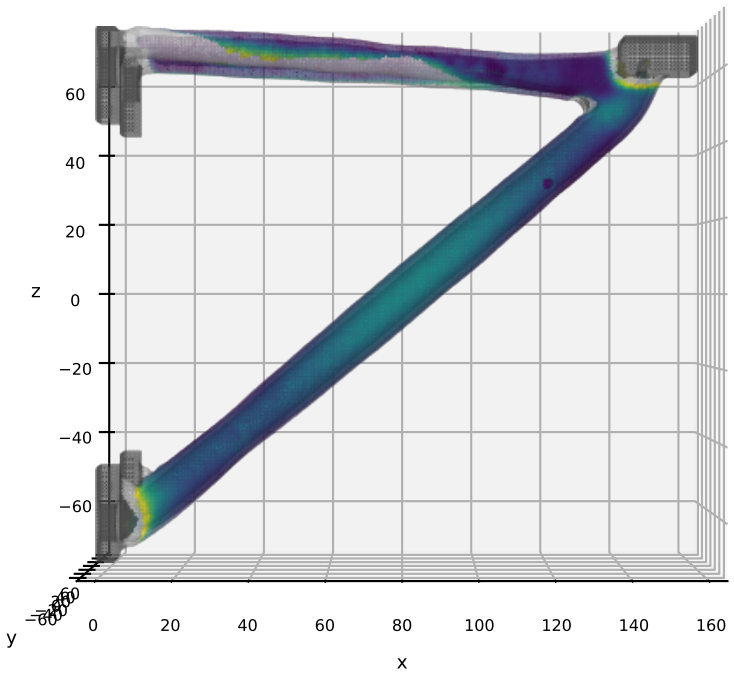


rear isometric

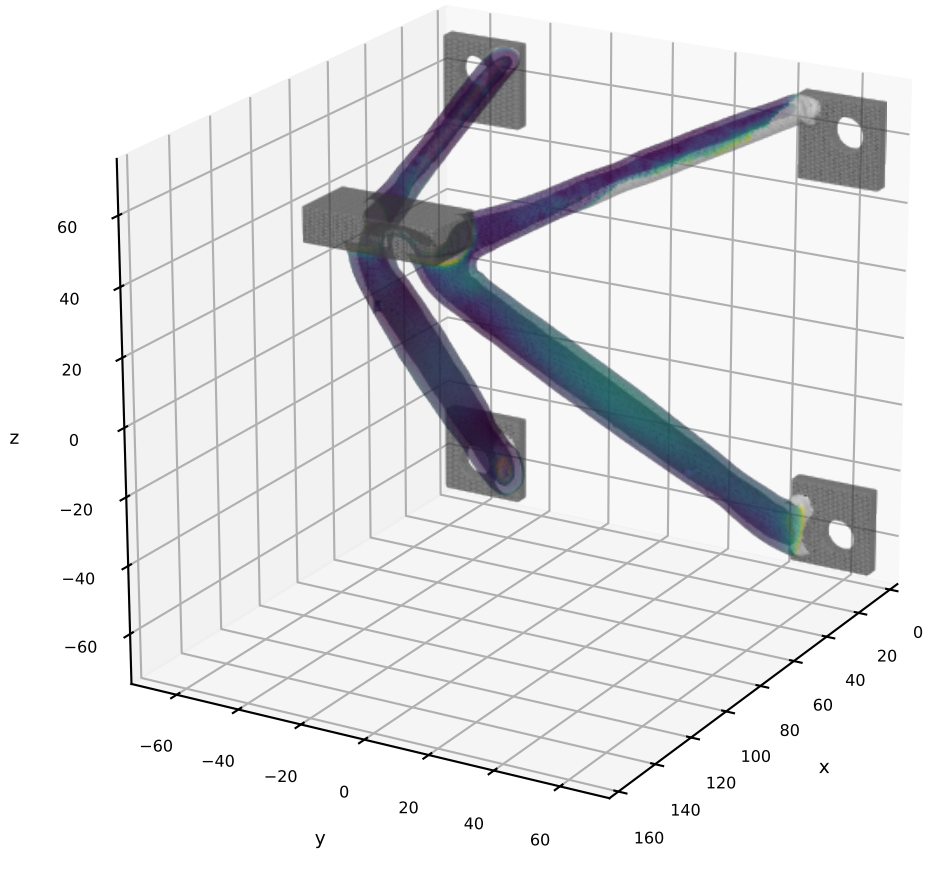


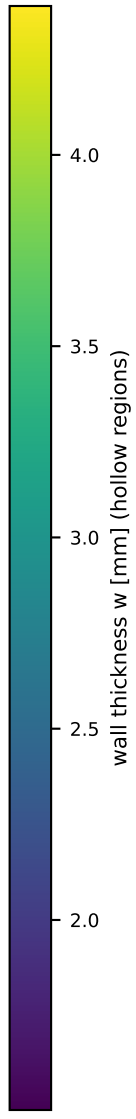



light grey = solid (closed) regions; dark grey = mounts; the colourbar covers the hollow regions only


Cantilever: sections of the final design through the two thickest-wall regions (red +); +-30 mm window

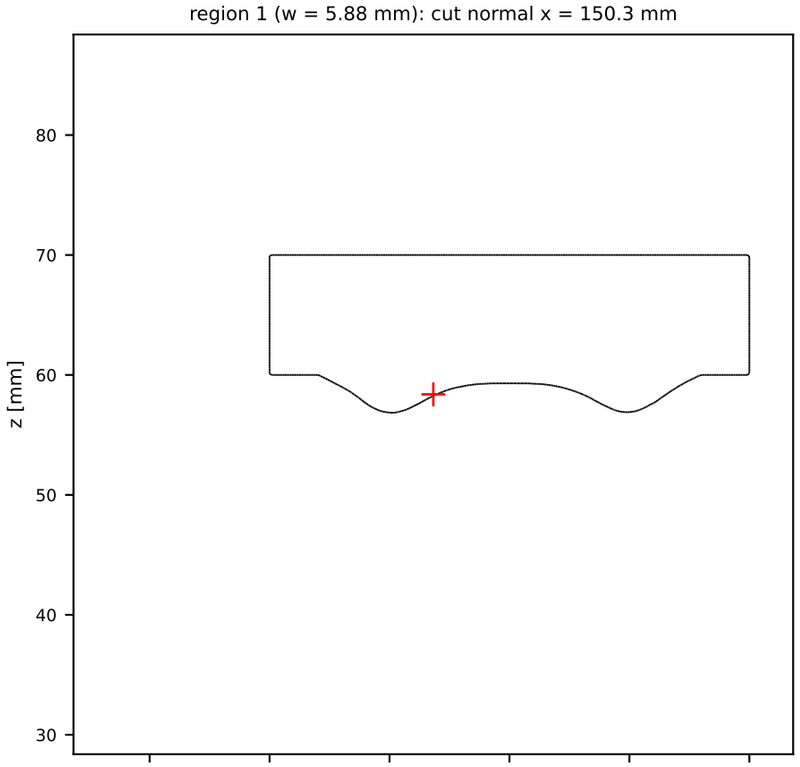


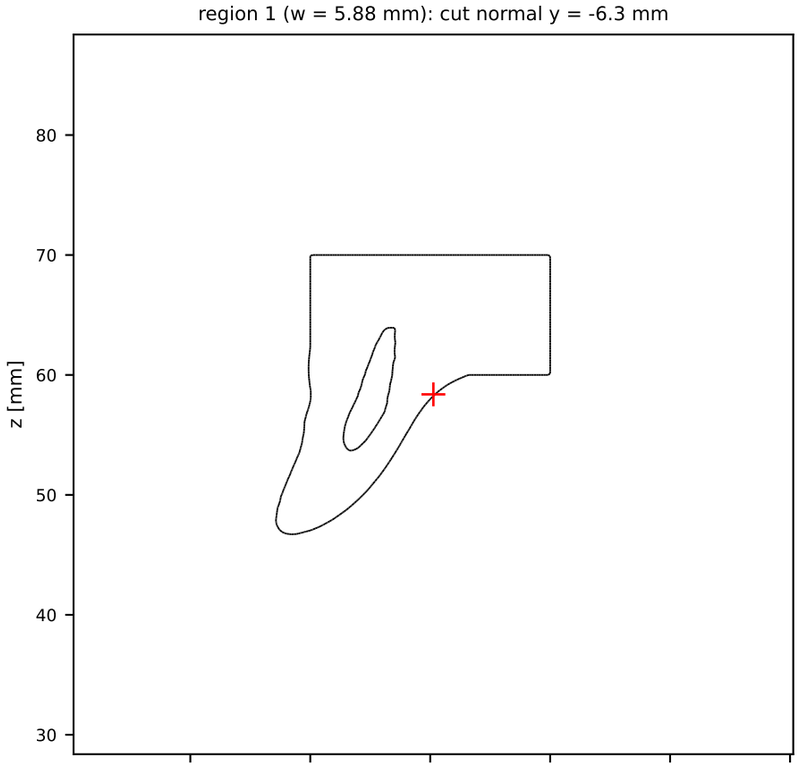

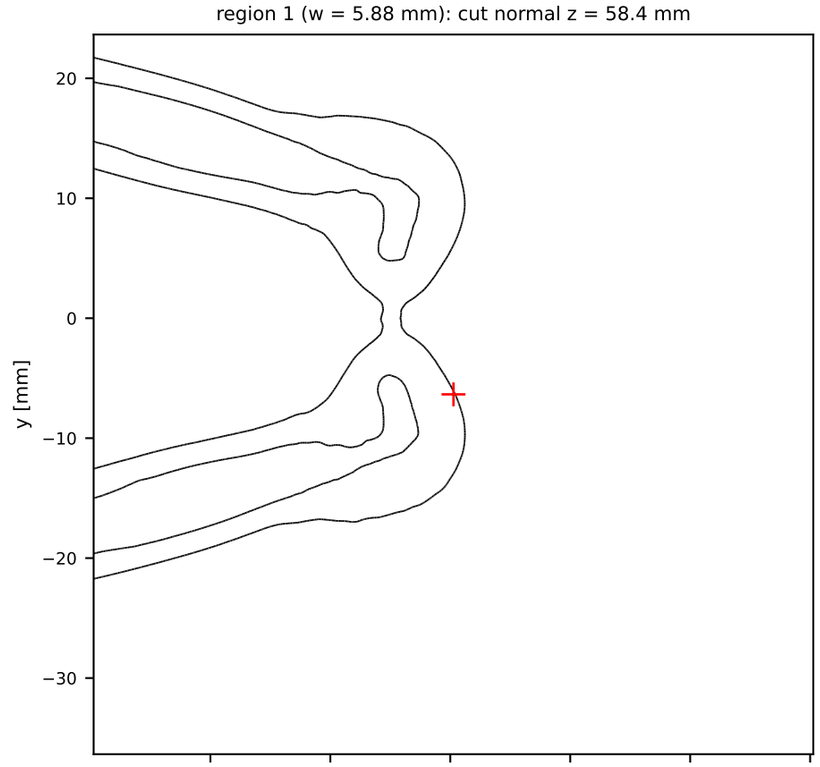

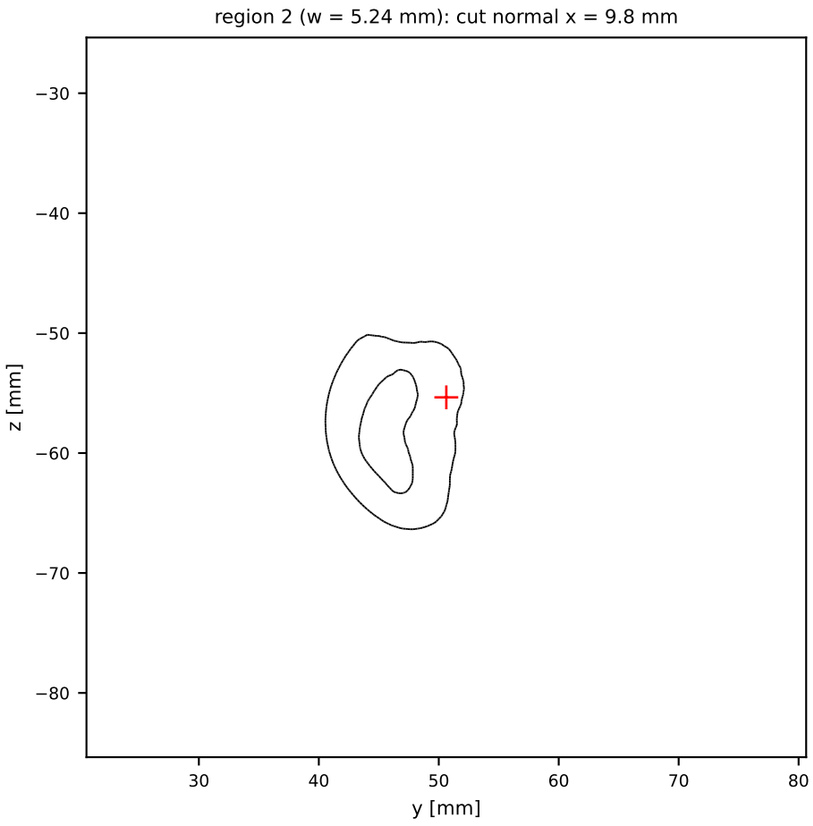


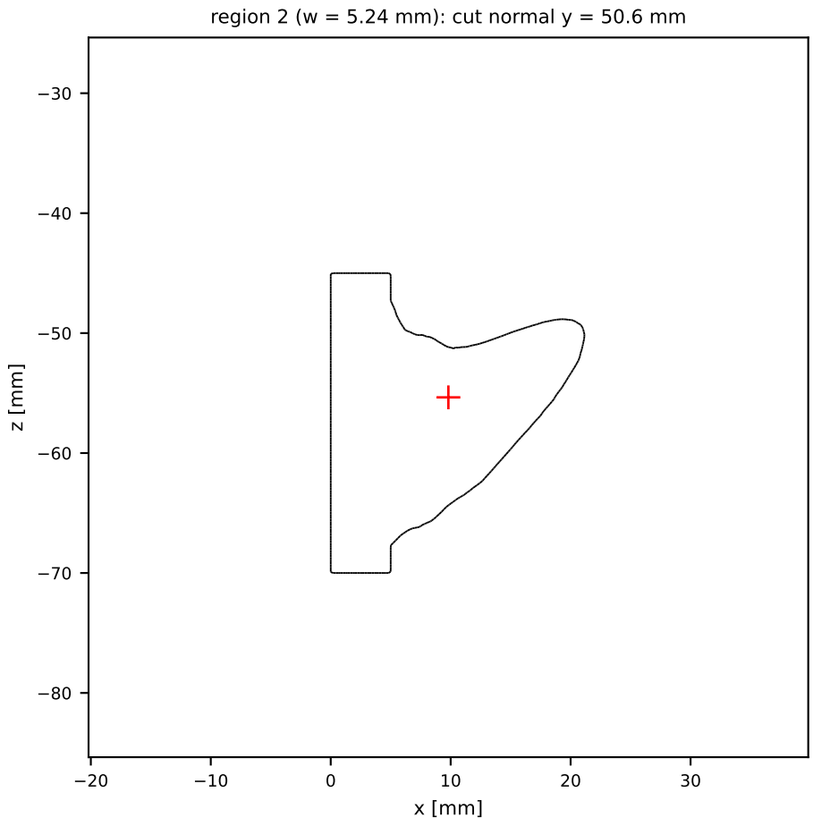

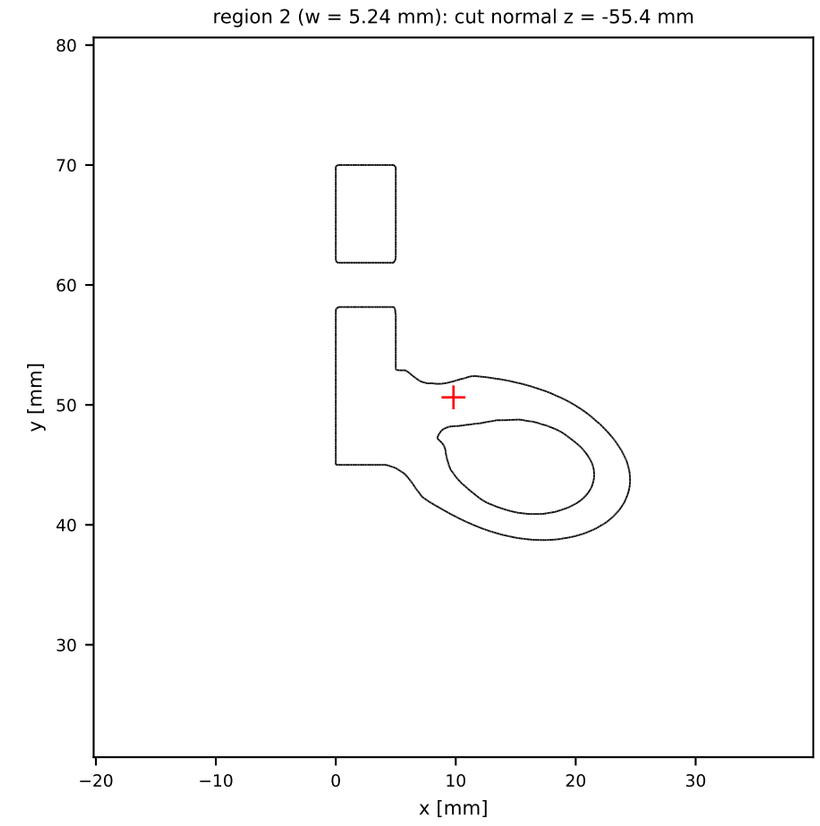


Cantilever: von Mises stress, original solid vs final design (peak solid 20.2, final 17.9 MPa; values from fields.vtp, nearest point)


solid: isometric

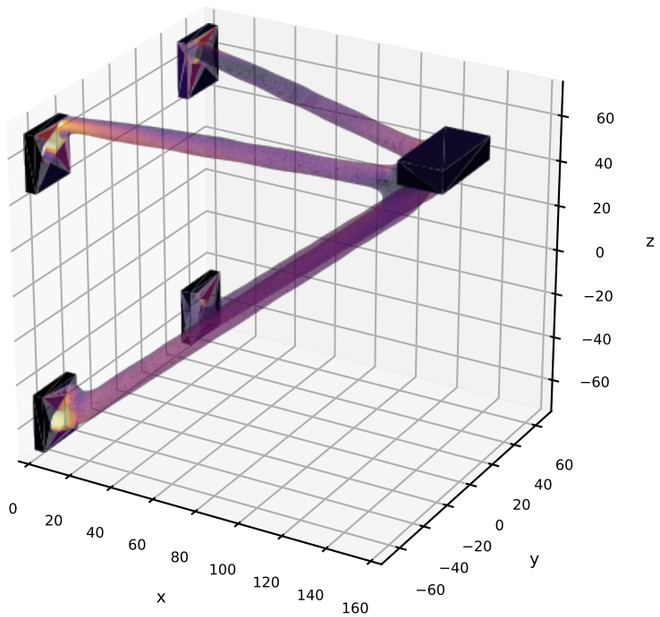


solid: top (+z)

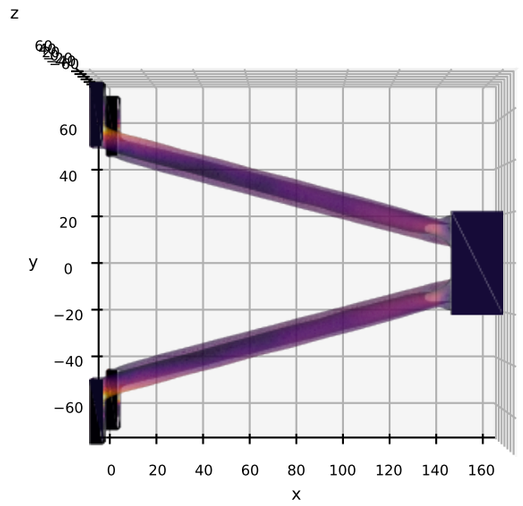



final design: isometric

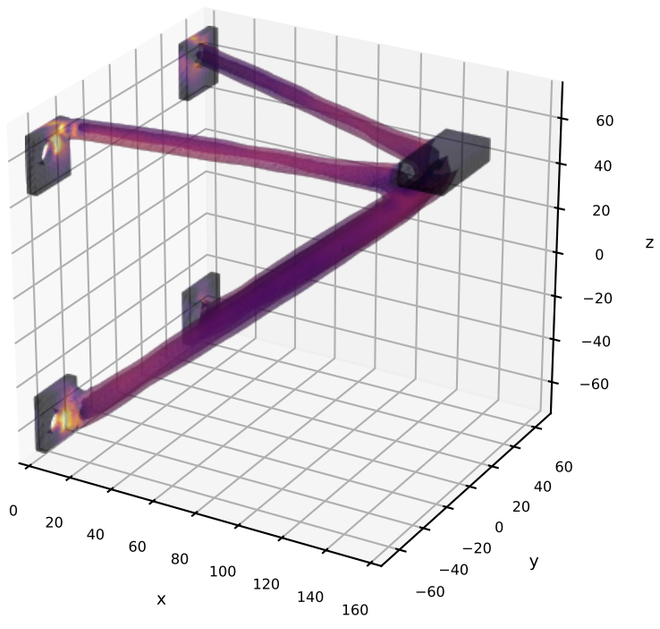


final design: top (+z)

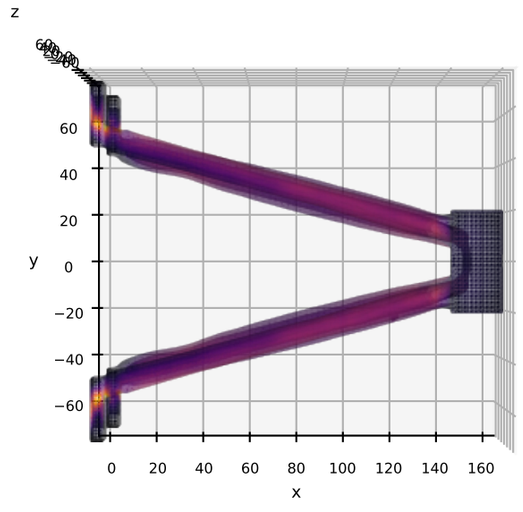




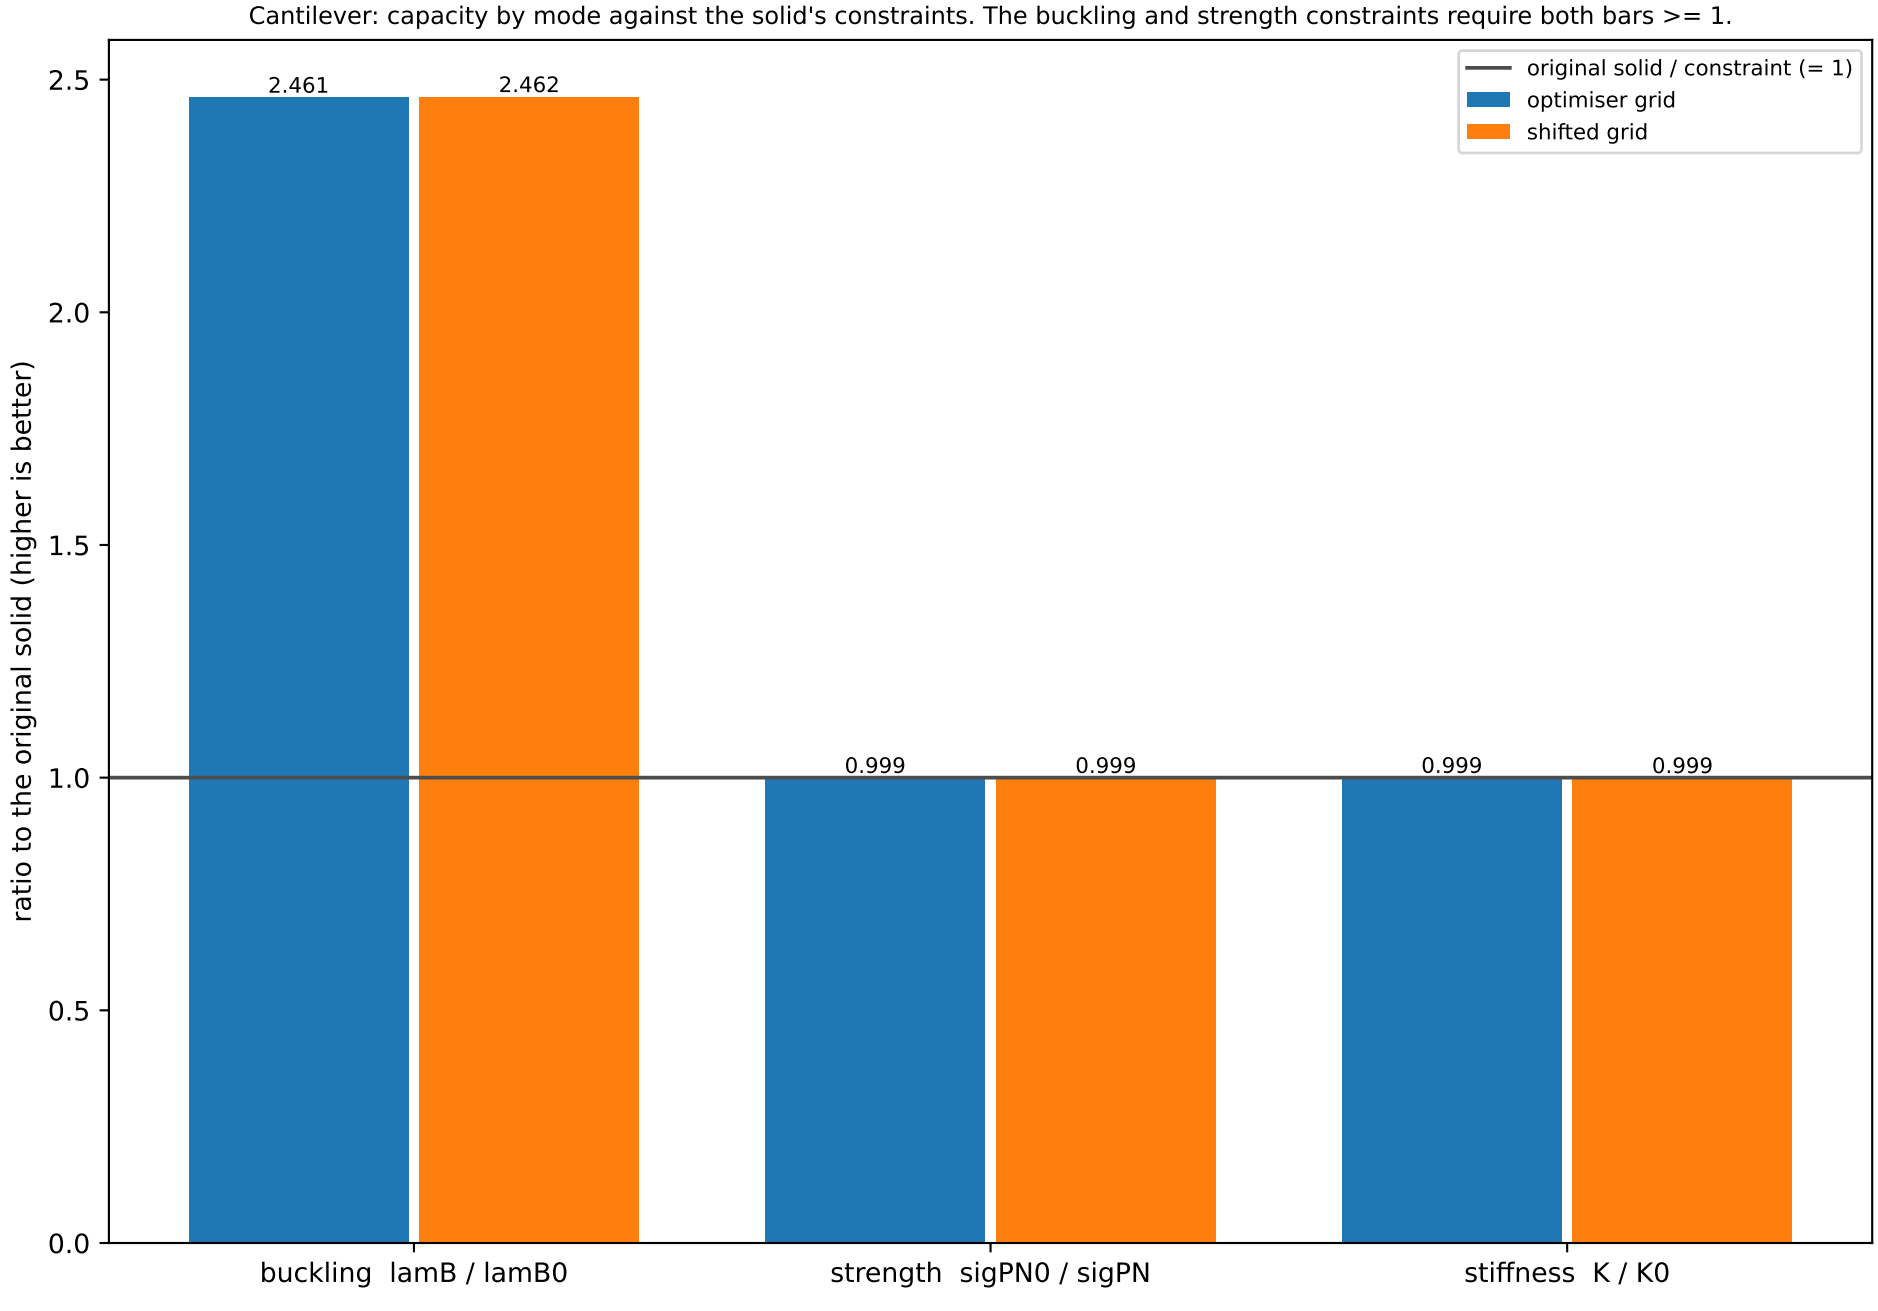
Cantilever: capacity by mode against the solid's constraints. The buckling and strength constraints require both bars >= 1.
original solid / constraint (= 1)
optimiser grid
shifted grid
ratio to the original solid (higher is better)
2.5
2.0
1.5
1.0
0.5
0.0
2.461
2.462
0.999
0.999
0.999
0.999
buckling lamB / lamB0
strength sigPN0 / sigPN
stiffness K / K0

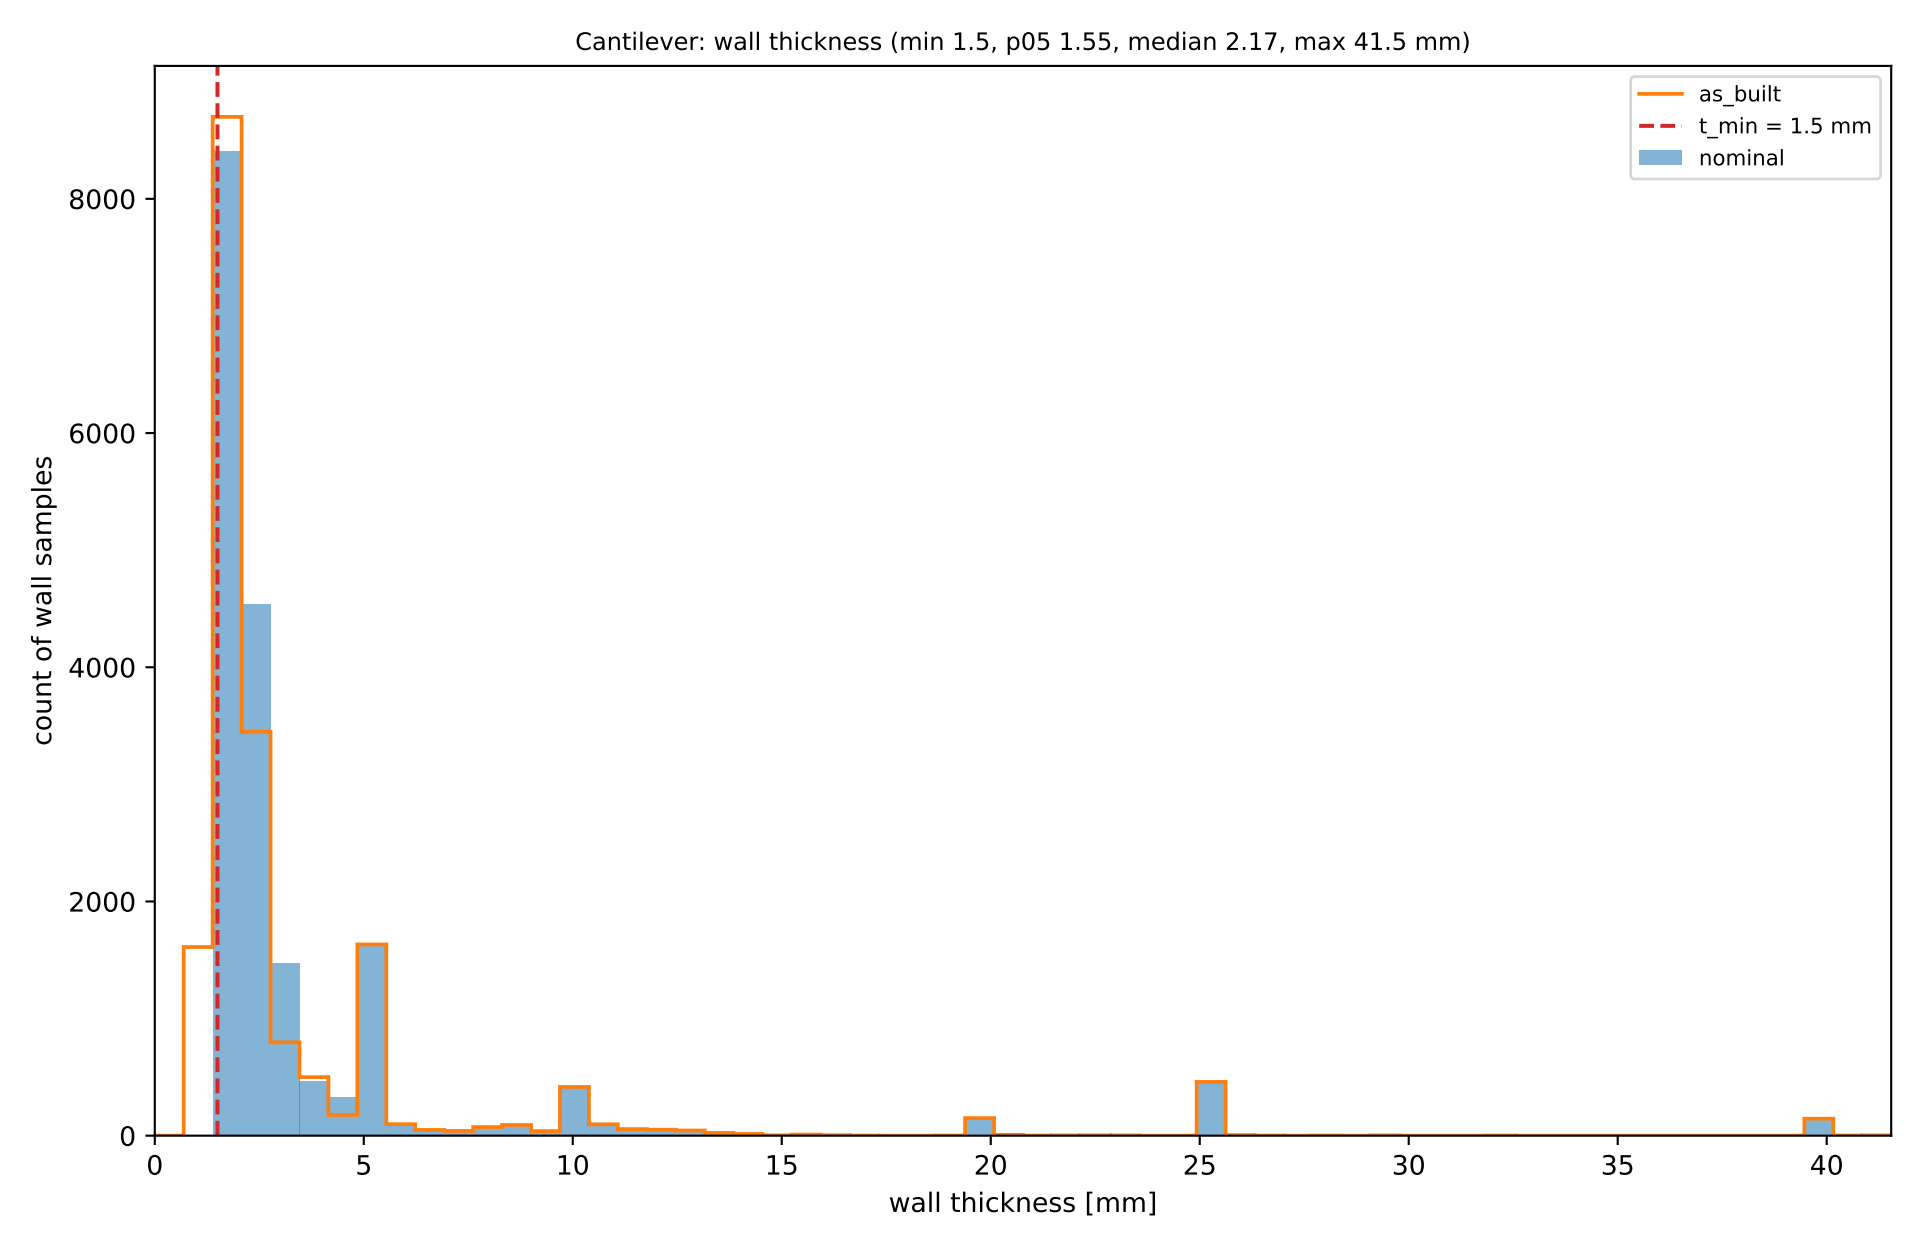

Cantilever: wall thickness (min 1.5, p05 1.55, median 2.17, max 41.5 mm)
as_built
t_min = 1.5 mm
nominal
count of wall samples
wall thickness [mm]
0
2000
4000
6000
8000
0
5
10
15
20
25
30
35
40

Cantilever: convergence history


J = weighted objective (accept above ln 1.02)

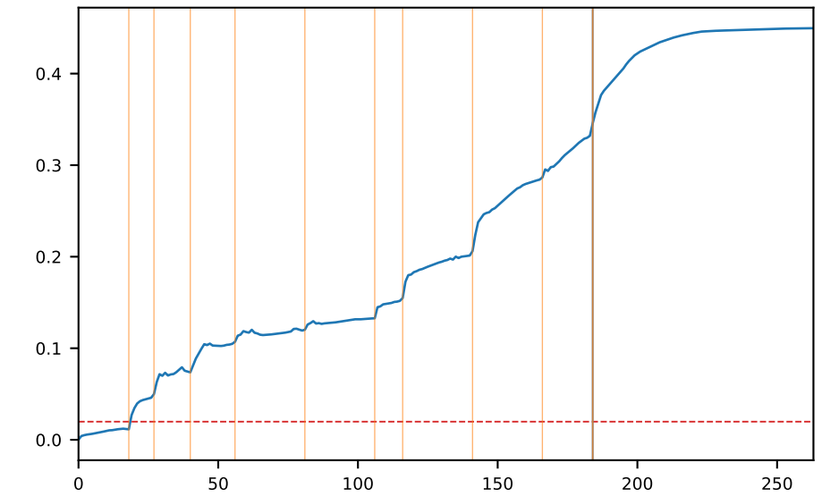


K / K0 (floor 0.85)

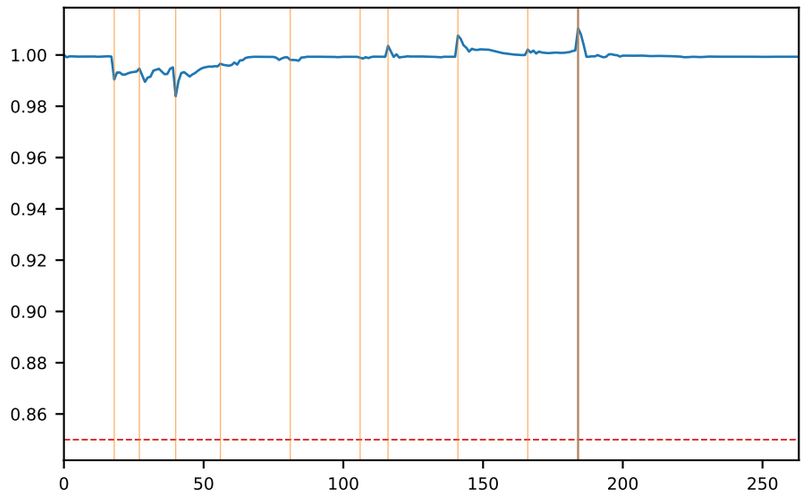


P / P0 (floor 0.85)

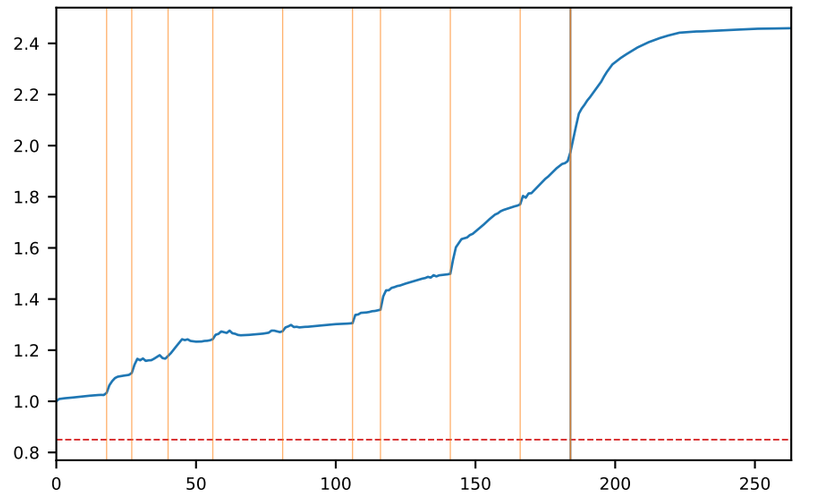


sigPN / sigPN0

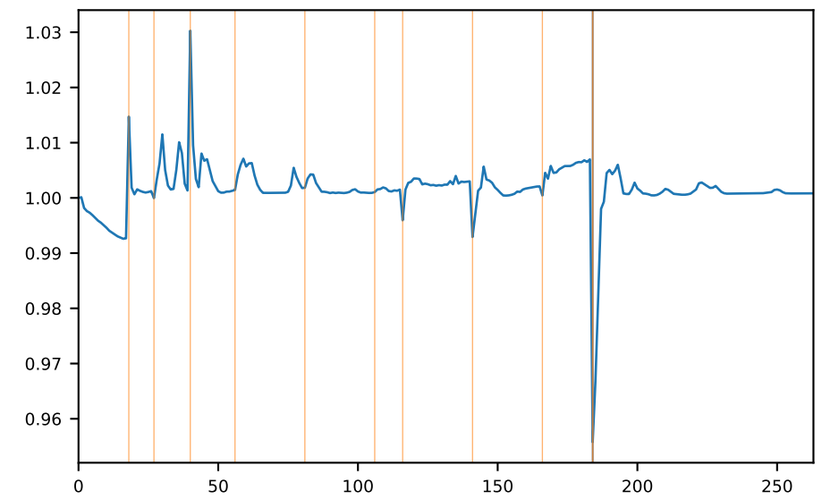


mass error V/V0 - 1

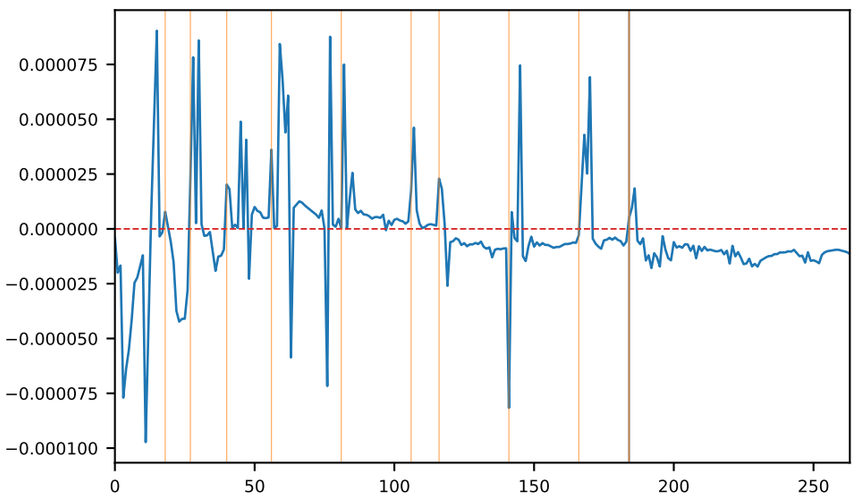


R_k (hollow allowed where R <= R_k)

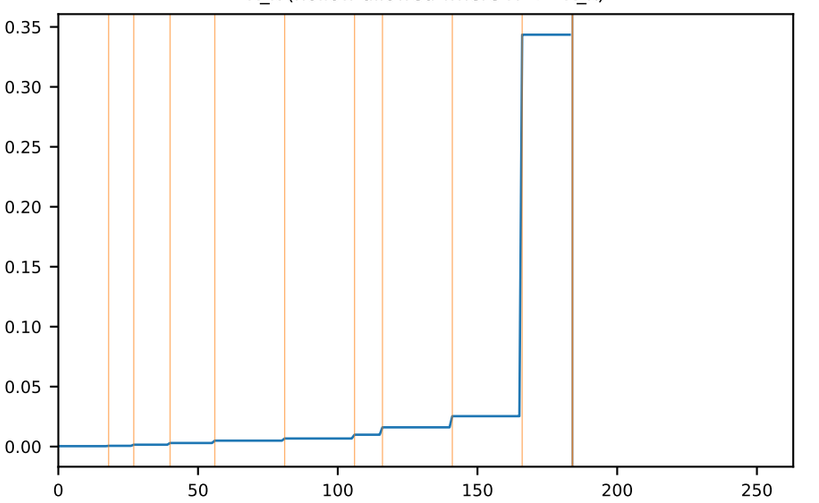

closed fraction

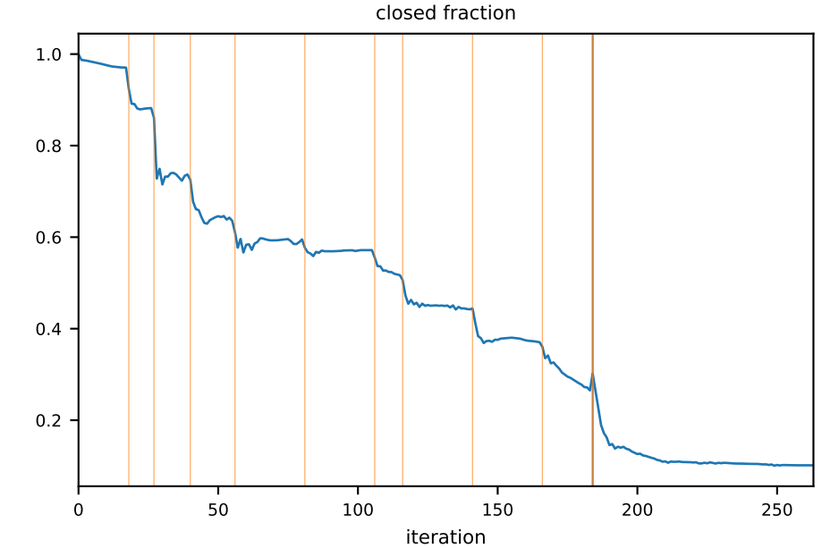

hollow-allowed fraction

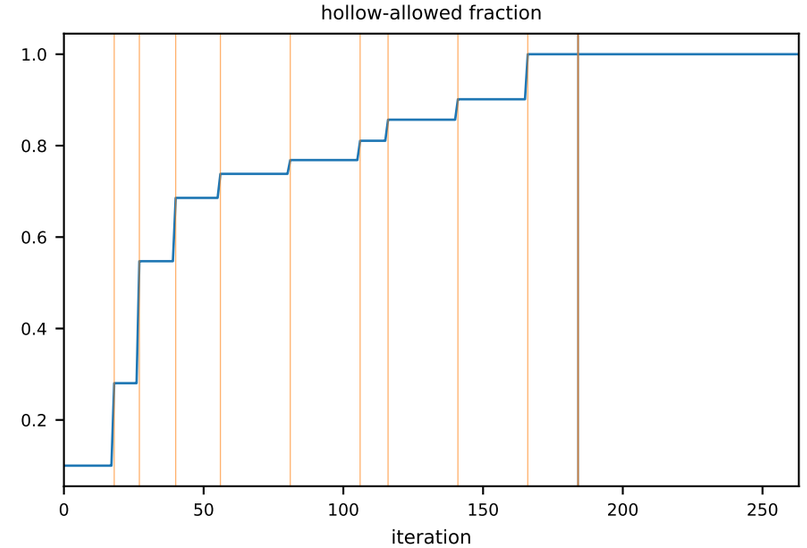



grey vertical: phase boundary
orange vertical: growth step (R_k rise)
iterations 264; growth steps 10
red dashed: constraint / acceptance level


```
enclosed voids: 1;  escape holes: 2;  voids without a hole: 0
  void 0: volume 27636 mm3, holes 2
```


void_id	hole	x	y	z	wall_mm	score_kind
0	0	118.75	-21.53	29.88	2.50	inset_a
0	1	55.45	37.79	-25.80	2.39	inset_a

Escape holes sit at the lowest-stress wall points of each void (outward direction in escape_holes.csv).

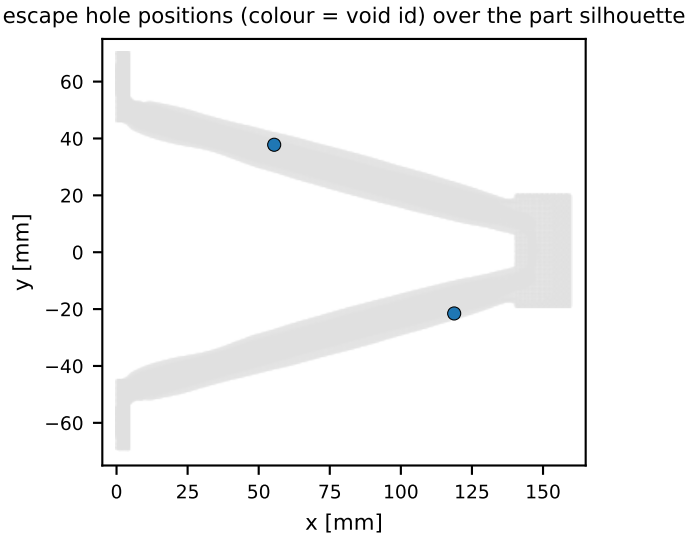

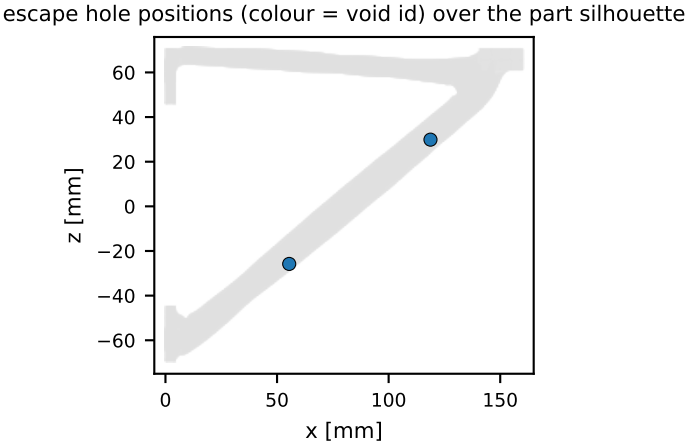

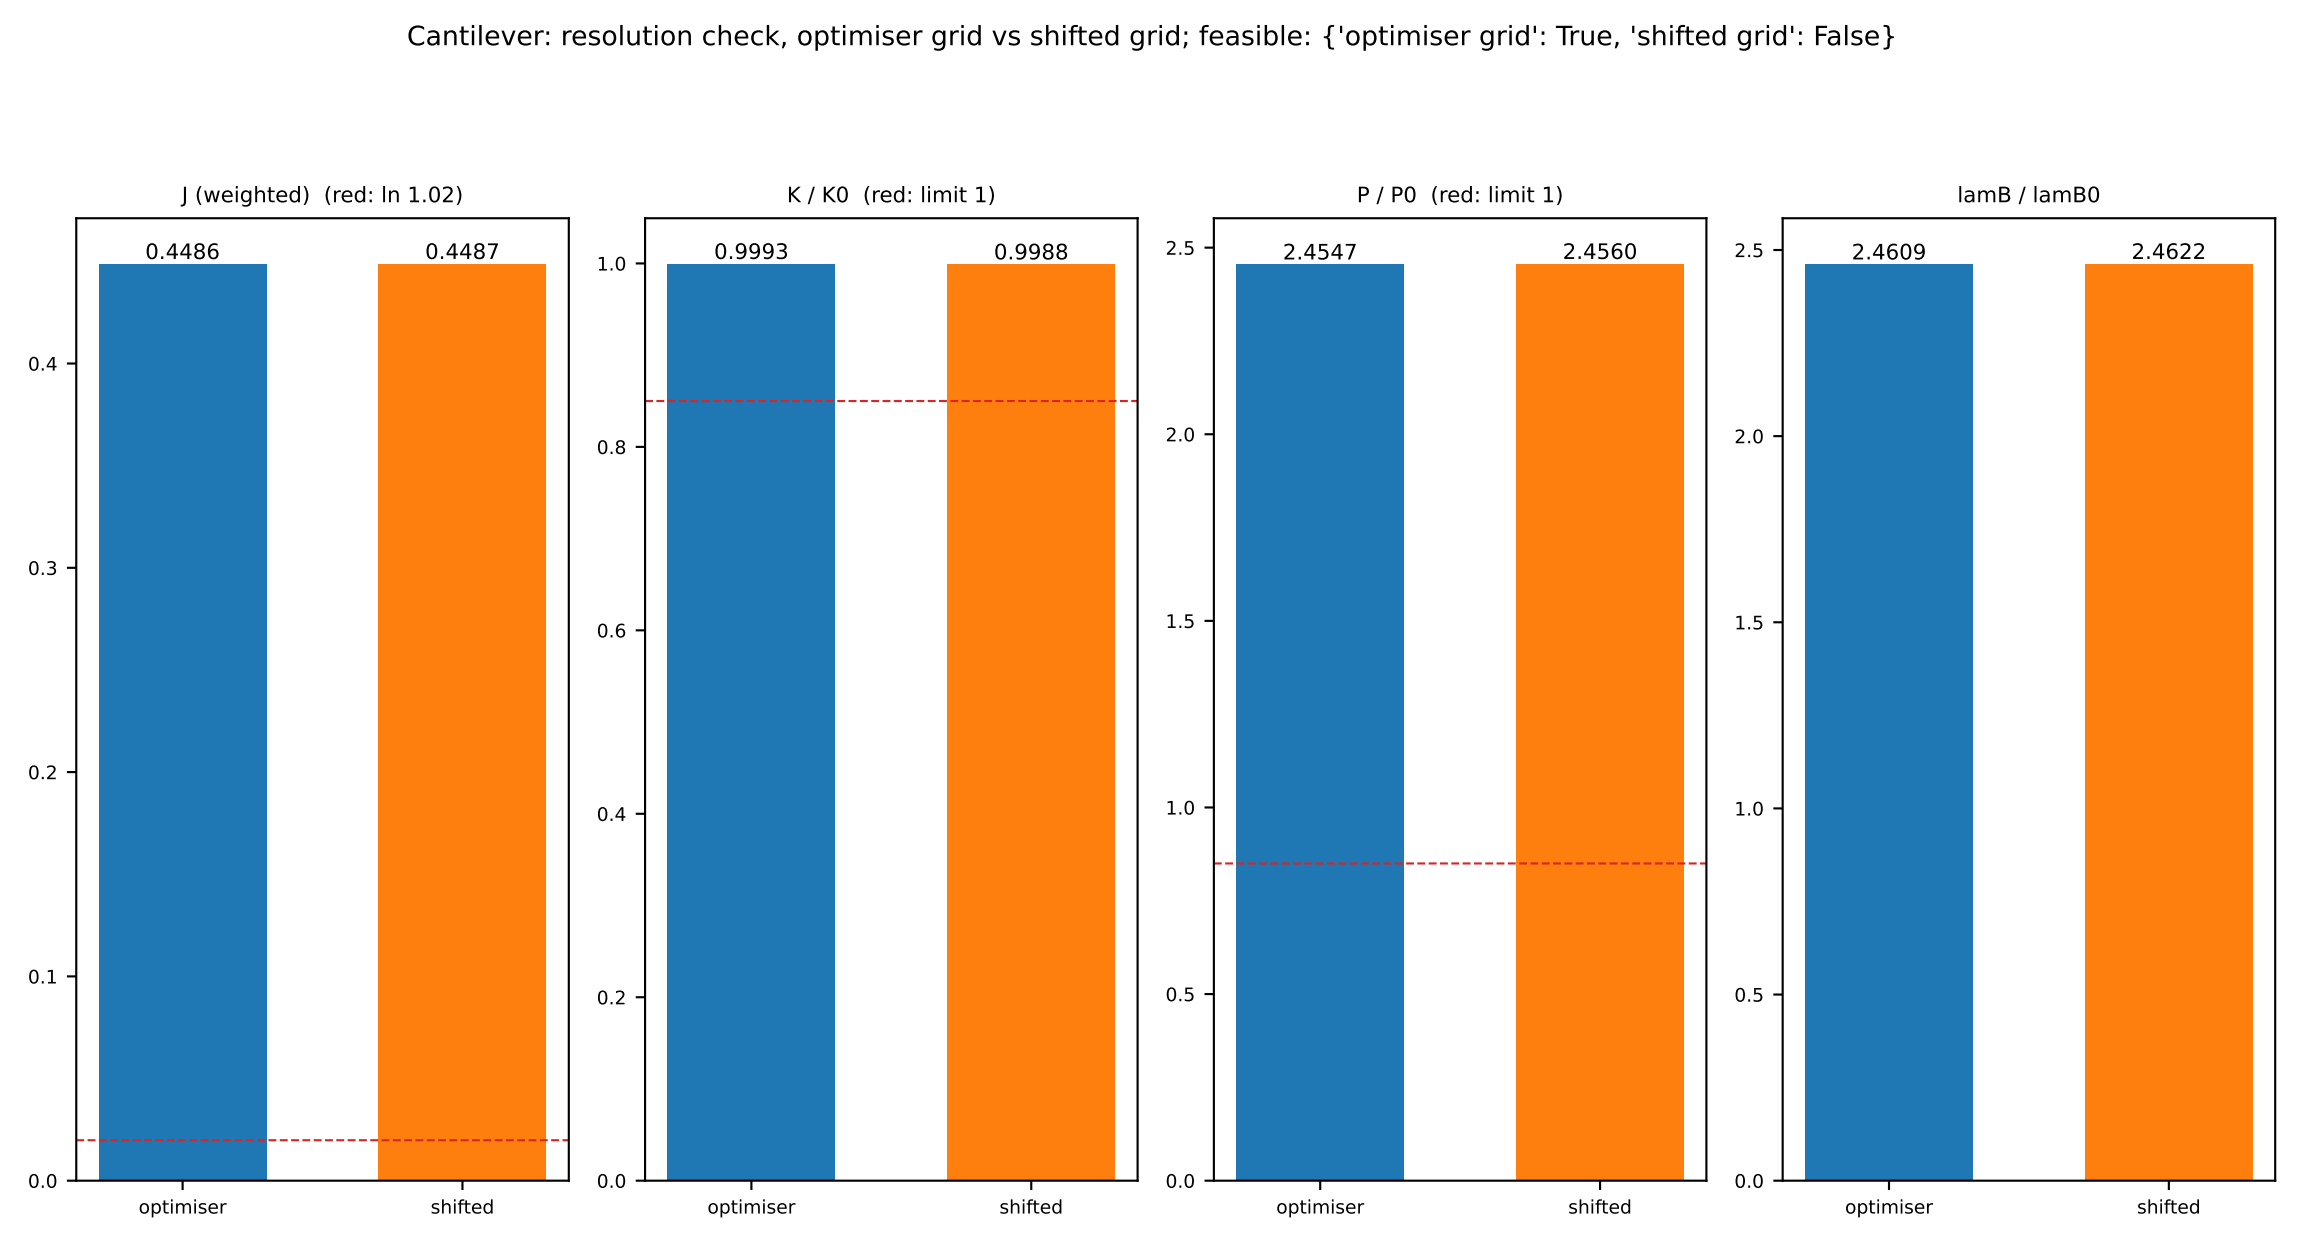
Cantilever: resolution check, optimiser grid vs shifted grid; feasible: {'optimiser grid': True, 'shifted grid': False}
J (weighted) (red: ln 1.02)
0.4486
0.4487
K / K0 (red: limit 1)
0.9993
0.9988
P / P0 (red: limit 1)
2.4547
2.4560
lamB / lamB0
2.4609
2.4622
optimiser
shifted

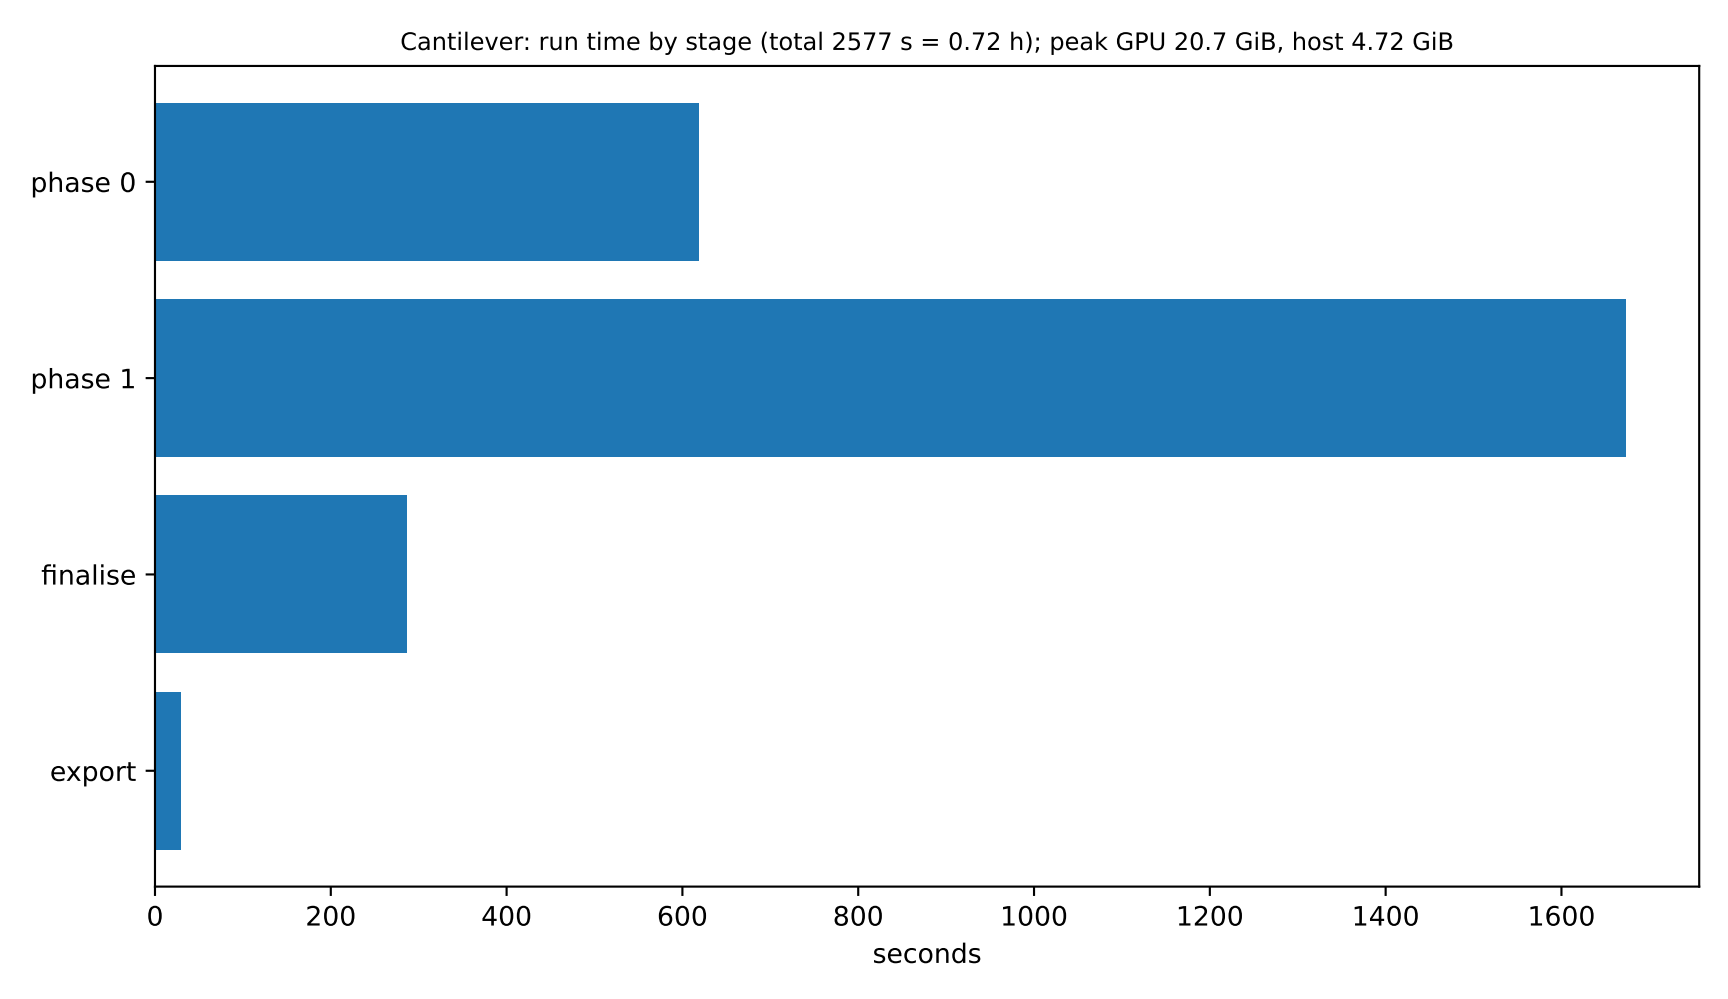
Cantilever: run time by stage (total 2577 s = 0.72 h); peak GPU 20.7 GiB, host 4.72 GiB
phase 0
phase 1
finalise
export
0
200
400
600
800
1000
1200
1400
1600
seconds