

Table of Contents	
01	TITLE PAGE
02	BLOCK DIAGRAM
03	SOC_PORT0~2
04	SOC_PORT3~5
05	SOC_PWR
06	USB & PWR
07	SD & QSPI & SENSOR
08	CAN PHY & ETHERNET PHY
09	MCU_LINK_USB
10	MCU_LINK_DEBUG
11	SWITCH & LED
12	HEADERS
13	APPENDIX JUMPER/DNP

Revision History		
REV	REVISION NOTES	Date
X1	Initial	Jun 10, 2023
A	Final Release	Jul 10, 2023
B	1.Change 3pin solder pads. 2.Update schematic per Ver.A test result.	Sep 15, 2023
B1	1.DNP J12&J7. 2.Change J10 MPN.	Nov 13, 2023

FRDM-MCXN947

<Core Design>



Microcontroller Product Group
6501 William Cannon Drive West
Austin, TX 78735-8598

This document contains information proprietary to NXP and shall not be used for engineering design, procurement or manufacture in whole or in part without the express written permission of NXP Semiconductors.

© NXP SEMICONDUCTORS

Classification: Company Internal/Proprietary

Designer:
John Wu

Drawing Title:
FRDM-MCXN947

Drawn by:
Kate Fan

Page Title:
TITLE PAGE

Approved:
William Jiang

Size
C


Document Number
SCH-90618 PDF: SPF-90618

Rev
B1







Date:
Monday, November 13, 2023

Sheet
1 of 1

BLOCK DIAGRAM

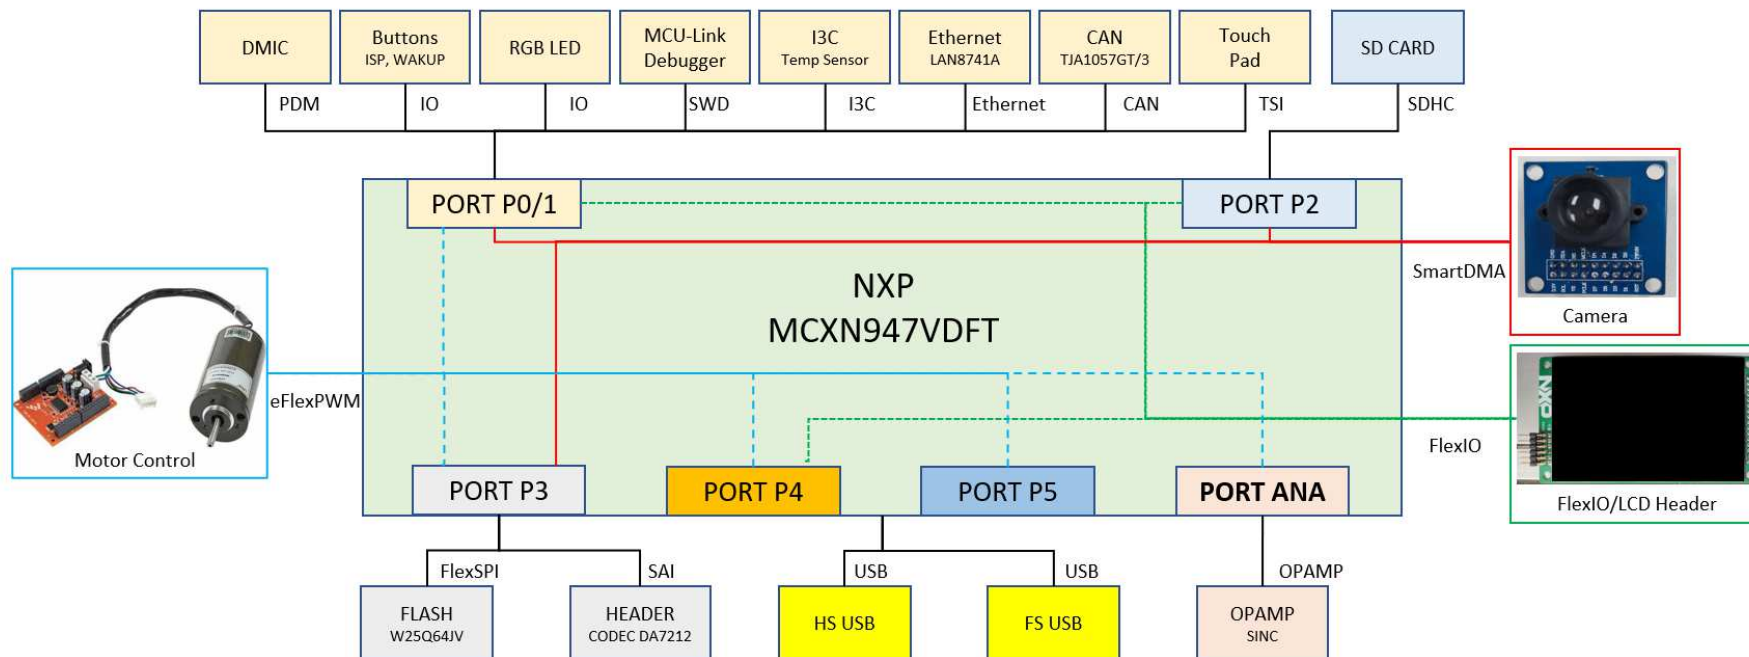


SOC PORT0~2

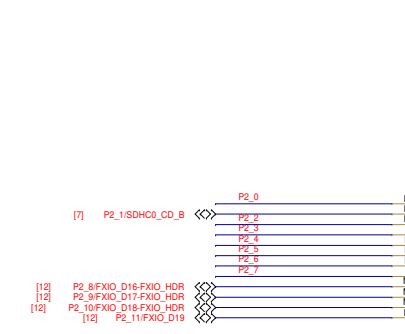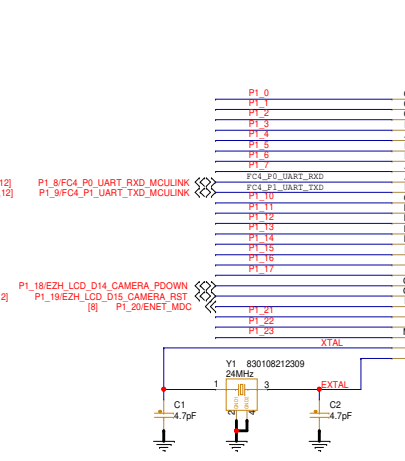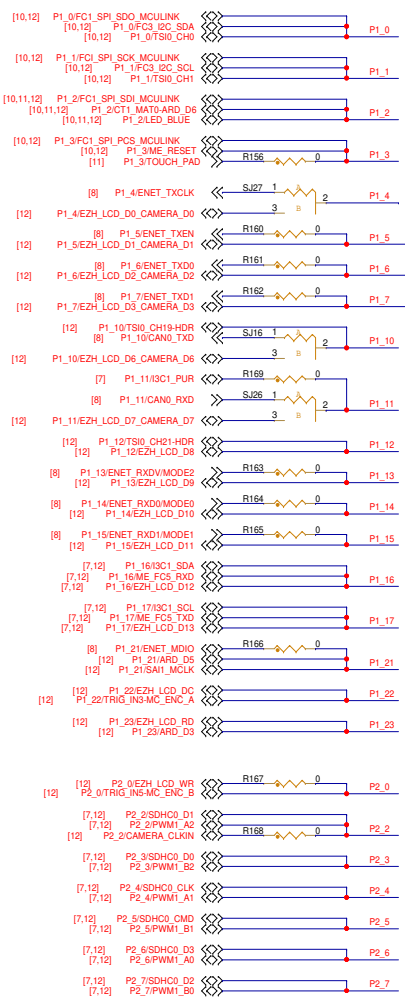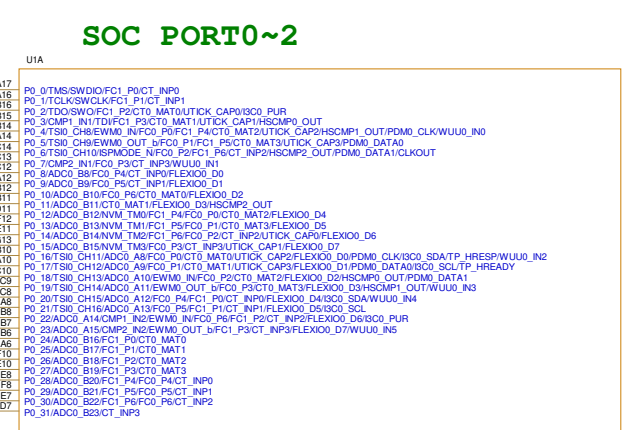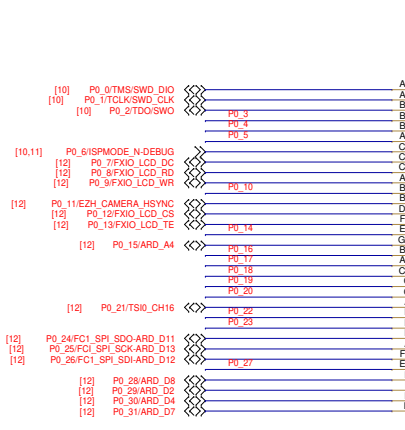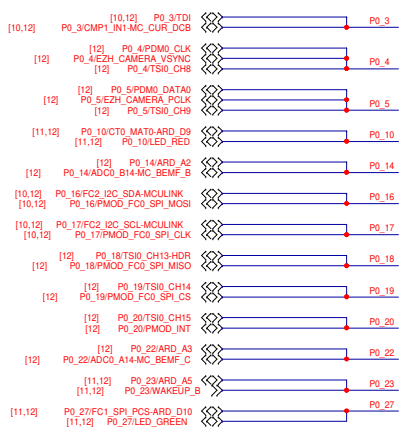


SOC PORT3~5

UID

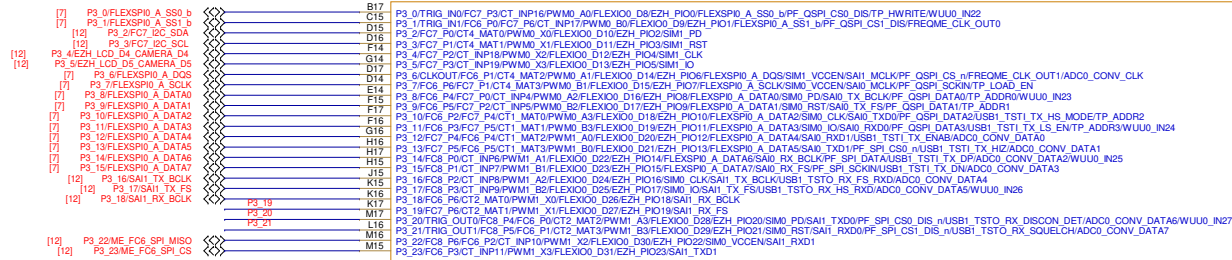


MCXN947VDF

UIE

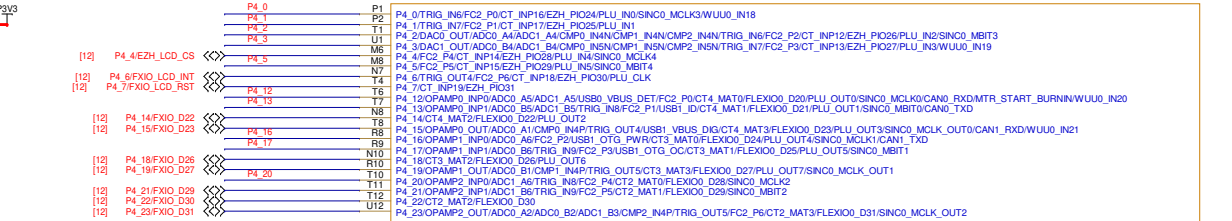

MCXN947VDF

UIF

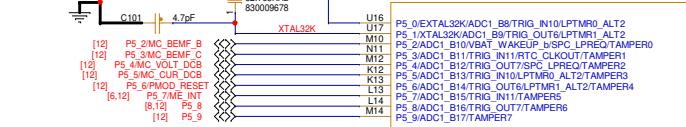


MCXN947VDF




Size C	Document Number SCH-90818 PDF: SPF-90818	Rev B1
Date:	Monday, November 13, 2023	Sheet 5 of 13


SYSTEM POWER

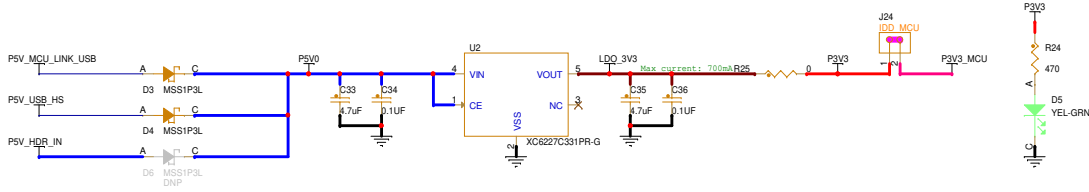


USB1_HIGH SPEED
USB2.0 Type C

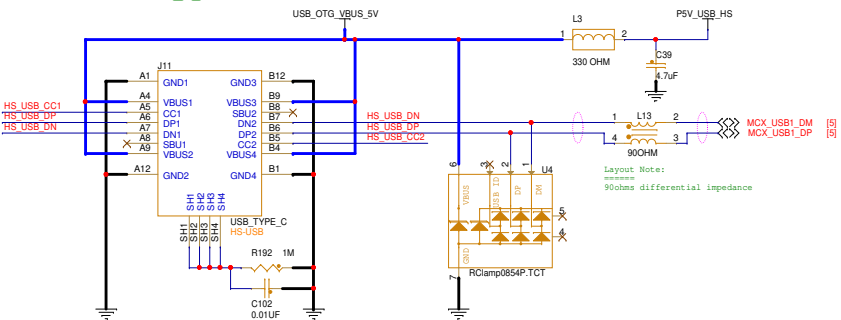

VBUS Power Control

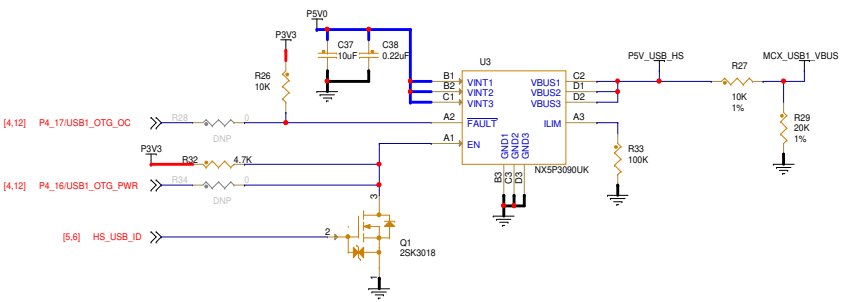


CC Logic

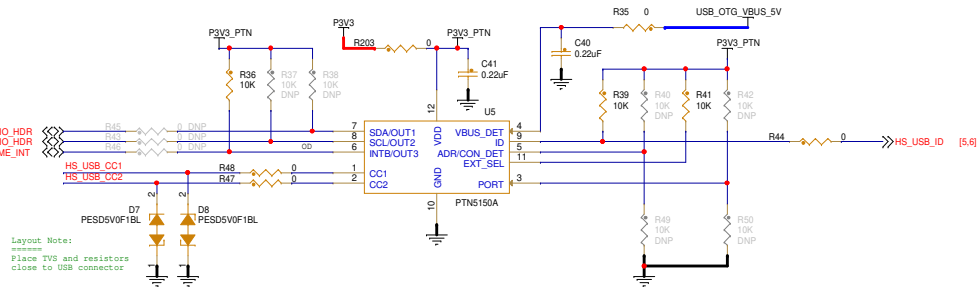

MOUNTING HOLE




Test Points



ADR/CON_DET:
When Power-up, ADR(input) function:
ADR=1: I2C Address: 0x7A(ADR)
ADR=0: I2C Address: 0x3A(ADR)
ADR=MID/FLOATING
After TIN/PUTLATCH, CON_DET(output) function:
CON_DET=1: Connection Detected
CON_DET=0: No Connection

EXT_SEL: External selection
High = CC1 orientation or no valid CC1/CC2 detection
Low = CC2 orientation


PORT=:
1: DFP mode
0: UFP mode
Floating: DRP mode

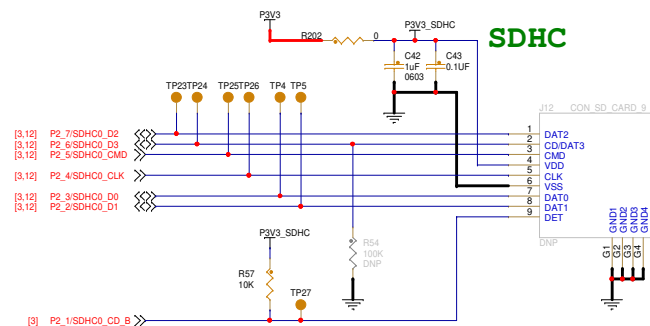

Layout Notes:


- 1) SDHC signals: equal length routing with 50ohm resistance. And as short as possible.
- 2) Place R54 to easily rework.

I3C SENSOR

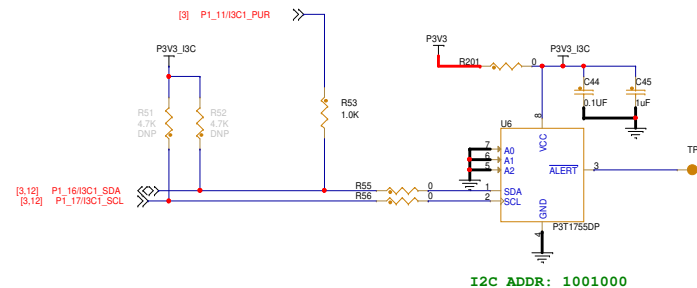

I2C ADDR: 1001000

QSPI

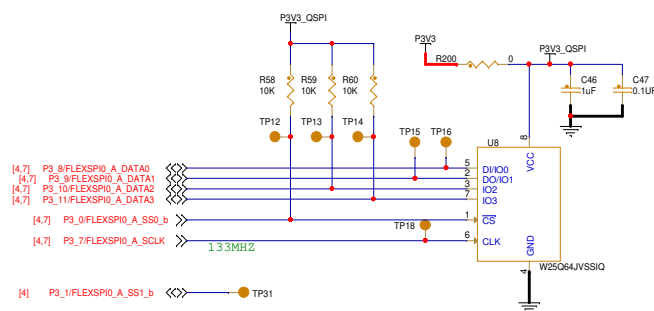


Other QSPI Flash Option: MT25QL128ABA1ESE-0SIT (MICRON)

Layout Notes:

=====

- 1.U7 & U8 footprint overlapped.
- 2.Equal length routing with 50ohm resistance.
- 3.Place TP31 close to TP12.

Octal Flash

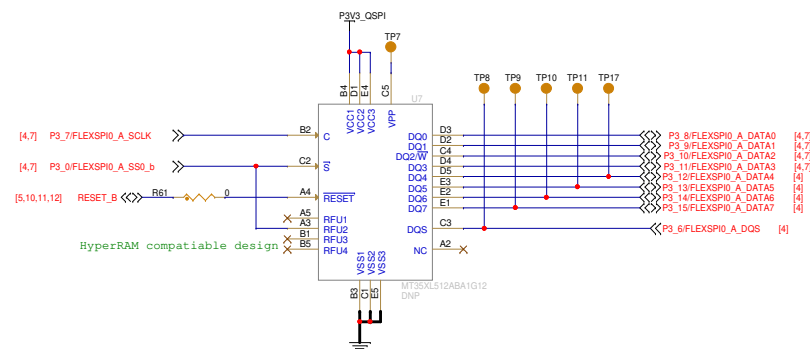

<Core Design>



Classification: Company Internal/Proprietary

Drawing Title: **FRDM-MCXXN947**


Page Title: **SD & QSPI & SENSOR**

Size C Document Number SCH-90818 PDF: SPF-90818


Date: Monday, November 13, 2023 Sheet 7 of 13

Rev B1

ETHERNET PHY

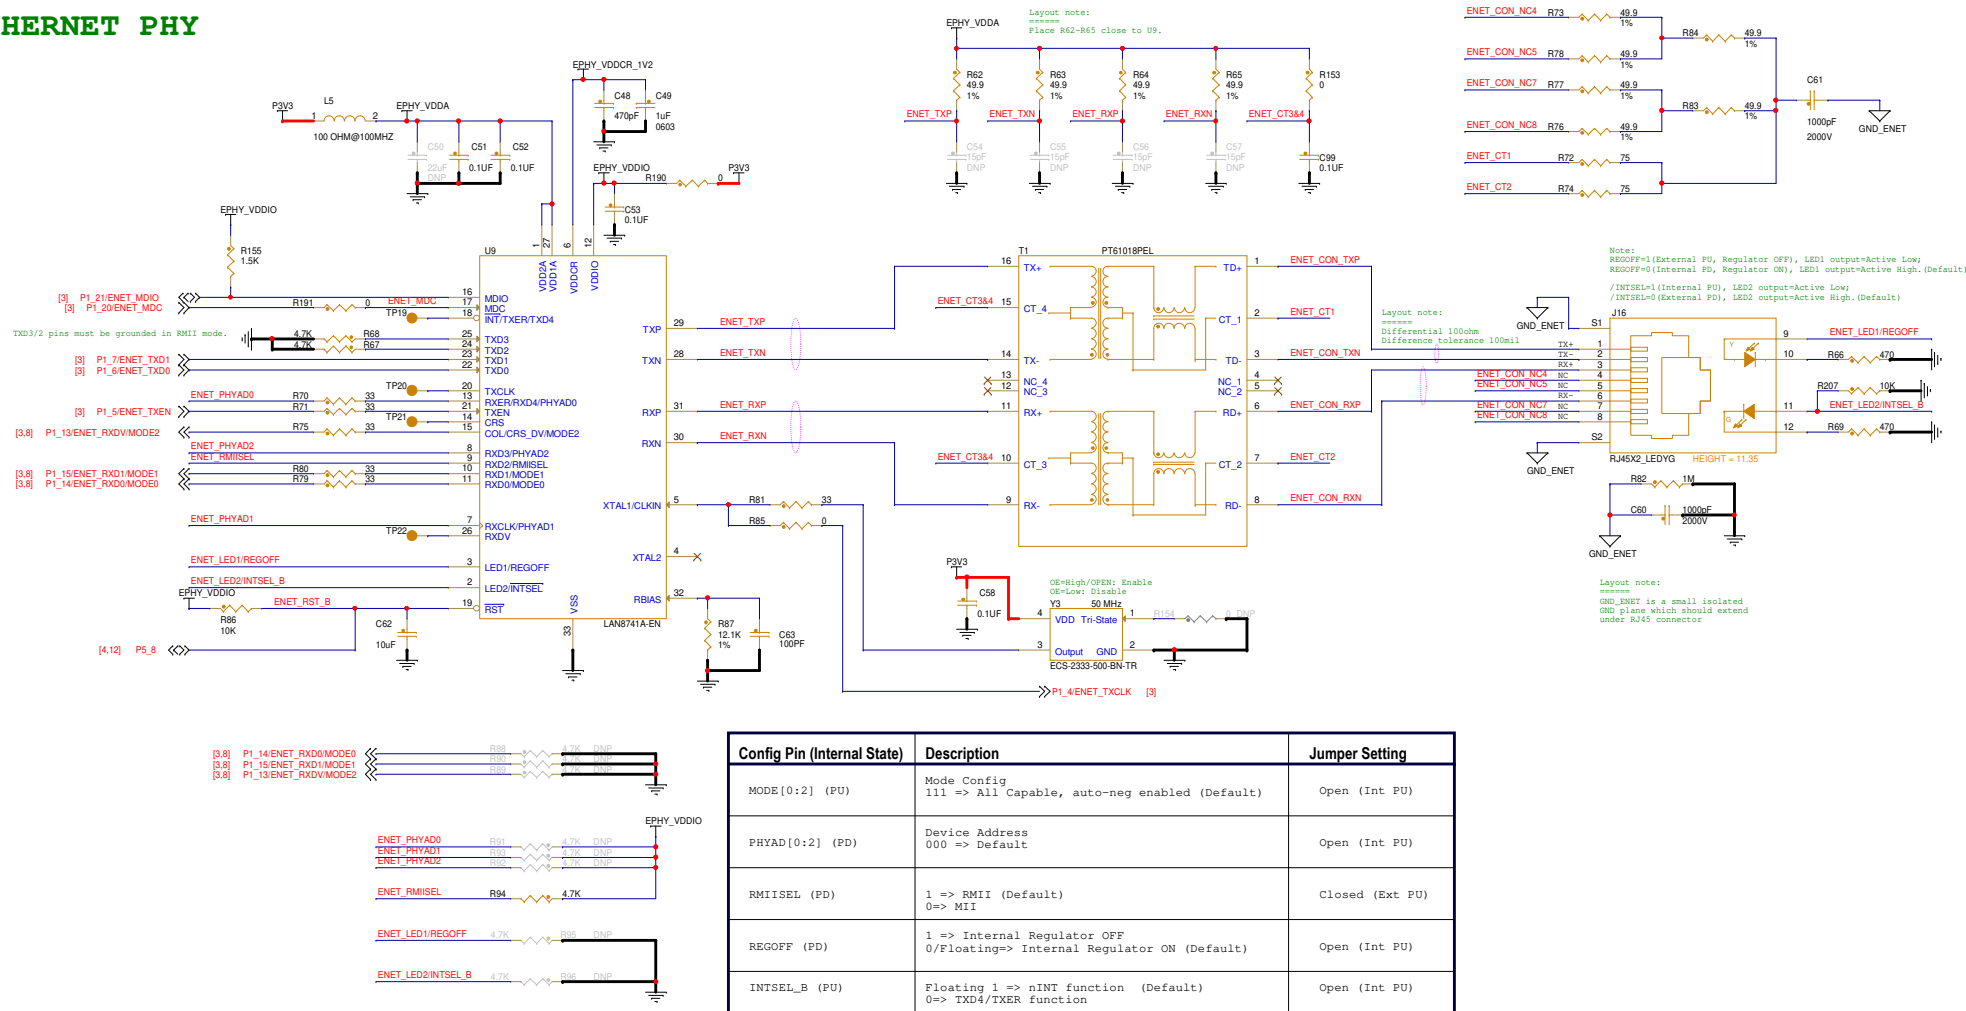

CAN PHY

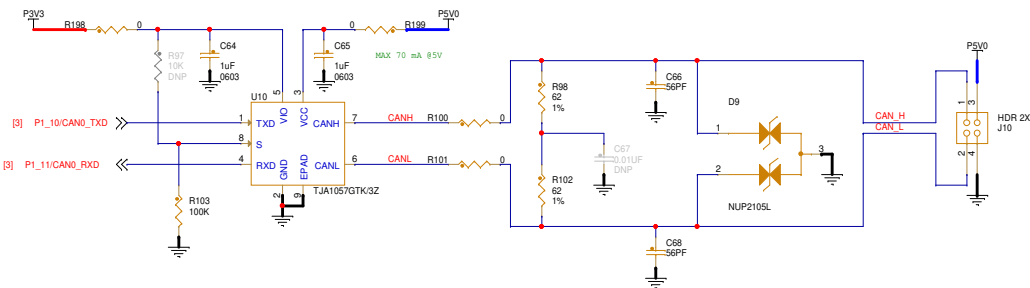

Classification: Company Internal/Proprietary

Drawing Title: **FRDM-MCXN947**

Page Title: CAN PHY & ETHERNET PHY



Size C	Document Number SCH-90818 PDF: SPF-90818
-----------	---

Date:	Monday, November 13, 2023	Sheet	8	of	13
-------	---------------------------	-------	---	----	----




Rev
B1

MCU-Link USB2.0 Type C

Layout Note:
Add a outline for MCU LINK related components.

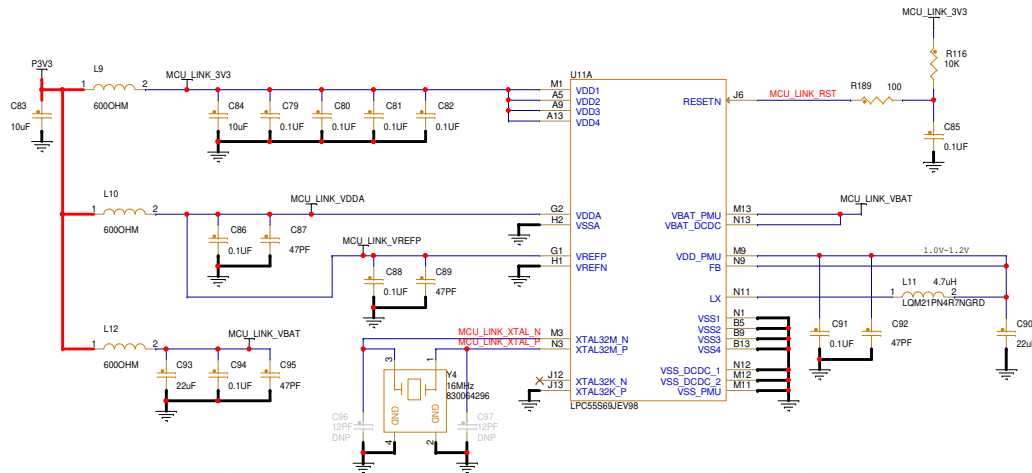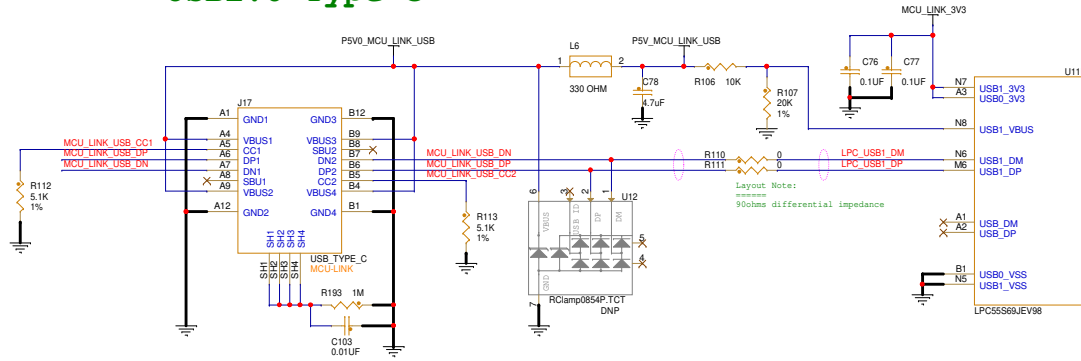

MCU-Link LEDs

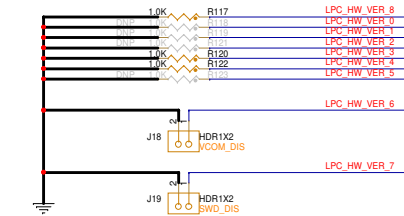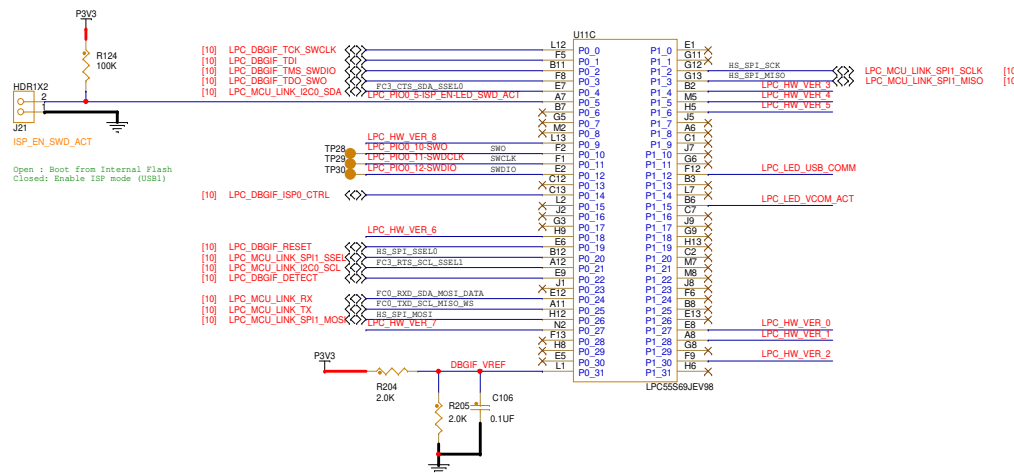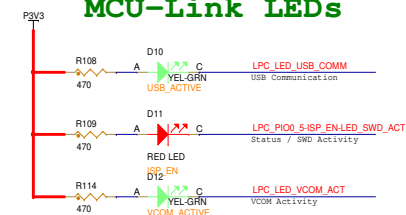

HW_VER_0: USB power negotiation enable when low
HW_VER_1: USB-SIO bridge disable when low
HW_VER_2: CB selection when low
HW_VER_3: Board identity code used when low
HW_VER_4: Power measurement disable if leave open
HW_VER_5: VCOM disable when low
HW_VER_6: SMD disable when low
HW_VER_7: Secondary VCOM disable when low



Classification: Company Internal/Proprietary


Drawing Title:
FRDM-MCXN947

Page Title:
MCU_LINK_USB


Size C Document Number SCH-90818 PDF: SPF-90818 Rev B1

Date: Monday, November 13, 2023 Sheet 9 of 13


MCU-Link Debug Interface

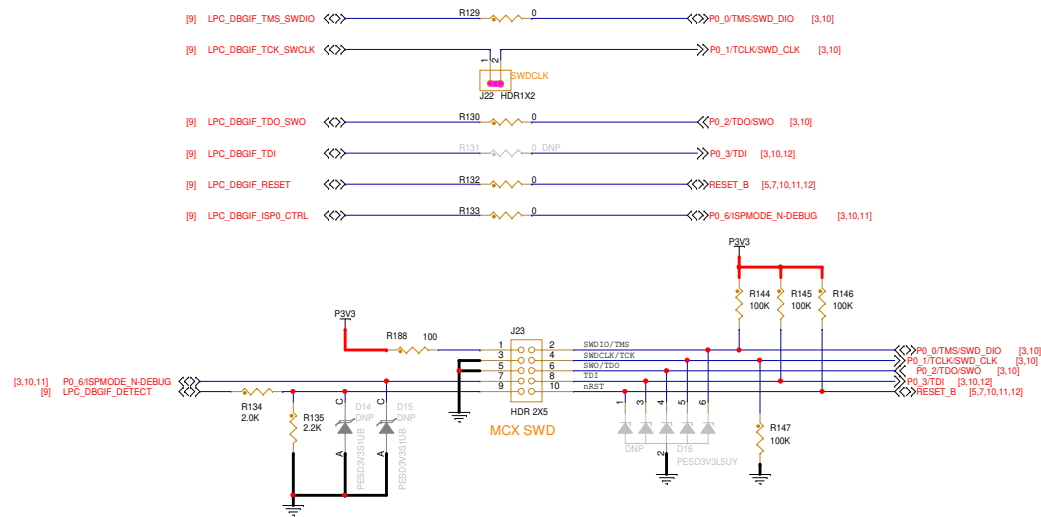

MCU-Link UART



USB Bridge

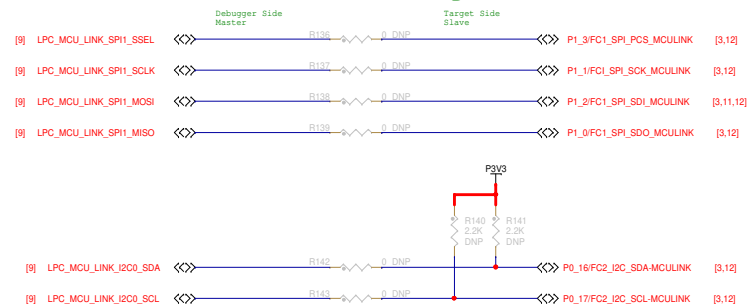

Classification: Company Internal/Proprietary

Drawing Title: **FRDM-MCXN947**


Page Title: **MCU_LINK_DEBUG**

Size C Document Number SCH-90818 PDF: SPF-90818

Rev B1

Date: Monday, November 13, 2023 Sheet 10 of 13

HMI

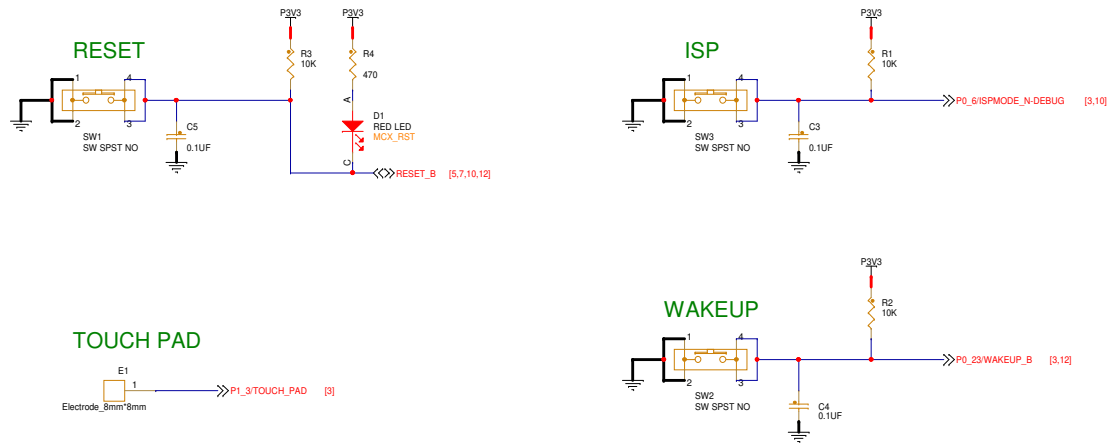

RGB



Classification: Company Internal/Proprietary

Drawing Title:
FRDM-MCXN947


Page Title:
BLOCK DIAGRAM

Size C Document Number SCH-90818 PDF: SPF-90818

Rev B1

Date: Monday, November 13, 2023 Sheet 11 of 13


ARDUINO SHIELD COMPATIBLE HEADERS

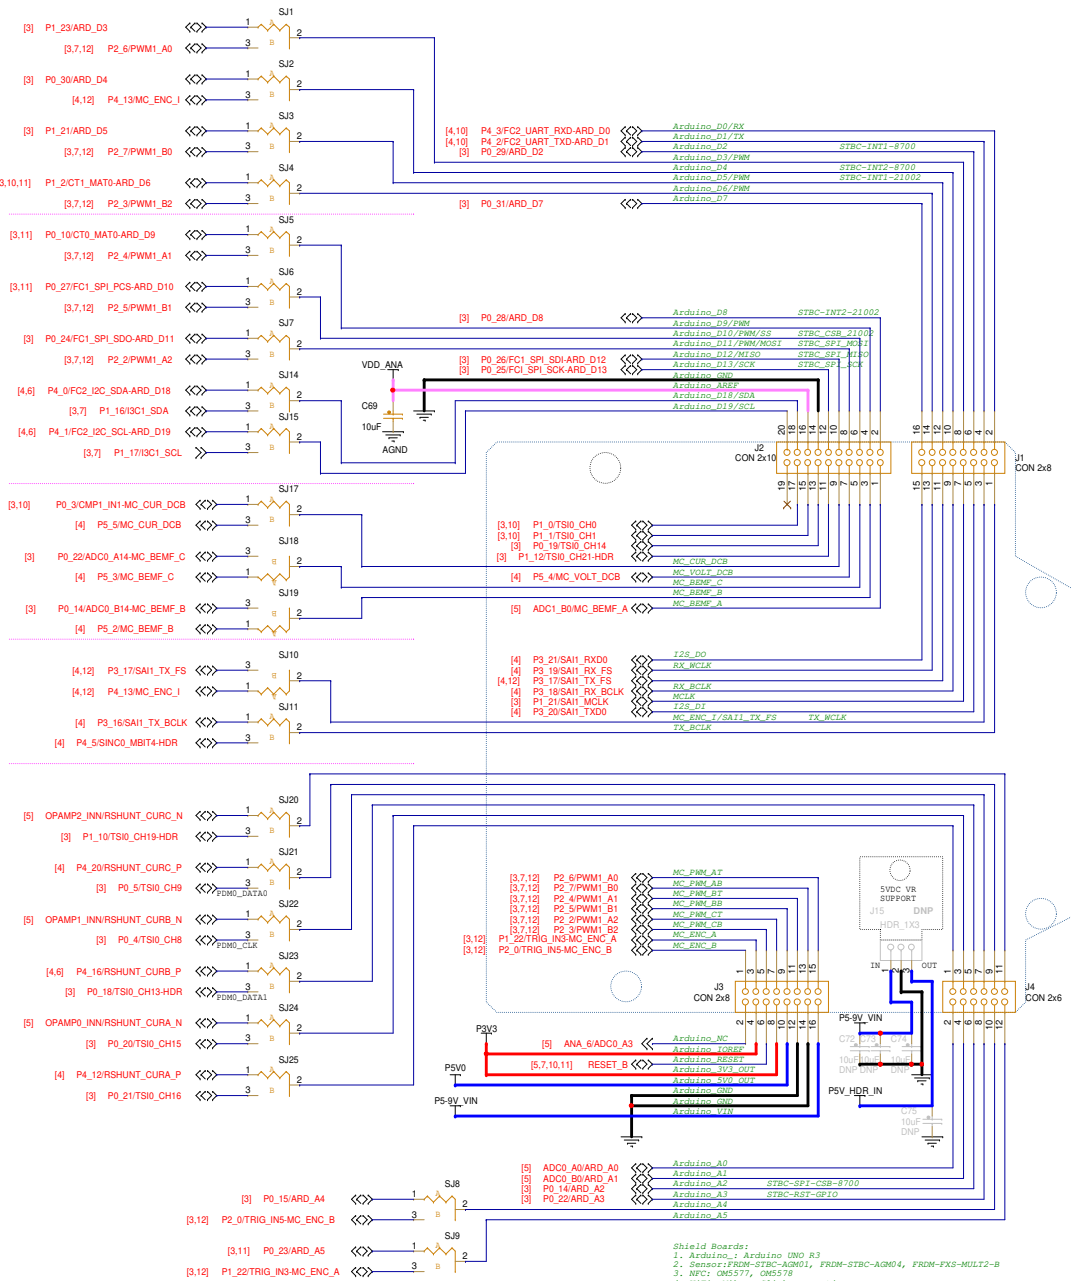


FlexIO LCD

Layout notes:


Add clear silkscreens for each pins of these connectors in this page.

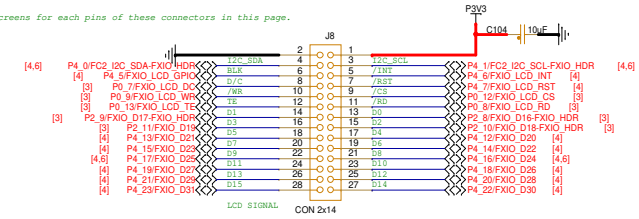


Camera

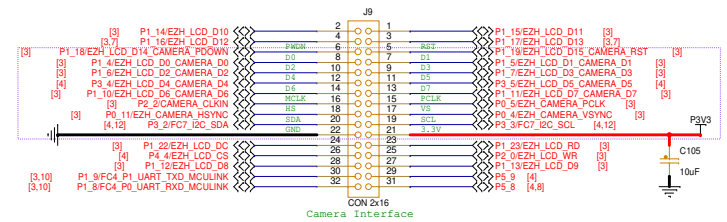

Mikro Bus

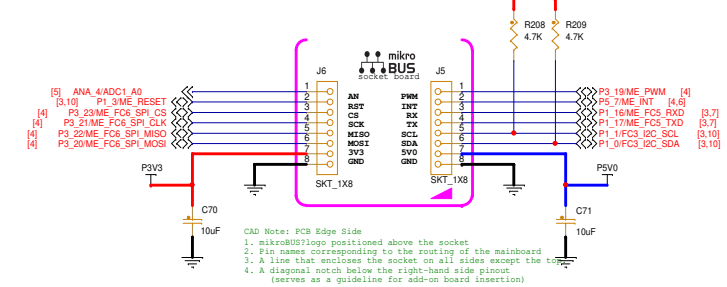

PMOD

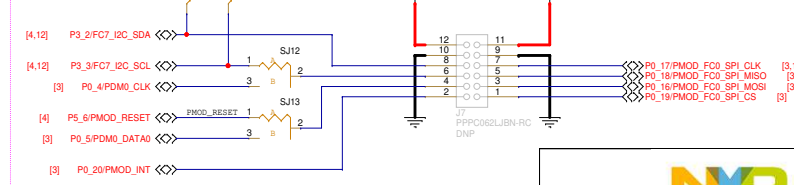

Classification: Company Internal/Proprietary

Drawing Title: **FRDM-MCXN947**

Page Title: **HEADERS**

Size C Document Number SCH-90818 PDF: SPF-90818 Rev B1

Date: Monday, November 13, 2023 Sheet 12 of 13

REF DES	JUMPER(DEFAULT)	PAGE NAME
J24	1-2	06 USB & PWR
J18,J19	OPEN	09 MCU_LINK_USB
J22	1-2	10 MCU_LINK_DEBUG

APPENDIX JUMPER/DNP

REF DES	ASSY_OPT	PAGE NAME
J25,J26,J27,J28,JP6,R17,R20,R23,R194	DNP	05 SOC_PWR
D6,JP1,JP2,R28,R34,R37,R38,R40,R42,R43,R45,R46,R49,R50	DNP	06 USB & PWR
J12,R51,R52,R54,U7	DNP	07 SD & QSPI & SENSOR
C50,C54,C55,C56,C57,C67,R88,R89,R90,R91,R92,R93,R95,R96,R97,R154	DNP	08 CAN PHY & ETHERNET PHY
C96,C97,R118,R119,R121,R123,U12	DNP	09 MCU_LINK_USB
D14,D15,D16,R131,R136,R137,R138,R139,R140,R141,R142,R143,R178,R179	DNP	10 MCU_LINK_DEBUG
C72,C73,C74,C75,J7,J15	DNP	12 HEADERS

REF DES	SHORT(DEFAULT)	PAGE NAME
SJ16,SJ26,SJ27	1-2	03 SOC_PORT0-2
SJ1,SJ2,SJ3,SJ4,SJ5,SJ6,SJ7,SJ8,SJ9,SJ10,SJ11,SJ12,SJ13,SJ14,SJ15,SJ17,SJ18,SJ19,SJ20,SJ21,SJ22,SJ23,SJ24,SJ25	1-2	12 HEADERS

