


STERIL

Vorschaltgerät 0224




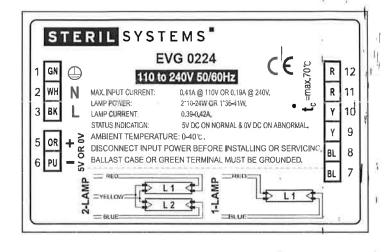

Zwei Lampen Konfiguration für 2x24W

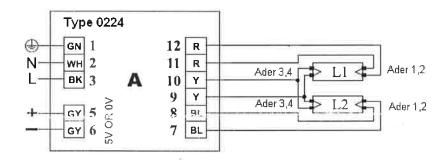

Ein Lampen Konfiguration für 1x40



Fehlermeldekontakt für Optokoppler

Ballast Case Size: 135 x 60 x 30 mm

Ballast Weight: 0.14kg

Case Size: 400 x 270 x 170mm

Case Quantity: 40pcs

Case Weight: 6.25kg

AC Source: 110~240V

Power Factor: ≥0.99

Input Frequency: 50/60Hz

ATHD: < 15%

Operating Frequency: 28~50KHz

Crest Factor:! ≤1.7

Efficiency: ≥80%

Ambient Temperature: 0~40°C

Starting: Preheat

Max. Case Temp: 70°C

Approval: CE