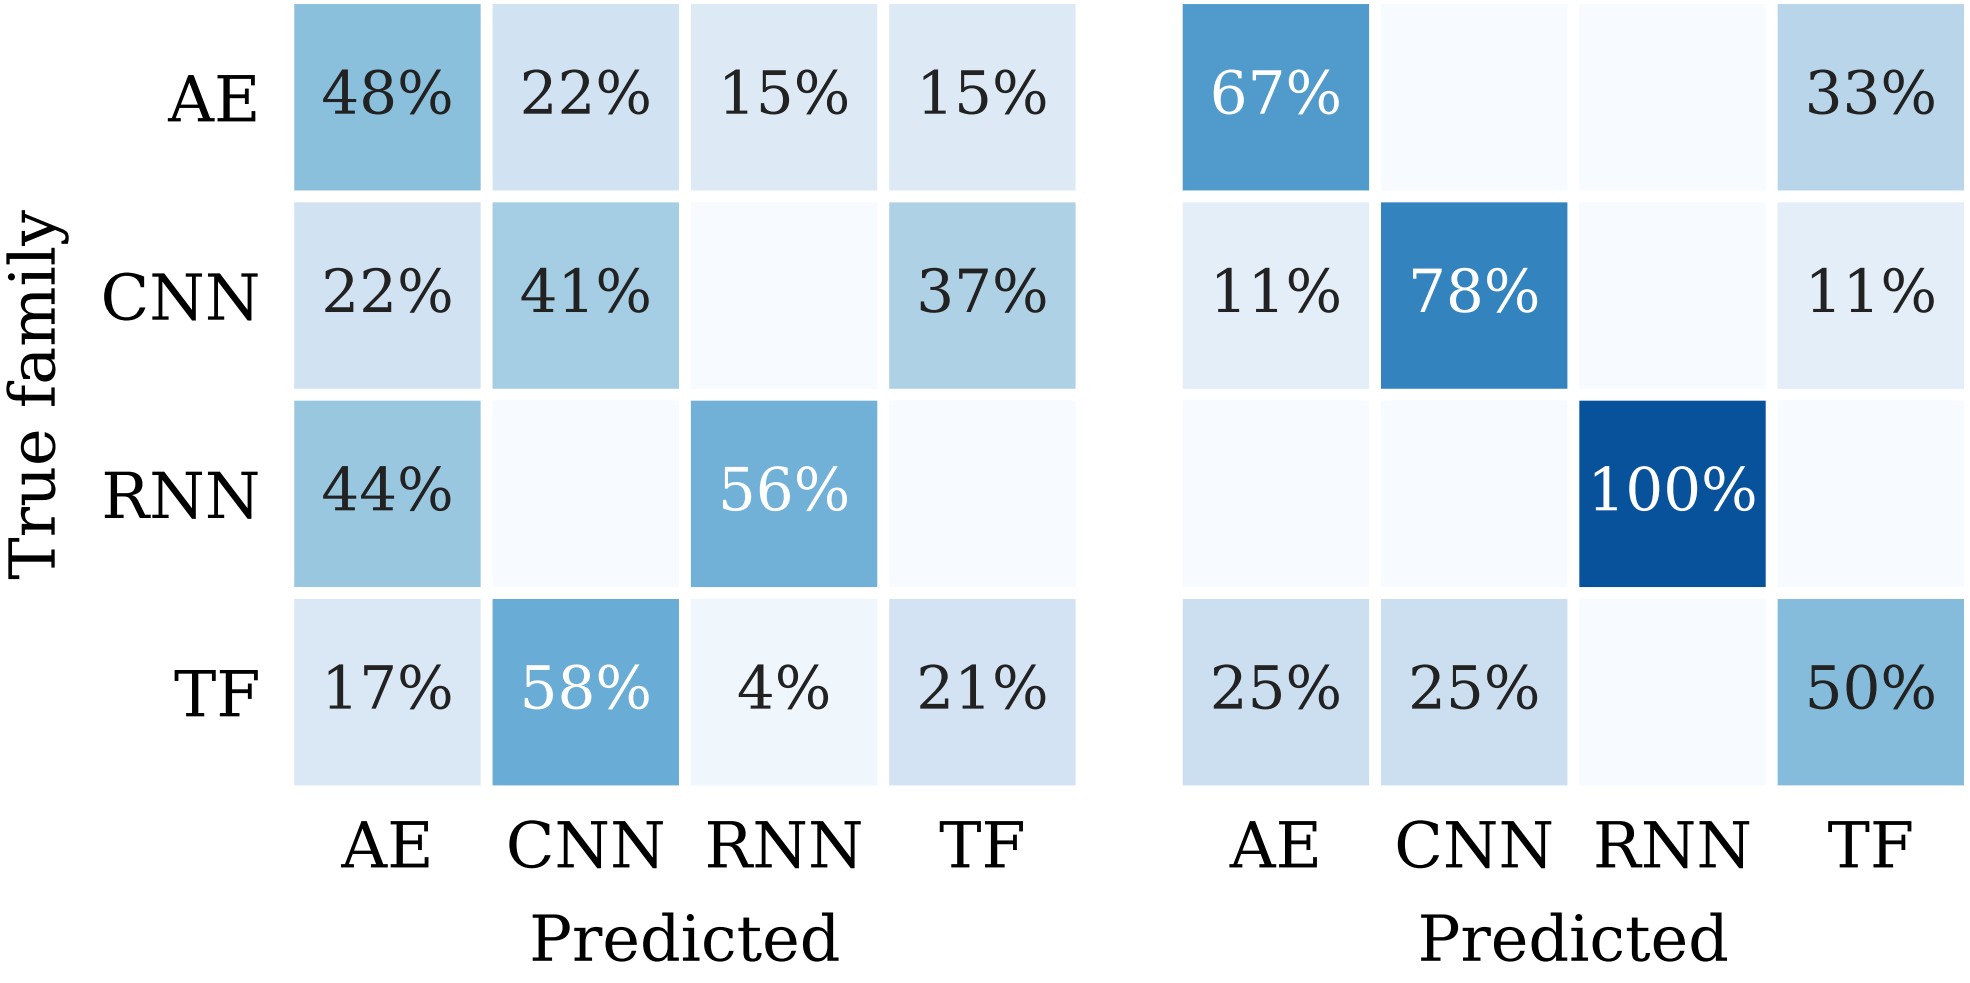

(a) Single-client RF (0.41) (b) Cross-device LR (0.74)