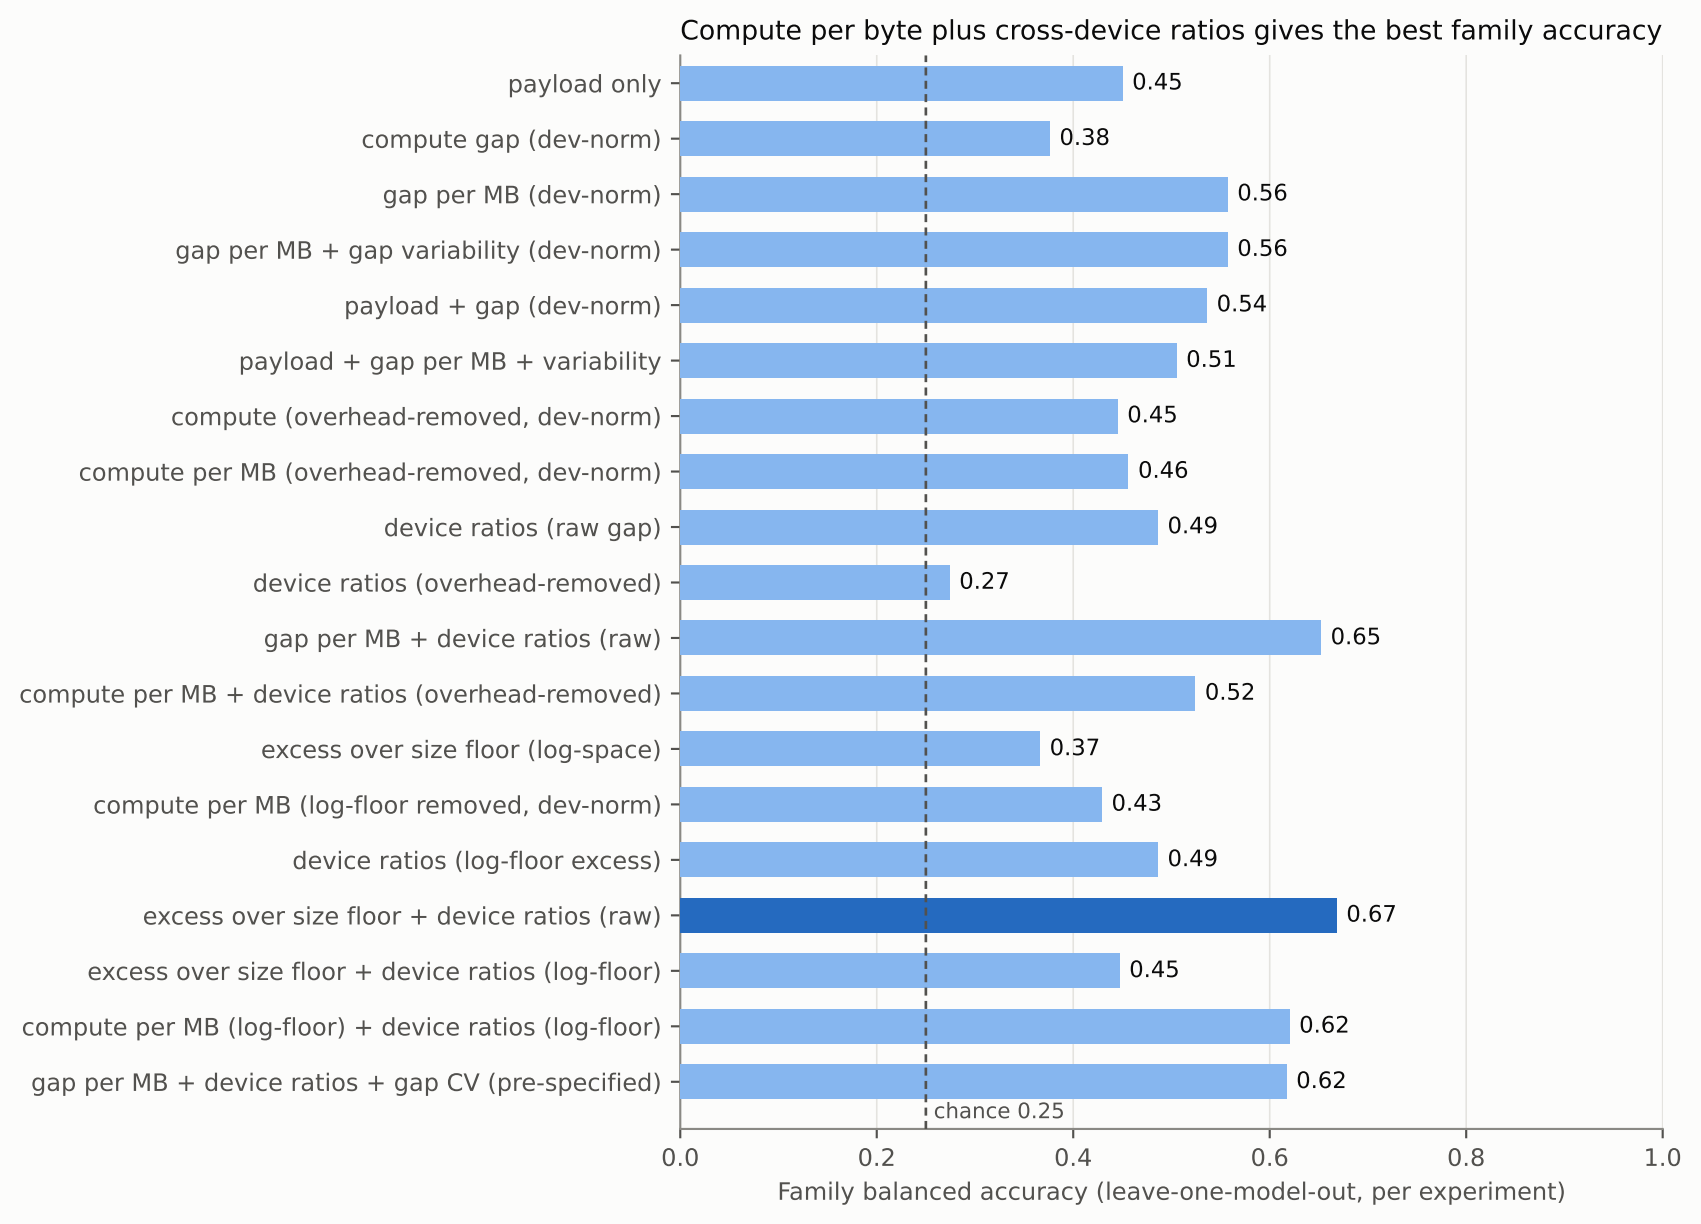
Compute per byte plus cross-device ratios gives the best family accuracy
payload only
compute gap (dev-norm)
gap per MB (dev-norm)
gap per MB + gap variability (dev-norm)
payload + gap (dev-norm)
payload + gap per MB + variability
compute (overhead-removed, dev-norm)
compute per MB (overhead-removed, dev-norm)
device ratios (raw gap)
device ratios (overhead-removed)
gap per MB + device ratios (raw)
compute per MB + device ratios (overhead-removed)
excess over size floor (log-space)
compute per MB (log-floor removed, dev-norm)
device ratios (log-floor excess)
excess over size floor + device ratios (raw)
excess over size floor + device ratios (log-floor)
compute per MB (log-floor) + device ratios (log-floor)
gap per MB + device ratios + gap CV (pre-specified)
0.45
0.38
0.56
0.56
0.54
0.51
0.45
0.46
0.49
0.27
0.65
0.52
0.37
0.43
0.49
0.67
0.45
0.62
0.62
chance 0.25
0.0
0.2
0.4
0.6
0.8
1.0
Family balanced accuracy (leave-one-model-out, per experiment)