Technical Data Sheet

BMMF-2200
Mini Magnetic Flowmeter


The BMMF2200 **Mini Magnetic flowmeter** extremely compact, low cost, inductive magnetic flow meter (including Transmitter and sensor)**, the Mini Magnetic flowmeter** is the perfect solution for measuring the flow of conductive liquids in applications where reliability and low-pressure loss. The magmeter are desired at an economical price compared to higher end models. This Magmeter measures flow using the magnetic-inductive principle. According to Faraday's law of magnetic induction, current is induced into a conductor as it moves through a magnetic field. The amount of current induced is directly proportional to the velocity of the moving conductor. A conductive liquid passing through the flow meter body acts as the conductor. The flow meter body contains a set of electromagnetic coils that generate the magnetic field. Electrodes mounted in the flowmeter body collect the current, whose magnitude is proportional to flow rate.





Technical Specification

- Size: DN1.5， 3， 6, 8, 10, 15, 20
- Velocity range: 0.01m/s – 10 m/s
- Accuracy: ±0.5% of RS (Velocity>0.6m/s) or ±3mm/s(Velocity≤0.6m/s)
- Repeatability: 1/3 of accuracy
- Temperature: PT1000, 0.1℃resolution
- Media Conductivity: 20 ms/cm
- Measuring Direction: Bi-directional measurement
- Max Working Pressure: 1.0MPa
- Max Working Temperature: 90℃for PEEK or Ceramic liner
- Liner: PEEK, Ceramic
- Electrodes: SS316L or HC
- Enclosure: Aluminum, IP65 for Blind version
- Connection: G1/2 or NPT 1/2
- Power supply: 24VDC, ≤100mA
- LCD display: flow rate and total flow
- Analog output: 4 – 20mA
- Pulse output: 0 – 5K Hz
- Relay Output: optional, 1 Relay 2A/30VDC for flow switch
- RS485 MODBUS: Optional for Display version, Standard for Blind version

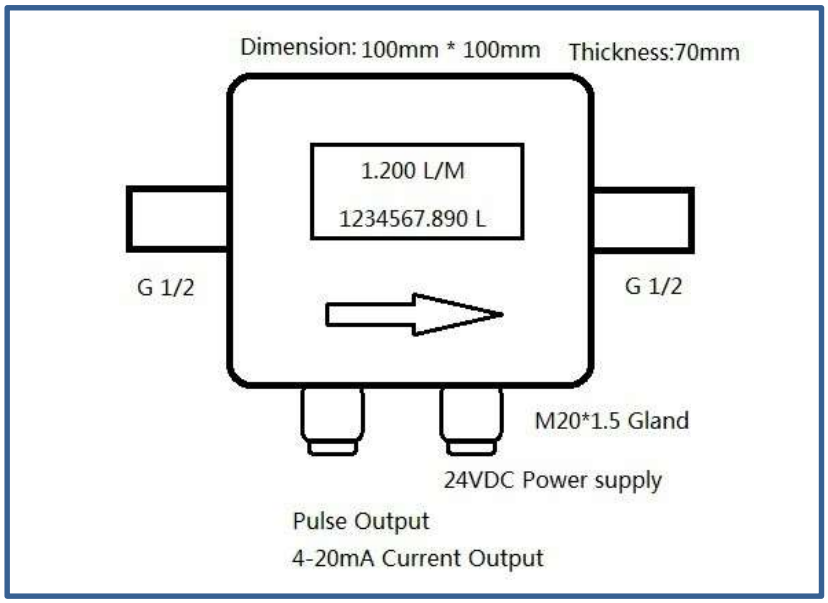

BMMF-2200 Mini Magnetic Flowmeter Model Selection											
Pipe Size											
1.5	DN1.5										
3	DN3										
6	DN6										
8	DN8										
10	DN10										
15	DN15										
20	DN20										
	Power										
	D	18-36VDC									
		Display									
		N	Blind								
		NH	Blind + Handheld (RS485 communicator)								
		D	With Display								
			Electrode								
			S	SS316L							
			H	HC							
				Liner							
				PK	PEEK						
				C	Ceramic						
					Output						
					A	4-20mA					
					P	Pulse					
					R	Relay					
					M	RS485					
					S	Others, pls clarify					
						Input					
						N	Without temperature sensor				
						T	With temperature sensor				
							Temperature				
							1	90℃ for PEEK or Ceramic liner			
							2	Special, clarify			
								Connection Type			
								G1/2	G 1/2"-ISO 228 external		
								G1/4	G 1/4"-ISO 228 external		
								NPT1/4	NPT1/4 "		
								DIN	DIN Flange(SS304)		
								ANSI	ANSI Flange (SS304)		
								S	Others, pls clarify		
									Flow range		
									1	0.3 to 0.6m/s	
									2	More than 0.6m/s	