BCUF-3000M
Clamp On Ultrasonic Flowmeter




Parameters of Main unit

Working Environment

	Main Unit	Transducer
Protection Level	IP65	IP68
Humidity	≤85%RH	
Temperature	-20~60℃	-30℃~160℃

Basic Parameters

Accuracy	≤1%
Velocity Range	0~±10m/s, Bi-directional measurement
Pipe Size	DN32~DN6000mm
Temperature	-30℃~160℃
Type of Liquid	Single liquid that can transmit ultrasound, such as water, sea water, sewage, oil, alcohol, etc.
Pipe Material	Steel, stainless steel, cast iron, copper, PVC, Aluminum, glass steel, etc. Liner is allowed.
Signal Output	1 way 4-20mA output 1 way OCT pulse output 1 way Relay output
Signal Input	3 way 4-20mA input, achieve to heat measurement by connecting PT100 platinum resistor.
Interface	RS485, support MODBUS
Consumption	1.5W
Power Supply	DC8~36V or AC85~264V

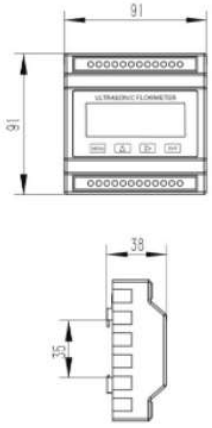

Installation width of guide rail: 35mm Unit: mm

Module clamp on ultrasonic flowmeter



Clamp on ultrasonic flow meter is available in market in various sizes, designs and shapes. It is highly appreciated for their long functional life.

- Non-invasive clamp-on Technology
- Easy to install
- No pressure drop, moving parts, leakage or corrosion
- No pipe cutting or process interruption
- Measurement independent of fluid properties
- Wide Bi-directional flow range

Installation Diagram

The main unit has the advantages of small size, complete functions and low price. Using guide rail installation, it is suitable to be installed in instrument box or distribution panel.

Optional clamp on transducers, measuring range from DN32~DN6000mm.



Parameters of Transducer

▼ Clamp on Transducer



- Built-in magnet, easy to be absorbed on pipe
- Protection Level: IP68
- Measuring range: DN32~DN6000
- Temperature range: -30~90℃

Type	Model	Measuring Range	Temperature	Dimension
Small Size	TS-2	DN32~DN100	-30~90 C	45×25×28mm
Medium Size	TM-1	DN50~DN700	-30~90 C	64×39×44mm
Large Size	TL-1	DN300~DN6000	-30~90 C	97×54×53mm