



1

SYSTEM FUNCTIONALITY CHART

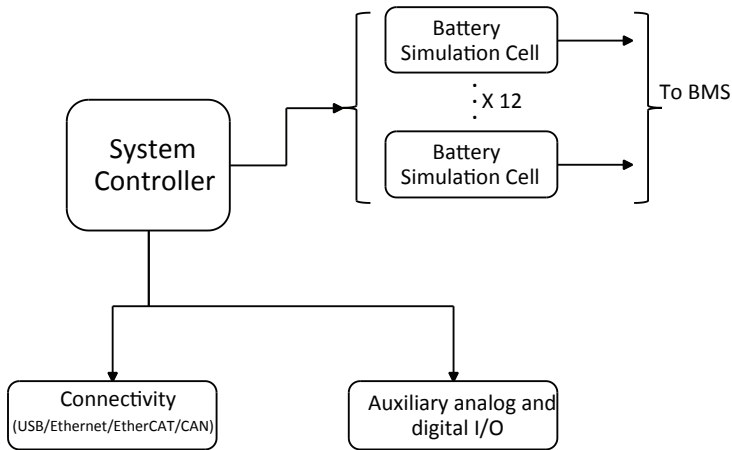

2


CELL OUTPUT CONNECTOR (CONNECTION TO BMS)
(PART NO:0039303046)



1	2	3	4
Sense +	Vout +	Vout -	Sense -

3

Auxiliary I/O Connector
(Part No:L775DB2551ACH4F)

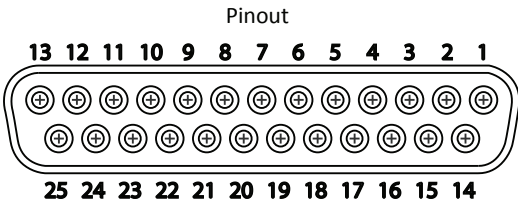

4

Pin Number	Connection	Pin Number	Connection	Pin Number	Connection	Pin Number	Connection
Pin 1	Analog In #1	Pin 7	GND	Pin 13	CANH	Pin 19	Analog In #1
Pin 2	Analog In #3	Pin 8	Digital I/O #2	Pin 14	Analog In #2	Pin 20	Analog In #3
Pin 3	Analog In #5	Pin 9	Digital I/O #4	Pin 15	Analog In #4	Pin 21	Analog In #5
Pin 4	Analog In #7	Pin 10	Digital I/O #6	Pin 16	Analog In #6	Pin 22	Analog In #7
Pin 5	GND	Pin 11	Digital I/O #8	Pin 17	Analog In #8	Pin 23	GND
Pin 6	Analog Out #1	Pin 12	GND	Pin 18	GND	Pin 24	Analog Out #1
						Pin 25	CANL

1.0 MECHANICAL SPECIFICATIONS:

1.1 ENCLOSURE MATERIAL: AL-5754
FINISH: POWDER TEXTURED MATTE PAINT, RAL 9005
CHEMICAL FILM PER SI-0000-0036, CLASS 2

2.0 ENVIRONMENTAL SPECIFICATIONS:

2.1 STORAGE TEMPERATURE: -40°C to 71°C (IEC 60068-2-1 & IEC 60068-2-2.
MEETS MIL-PRF-28800F CLASS 3 LIMITS.)

2.2 OPERATING TEMPERATURE: 0°C to 50°C (IEC-60068-2-1 & IEC-60068-2-2.
MEETS MIL-PRF-28800F CLASS 3 LOW TEMPERATURE LIMIT AND MIL-PRF-28800F
CLASS 2 HIGH TEMPERATURE LIMIT.)

2.3 OPERATING HUMIDITY: 10% TO 90%, NONCONDENSING (IEC 60068-2-78)

2.4 STORAGE HUMIDITY: 5% TO 95%, NON CONDENSING (IEC 60068-2-78)

2.5 OPERATING VIBRATION: 5 HZ TO 500 HZ, 0.3 GRMS (WITH SOLID-STATE HARD
DRIVE)

2.6 NON-OPERATING VIBRATION: 5 HZ TO 500 HZ, 2.4 GRMS (IEC 60068-2-64.
NON-OPERATING TEST PROFILE EXCEEDS THE REQUIREMENTS OF MIL-PRF-28800F,
CLASS 3.)

2.7 SHOCK: 30 G PEAK, HALF-SINE, 11 MS PULSE (IEC 60068-2-27. MEETS
MIL-PRF-28800F CLASS 2 LIMITS.)

2.8 ACOUSTIC: ACOUSTIC TESTING SHOULD BE CARRIED OUT
ACCORDING TO ISO-7779 ON A STANDARD TEST TABLE AT THE
OPERATOR POSITION. CHASSIS TESTING SHOULD BE CONDUCTED
WITH THE CHASSIS RUNNING AT FULL LOAD WITH FRONT PANELS
INSTALLED. IF MULTIPLE FAN SPEED OPTIONS ARE AVAILABLE, THE
SOUND PRESSURE LEVELS SHALL BE PROVIDED FOR THE VARIOUS
FAN SPEED OPTIONS.


2.9 EMI/EMC:

EN 61326-1 (IEC 61326-1): CLASS A EMISSIONS; BASIC IMMUNITY
EN 55011 (CISPR 11): GROUP 1, CLASS A EMISSIONS
EN 55022 (CISPR 22): CLASS A EMISSIONS
EN 55024 (CISPR 24): IMMUNITY
AS/NZS CISPR 11: GROUP 1, CLASS A EMISSIONS
AS/NZS CISPR 22: CLASS A EMISSIONS
FCC 47 CFR PART 15B: CLASS A EMISSIONS
ICES-001: CLASS A EMISSIONS


3.0 SAFETY REQUIREMENTS:

IEC 61010-1, EN 61010-1
UL 61010-1, CSA C22.2 No. 61010-1


6

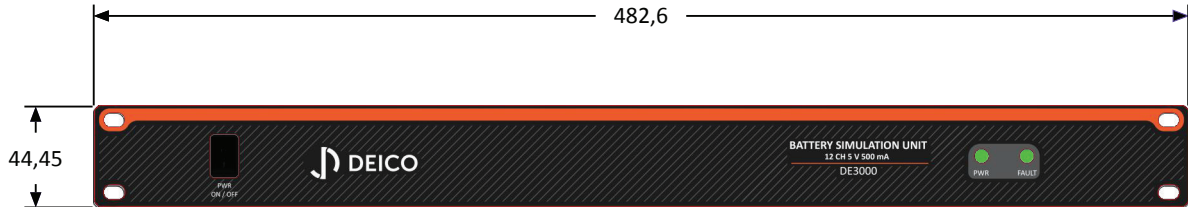

FRONT VIEW



BACK VIEW

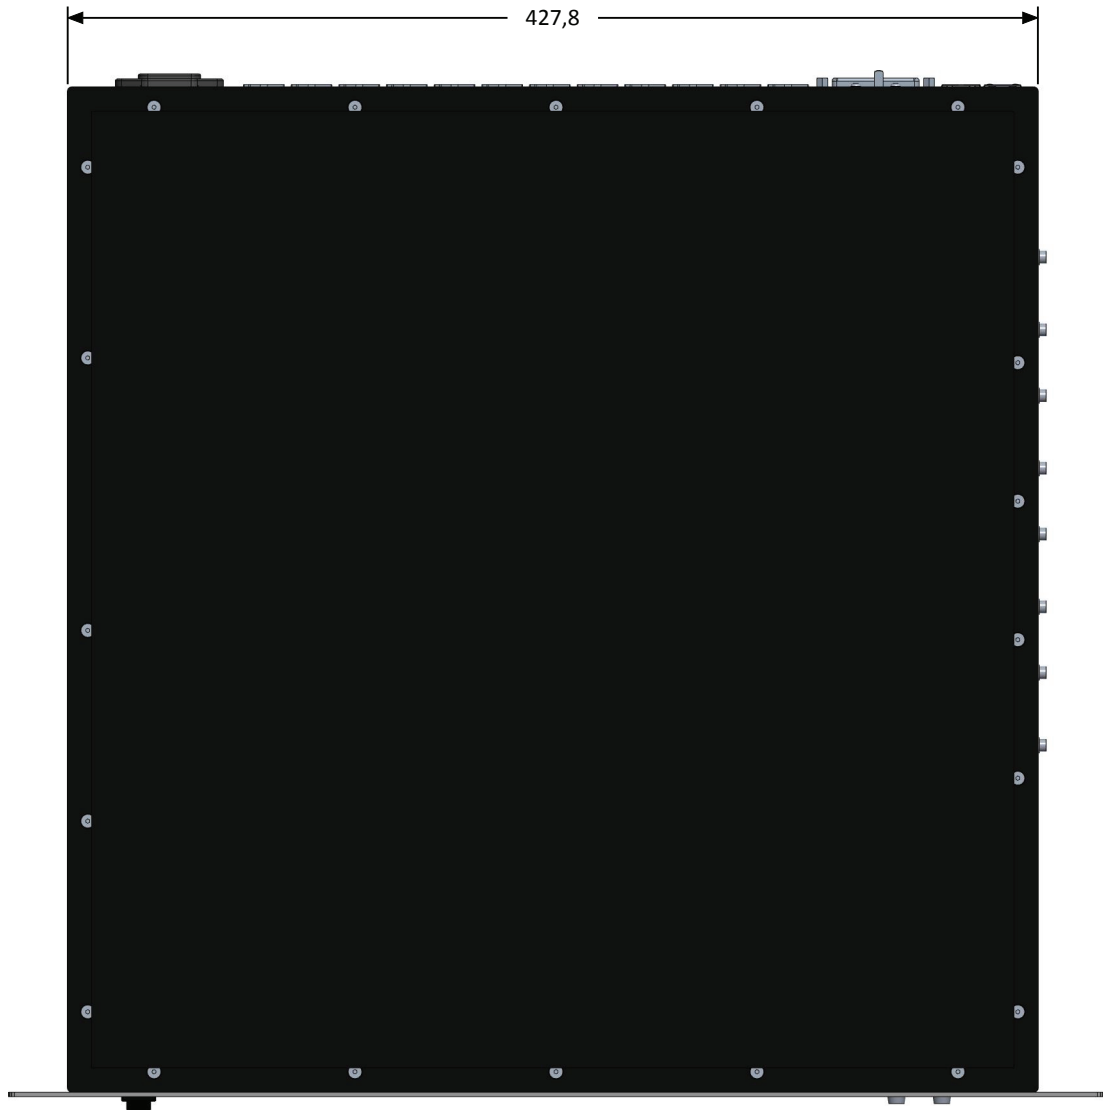

TOP VIEW

SIDE VIEW

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS.					
PRODUCT NAME DE3000 - Battery Simulation Unit 12 CH 5 V 500 mA					 www.deico.com.tr
DOCUMENT NAME DEICO_DE3000_Technical_Drawing					
SIZE A3	SCALE 13:100	REVISION 2	REVISION DATE 04.06.2025	SHEET 1/1	