

HV-SESAME ANALYZER

Automated SESAME Reliability and Clear Peak Assessment Report

Total Stations

32

Accepted

4

Controlled

24

Rejected

4

Project-Level Criteria Summary

Stations passing Reliability (V1-V3): 27 / 32

84%

Stations passing Clear Peak (V4-V9): 5 / 32

16%


Status Definitions

Accepted: Reliability = TRUE and Clear Peak = TRUE


Controlled Acceptance: only one group is TRUE

Rejected: Reliability = FALSE and Clear Peak = FALSE

Station Status Distribution

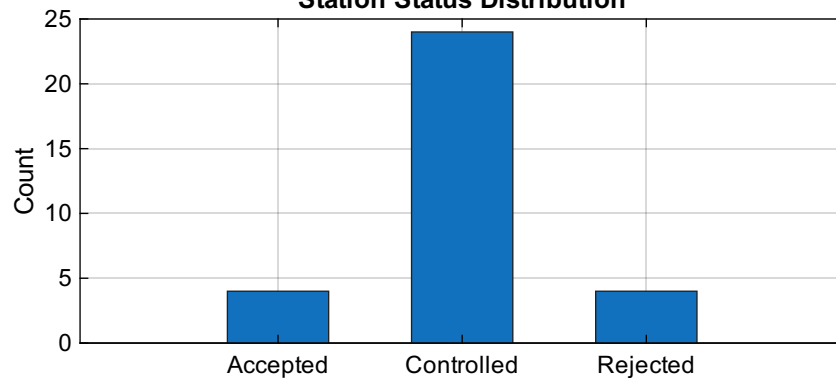


Failed Criteria Statistics

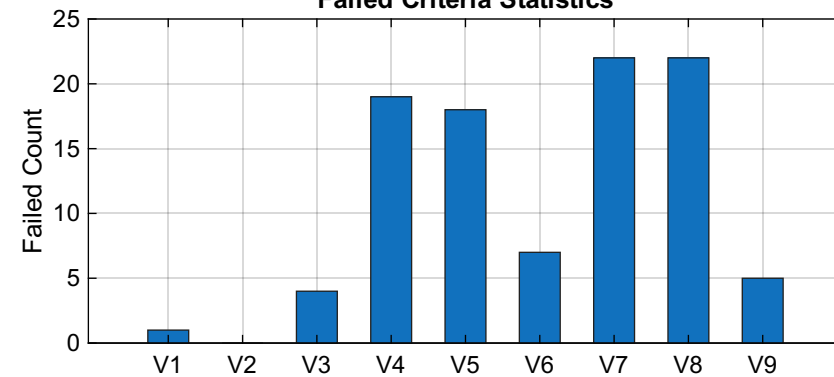

Overall SESAME Classification Map

Accepted / Controlled Acceptance / Rejected | Esri World Imagery background when online

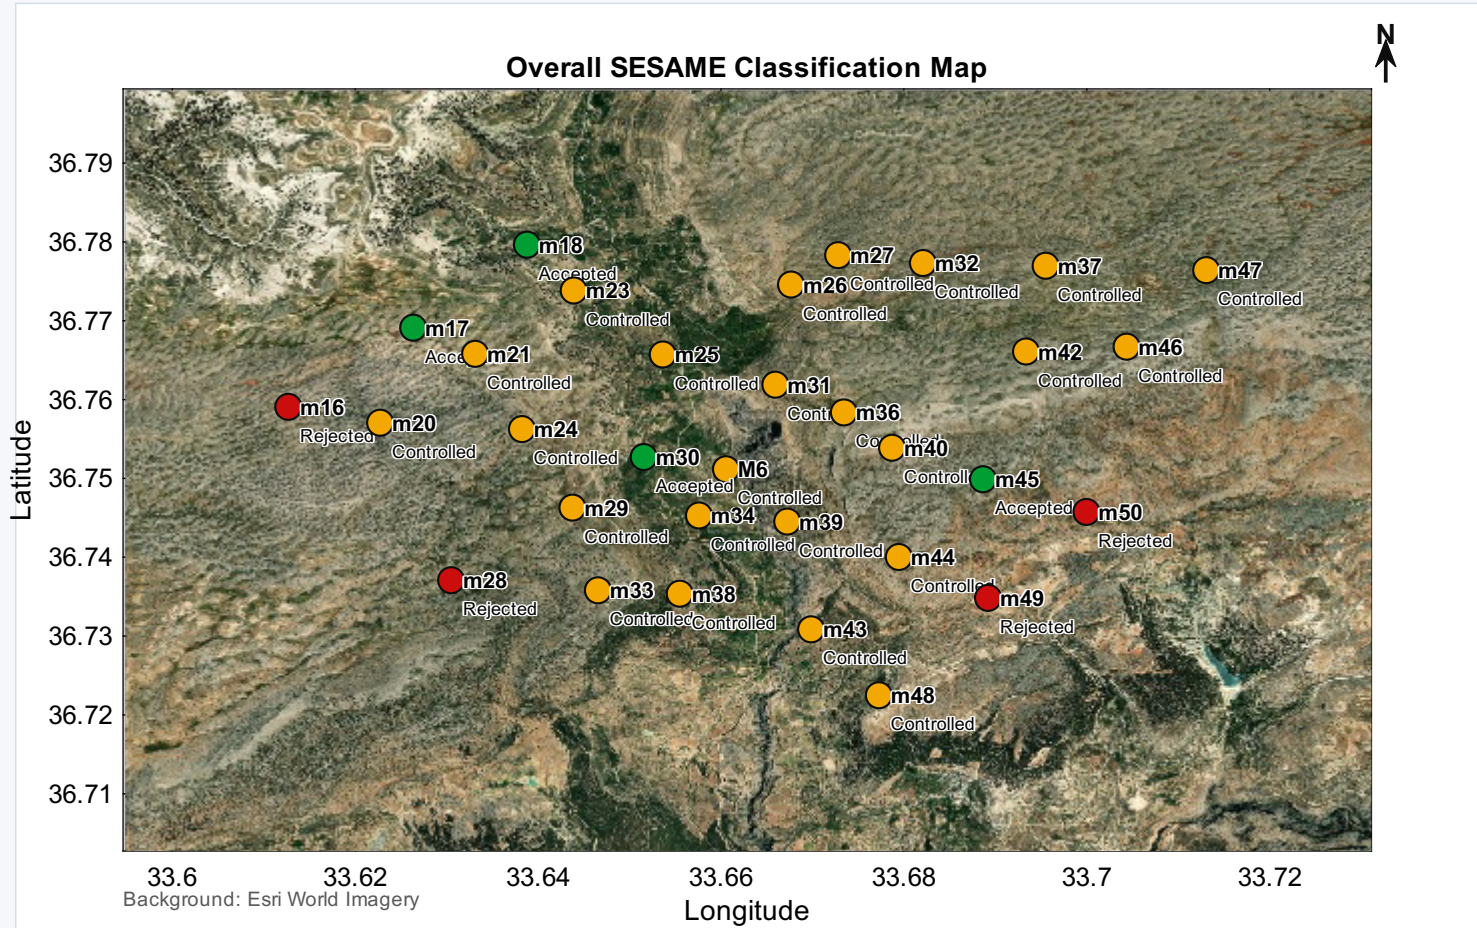

Legend

- Accepted
- Controlled Acceptance
- Rejected

Project Summary

Total stations: 32


Accepted: 4

Controlled: 24

Rejected: 4

Reliability Score Map

Score based on V1-V3 criteria | Esri World Imagery background when online

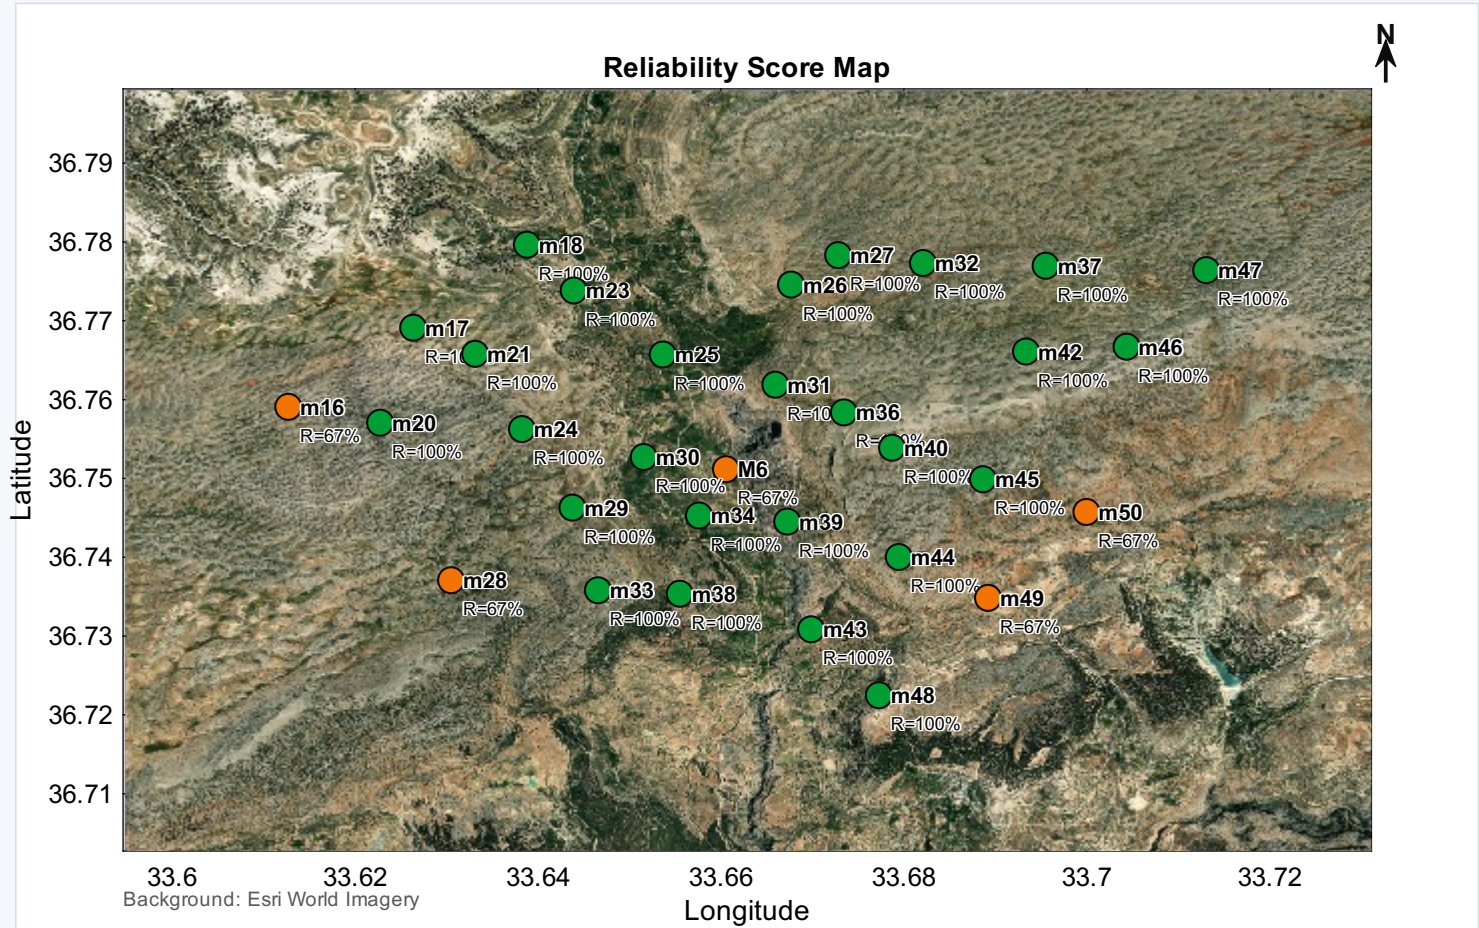

Legend

- 100%
- 80-99%
- 50-79%
- <50%

Project Summary

Total stations: 32

Accepted: 4


Controlled: 24

Rejected: 4

Mean Reliability: 95%

Clear Peak Score Map

Score based on V4-V9 criteria | Esri World Imagery background when online

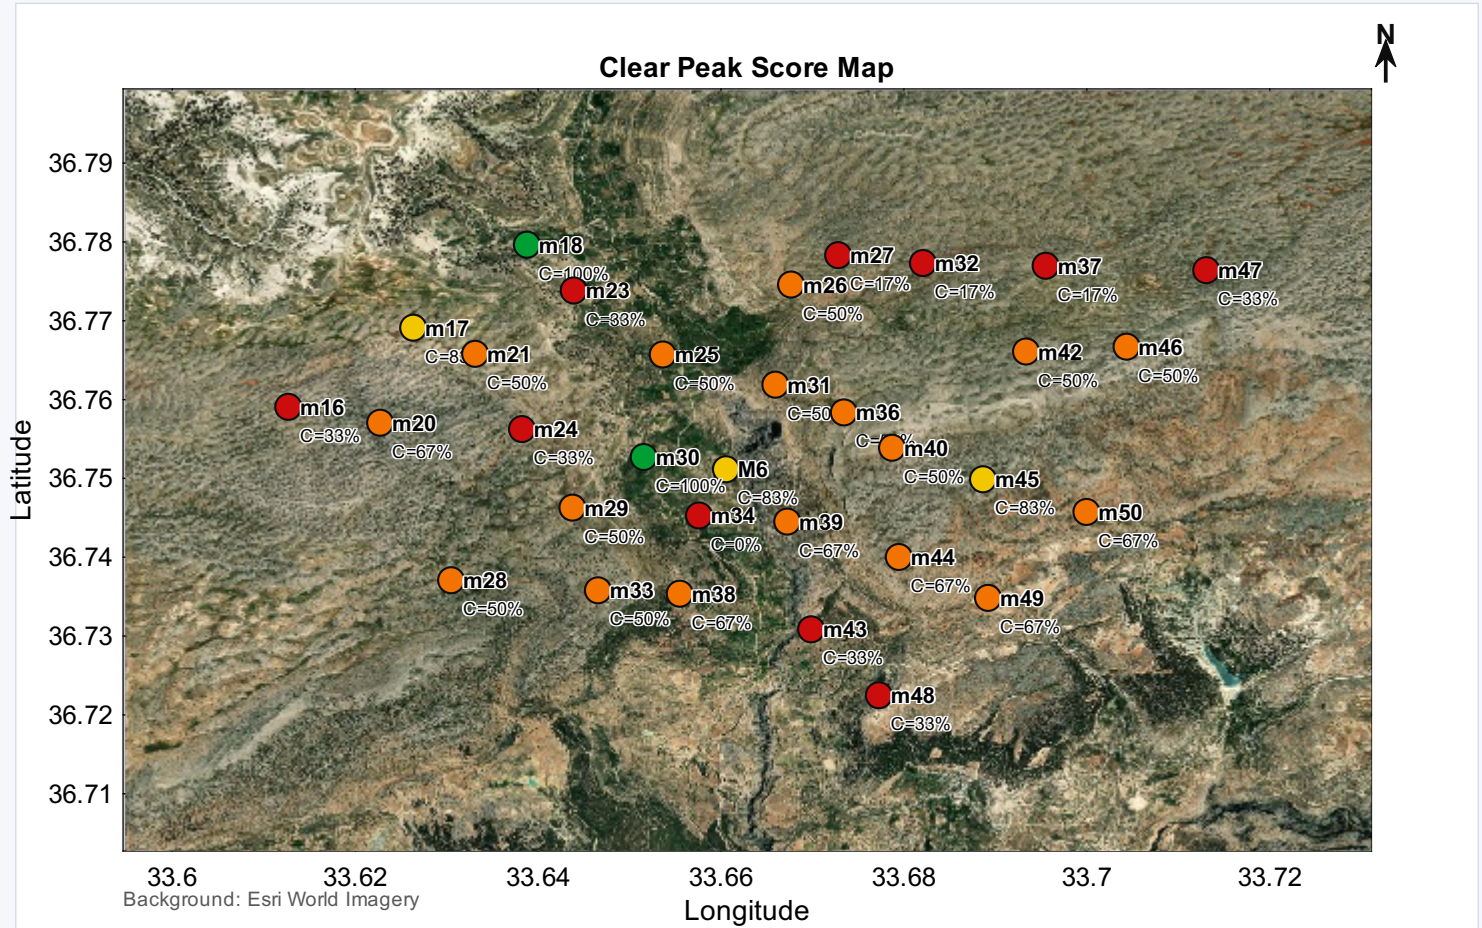

Legend

- 100%
- 80-99%
- 50-79%
- <50%

Project Summary

Total stations: 32

Accepted: 4

Controlled: 24

Rejected: 4

Mean Clear Peak: 52%

Batch Results Table | Page 1 / 2

Name	X	Y	Z	f0	T0	A0	Rel.	Clear	Status
M6	558964.00	4067472.00	39.5	0.2330	4.292	4.131	FALSE	TRUE	C
m16	554686.00	4068322.00	76.3	0.5529	1.809	3.797	FALSE	FALSE	R
m17	555898.00	4069444.00	8.4	0.5394	1.854	3.415	TRUE	TRUE	A
m18	557000.00	4070619.00	17.9	1.3121	0.762	5.921	TRUE	TRUE	A
m20	555584.00	4068104.00	37.7	5.2300	0.191	2.728	TRUE	FALSE	C
m21	556505.00	4069080.00	18.8	8.1570	0.123	2.819	TRUE	FALSE	C
m23	557461.00	4069978.00	24.0	1.8087	0.553	2.278	TRUE	FALSE	C
m24	556969.00	4068024.00	39.6	9.2289	0.108	1.410	TRUE	FALSE	C
m25	558336.00	4069083.00	71.5	0.9518	1.051	5.475	TRUE	FALSE	C
m26	559581.00	4070076.00	81.7	0.9286	1.077	3.290	TRUE	FALSE	C
m27	560038.00	4070493.00	118.3	1.9003	0.526	1.661	TRUE	FALSE	C
m28	556291.00	4065892.00	103.8	1.4845	0.674	5.898	FALSE	FALSE	R
m29	557469.00	4066922.00	82.7	8.1570	0.123	3.681	TRUE	FALSE	C
m30	558160.00	4067639.00	80.7	9.0038	0.111	2.516	TRUE	TRUE	A
m31	559438.00	4068666.00	54.5	1.5986	0.626	3.368	TRUE	FALSE	C
m32	560866.00	4070388.00	77.8	9.2289	0.108	1.622	TRUE	FALSE	C
m33	557726.00	4065760.00	101.7	2.4933	0.401	1.528	TRUE	FALSE	C
m34	558705.00	4066820.00	50.7	7.3898	0.135	1.444	TRUE	FALSE	C

A: Accepted C: Controlled Acceptance R: Rejected

Batch Results Table | Page 2 / 2


Name	X	Y	Z	f0	T0	A0	Rel.	Clear	Status
m36	560109.00	4068280.00	45.3	9.4596	0.106	4.031	TRUE	FALSE	C
m37	562064.00	4070358.00	80.7	3.7939	0.264	1.502	TRUE	FALSE	C
m38	558525.00	4065718.00	110.2	2.4933	0.401	2.190	TRUE	FALSE	C
m39	559567.00	4066740.00	36.0	6.8622	0.146	2.222	TRUE	FALSE	C
m40	560583.00	4067786.00	20.3	9.0038	0.111	4.338	TRUE	FALSE	C
m42	561881.00	4069150.00	36.7	1.9003	0.526	2.002	TRUE	FALSE	C
m43	559811.00	4065225.00	76.8	1.5216	0.657	3.067	TRUE	FALSE	C
m44	560660.00	4066249.00	67.3	1.8539	0.539	2.143	TRUE	FALSE	C
m45	561474.00	4067349.00	13.5	0.5394	1.854	2.491	TRUE	TRUE	A
m46	562862.00	4069225.00	24.6	1.4483	0.690	2.739	TRUE	FALSE	C
m47	563631.00	4070308.00	32.5	1.9003	0.526	3.220	TRUE	FALSE	C
m48	560479.00	4064302.00	64.1	10.7026	0.093	1.830	TRUE	FALSE	C
m49	561535.00	4065680.00	30.0	5.6321	0.178	3.815	FALSE	FALSE	R
m50	562487.00	4066896.00	6.2	0.6905	1.448	2.868	FALSE	FALSE	R

A: Accepted C: Controlled Acceptance R: Rejected

SESAME Criteria Statistics

Station-level H/V plots are available interactively in the software.

Criterion	Description	Passed	Failed	Pass %
V1	$f_0 > 10/lw$	31	1	96.9
V2	$nc(f_0) > 200$	32	0	100.0
V3	s sigma	28	4	87.5
V4	clear low	13	19	40.6
V5	clear high	14	18	43.8
V6	$A_0 > 2$	25	7	78.1
V7	max f_0 band	10	22	31.2
V8	$sf < ef_0$	10	22	31.2
V9	sigma limit	27	5	84.4

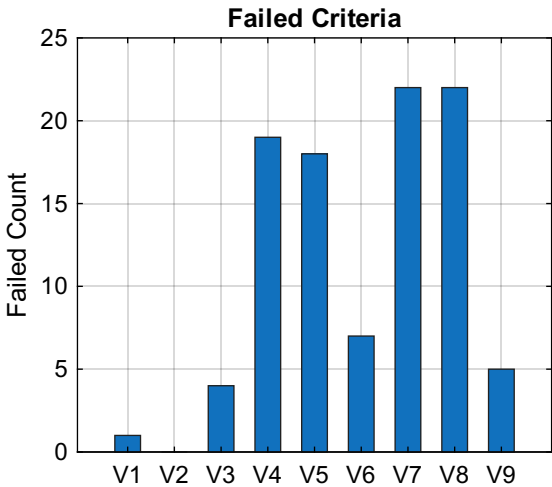

Report Note

Detailed station-level H/V curves and SESAME evaluations are intentionally omitted from this PDF to reduce file size and export time.
Use the interactive station list in the software for details.