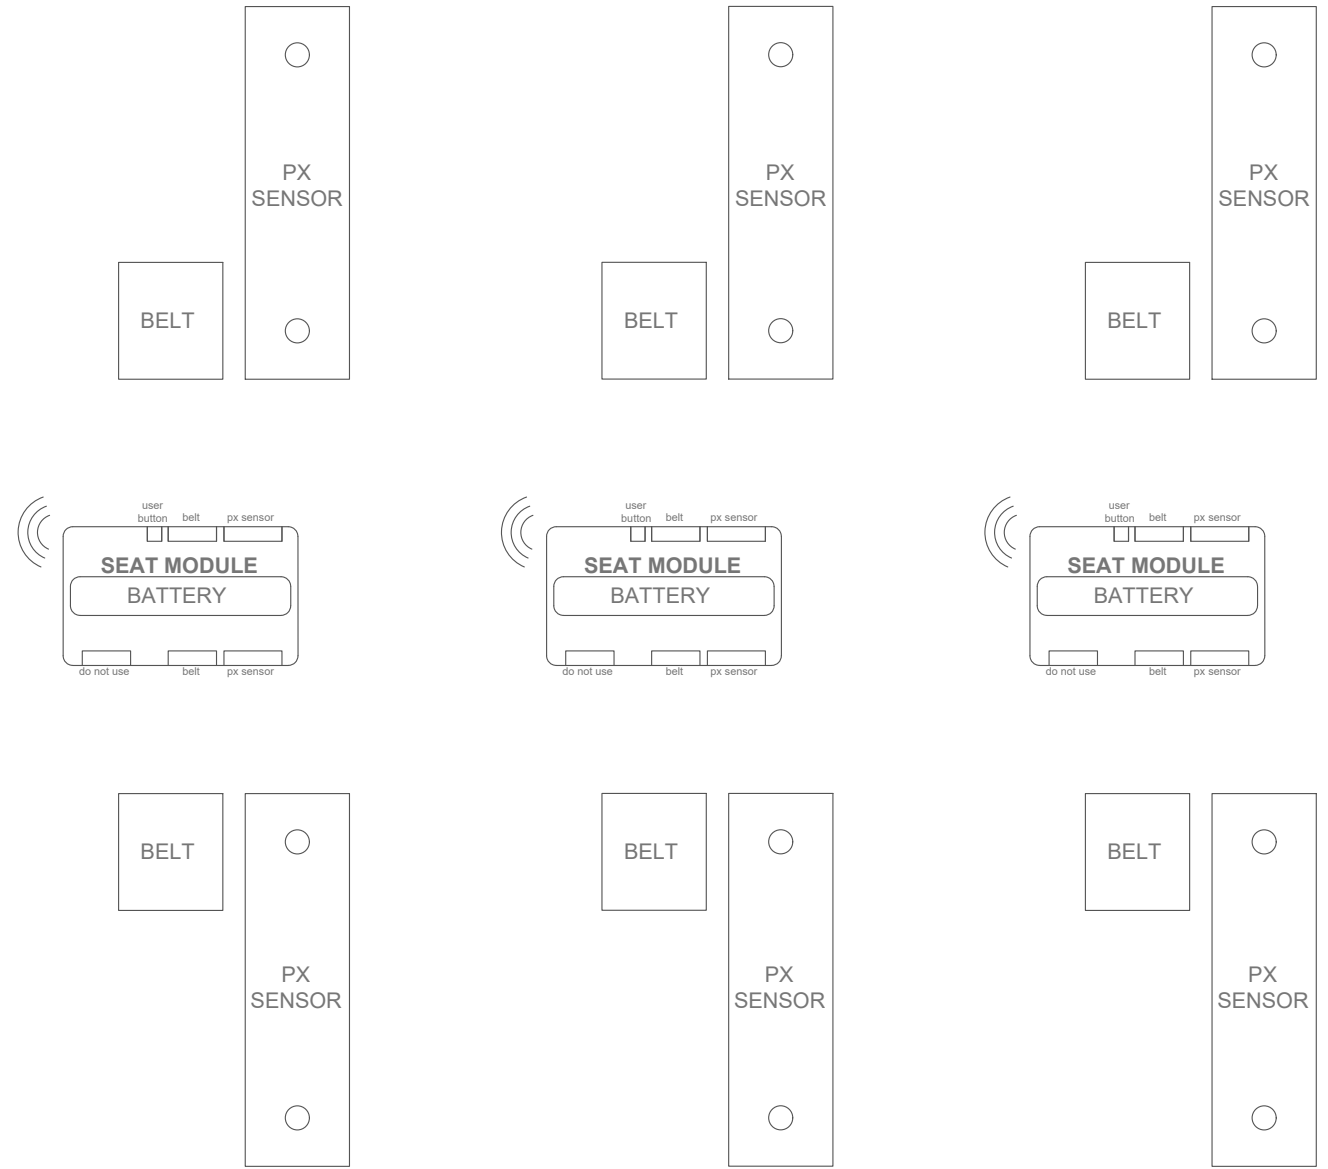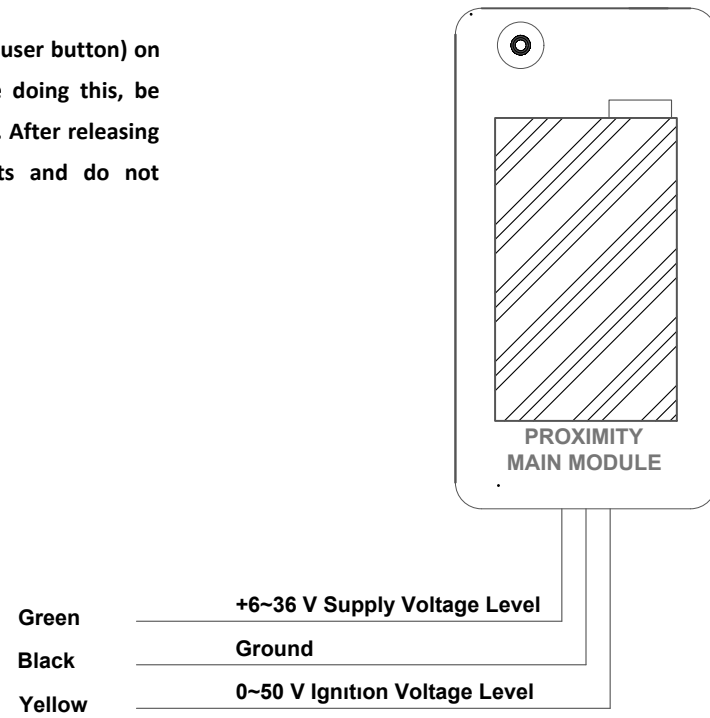**BEFORE THE START,**

1- Px(proximity) sensors, plug into seat module connector.

2 -Install the px sensors under the seats with M5 screws.

3- Install the belts and plug the belt cables into the seat module connector. Belt cables must not pass near, over, or under the px sensor and px sensor cable.

4- Plug to batteries in seat modules

5- Complete the main module wiring connections and set proper voltage levels. when yellow cable(ignition) get to voltage level, its starts main module and it will be automatically active system.

6- Respectively press and hold the button(user button) on the seat module for two seconds. While doing this, be careful not to be close to the seat surface. After releasing the button, move away from the seats and do not approach the sensors for 5 seconds.

Assembly process is completed.

Green	**+6~36 V Supply Voltage Level**
Black	**Ground**
Yellow	**0~50 V Ignıtıon Voltage Level**

REGISTER MODE INTSRUCTION

Ps. The products sent are registered. These steps do not need to be followed.

1- Hold down the button on the main module (3 seconds). Until turning off blue led on the main module. Then release the button.

2- To press the button(fastly) on the main module. It wıll be turnıng on the blue led.

3- "Record mode" will be seen on the LCD screen.

4- When you touch the any seat center areas, main module recorded thoose all px sensors on the that seat module. Then apply theese process all sensors.

5- After the all seats recorded to main module, you will see on the screen. Then press the main module button one time.

Registration process completed.

REVİZYONLAR

BÖLGE	REV.	TANIM	TARİH	ONAY
	A	İlk Yayın	21.01.2021	M.Erce HERGUL

Malzeme / Material: PASSENGER CONTROL SYSTEM V00

Yüzey Kaplama:

	Tarih / Date	Adi / Name	Imza / Sign.
Çizen / Dr. By.	20.01.2021	M.Erce HERGUL	
Kontrol / Check	21.01.2021	M.Erce HERGUL	
Onay / Appr.			

Ölçek / Scale :

50 Uzunluk(mm)

Daralan Makaron

İlaçlı Daralan Makaron

LIYCY

Tekstil Bant

Resim no./Dwg. no.

PCS_V00
GENERAL A.SCHEMA