


EUROPEAN
WHOLESALE
SIGNAGE
SPEC GUIDE

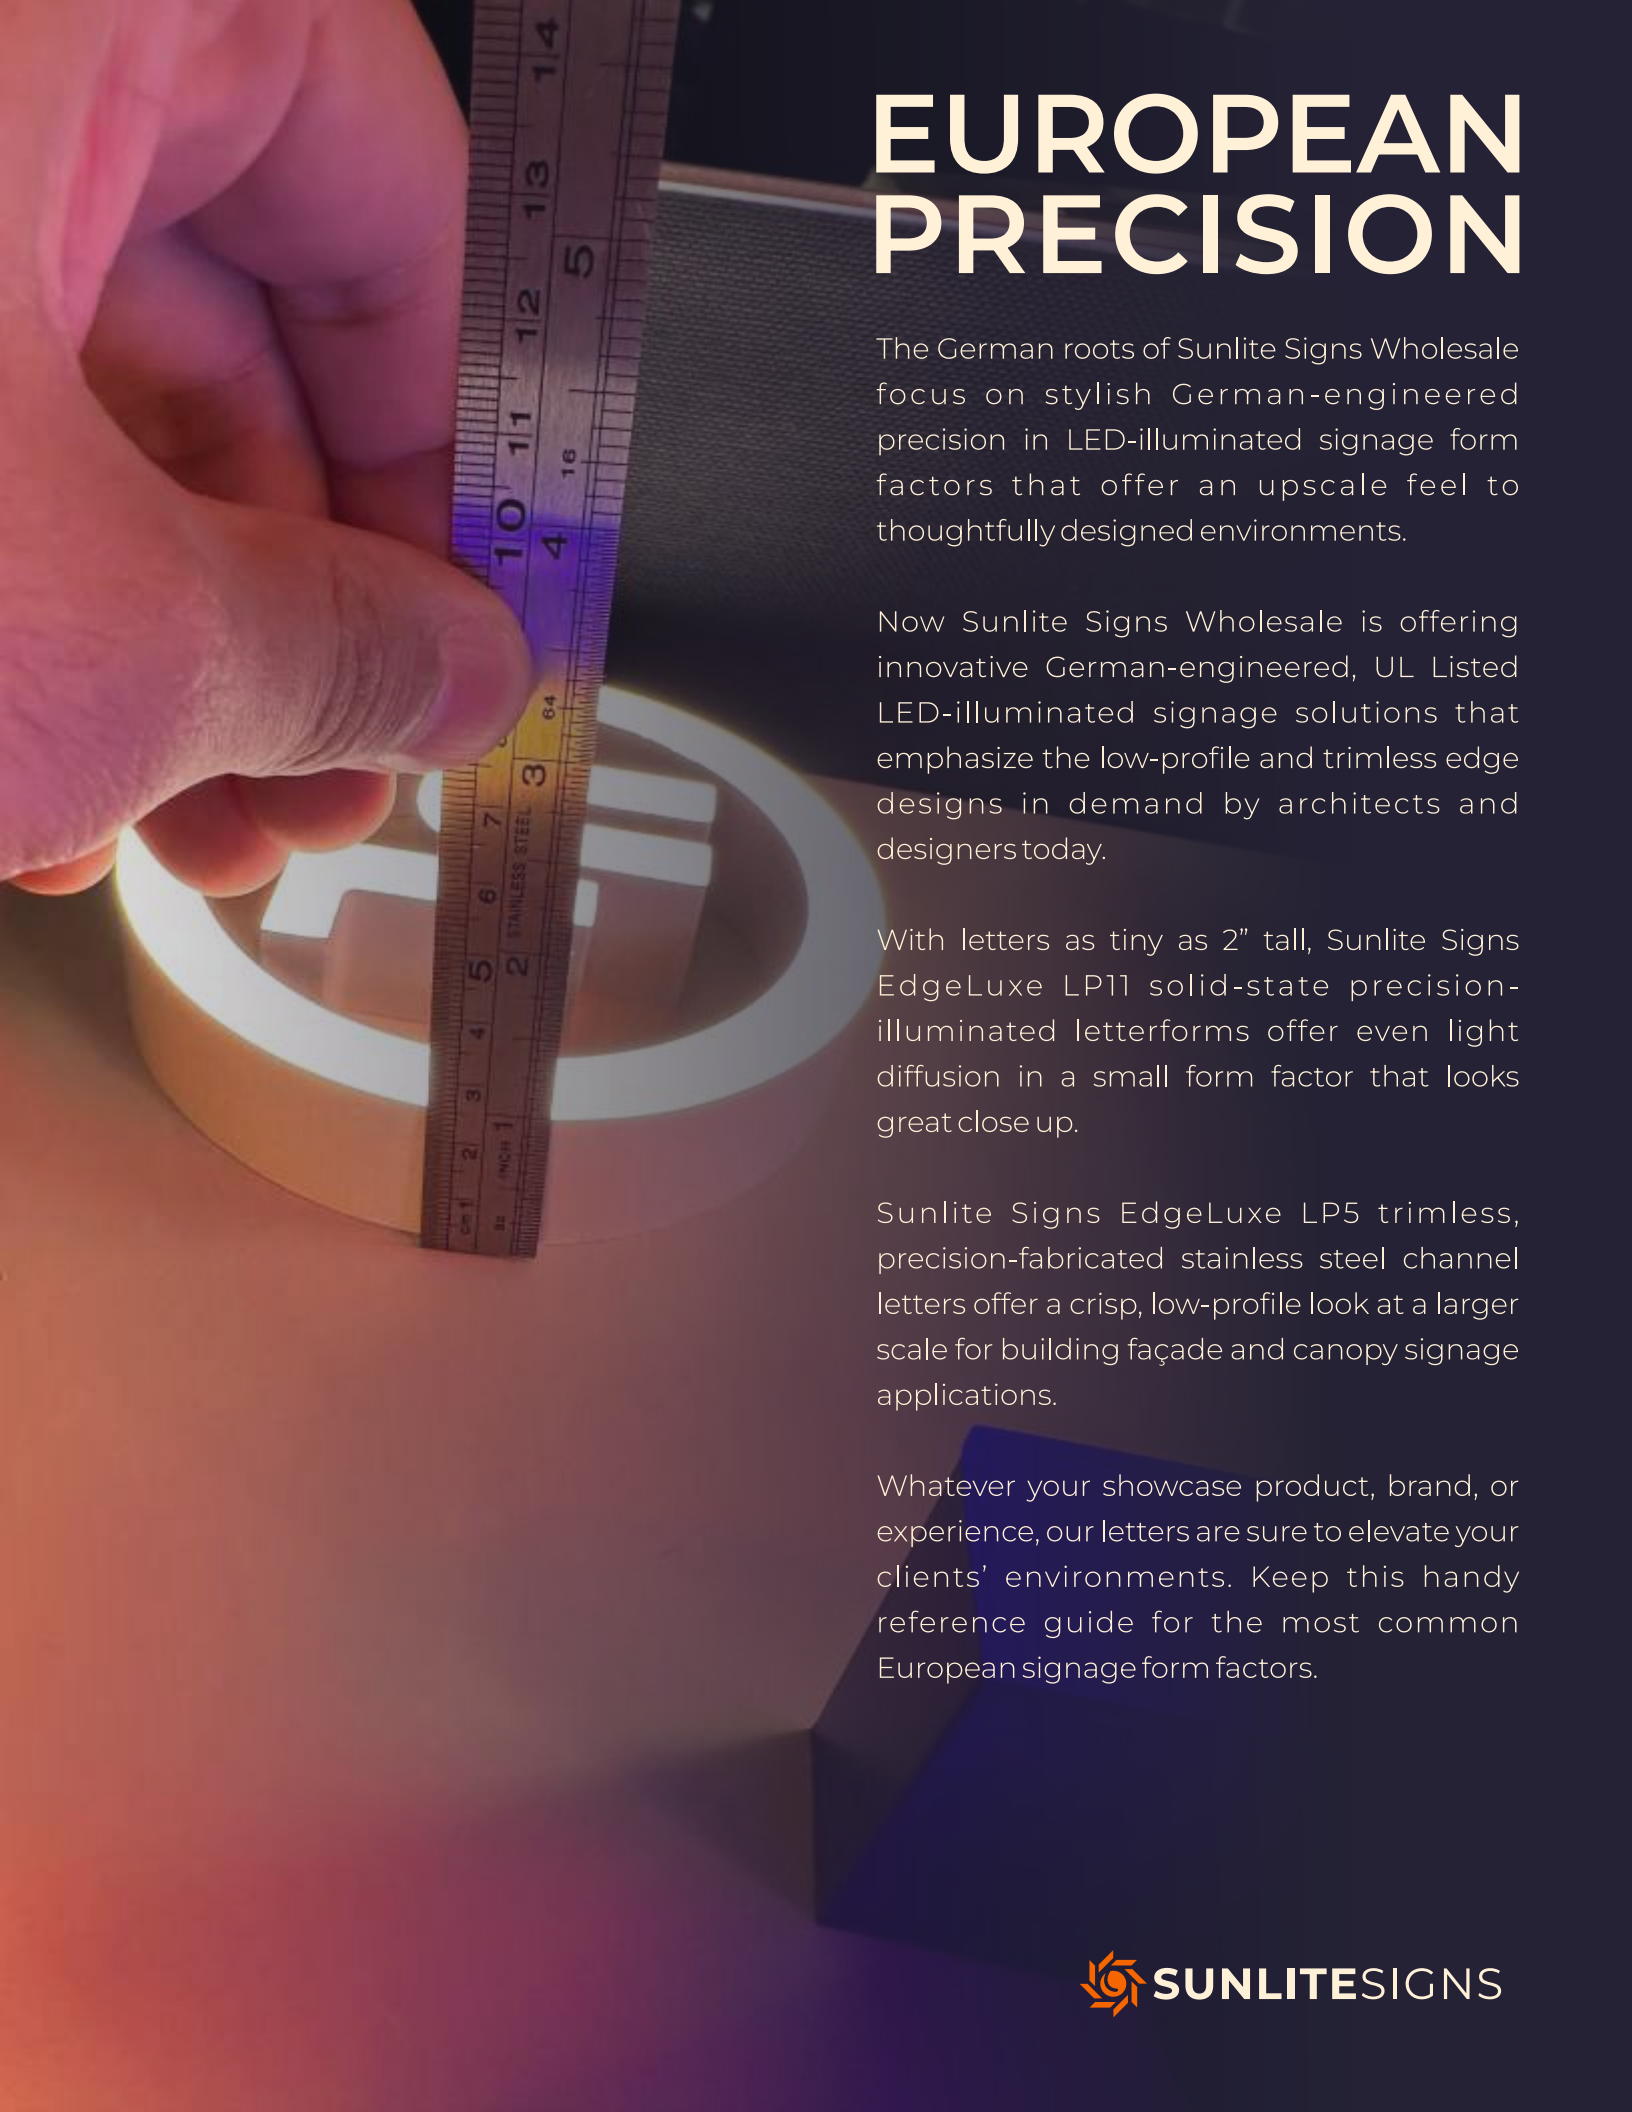

EUROPEAN PRECISION

The German roots of Sunlite Signs Wholesale focus on stylish German-engineered precision in LED-illuminated signage form factors that offer an upscale feel to thoughtfully designed environments.

Now Sunlite Signs Wholesale is offering innovative German-engineered, UL Listed LED-illuminated signage solutions that emphasize the low-profile and trimless edge designs in demand by architects and designers today.

With letters as tiny as 2" tall, Sunlite Signs EdgeLuxe LP11 solid-state precision-illuminated letterforms offer even light diffusion in a small form factor that looks great close up.

Sunlite Signs EdgeLuxe LP5 trimless, precision-fabricated stainless steel channel letters offer a crisp, low-profile look at a larger scale for building façade and canopy signage applications.

Whatever your showcase product, brand, or experience, our letters are sure to elevate your clients' environments. Keep this handy reference guide for the most common European signage form factors.

EDGELUXE LP 1

Flat Cutout Letters (FCO)



Materials:

Wood, aluminum, stainless steel,
acrylic and many more

Thickness:

1 mm (0.039") to 200 mm (7.87")

Customization:

Broad range of acrylic colors, paint,
and vinyl.

Stroke Width:

Minimum 5 mm (0.2")

Maintenance:

No maintenance

Minimum height:

10 mm (0.4")



EDGELUXE LP 3.1

Fabricated Stainless Steel with Standoffs



Illumination:

Halo illuminated from the back with standoff spacers, LEDs arranged to avoid reflection of diodes on mounting surface.

Depth:

30 mm (1.2"), 50 mm (2"), 75 mm (3"), 100 mm (4") and custom depth

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colorful halo effects.

Stroke Width:

Minimum 15 mm (0.5") for stability and even illumination.

Minimum height:

50 mm (2")

Maintenance:

Serviceable LEDs



EDGELUXE LP 3.2

Fabricated Stainless Steel flush-mount



Illumination:

Partial side-lit flush-mounted halo effect.

Depth:

30 mm (1.2"), 50 mm (2"),
75 mm (3"), 100 mm (4") and custom depth

Standard thickness of exposed acrylic is 10mm (0.39")

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored halo effects.

Stroke Width:

Minimum 15 mm (0.5") for stability and even illumination.

Minimum height:

50 mm (2")

Maintenance:

Serviceable LEDs



EDGE LUXE LP 5

Trimless Fabricated Stainless Steel Letters



Materials:

Thick gauge stainless steel returns and back welded together. Step-router acrylic face, trim-less.

Illumination:

Face-lit

Depth:

30 mm (1.2"), 50 mm (2"),
75 mm (3"), 100 mm (4") and custom
depth

Customization:

Painted in any PMS color, with options
for vinyls or pigmented translucent
acrylics for colored face-lit effects.

Stroke Width:

Minimum 15 mm (0.5") for stability and
even illumination.

Minimum height:

50 mm (2")

Maintenance:

Serviceable LEDs



EDGE LUXE LP 11-F

Block Acrylic Face-lit



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform face lighting.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

For small letters and signs 25mm (1")

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-B

Block Acrylic Back-lit



Materials:

10-30mm (0.39"-1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform halo-lit with standoff spacers.

Depth:

10mm (0.39"), 15 mm (0.5"), 20 mm (0.78") and 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored halo-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-FB

Block Acrylic Face- and Halo-lit Combo



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform face- and halo-lit with standoff spacers.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-BS

Block Acrylic Partial Back Side-lit



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform partial back side-lit, flush-mount.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-FS

Block Acrylic Partial Front Side-lit



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform partial front side-lit, flush-mount.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-S

Block Acrylic Full Side-lit



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform full side-lit.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Recommended minimum 20 mm (0.79") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-N

Block Acrylic Faux Neon



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform face-lit, routed to simulate neon glass tube.

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance



EDGE LUXE LP 11-C

Block Acrylic Conical Profile



Materials:

30 mm (1.2") cast block acrylic

Illumination:

Embedded LEDs for uniform face-lit, conical profile for narrow strokes and serifs.

The minimum body stroke width is 12mm(0.47") but the stroke width on the face can be as narrow as 3mm (0.12")

Depth:

Standard 30 mm (1.2") for durability and optimal light diffusion.

Customization:

Painted in any PMS color, with options for vinyls or pigmented translucent acrylics for colored face-lit effects.

Stroke Width:

Minimum 12 mm (0.47") for stability and even illumination.

Minimum height:

50 mm (2")

Sealing:

Epoxy-sealed for IP67 waterproofing and heat dissipation.

Maintenance:

IP67 water- and dust-proof
no maintenance







Contact

hello@sunlitesigns.com

WEST: 651.230.2827

EAST: 689.294.0912

www.sunlitesigns.com

