

Medium-voltage air-insulated switchgear UniGear ZS1

Slim 500 mm width panel



ABB's well-known and widely accepted UniGear ZS1 is also available with a slim width panel of only 500 mm. The well-established medium-voltage switchgear offers the highest safety for personnel, enhanced switchgear reliability, and smart monitoring & diagnostic solution.

At a glance

- 500 mm panel width
- Withdrawable VD4 circuit breaker
- Two panels can be assembled and shipped out, which saves time during installation
- Internal arc classification IAC AFLR
- The whole cabinet has passed the condensation test
- Innovative Safety guard system, full range of safety for personnel
- Comprehensive monitoring and diagnostic solutions yet extendable and upgradable
- Available for GB, IEC

Key benefits and features

UniGear ZS1 air-insulated metal-enclosed switchgear with a panel width of 500 mm is

Smaller - installation space savings up to 25%

- The slim panel is equipped with a withdrawal circuit breaker trolley, which is especially suitable for commercial real estate applications, where space is limited
- The slim panels permit the delivery of two panels already assembled together in the factory – reducing delivery time by up to 30% and on-site installation time by 10%

Safe

- With its optimized electric field distribution design, excellent stable insulation and temperature rise performance

- Offers an innovative Safety guard system for comprehensive personal safety

Reliable

- Comprehensive performance improvements for increased operational reliability and safety
- The circuit breaker uses PT embedded poles with a mechanical life of up to 30,000 cycles and passes 30 full-capacity breaking tests
- Passes the condensation withstand voltage test
- Low partial discharge
- Internal arcing level is AFLR and reaches 31.5 kA/1 s

Smart

Comprehensive online monitoring covering:

- Temperature rise
- Panel interlocking
- Ambient temperature and humidity
- Breaker and motorization of truck & earthing switch

Further enhancement of safety and reliability; Improve the operation and maintenance efficiency with costs reduced significantly.


Easy to combine

- It can be combined with the other UniGear ZS1 panel widths to meet the different needs

Technical data

Product name		UniGear ZS1
Rated voltage	[kV]	12
Rated power frequency withstand voltage	[kV / 1 min]	42
Rated lightning impulse withstand voltage	[kV]	75 ¹⁾
Rated frequency	[Hz]	50/60 ²⁾
Rated main busbar current (40°C)	[A]	...4000
Rated feeder current (40°C)	[A]	630, 1250
Rated short time withstand current	[kA / 4 s]	...31.5
Internal arc withstand current	[kA / 1 s]	...31.5
Standard		GB, IEC
Dimension		H[mm]
		2200/2400 ³⁾
		W[mm]
		500
		D[mm]
		1310/1620

- 1) 95 kV on request.
2) 60 Hz on request.
3) Height of the low voltage compartment is 705 / 905 mm.

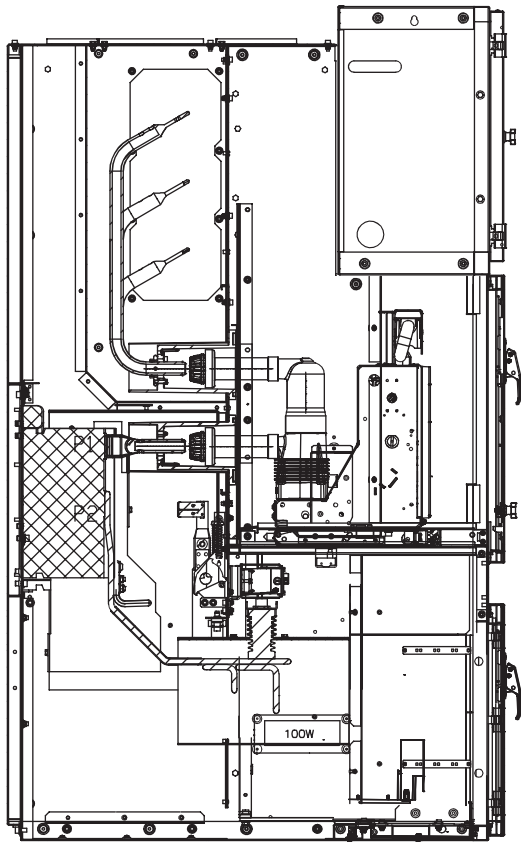

Please note that all pictures shown in the document are for illustration purpose only and actual products may vary.