

IR275K: A Benchmark for Infrared Multi-Frame Super-Resolution Toward Efficient Remote Sensing

Jie Deng^{1,3}, Heyang Wang^{1,3}, Changxin Wang^{1,3}, Junkai Shen^{1,3}, Hongyi Chen^{1,3}, Zhiping He^{2,3,†}, Hongxing Qi^{1,3,†}, Xudong Zhang^{1,3,*}, and Jianyu Wang^{1,3}

Abstract—Efficient processing is becoming increasingly important in infrared remote sensing, where satellite constellations produce large volumes of observations under constrained detector resolution, power, and downlink bandwidth. Multi-frame super-resolution (MFSR) offers a software-based route to spatial enhancement, but its evaluation in infrared sensing remains fragmented across private datasets and ad-hoc protocols. Existing benchmarks do not explicitly capture the thermal contrast, sensor noise, weak texture, and platform-induced frame-to-frame variation that characterize infrared video. We introduce IR275K, a curated benchmark containing 594 infrared video sequences and 275,196 frames. It provides sequence-level train/validation/test splits and a reproducible $\times 4$ evaluation protocol. As an initial architectural probe, we further evaluate CGMamba, a lightweight state-space model with 10.90M parameters and 112.14G FLOPs. CGMamba combines 2D rotary position encoding (2D RoPE) with center-guided cross-Mamba (CGCM) fusion for implicit multi-frame reconstruction. It achieves 33.19 dB PSNR, outperforming infrared single-image super-resolution references by 0.35–0.52 dB at substantially lower computational cost. Ablation results show that removing 2D RoPE from CGCM causes a 1.53 dB drop and severe grid-like artifacts. This indicates that explicit spatial anchoring is critical for stabilizing SSM-based cross-frame gating under infrared conditions. IR275K provides a reproducible foundation for accuracy–efficiency evaluation of infrared MFSR methods, while the architectural analysis offers a concrete starting point for spatially aware SSM design under resource-constrained infrared sensing. Dataset and evaluation resources are available at: <https://github.com/InfraRecon7/IR275K>.

Index Terms—Infrared remote sensing, multi-frame super-resolution, benchmark dataset, efficient payloads, satellite constellations, state-space models, Mamba.

I. INTRODUCTION

INFRARED remote sensing is expanding rapidly. Satellites, aircraft, and low-altitude platforms now carry infrared payloads for applications ranging from maritime surveillance to emergency response. These platforms, however, operate under tight constraints, including limited detector resolution, restricted power budgets, and narrow downlink bandwidth. As constellations grow, the volume of platform-acquired infrared video increasingly exceeds what can be transmitted to ground stations. Efficient processing is therefore becoming a prerequisite for timely observation [1].

Multi-frame super-resolution (MFSR) is well suited to this setting. Moving platforms capture consecutive frames that contain complementary spatial information, and exploiting this temporal redundancy can sharpen infrared imagery without upgrading the detector or increasing downlink demand. For this strategy to be relevant to resource-constrained payloads, however, MFSR methods must be evaluated jointly in terms of reconstruction quality, computational efficiency, and reproducibility.

Infrared multi-frame super-resolution, by contrast, still lacks a common benchmark. Widely used evaluation suites such as REDS [2], Vimeo-90K [3], and DIV2K [4] were built for visible-light or single-frame settings. They do not capture the conditions that define infrared sensing: weak thermal contrast, pervasive sensor noise, sparse texture [5], and frame-to-frame variation driven by platform motion rather than scene dynamics. These conditions are not merely data nuisances. They directly affect the validity of both evaluation protocols and model design, because weak texture and irregular motion can make explicit cross-frame alignment unreliable, while noise can obscure the complementary information that MFSR is intended to exploit. As a result, published infrared MFSR results remain scattered across private datasets and ad-hoc protocols, making fair comparison and generalization analysis difficult.

We introduce IR275K, a curated benchmark for infrared multi-frame super-resolution. It contains 594 video sequences totaling 275,196 frames, with sequence-level train, validation, and test splits; no frame from the same sequence appears in more than one partition. Unlike existing suites built for visible-light or single-frame settings, IR275K preserves infrared-specific imaging characteristics and embeds controlled train–evaluation shifts in contrast, noise, and motion. The benchmark is designed around a practical question: can a method reconstruct high-quality infrared frames with computational cost low enough for resource-constrained payloads while remaining robust to the failure modes that infrared deployments naturally produce?

IR275K also raises an architectural question. If weak texture and large displacement make explicit alignment less reliable, an infrared MFSR model should be able to fuse frames implicitly. Yet implicit fusion still needs to preserve spatial correspondence; otherwise, information from neighboring frames may be gated into the wrong locations. To examine this issue, we evaluate CGMamba on IR275K as a lightweight state-space reference. CGMamba combines 2D rotary position encoding (2D RoPE), which injects spatial coordinates into the Mamba scan, with Center-Guided CrossMamba (CGCM),

¹Hangzhou Institute for Advanced Study, Hangzhou 310024 China.

²Shanghai Institute of Technical Physics of the Chinese Academy of Sciences, Shanghai 200000 China. ³University of Chinese Academy of Sciences, Beijing 100000 China.

*Corresponding author: Xudong Zhang (zhangxudong@ucas.ac.cn). [†]Co-corresponding authors: Zhiping He (hzping@mail.sitp.ac.cn), Hongxing Qi (Qihongxing@ucas.ac.cn).

which uses the central frame to gate information from neighboring frames. The ablation shows that these two components are mutually dependent: removing 2D RoPE from CGCM causes a 1.53 dB drop and severe grid-like artifacts. This result suggests a benchmark-driven design principle for infrared MFSR: implicit cross-frame fusion must be spatially anchored to remain stable.

Our contributions are:

- 1) IR275K, a benchmark of 594 curated infrared video sequences with standardized sequence-level splits and a reproducible $\times 4$ evaluation protocol.
- 2) A controlled comparison between single-frame and multi-frame methods on the same infrared testbed, establishing a reference point for future infrared MFSR work.
- 3) A benchmark-driven architectural finding, within CG-Mamba, that SSM-based implicit fusion is effective only when cross-frame gating is spatially anchored; without explicit coordinate information, cross-frame fusion loses 1.53 dB.

II. RELATED WORK

Super-resolution architectures have moved through three generations. Convolutional networks established the dominant early paradigm, from SRCNN-style direct reconstruction to deeper residual, dense, pyramid, and channel-attention designs [6]–[12]. Remote sensing SR further explored hybrid-scale self-similarity and domain-specific convolutional priors [13]. Non-local and sparse-attention mechanisms expanded contextual modeling beyond local convolutional neighborhoods [14], [15]. Transformer self-attention then provided a general framework for long-range dependency modeling [16], enabling image restoration and super-resolution methods such as Restormer, SwinIR, and HAT [17]–[21]. Their cost, however, grows quadratically with sequence length and becomes a bottleneck for multi-frame video.

The third generation replaces attention with state-space recurrence. Mamba [22] demonstrated that selective SSMs can match Transformer-level quality at linear complexity, and Vision Mamba extended this direction to visual representation learning [23]. The idea has since spread to remote sensing. Rep-Mamba [24] introduces re-parameterization and cross-scale state propagation for lightweight RSISR. Dynamic state-control modeling further adapts state-space mechanisms to generalized remote sensing SR [25]. EMAN [26] pairs a multi-scale detail extraction unit with multi-dimensional Mamba-attention, using atrous-based selective scanning to establish global correlations at low cost. FMSR [27], the first Mamba-based RSI-SR framework, couples frequency selection with SSM scanning. HAM adds hierarchical attention and spatial-frequency fusion [28]. DVMSR applies knowledge distillation to Vision Mamba for efficient inference [29]. CNMC pairs Mamba blocks with CNN units, combining global context with local inductive bias [30]. CGMamba is positioned within this SSM family, whose efficiency advantage matters directly for the resource-constrained infrared payloads that IR275K targets.

Infrared super-resolution has received far less attention than its visible-light counterpart. Three recent single-image methods are directly relevant. GPSMamba [31] augments Mamba with global phase and spectral prompts, coupled with a thermal-spectral attention and phase consistency loss to enforce structural fidelity. IRSRMamba [32] integrates wavelet transform feature modulation for multi-scale adaptation and an SSM-based semantic consistency loss to restore fragmented contextual information. DifIISR [33] takes a different route, injecting gradients from infrared thermal-spectrum priors and visual foundation models into the diffusion reverse process for task-aware reconstruction. What all three share is a single-frame assumption—none exploits the temporal redundancy that moving infrared platforms provide. DCUNet [34] is a rare exception. It performs multi-frame infrared SR through deformable-convolution alignment, but such alignment-first designs may be vulnerable under the weak textures and large displacements typical of infrared video. CGMamba is designed as an implicit-fusion reference model for this setting, using center-guided cross-Mamba gating rather than explicit motion estimation.

For methods that exploit multiple frames, the central design choice is how frames are fused. The dominant strategy estimates motion between frames, warps them to a common reference, and then merges. VESPCN [35] introduced spatio-temporal subpixel convolution for real-time video SR. Satellite video SR [36] extends alignment to remote sensing via multiscale deformable convolution and temporal grouping projection. VSRM [37] combines deformable cross-Mamba alignment with spatial-to-temporal scanning within an SSM framework. Alignment provides a strong prior when correspondences are reliable. Under infrared conditions, however, thermal smoothness deprives the motion estimator of needed texture, and frame-to-frame displacement can be large and irregular. An alternative strategy—implicit fusion—avoids motion estimation and lets the network learn to aggregate cross-frame information in feature space. Deep reparametrization of MAP-based multi-frame restoration [38] demonstrated the effectiveness of learned latent-space fusion for burst denoising and burst SR. QMambaBSR [39] extends this idea with a query state-space model for inter-frame querying and intra-frame scanning. MamEVSr [40] further shows that interleaved and cross-modality Mamba blocks can support efficient spatio-temporal fusion in event-based VSR. CGMamba inherits the implicit fusion strategy and realizes it through CGCM. The central frame acts as a query to gate feature extraction from neighbors, sidestepping an alignment step that can be fragile in infrared MFSR.

III. THE IR275K BENCHMARK

A. Why Random Splits Fail

Most super-resolution benchmarks rely on random data splits. When a method performs well on the held-out set, it is often assumed to generalize. This assumption is less reliable for infrared multi-frame super-resolution, particularly when deployment data contain shifted or out-of-distribution conditions that standard test sets may not adequately cover [41].

Infrared video is shaped by thermal contrast, sensor noise, and platform-induced motion, and random splits tend to distribute these factors similarly across training and evaluation. A model trained under such a split may therefore encounter most difficulty modes during training, leaving the test set with limited ability to probe deployment robustness. In practice, satellite detectors may drift as they heat up, maritime scenes may provide very low thermal contrast, and platform vibration may increase frame-to-frame displacement beyond the sub-pixel regime. These conditions should be tested explicitly rather than averaged away by random partitioning.

IR275K therefore replaces random partitioning with controlled difficulty shifts. The train–evaluation gap is intentionally introduced to expose failure modes that random splits tend to obscure. Each mismatch targets a condition that an infrared MFSR method is likely to encounter in operational sensing.

B. Three Stress Tests

IR275K evaluates each method under three controlled mismatches between training and evaluation. Each mismatch targets a failure mode that random splits would tend to conceal.

Contrast–noise coupling. In infrared images, signal strength is determined by the temperature difference between target and background. Low contrast and high relative noise often co-occur because weak thermal signals are easily buried. Across IR275K, global thermal contrast spans more than one order of magnitude, from 0.009 to 0.32. Training, validation, and test splits average 0.105, 0.116, and 0.122. The three splits show nearly identical contrast distributions, confirming that the partition preserves this spectral characteristic (Fig. 2). IR275K also preserves the natural coupling between thermal contrast and temporal noise rather than treating them as independent factors. This design prevents methods from exploiting artificial combinations, such as clean low-contrast samples or noisy high-contrast samples, that are less representative of real infrared sensing. Fifty percent of training sequences fall within a contrast IQR of [0.034, 0.170], placing the central operating regime under typical infrared conditions while both tails probe more difficult cases.

Noise domain gap. Temporal noise, estimated as the per-pixel standard deviation over all frames within a stationary center-crop region, ranges from 0.006 to 0.26 across IR275K. Training, validation, and test splits average 0.074, 0.077, and 0.082. The test split is intentionally noisier than the training split. By assigning noisier sequences to the test split, IR275K introduces a controlled domain gap: a method that performs well on the cleaner training distribution but degrades under test-split noise exposes a robustness limitation that a random split could obscure. This design reflects a practical property of infrared payloads, where noise levels can change with detector temperature drift, integration-time variation, and environmental thermal interference. Related spaceborne active optical sensing studies have also emphasized waveform filtering, explicit noise modeling, and real-time denoising for low-SNR measurements [42]–[44]. A recent lunar-sensing example illustrates the same thermal-sensitivity issue in an operational infrared instrument: the Lunar Mineral Spectrometer onboard

Chang’e-6 experienced internal temperatures exceeding 74 °C during noontime operations, causing marked signal-to-noise degradation in infrared channels that required temperature-compensated calibration to recover measurement fidelity [45]. The IQR of [0.026, 0.117] in training ensures that the central regime remains representative, while the upper tail above 0.19 across all splits probes severely noise-limited reconstruction.

Motion robustness. Frame-to-frame displacement provides the physical basis for multi-frame super-resolution, but it is also one of its most fragile assumptions. Figure 3 visualizes the inter-frame displacement shift across the three splits. The training split concentrates on a moderate-motion regime: the mean displacement is 0.91 px, 95% of sequences fall below 4.4 px, and the median is 0.36 px. Validation and test splits cover substantially broader distributions, with means of 2.57 and 2.86 px and maxima of 25.0 and 26.4 px, respectively. This design probes whether a method can maintain reconstruction quality when inter-frame displacement exceeds the dominant training regime. For alignment-based methods that rely on reliable correspondences, large and irregular motion is a known failure mode. For implicit fusion methods, robustness under this shift is a minimal requirement. The train–test shift in median displacement, from 0.36 px to 0.56 px, directly reflects the benchmark’s central evaluation question: whether a method remains effective under harder correspondence conditions than those seen during training.

These three pressure points—weak signal with coupled noise, elevated sensor noise at test time, and large inter-frame displacement—are not new in isolation. The contribution of IR275K is to embed them into the partition design. A high score on IR275K therefore reflects not only reconstruction quality under a fixed degradation model, but also performance under the main failure modes encountered by infrared multi-frame super-resolution in practice.

The following sections describe how these stress tests are realized in the benchmark construction.

C. Data Sources and Acquisition Diversity

IR275K draws from three public infrared sources: AnyTSR++ [46] and two resources released through Science Data Bank [47], [48]. Relying on a single source would risk overfitting to one capture condition or motion regime. Multiple sources bring variation in viewing geometry, platform behavior, and thermal appearance—the very factors a generalizable infrared MFSR method must handle. Representative scenes are shown in Fig. 1. Source-level statistics are not preserved in the final partitions, which were generated after sequence-level shuffling.

D. Curation Criteria

Three types of sequences were excluded. Fully static scenes offer no sub-pixel variation and cannot test multi-frame reconstruction. Severely blurred sequences are unusable because noise dominates signal and prevents reliable supervision. Sequences with extreme frame-to-frame displacement—scene cuts, discontinuous motion—were removed because they violate the assumption that neighboring frames share recoverable spatial information. After filtering, 594 sequences remained.

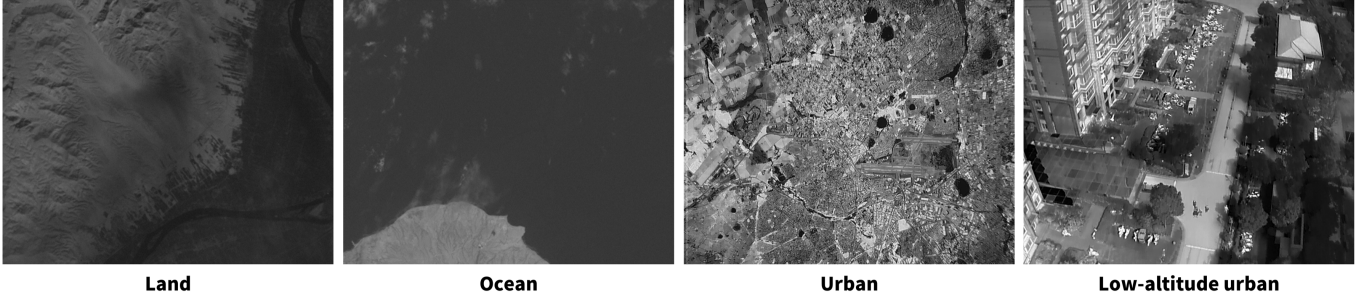


Fig. 1. Representative scenes in IR275K, including land remote sensing, ocean remote sensing, urban remote sensing, and low-altitude urban sensing. These examples illustrate the diversity of thermal appearance, target structure, and imaging context covered by the benchmark.

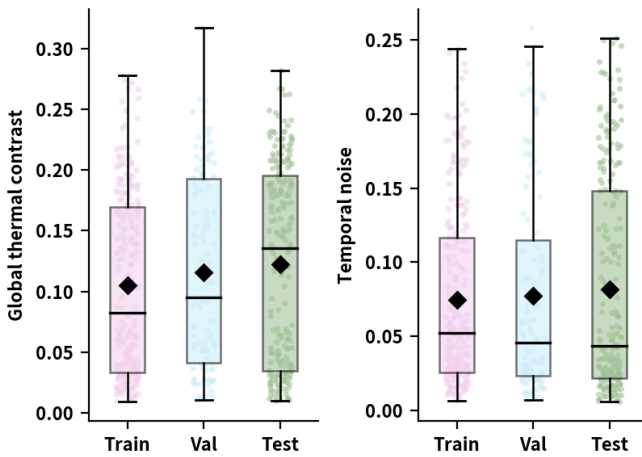


Fig. 2. IR275K partition design in two infrared-specific characteristics. (a) Global thermal contrast distributions with per-sequence scatter overlay, showing that the partition preserves contrast characteristics (black diamonds denote per-split means). (b) Temporal noise distributions, showing that the test split carries heavier upper-tail noise (the separation between the mean diamond and the median bar reflects distribution skew).

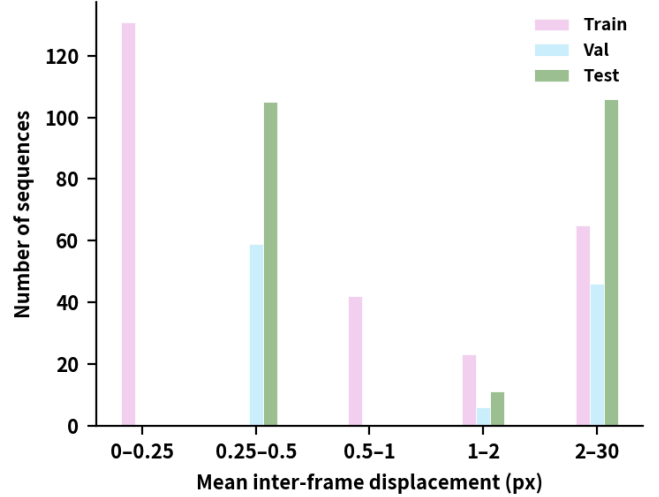


Fig. 3. Inter-frame displacement distribution across the three IR275K splits. The training split concentrates in the sub-pixel regime while validation and test splits cover a wider motion envelope, probing robustness to larger inter-frame displacement.

E. Scene Diversity and Imaging Conditions

Figure 1 shows the four scene categories IR275K covers—land, ocean, urban, and low-altitude urban sensing. Each stresses a different capability. Land and ocean scenes are dominated by thermal smoothness and noise, demanding reconstructions that suppress artifacts without hallucinating structure. Urban and low-altitude scenes introduce sharp thermal edges and fast platform motion, probing a method’s ability to preserve boundaries across frames.

Beyond scene categories, IR275K is characterized by measurable infrared-specific imaging conditions. Figure 2 summarizes two of them: global thermal contrast and temporal noise. The contrast distributions remain broadly comparable across training, validation, and test splits, indicating that the partition preserves the overall thermal-contrast regime. In contrast, the temporal-noise distribution shows a heavier upper tail in the test split, introducing a controlled noise-domain gap for evaluating robustness under noisier infrared observations.

F. Benchmark Statistics and Partitioning

IR275K contains 594 sequences totaling 275,196 frames (Table I, Fig. 4). Sequence lengths range from 16 to 5,625 frames, at a fixed spatial resolution of 640×512 pixels. All low-resolution inputs are generated from high-resolution ground truth by bicubic downsampling at $\times 4$ scale.

The benchmark is split at the sequence level. No frame from the same original sequence appears in more than one partition. Training receives 261 sequences with 192,776 frames, validation receives 111 sequences with 27,576 frames, and test receives 222 sequences with 54,844 frames. The training split contains longer sequences on average, with a mean of 738.6 frames and a median of 548, to support model training. Validation and test splits use shorter sequences, averaging 248.4 and 247.0 frames, for standardized evaluation.

G. Protocol, Reproducibility, and Scope

IR275K defines a single evaluation protocol for all methods. The task is $\times 4$ upscaling of the center frame from consecutive low-resolution infrared inputs. Single-image methods use one input frame, while multi-frame methods use three. All low-



Fig. 4. Dataset statistics of IR275K, including split sizes, frame counts, sequence-length trends, and overall benchmark settings.

TABLE I
SUMMARY STATISTICS OF IR275K. ALL SEQUENCES ARE STORED AT A SPATIAL RESOLUTION OF 640×512 PIXELS, AND ALL LR-HR PAIRS FOLLOW A UNIFORM $\times 4$ SCALE.

Split	Sequences	Frames	Min Length	Max Length	Mean Length	Median Length
Train	261	192,776	445	5625	738.6	548
Validation	111	27,576	17	445	248.4	300
Test	222	54,844	16	432	247.0	300
Total	594	275,196	16	5625	463.3	400

resolution inputs are generated by bicubic downsampling. PSNR and SSIM are computed on single-channel reconstructions after cropping 10 pixels from the image boundary. Runtime is measured with batch size 1 on an NVIDIA RTX 4090 GPU and reported as the average over full test-set inference. Reporting runtime, parameter count, and FLOPs alongside PSNR and SSIM is required, because accuracy without cost says little about practical efficiency.

The complete benchmark will be released with fixed sequence-level partitions, the generated low-resolution inputs, evaluation scripts, and reference configuration files for all reported models. These materials are intended to make every result in this paper independently reproducible.

Two boundaries are explicit. First, IR275K uses bicubic downsampling as its sole degradation model. It does not yet incorporate real-sensor effects—detector-specific blur, non-uniform noise, or compression artifacts. Second, evaluation is limited to PSNR, SSIM, and computational cost. Extending metrics to downstream task performance is a planned next step.

These boundaries are deliberate. Standardizing a controlled setting first enables clean comparison. Adding complexity later, on the same data foundation, lets the community measure exactly what each new factor costs.

The same stress factors also shape the choice of reference architecture. Weak texture and large inter-frame displacement may make explicit alignment vulnerable, while temporally independent noise limits the reliability of direct frame aggregation. IR275K therefore motivates evaluating implicit-fusion models that can exploit neighboring frames without depending on a separately estimated motion field. At the same time, the benchmark requires such models to preserve spatial correspondence under difficult infrared conditions, which leads to the spatially anchored SSM design studied next.

IV. LIGHTWEIGHT SSM REFERENCE MODEL: CGMAMBA

A. Overall Architecture

As shown in Fig. 5, CGMamba is designed with two requirements motivated by the IR275K stress tests: avoiding

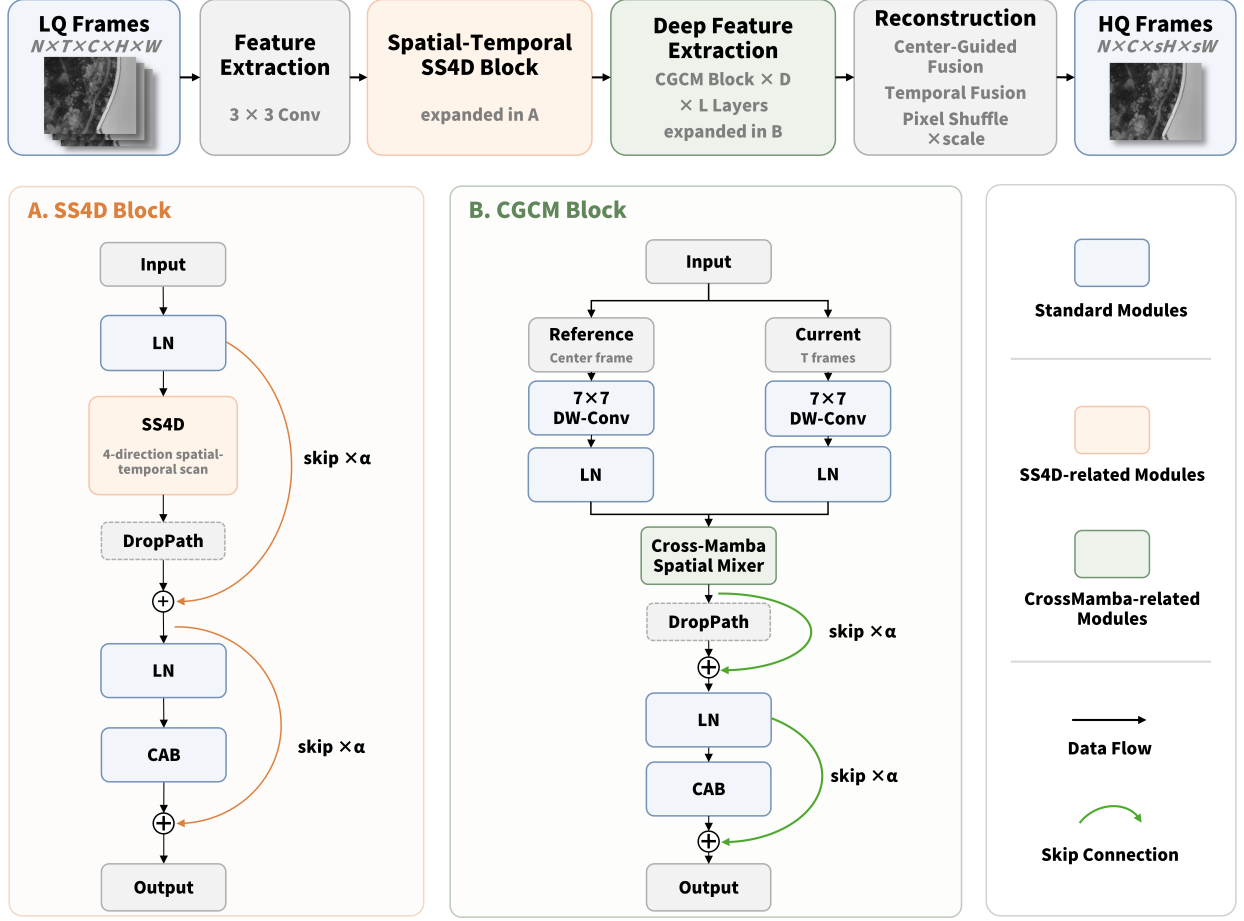


Fig. 5. Overall architecture of CGMamba.

a separate explicit-alignment stage and preserving spatial correspondence during implicit fusion. It reconstructs the high-resolution central frame from a low-resolution infrared video sequence in three stages. First, a convolutional layer followed by a selective scan 4D (SS4D) module extracts intra-frame spatial features. Second, multiple Center-guided CrossMamba Groups process the features, using CGCM to refine neighboring-frame features under the guidance of the central-frame feature. Third, lightweight channel attention blocks (CAB) refine the fused representation, and a pixel-shuffle layer upsamples it to the target resolution.

B. 2D Rotary Position Encoding

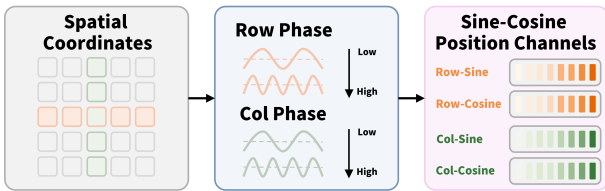


Fig. 6. 2D rotary position encoding.

The native Mamba model flattens 2D images into 1D sequences for state-space scanning, which weakens explicit

2D spatial adjacency. To introduce spatial priors without sacrificing linear complexity, CGMamba integrates 2D RoPE [49] into the complex rotation mechanism of the SSM, as illustrated in Fig. 6.

For each pixel coordinate (i, j) , the phase angles along the X and Y directions are computed from two independent frequency vectors ω_x and ω_y :

$$\begin{cases} \theta_x^{(i)} = i \cdot \omega_x \\ \theta_y^{(j)} = j \cdot \omega_y \end{cases} \quad (1)$$

The concatenated phase angles form the 2D spatial angle matrix θ_{2D} , which carries explicit absolute coordinate information. CGMamba combines this coordinate signal with the learned content-dependent positional signal from Mamba's projection layers through a learnable mixing coefficient α :

$$Angle' = Angle + \alpha \cdot \theta_{2D} \quad (2)$$

The blended angle $Angle'$ is fed into the Mamba-3 kernel's native rotation mechanism [50], so that each token in the 1D scanning sequence carries both absolute 2D coordinate information and learned contextual cues.

In infrared imagery, thermally homogeneous regions such as water, terrain, and facades provide weak content-based position discrimination, and thermal image formation can

further suppress geometric texture [5]. Tokens from different locations may therefore be difficult to distinguish by value alone. 2D RoPE enables the SSM to separate adjacent and distant token pairs even when their thermal values are similar, consistent with the severe grid-like artifacts observed when 2D RoPE is removed (Section V-B).

C. Center-Guided CrossMamba

In infrared MFSR, explicit alignment via optical flow or deformable convolution may become unreliable under weak texture and thermal homogeneity. We therefore adopt implicit fusion through reference-guided cross-frame gating: the central frame serves as a structural reference that guides feature extraction from each neighboring frame, without estimating an explicit motion field.

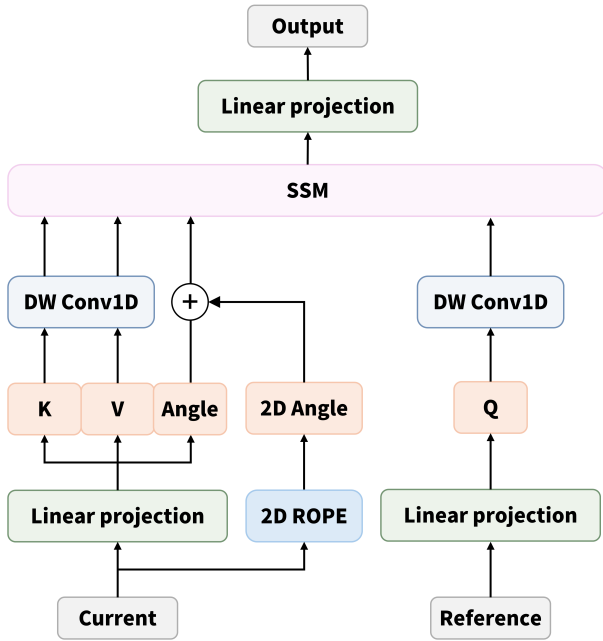


Fig. 7. Architecture for the Center-guided CrossMamba.

1) *Reference-Guided Cross-Frame Gating*: Figure 7 shows the CGCM design. CGCM uses the Structured State Space Duality (SSD) theory [51] to implement reference-guided cross-frame fusion, allowing the central frame to guide feature extraction from each neighboring frame without explicit motion estimation.

Under the SSD framework [51], the output at position t expands as:

$$y_t = \sum_{s \leq t} C_t^\top \left(\prod_{k=s+1}^t A_k \right) B_s x_s, \quad (3)$$

where the term $C_t^\top (\prod_{k=s+1}^t A_k) B_s$ is structurally analogous to $Q_t^\top K_s$ in attention, providing the basis for decoupling cross-frame interaction into query and key pathways.

We decouple the input into a current branch (from the neighboring frame F_{neighbor} , generating K , V , and the step size Δ) and a support branch (from the central frame F_{center} , generating Q):

$$K, V, \Delta = \text{Linear}_{\text{current}}(F_{\text{neighbor}}) \quad (4)$$

$$Q = \text{Linear}_{\text{support}}(F_{\text{center}}) \quad (5)$$

The hidden state update and output are computed as:

$$\begin{cases} h_t = \exp(\Delta_t A) h_{t-1} + \Delta_t K_t V_t \\ y_t = Q_t h_t \end{cases} \quad (6)$$

where A is the structured matrix governing state decay.

This asymmetric design exploits a property of infrared video: the central and neighboring frames share the same scene structure but carry independent temporal noise realizations. Because Q (from F_{center}) attends to corresponding spatial locations in F_{neighbor} via K , structural features are expected to produce stronger responses than uncorrelated noise. This provides a plausible explanation for why the hidden state can attenuate frame-to-frame noise without an explicit denoising module. Inference uses the chunked recurrent SSM form ($O(N)$ per step), avoiding the $O(N^2)$ cost of the attention dual form.

D. Training Objective and Design Rationale

We adopt the Charbonnier loss [52]:

$$\mathcal{L}_{\text{rec}} = \sqrt{(I_{\text{SR}} - I_{\text{GT}})^2 + \epsilon^2} \quad (7)$$

with $\epsilon = 10^{-3}$. The Charbonnier loss interpolates between ℓ_2 and ℓ_1 , behaving quadratically near zero for stable convergence and linearly for large residuals to suppress outliers. To keep the benchmark protocol controlled, all reported models are trained with the same distortion-oriented objective, without perceptual, adversarial, or frequency-domain auxiliary losses.

V. EXPERIMENTS

A. Experimental Setup

All models are trained on four NVIDIA RTX 4090 GPUs using PyTorch. Inputs are three consecutive low-resolution frames of size 128×128 . CGMamba uses depth configuration depths = (3, 3, 3, 3, 3), feature dimension embeddim = 128, and SSM state dimension cross_d_state = 32. Training uses AdamW ($\beta_1 = 0.9$, $\beta_2 = 0.95$, weight decay 5×10^{-6}), gradient clipping at 1.0, and EMA decay of 0.999. The learning rate is warmed up from 0 to 1×10^{-4} over 20,000 iterations, then follows cosine annealing with restarts. The schedule runs for 100,000 iterations with restart periods of 60,000, 30,000, and 10,000 iterations and restart weights of 1.0, 0.7, and 0.5, decaying to a minimum of 5×10^{-6} . The effective batch size is 256, with a per-GPU batch size of 64 across 4 GPUs. Charbonnier loss is used with weight 1.0. Metrics, protocols, and benchmark statistics follow Section III.


B. Ablation Study

We conduct ablation studies to evaluate the contribution of each architectural component of CGMamba. All experiments use identical training configurations and are evaluated on the test set for the $\times 4$ task.

TABLE II
ABLATION STUDY ON STRUCTURAL COMPONENTS

Variant	2D RoPE	CGCM	PSNR $\uparrow$	SSIM $\uparrow$
Base	×	×	32.49	0.8571
+2D RoPE	✓	×	32.47	0.8561
+CGCM	×	✓	30.96	0.8052
Full Structure	✓	✓	33.19	0.8720

A. Visual comparison

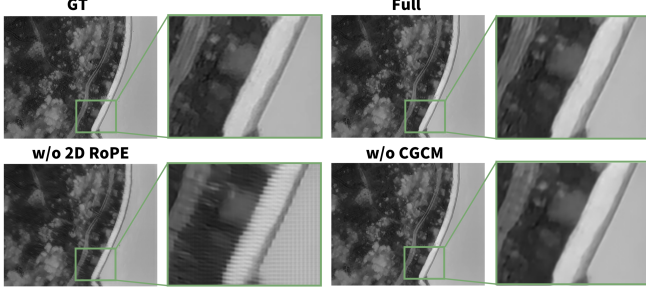

B. Error analysis

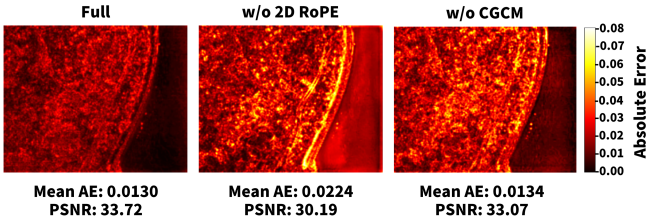


Fig. 8. Structural ablation study. (A) Visual comparison of GT, Full Structure, w/o 2D RoPE (i.e., the +CGCM variant), and w/o CGCM (i.e., the +2D RoPE variant). Each entry shows the full image with the ROI highlighted (left) and the cropped region (right). The w/o 2D RoPE result exhibits pronounced grid-like artifacts caused by spatially disordered cross-frame guidance. (B) Absolute error maps computed over the entire image with respect to GT (brighter pixels indicate larger error), with Mean AE and PSNR annotated below. Full Structure achieves the lowest error, while removing 2D RoPE leads to a substantial increase in both Mean AE and structural artifacts. PSNR values are computed on this representative sample; averaged results over the full test set are reported in Table II.

1) *Structural Design Analysis:* Table II and Fig. 8 report the structural ablation. Neither component is sufficient on its own. Adding 2D RoPE alone produces almost no change (32.47 vs. 32.49 dB). Adding CGCM without 2D RoPE degrades performance: PSNR drops to 30.96 dB, and the output exhibits severe grid-like artifacts along structural boundaries. When combined, the two components reach 33.19 dB.

This asymmetry indicates a dependency between spatial encoding and cross-frame gating. The failure of CGCM without 2D RoPE is not simply a loss of one auxiliary component; it shows that implicit fusion in this architecture can become unstable when the central-frame query and neighboring-frame key do not share a reliable spatial reference. Without 2D RoPE, cross-frame gating becomes spatially disordered. The query may select features from incorrect locations, injecting misaligned information into the reconstruction. The error maps support this interpretation: high-error regions concentrate where spatial correspondence is most important. With 2D RoPE in place, Q and K operate in a shared coordinate system, allowing CGCM to establish more

reliable correspondences. The full model gains 0.70 dB over the base, suggesting that spatially anchored queries are critical for making CGMamba’s SSM-based implicit fusion effective under the IR275K stress conditions.

2) *Network Depth Analysis:* We vary the number of CGCM blocks per CrossMamba Group while keeping all other settings fixed. Table III and Fig. 9 report the results. Performance improves steadily up to the (3,3,3,3,3) setting, which obtains 33.19 dB with 10.90M parameters and 112.14G FLOPs. Shallower variants reduce accuracy: the (2,2,2,2,2) configuration loses 1.49 dB relative to this setting. Increasing depth to (4,4,4,4,4) adds 26% more FLOPs for a limited 0.34 dB gain, while the deeper (5,5,5,5,5) configuration decreases to 32.84 dB. We therefore adopt (3,3,3,3,3) as the accuracy–efficiency tradeoff.

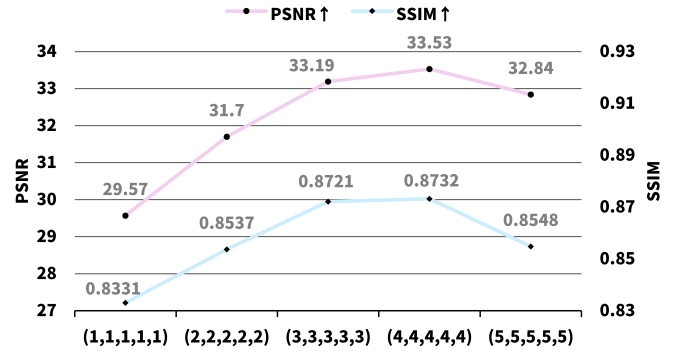


Fig. 9. Impact of network depth on reconstruction performance and model complexity.

TABLE III
IMPACT OF NETWORK DEPTH ON PERFORMANCE

Depths	Params (M) $\downarrow$	FLOPs (G) $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$
(1,1,1,1,1)	5.84	59.13	29.57	0.8331
(2,2,2,2,2)	8.37	85.64	31.70	0.8537
(3,3,3,3,3)	10.90	112.14	33.19	0.8720
(4,4,4,4,4)	13.43	138.64	33.53	0.8732
(5,5,5,5,5)	15.96	166.15	32.84	0.8548

C. Comparison with Existing Methods

We compare CGMamba against two infrared single-image super-resolution references, GPSMamba and IRSRMamba, and bicubic interpolation as a non-learnable baseline. All models are trained and evaluated under the same IR275K protocol.

Table IV reports the $\times 4$ quantitative comparison. Bicubic interpolation achieves 31.50 dB. GPSMamba reaches 32.84 dB with 36.9M parameters and 429.39G FLOPs. IRSRMamba reaches 32.67 dB with 26.40M parameters and 206.35G FLOPs. CGMamba obtains 33.19 dB and 0.8720 SSIM with 10.90M parameters and 112.14G FLOPs. It outperforms both SISR references by 0.35–0.52 dB while using substantially fewer FLOPs. The runtime difference is also substantial: 340 ms for CGMamba compared with 618 ms and 1165 ms for the SISR models.

TABLE IV
QUANTITATIVE COMPARISON WITH REPRESENTATIVE SUPER-RESOLUTION METHODS ON IR275K

Type	Method	Time(ms)↓	Params(M)↓	FLOPs(G)↓	PSNR↑	SSIM↑
Interpolation	Bicubic	0.229	—	—	31.50	0.8182
IR-SISR	GPSMamba	1165	36.9	429.39	32.84	0.8482
	IRSRMamba	618	26.40	206.35	32.67	0.8447
IR-MFSR	CGMamba	340	10.90	112.14	33.19	0.8720

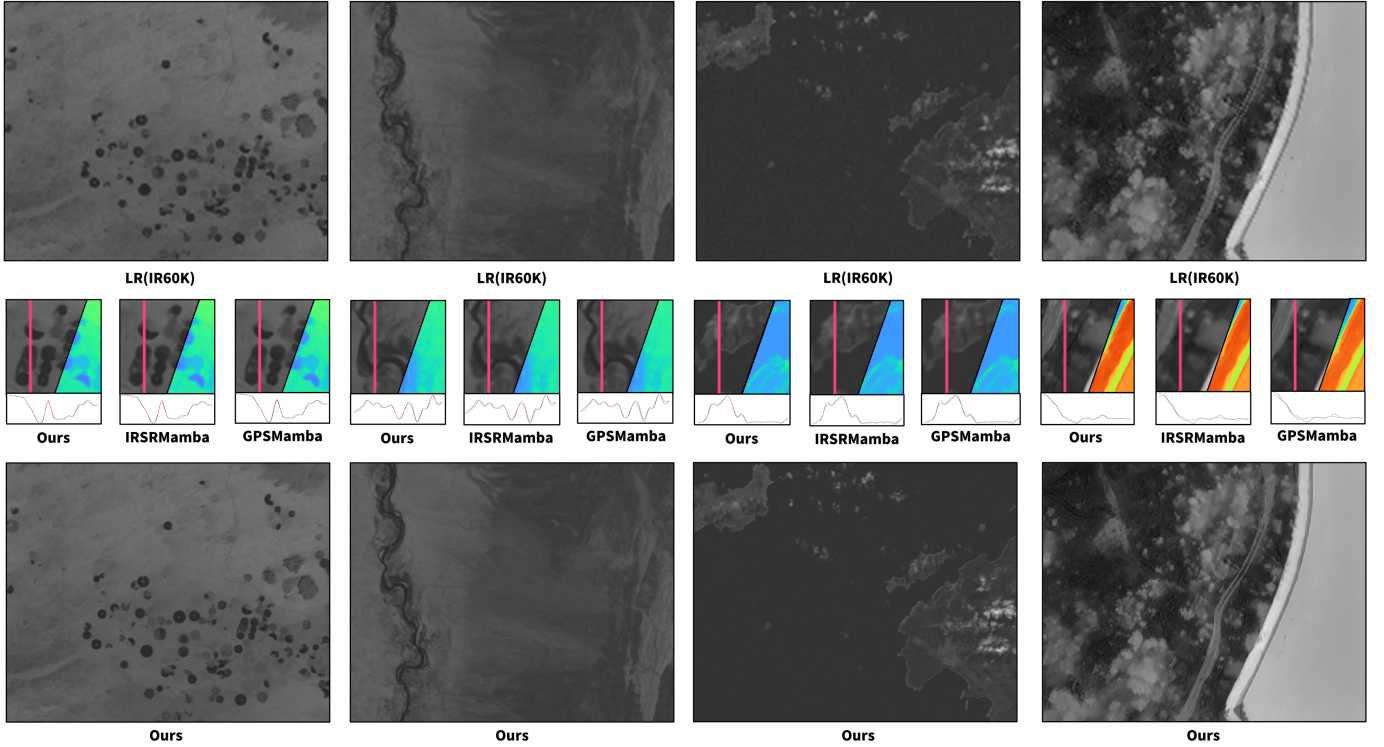


Fig. 10. Qualitative comparison on representative IR275K test scenes. Each example shows the reconstructed infrared image, a magnified region of interest, and the intensity profile along the marked line. The visual comparison highlights local thermal boundaries and intensity transitions, complementing the quantitative results in Table IV.

Figure 10 shows qualitative results on representative test scenes. CGMamba preserves continuous thermal boundaries more faithfully than the SISR references, which occasionally produce over-smoothed or aliased intensity transitions. The intensity profiles further illustrate this difference along selected cross-sections.

VI. CONCLUSION

This paper introduced IR275K, a curated benchmark of 594 infrared video sequences with sequence-level splits and a reproducible $\times 4$ evaluation protocol. The benchmark is designed to expose the coupled low-contrast, high-noise, and large-motion conditions that make infrared MFSR difficult and that random splits can obscure. We also evaluated CGMamba, a lightweight SSM-based multi-frame reference model that responds to these conditions through implicit fusion rather than a separate explicit-alignment stage. CGMamba achieves 33.19 dB PSNR with 10.90M parameters, and the ablation shows that removing 2D RoPE from CGCM costs 1.53 dB. This result indicates that spatial anchoring is a key requirement for stabilizing SSM-based cross-frame gating in

CGMamba under infrared conditions. Together, IR275K and CGMamba establish both a reproducible evaluation foundation and an architecture-level starting point for efficient, spatially grounded implicit fusion.

Several limitations define the agenda for immediate next steps. First, the current benchmark adopts $\times 4$ bicubic down-sampling as the sole degradation model and does not yet incorporate real-sensor effects such as detector-specific blur kernels, non-uniform noise fields, or compression artifacts that affect operational infrared payloads. Extending the degradation pipeline to include these factors is important for translating benchmark results to operational data. Second, the CGMamba architecture, while parameter-efficient, has been evaluated only under the three-frame input setting; its behavior under longer temporal windows and its sensitivity to input frame ordering remain uncharacterized. Third, the present evaluation reports aggregate test-set performance; stress-stratified evaluation by contrast, noise, and motion remains an important next step. Finally, the relationship between infrared and visible-spectrum MFSR architectures — whether RGB innovations such as propagation, alignment, and temporal attention require

infrared-specific reformulation, or whether the bottleneck lies in data scale and pre-training strategy — remains an open question that the benchmark is designed to help investigate systematically.

Addressing these limitations starts with releasing IR275K alongside the fixed splits, evaluation scripts, and reference configurations described in this paper. The next benchmark version will incorporate at least one real-sensor degradation variant, enabling the community to measure the gap between synthetic and realistic evaluation on the same data foundation. On the model side, systematic comparisons between implicit-fusion SSM architectures and RGB-derived alignment methods would clarify which components transfer across domains and which require infrared-specific redesign. Extending metrics beyond PSNR and SSIM to downstream tasks would further connect IR-MFSR research to application needs. By exposing infrared-specific failure modes and supporting spatially grounded multi-frame fusion, IR275K aims to accelerate progress toward practical infrared perception under resource constraints.

REFERENCES

- [1] Q. Jiang, L. Zheng, Y. Zhou, H. Liu, Q. Kong, Y. Zhang, and B. Chen, “Efficient on-orbit remote sensing imagery processing via satellite edge computing resource scheduling optimization,” *IEEE Trans. Geosci. Remote Sens.*, vol. 63, pp. 1–19, 2025.
- [2] S. Nah, S. Baik, S. Hong, G. Moon, S. Son, R. Timofte, and K. M. Lee, “NTIRE 2019 challenge on video deblurring and super-resolution: Dataset and study,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, 2019.
- [3] T. Xue, B. Chen, J. Wu, *et al.*, “Video enhancement with task-oriented flow,” *Int. J. Comput. Vis.*, vol. 127, no. 8, pp. 1106–1125, 2019.
- [4] E. Agustsson and R. Timofte, “NTIRE 2017 challenge on single image super-resolution: Dataset and study,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, 2017, pp. 126–135.
- [5] F. Bao, S. Jape, A. Schramka, J. Wang, T. E. McGraw, and Z. Jacob, “Why thermal images are blurry,” *Opt. Express*, vol. 32, no. 3, pp. 3852–3865, 2024.
- [6] C. Dong, C. C. Loy, K. He, and X. Tang, “Image super-resolution using deep convolutional networks,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 38, no. 2, pp. 295–307, 2015.
- [7] B. Lim, S. Son, H. Kim, S. Nah, and K. M. Lee, “Enhanced deep residual networks for single image super-resolution,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, 2017, pp. 136–144.
- [8] Y. Zhang, Y. Tian, Y. Kong, B. Zhong, and Y. Fu, “Residual dense network for image super-resolution,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2018, pp. 2472–2481.
- [9] W.-S. Lai, J.-B. Huang, N. Ahuja, and M.-H. Yang, “Deep Laplacian pyramid networks for fast and accurate super-resolution,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2017, pp. 624–632.
- [10] J. Kim, J. K. Lee, and K. M. Lee, “Accurate image super-resolution using very deep convolutional networks,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2016, pp. 1646–1654.
- [11] Y. Zhang, K. Li, K. Li, L. Wang, B. Zhong, and Y. Fu, “Image super-resolution using very deep residual channel attention networks,” in *Proc. Eur. Conf. Comput. Vis. (ECCV)*, 2018, pp. 286–301.
- [12] T. Dai, J. Cai, Y. Zhang, S.-T. Xia, and L. Zhang, “Second-order attention network for single image super-resolution,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2019, pp. 11065–11074.
- [13] S. Lei and Z. Shi, “Hybrid-scale self-similarity exploitation for remote sensing image super-resolution,” *IEEE Trans. Geosci. Remote Sens.*, vol. 60, pp. 1–10, 2021.
- [14] Y. Mei, Y. Fan, and Y. Zhou, “Image super-resolution with non-local sparse attention,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2021, pp. 3517–3526.
- [15] X. Wang, R. Girshick, A. Gupta, and K. He, “Non-local neural networks,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2018, pp. 7794–7803.
- [16] A. Vaswani *et al.*, “Attention is all you need,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 30, 2017, pp. 5998–6008.
- [17] Z. Liu, Y. Lin, Y. Cao, H. Hu, Y. Wei, Z. Zhang, S. Lin, and B. Guo, “Swin Transformer: Hierarchical vision Transformer using shifted windows,” in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, 2021, pp. 10012–10022.
- [18] S. W. Zamir, A. Arora, S. H. Khan, M. Hayat, F. S. Khan, and M.-H. Yang, “Restormer: Efficient Transformer for high-resolution image restoration,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2022, pp. 5728–5739.
- [19] S. Lei, Z. Shi, and W. Mo, “Transformer-based multistage enhancement for remote sensing image super-resolution,” *IEEE Trans. Geosci. Remote Sens.*, vol. 60, pp. 1–11, 2021.
- [20] X. Chen, X. Wang, J. Zhou, Y. Qiao, and C. Dong, “Activating more pixels in image super-resolution Transformer,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2023, pp. 22367–22377.
- [21] J.-F. Hu, T.-Z. Huang, L.-J. Deng, H.-X. Dou, D. Hong, and G. Vivone, “Fusformer: A Transformer-based fusion network for hyperspectral image super-resolution,” *IEEE Geosci. Remote Sens. Lett.*, vol. 19, pp. 1–5, 2022.
- [22] A. Gu and T. Dao, “Mamba: Linear-time sequence modeling with selective state spaces,” *arXiv preprint arXiv:2312.00752*, 2023.
- [23] L. Zhu, B. Liao, Q. Zhang, *et al.*, “Vision Mamba: Efficient visual representation learning with bidirectional state space model,” *arXiv preprint arXiv:2401.09417*, 2024.
- [24] K. Jiang, M. Yang, Y. Xiao, J. Wu, G. Wang, X. Feng, and J. Jiang, “Rep-Mamba: Re-parameterization in vision Mamba for lightweight remote sensing image super-resolution,” *IEEE Trans. Geosci. Remote Sens.*, 2025.
- [25] C. Li, Z. Pan, and D. Hong, “Dynamic state-control modeling for generalized remote sensing image super-resolution,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2025, pp. 3076–3084.
- [26] T. Wu, R. Zhao, M. Lv, Z. Jia, L. Li, M. Liu, X. Zhao, H. Ma, and G. Vivone, “Efficient Mamba-attention network for remote sensing image super-resolution,” *IEEE Trans. Geosci. Remote Sens.*, 2025.
- [27] Y. Xiao, Q. Yuan, K. Jiang, *et al.*, “Frequency-assisted Mamba for remote sensing image super-resolution,” *IEEE Trans. Multimedia*, vol. 27, pp. 1783–1796, 2024.
- [28] M. Li, C. Xiong, Z. Gao, and J. Ma, “HAM: Hierarchical attention Mamba with spatial-frequency fusion for remote sensing image super-resolution,” *IEEE Trans. Geosci. Remote Sens.*, 2025.
- [29] X. Lei, W. Zhang, and W. Cao, “DVMSR: Distillated vision Mamba for efficient super-resolution,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, 2024, pp. 6536–6546.
- [30] X. Wang, J. Li, J. Li, S. Wang, L. Yan, and Y. Xu, “A collaborative network of Mamba and CNN for lightweight image super-resolution,” *IEEE Trans. Consum. Electron.*, 2025.
- [31] Y. Huang, T. Miyazaki, X. Liu, and S. Omachi, “GPSMamba: A global phase and spectral prompt-guided Mamba for infrared image super-resolution,” *arXiv preprint arXiv:2507.18998*, 2025.
- [32] Y. Huang, T. Miyazaki, X. Liu, and S. Omachi, “IRSRMamba: Infrared image super-resolution via Mamba-based wavelet transform feature modulation model,” *IEEE Trans. Geosci. Remote Sens.*, 2025.
- [33] X. Li, Z. Wang, Y. Zou, *et al.*, “DiffISR: A diffusion model with gradient guidance for infrared image super-resolution,” *arXiv preprint arXiv:2503.01187*, 2025.
- [34] Y. Huang, X. Zhi, W. Chen, X. Liang, Z. Wang, and W. Zhang, “DCUNet: Deformable convolutional UNet for multi-frame infrared small target super-resolution,” in *Proc. IEEE Int. Conf. Signal Image Data Process. (ICSIDP)*, 2024, pp. 1–7.
- [35] W. Shi, J. Caballero, F. Huszár, *et al.*, “Real-time single image and video super-resolution using an efficient sub-pixel convolutional neural network,” in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2016, pp. 1874–1883.
- [36] Y. Xiao, X. Su, Q. Yuan, D. Liu, H. Shen, and L. Zhang, “Satellite video super-resolution via multiscale deformable convolution alignment and temporal grouping projection,” *IEEE Trans. Geosci. Remote Sens.*, vol. 60, pp. 1–19, 2022.
- [37] D. P. Tran, D. D. Hung, and D. Kim, “VSRM: A robust Mamba-based framework for video super-resolution,” in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, 2025, pp. 14711–14721.
- [38] G. Bhat, M. Danelljan, F. Yu, L. Van Gool, and R. Timofte, “Deep reparametrization of multi-frame super-resolution and denoising,” in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, 2021, pp. 2460–2470.
- [39] X. Di, L. Peng, P. Xia, *et al.*, “QMambaBSR: Burst image super-resolution with query state space model,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2025, pp. 23080–23090.

- [40] Z. Xiao and X. Wang, "Event-based video super-resolution via state space models," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2025, pp. 12564–12574.
- [41] J. Zhang, F. Wang, J. Keung, Y. Liao, Y. Xiao, and L. Ma, "Empirical insights of test selection metrics under multiple testing objectives and distribution shifts," *Proc. ACM Softw. Eng.*, vol. 3, no. FSE, pp. 1288–1311, 2026.
- [42] Q. Fang, H. Wang, G.-H. He, Z.-Y. Zhou, F.-W. Cao, and Q.-H. Song, "Research on spaceborne full-waveform LiDAR filtering processing technology based on bat algorithm Gaussian sharpening," *J. Infrared Millim. Waves*, vol. 44, no. 6, p. 844, 2025.
- [43] J. Yang, Y. Ma, W.-B. Yu, S.-H. Li, J. Yu, Q.-Y. Wang, and S. Li, "Noise model of oceanic spaceborne photon counting LiDAR," *J. Infrared Millim. Waves*, vol. 43, no. 3, pp. 393–398, 2024.
- [44] C.-T. Tan, W.-B. Yu, Y.-Y. Xiang, S.-H. Li, J. Yu, Q.-Y. Wang, and S. Li, "Real-time denoising method for spaceborne photon counting laser ranging radar," *J. Infrared Millim. Waves*, vol. 43, no. 2, pp. 241–253, 2024.
- [45] J. Li, X. Shi, B. Liu, R. Wang, Z. Wang, M. Wang, G. Lv, L. Yuan, Q. Ma, G. Yuan, *et al.*, "High-fidelity in-situ spectroscopy under thermal extremes enables cross-scale validation of the Chang'e-6 landing area," *Photonix*, vol. 7, no. 1, p. 44, 2026.
- [46] M. Li, C. Fu, Z. Lu, Z. Zhang, H. Zuo, and L. Yao, "AnyTSR++: Prompt-oriented any-scale thermal super-resolution for unmanned aerial vehicle," *IEEE Trans. Geosci. Remote Sens.*, vol. 63, pp. 1–15, 2025, doi: 10.1109/TGRS.2025.3630597.
- [47] R. Li, Y. Zeng, W. Sheng, *et al.*, "Infrared video satellite aerial moving target detection dataset," V2, Science Data Bank, 2025. [Online]. Available: <https://cstr.cn/31253.11.sciencedb.j00240.00077>. Accessed: Jul. 23, 2026. CSTR: 31253.11.sciencedb.j00240.00077.
- [48] X. Sun, L. Guo, W. Zhang, *et al.*, "A dataset of semi-synthetic detection for small infrared moving targets under complex backgrounds," V3, Science Data Bank, 2024. [Online]. Available: <https://cstr.cn/31253.11.sciencedb.j00001.00231>. Accessed: Jul. 23, 2026. CSTR: 31253.11.sciencedb.j00001.00231.
- [49] J. Su, M. Ahmed, Y. Lu, S. Pan, W. Bo, and Y. Liu, "RoFormer: Enhanced Transformer with rotary position embedding," *Neurocomputing*, vol. 568, Art. no. 127063, 2024.
- [50] A. Lahoti, K. Y. Li, B. Chen, *et al.*, "Mamba-3: Improved sequence modeling using state space principles," *arXiv preprint arXiv:2603.15569*, 2026.
- [51] T. Dao and A. Gu, "Transformers are SSMS: Generalized models and efficient algorithms through structured state space duality," *arXiv preprint arXiv:2405.21060*, 2024.
- [52] P. Charbonnier, L. Blanc-Féraud, G. Aubert, *et al.*, "Deterministic edge-preserving regularization in computed imaging," *IEEE Trans. Image Process.*, vol. 6, no. 2, pp. 298–311, 1997.



Jie Deng Jie Deng received the B.Eng. degree from Hunan University of Technology, Zhuzhou, China. He is currently pursuing the M.Eng. degree with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His current research interests include computational imaging, artificial intelligence-based imaging, infrared multi-frame super-resolution, and remote sensing image preprocessing.



Heyang Wang Heyang Wang (Student Member, IEEE) received the B.Sc. degree in mathematics and applied mathematics from Harbin Normal University, Harbin, China, in 2022. She is currently pursuing the M.Sc. degree in physical electronics with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. Her current research interests include computer vision and remote sensing image processing.



Changxin Wang Changxin Wang received the B.Eng. degree from China University of Mining and Technology, Xuzhou, China. He is currently pursuing the M.Eng. degree with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His current research interests include visual SLAM, LiDAR SLAM, multi-sensor fusion, and robust 3-D perception and localization in degraded environments.




Junkai Shen Junkai Shen is currently pursuing the M.Eng. degree in physical electronics with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His current research interests include visual SLAM and LiDAR SLAM.



Hongyi Chen Hongyi Chen received the Ph.D. degree from the School of Engineering, University of Edinburgh, Edinburgh, U.K., in 2021. He is currently a Postdoctoral Researcher with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His research interests include computer vision, remote sensing image processing, physics-informed machine learning, and edge computing.



Zhiping He Zhiping He received the M.S. degree in optoelectronic engineering from Zhejiang University, Zhejiang, China, in 2003, and the Ph.D. degree from the Shanghai Institute of Technical Physics, Chinese Academy of Sciences, Shanghai, China, in 2009. He has long been engaged in research on space optics and optoelectronic technology, with a focus on key technologies for space spectral sensing and active-passive composite optical systems. The instruments developed by his team have been successfully applied to China's Chang'E 3, Chang'E 4, Chang'E 5, and Mars exploration projects.



Hongxing Qi Hongxing Qi received the Ph.D. degree in physical electronics from the Shanghai Institute of Technical Physics, Chinese Academy of Sciences, Shanghai, China, in 2007. He is currently a Researcher and Doctoral Supervisor with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His current research interests include optoelectronic technology and devices.



Xudong Zhang Xudong Zhang received the Ph.D. degree from the Shanghai Institute of Technical Physics, Chinese Academy of Sciences, Shanghai, China, in 2019. He is currently a Distinguished Research Fellow with the Hangzhou Institute for Advanced Study, Hangzhou, China, and the University of Chinese Academy of Sciences, Beijing, China. His research interests include spatial intelligence, 3-D reconstruction, and artificial intelligence algorithms for edge devices, such as robots, satellite payloads, and unmanned aerial vehicles.