

Coupled Control and Wireless World Models for Resilient Remote Robotic Control

H.P. Madushanka, *Student Member, IEEE*, Sumudu Samarakoon, *Member, IEEE*, and Mehdi Bennis, *Fellow, IEEE*

Abstract—Remote robotic systems operating over wireless networks must maintain reliable control despite limited communication resources, changing channel conditions, and environmental disturbances. However, continuously transmitting high-dimensional sensory observations, such as camera images, increases communication overhead and energy consumption while reducing robustness under unreliable connectivity. To address these challenges, this paper proposes a resilient communication-aware remote robotic control framework based on coupled control and wireless Joint Embedding Predictive Architecture (JEPA) world models that jointly capture robot dynamics and wireless channel evolution from visual observations and a combination of raw and structured radio frequency (RF) representations based on spectrograms and Persistence Images (PIs). The learned latent representations enable predictive communication scheduling by jointly forecasting future robot states and wireless conditions, thereby reducing unnecessary uplink transmissions while maintaining reliable control performance. Furthermore, an adaptive resilience mechanism detects latent prediction discrepancies and efficiently adapts perception embeddings to accommodate wireless and visual environmental changes without retraining the complete control policy. The proposed framework is evaluated in a synchronized Gazebo–Robot Operating System (ROS)–Sionna robot–wireless simulation environment under diverse wireless propagation and perception perturbations. Experimental results demonstrate significant improvements in communication efficiency, robustness, and resilience while maintaining navigation performance compared with conventional Proportional Integral Derivative (PID), model-free Deep Q-Network (DQN), and predictive approaches based on Vision Transformers (ViTs).

Index Terms—World models, joint embedding predictive architecture, wireless remote control, Gazebo, Sionna

I. INTRODUCTION

Remote robotic systems are becoming increasingly important in applications such as warehouse automation, industrial inspection, disaster response, healthcare, autonomous transportation, and smart manufacturing [1]–[3]. Therein, the connectivity between the robots and edge servers/centralized controllers for sensing and controlling mostly relies on wireless communication links, and future intelligent robotic systems are expected to leverage emerging 6G networks to provide ultra-reliable, low-latency, and AI-native communication services for distributed autonomy and edge intelligence [4], [5]. Continuously transmitting high-dimensional sensory observations, such as camera images, depth maps, or multimodal sensor data, can significantly increase communication overhead, latency, and energy consumption thereby reducing

communication efficiency [4], [6]. Furthermore, wireless channel variations, intermittent packet losses, and environmental disturbances can considerably degrade control performance in remote robotic systems [7], [8]. Hence, it is crucial to maintain reliable remote operation under limited communication resources, stochastic wireless connectivity, and dynamic environmental conditions.

Recent advances in Artificial Intelligence (AI) and model-based learning have motivated the development of predictive frameworks capable of learning system dynamics directly from sensory observations. Among these approaches, world models (WMs) that characterize system dynamics have emerged as a promising framework for learning compact latent representations of environments and predicting future observations and states [9], [10]. WMs are widely used in model-based Reinforcement Learning (RL), autonomous driving, embodied intelligence, and robotic planning systems because they allow agents to reason about future system behavior instead of relying solely on reactive control policies [11], [12]. Additionally, WMs are becoming increasingly relevant in realistic simulation frameworks and digital twins, where high-fidelity virtual environments are used to replicate physical systems while their predictive capabilities are used to support intelligent control and optimization in realistic settings [13]. Reliable remote robotic control with WMs requires predictive understanding of both the physical environment, which governs robot behavior, and the wireless communication environment that determines the quality of information exchange between the robot and the remote controller [14]. Jointly modeling these complementary dynamics therefore motivates the development of multimodal WMs that learn predictive latent representations from visual observations and wireless communication measurements.

To effectively model complex system dynamics, WMs require informative latent representations that capture the underlying structure of the environment and enable accurate prediction of future system states. Among recent predictive representation learning approaches, Joint Embedding Predictive Architectures (JEPAs) have emerged as a promising framework for learning such predictive latent representations directly from sensory observations [15]. Unlike conventional generative models operating directly in pixel space, JEPAs focus on learning semantically meaningful predictive embeddings that are better suited for downstream control and prediction tasks. Recent studies have demonstrated the effectiveness of JEPAs in visual representation learning, video understanding, and embodied intelligence, highlighting their ability to learn predictive representations that generalize across diverse environments and tasks [15]–[17]. Building upon these advances, a coupled Control Joint Embedding Predictive Ar-

The authors are with the Centre for Wireless Communications, University of Oulu, 90570 Oulu, Finland (e-mail: madushanka.hewapathirana@oulu.fi; sumudu.samarakoon@oulu.fi; mehdi.bennis@oulu.fi).

chitecture (C-JEPA) and Wireless Joint Embedding Predictive Architecture (W-JEPA) framework was proposed in [18] for jointly modeling control and wireless dynamics in a latent space to optimize wireless resource utilization while maintaining control performance in remote robotic systems. In particular, the framework combined latent control dynamics learned from visual observations with wireless Channel State Information (CSI) dynamics through cross-modal conditioning. Their results demonstrated reductions in communication overhead and transmit power while maintaining comparable control performance to model-free RL approaches. Yet the above framework has primarily been validated in simplified simulation environments and does not sufficiently investigate robustness and resilience under realistic wireless and environmental disturbances. Furthermore, transferring predictive WMs from lightweight RL environments to realistic robotic simulators remains a challenging problem due to differences in sensing, environment dynamics, and computational complexity. In addition, the use of predictive wireless representations within WMs to enable resilient communication-aware robotic control under dynamic wireless environments remains relatively underexplored [18]–[20].

Motivated by these challenges, this paper extends the coupled C-JEPA and W-JEPA framework proposed in [18] by developing a realistic communication-aware robotic control framework within a simulation environment integrating Gazebo, Robot Operating System (ROS), and the Sionna Ray Tracing (RT) simulator [21]–[23]. Unlike the original framework, the proposed design addresses the challenges of deploying predictive WMs in a realistic robotic simulation environment characterized by richer sensing, more complex environmental dynamics, and increased computational requirements. Towards this end, a transfer learning strategy is introduced to efficiently adapt a pretrained control WM from the Gym environment to Gazebo, thereby reducing the computational cost and training time associated with learning directly in realistic robotic environments. Furthermore, to better understand the impact of wireless representations on predictive wireless world modeling, this work systematically evaluates multiple wireless representations, including raw wireless channel measurements and structured radio frequency (RF) representations. To enable resilience under dynamic environmental conditions, an adaptive perception mechanism is further proposed to detect discrepancies between predicted and observed robot perceptions and trigger appropriate observation adaptation in response to environmental changes. Finally, the proposed framework is extensively evaluated under both wireless communication disturbances and perception disturbances, demonstrating its robustness to communication impairments and its resilience through adaptive recovery under changing operating conditions. The main contributions of this paper are summarized as follows:

- We develop a realistic communication-aware synchronized robot-wireless simulation framework by integrating Gazebo, ROS, and the Sionna RT simulator, enabling joint robotic control and wireless communication experiments under realistic operating conditions.

- We extend the coupled C-JEPA and W-JEPA framework proposed in [18] from a lightweight RL Gym environment to a realistic simulation environment through an efficient transfer learning strategy, reducing the computational cost and training effort required for predictive world modeling in complex robotic environments.
- We comprehensively evaluate the robustness of the proposed framework under diverse wireless communication disturbances, including carrier-frequency shifts, scatterer variations, access-point handover, and intermittent uplink communication failures.
- We propose an adaptive resilience mechanism that detects discrepancies between predicted and observed robot perceptions and updates the perception pipeline, enabling recovery from environmental changes during remote robotic operation.
- We systematically investigate multiple wireless representations, including raw wireless channel measurements and structured RF representations, to analyze their effectiveness for predictive wireless world modeling and communication-aware remote robotic control.

The rest of the paper is organized as follows. The related work is first summarized in Sec. II. Sec. III presents the system architecture and implementation related details. The experimental settings and performance evaluation are discussed in Sec. IV. Finally, Sec. V concludes the paper and outlines future research directions.

II. RELATED WORK

Recent advances in model-based learning have established WMs as a promising framework for learning compact latent representations of complex environments and predicting future system dynamics. By learning predictive representations directly from sensory observations, WMs enable planning, decision making, and control while reducing the need for extensive real-world interactions [9]–[12]. Such approaches have demonstrated strong performance in RL [10], [11], [24], autonomous navigation [12], [20], and embodied intelligence [17], [25], where latent representations are used to forecast future states and support long-horizon reasoning. More recently, predictive representation learning methods have shifted attention from observation reconstruction toward latent prediction, allowing models to focus on semantically meaningful information while improving learning efficiency [15], [16], [25]. These developments have motivated the use of latent predictive models for robotics, communication systems, and autonomous decision making. However, most existing world-model frameworks primarily focus on physical environment dynamics and do not explicitly account for wireless communication conditions or communication-resource constraints.

The integration of control and communication has attracted increasing attention in wireless robotic systems and networked control applications. Traditional approaches focus on maintaining stability and control performance under communication limitations through scheduling, estimation, and resource allocation mechanisms [7], [26]. More recent studies have explored communication-aware control strategies that jointly

optimize communication and control decisions to improve overall system performance [19], [26], [27]. Building upon these ideas, predictive latent models have recently been extended to jointly capture control and wireless dynamics, enabling communication-aware decision making and wireless resource management through latent-space reasoning [18], [27]. Despite these advances, the application of communication-aware latent WMs to realistic robotic environments remains relatively unexplored.

Robotic systems operating in real-world environments must remain robust to uncertainties arising from communication failures, sensing errors, environmental changes, and model inaccuracies. Existing research has investigated robustness through adaptive control, probabilistic estimation, sensor fusion, and uncertainty-aware learning techniques [28], [29]. Similarly, resilience in wireless systems has been addressed through channel estimation, adaptive scheduling, diversity techniques, and robust communication protocols [6], [30]. While these approaches improve performance under specific disturbances, they often treat communication and control as independent problems. Furthermore, most existing methods focus on maintaining performance under known disturbances rather than adapting to previously unseen environmental changes. The use of predictive latent models for jointly identifying communication anomalies, perception mismatches, and environmental changes remains an emerging research direction.

The increasing complexity of intelligent robotic systems has also highlighted the importance of realistic and high-fidelity simulation environments. High-fidelity simulation environments provide a safe and cost-effective platform for developing, testing, and validating autonomous systems prior to real-world deployment [13], [31]. Within robotics, Gazebo has become one of the most widely adopted simulation platforms due to its realistic physics engine, sensor models, and integration with the ROS [21], [23]. In wireless communications, Sionna has recently emerged as a powerful framework for ray-tracing-based wireless simulation, enabling realistic modeling of propagation effects, channel dynamics, and communication performance [22]. Although both platforms have demonstrated significant value independently, relatively few studies have investigated their joint integration for communication-aware robotic systems. Existing robotic simulations often rely on simplified wireless assumptions, while wireless simulations typically abstract away robot dynamics and perception. As a result, the interaction between robot control, wireless communication, and environmental changes remains insufficiently explored within unified synchronized robot–wireless simulation environments.

III. SYSTEM ARCHITECTURE, METHODOLOGY, AND IMPLEMENTATION

We consider a system consists of a mobile robot, a wireless communication infrastructure, and a remote controller connected through a wireless Access Point (AP) as illustrated in Fig. 1. The robot uses an onboard sensing system to acquire visual observations o_t at each time step t , and transmits

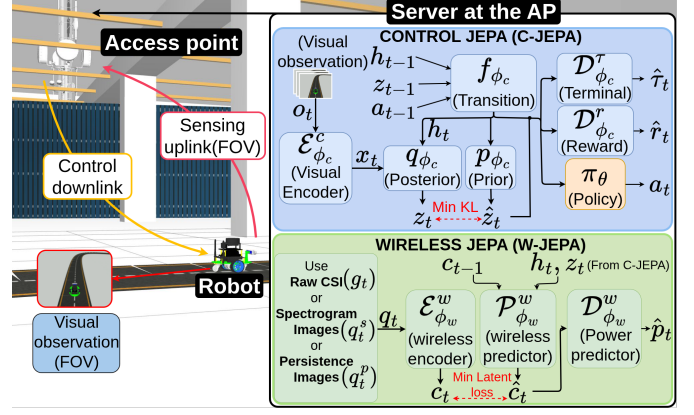


Fig. 1: Proposed communication-aware remote robotic control framework based on coupled C-JEPA and W-JEPA.

them to the remote controller through the uplink channel. Simultaneously, the uplink CSI g_t or alternative wireless representations derived from RF measurements q_t are used at the controller as wireless observations. Together with the visual and wireless observations, the controller derives the control commands a_t and sends them to the robot through the downlink channel, forming a closed-loop control architecture. Based on the received control commands, the robot performs a navigation task.

The physical environment consisting of solid objects, light sources, texture, and terrain serves multiple purposes. It depicts the world that the robot has to interact and operate, in which, lighting and texture with objects create realistic visual sensory observations while the terrain and obstacles together defines the robot's mobility dynamics. Additionally, the objects with different RF materials acting as scatters along with the robots movements directly impact on the wireless channel dynamics. For such a realistic depiction of the wireless conditions, we rely on the Sionna RT simulator to model both the uplink and downlink channels using physics-based RT over the synchronized scene geometry, where material-dependent propagation is based on the International Telecommunication Union (ITU)-defined radio material models that captures Line-of-Sight (LoS) and multipath propagation effects. Unlike the remote controller, the robot is constrained with a limited energy, and thus, its uplink communication is scheduled by the controller towards the utilization of wireless resources [32].

In this view, a binary scheduling variable ρ_t is introduced, where $\rho_t = 1$ indicates the uplink channel use for transmitting an observation while $\rho_t = 0$ indicates that the transmission is omitted. It is worth noting that for scheduling, the controller needs to be aware of future uplink channel conditions, i.e., wireless dynamics, while controlling with the cases of $\rho_t = 0$, the controller needs to be aware of future observations, i.e., sensing and control dynamics. Hence, we consider that the controller is equipped with WMs that allow predicting wireless and sensing observations through a series of learned latent representations. Together, the framework pursues four main objectives:

- Maintain reliable robotic control and task performance under limited wireless connectivity.
- Reduce communication overhead through predictive transmission of informative observations and compact latent representations.
- Improve wireless resource utilization by exploiting favorable predicted channel conditions.
- Enhance resilience via adapting to dynamic wireless and environmental changes that may affect communication and control performance.

Towards achieving these objectives, the proposed framework employs two coupled predictive WMs, namely the C-JEPA and W-JEPA, to jointly model the dynamics of the robot movements and wireless conditions within a unified latent representation space. Here, the C-JEPA learns predictive representations of the robot and its environment from visual observations, while the W-JEPA learns the evolution of wireless communication conditions from CSI or RF-derived spectrogram observations. The latent representations generated by both JEPA models are subsequently utilized for control policy learning, wireless power prediction, and predictive communication scheduling. By jointly reasoning about future robot behavior and future communication conditions, the framework enables communication-aware remote robotic control under limited and dynamic wireless connectivity.

A. Joint C-JEPA and W-JEPA Learning

As illustrated in Fig. 1, the proposed framework consists of two coupled predictive models, namely the C-JEPA and W-JEPA, following the JEPA-based predictive world modeling framework presented in [18]. The C-JEPA and W-JEPA are parameterized by the learnable weights ϕ_c and ϕ_w , respectively, and jointly optimized through their corresponding predictive learning objectives. During training, the C-JEPA first learns predictive latent control dynamics from visual observations, while the W-JEPA subsequently learns predictive wireless dynamics by encoding wireless observations and conditioning the latent wireless prediction on the predictive control latent representations generated by the C-JEPA. The joint learning process is described as follows.

Once the robot acquires a visual observation $\mathbf{o}_t$, it is transmitted to the remote controller through the sensing uplink and encoded into a compact latent representation $x_t = \mathcal{E}_{\phi_c}^c(\mathbf{o}_t)$ where $\mathcal{E}_{\phi_c}^c(\cdot)$ denotes the visual encoder and represents the latent visual embedding. The encoded representation is subsequently propagated through a Recurrent State Space Model (RSSM), which learns the temporal evolution of the robot dynamics using a deterministic latent state h_t and a stochastic latent state z_t . The deterministic latent state captures the temporal memory of the system, while the stochastic latent state represents the uncertainty of the underlying robot dynamics.

The RSSM consists of three learnable components: the recurrent transition model $f_{\phi_c}(\cdot)$, the prior model p_{ϕ_c} , and the posterior model q_{ϕ_c} . The recurrent transition model first updates the deterministic latent state according to $h_t = f_{\phi_c}(h_{t-1}, a_{t-1}, z_{t-1})$, where a_{t-1} denotes the previous control action. Conditioned on the updated h_t , the prior model

predicts the stochastic latent representation as $\hat{z}_t \sim p_{\phi_c}(\hat{z}_t | h_t)$, while the posterior model incorporates the encoded visual representation to infer the observation-conditioned latent state according to $z_t \sim q_{\phi_c}(z_t | h_t, x_t)$.

The learned latent representations h_t and z_t are subsequently utilized by the reward prediction model $\mathcal{D}_r^c(\cdot)$, the terminal prediction model $\mathcal{D}_\tau^c(\cdot)$, and the control policy model $\pi_{\theta_c}(\cdot)$, parameterized by the learnable weights θ_c . Specifically, the reward and terminal prediction models estimate the immediate reward and episode termination probability, respectively, $\hat{r}_t = \mathcal{D}_r^c(h_t, z_t)$, $\hat{\tau}_t = \mathcal{D}_\tau^c(h_t, z_t)$, while the control policy generates the corresponding robot control action according to $a_t = \pi_{\theta_c}(h_t, z_t)$.

During training, the C-JEPA is optimized over sequences of length T sampled from the collected experience, with the WM objective accumulated over the sequence as $\phi_c^* = \arg \min_{\phi_c} \mathcal{L}_C(\phi_c)$ where

$$\mathcal{L}_C(\phi_c) = \mathbb{E}_{q_{\phi_c}} \left[\sum_{t=1}^T \left(\beta D_{\text{KL}}(z_t \| \hat{z}_t) - \log p_{\phi_c}(r_t | \hat{r}_t) - \log p_{\phi_c}(\tau_t | \hat{\tau}_t) \right) \right]. \quad (1)$$

Here, $D_{\text{KL}}(\cdot)$ denotes the Kullback–Leibler (KL) divergence between the posterior and prior latent distributions, while the second and third terms correspond to the reward prediction and terminal prediction log-likelihood losses, respectively.

In parallel, the W-JEPA receives the wireless observation q_t , which represents a generic wireless observation. Depending on the selected RF representation, q_t may correspond to the raw CSI, spectrogram image, or Persistence Image (PI), as described in the following subsection. The wireless observation is first encoded into a compact latent representation according to $c_t = \mathcal{E}_{\phi_w}^w(q_t)$, where $\mathcal{E}_{\phi_w}^w(\cdot)$ denotes the wireless encoder and c_t is the corresponding latent wireless representation. The encoded representation is subsequently processed by the wireless predictor $\mathcal{P}_{\phi_w}^w(\cdot)$, which predicts the future wireless latent representation by jointly exploiting the previous wireless latent representation and the predictive control latent states according to $\hat{c}_t = \mathcal{P}_{\phi_w}^w(c_{t-1}, h_t, z_t)$.

Similarly, the wireless encoder and wireless predictor are trained by minimizing the discrepancy between the predicted wireless latent representation $\hat{c}_t$ and the encoded target representation c_t over a training sequence of length T . The corresponding latent prediction loss is

$$\mathcal{L}_W(\phi_w) = \mathbb{E}_{q_{\phi_w}} \left[\sum_{t=1}^T \|\hat{c}_t - c_t\|^2 \right]. \quad (2)$$

This objective encourages the W-JEPA to learn temporally consistent latent representations of the wireless dynamics.

The predicted wireless latent representation is subsequently processed by the wireless power prediction model $\mathcal{D}_{\phi_w}^w(\cdot)$ to estimate the future uplink transmission power according to $\hat{p}_t = \mathcal{D}_{\phi_w}^w(\hat{c}_t)$. The power prediction model is trained by min-

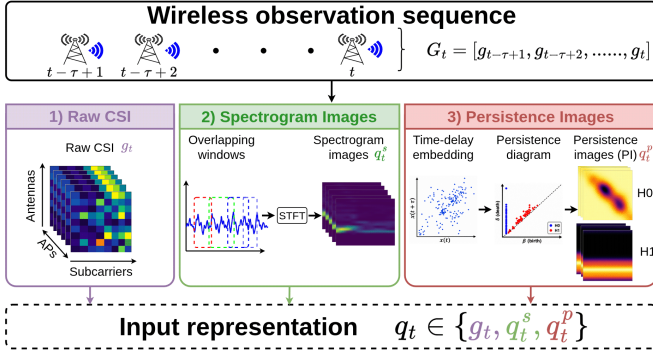


Fig. 2: Structured RF representation generation from the wireless observation sequence G_t . Three alternative input representations are considered for the W-JEPA: raw CSI g_t , spectrogram images q_t^s , and PIs q_t^p .

imizing the discrepancy between the predicted transmission power $\hat{p}_t$ and the corresponding target power p_t given by,

$$\mathcal{L}_P(\phi_w) = \sum_{t=1}^T |\hat{p}_t - p_t|. \quad (3)$$

The predicted transmission power $\hat{p}_t$ is subsequently utilized for communication-aware uplink scheduling. Based on the resulting scheduling decision ρ_t , the current visual observation is transmitted to the remote controller or the controller continues predicting the robot state using the learned C-JEPA latent dynamics.

B. Structured RF Representations for W-JEPA

Towards improving the identification of temporal changes in wireless conditions, we further study the use of CSI-derived structured RF representations generated from a sequence of historical wireless observations $G_t = [g_{t-\tau+1}, g_{t-\tau+2}, \dots, g_t]$ over a window with length τ .

The first alternative is to generate a time-frequency representation of G_t known as a *spectrogram image* [33], [34]. Here, G_t is first divided into a set of overlapping segments using a windowing function (such as a Hann or Hamming window). Then, a Fast Fourier Transform (FFT) is applied to each windowed block, converting the time-domain observations into the frequency domain. Stacking these frequency domain observations over all segments creates the time-frequency image q_t^s .

For the second method, we resort to the tools from Topological Data Analysis (TDA), more specifically the *persistence images*. Here, G_t is mapped into an m -dimensional point cloud using time-delay embedding [35], [36]. Next, persistent homology is applied to this point cloud by constructing a simplicial complex (e.g., a Vietoris-Rips complex) that grows with a spatial scale parameter ϵ . This tracks the birth (β) and death (δ) scales of topological features, such as 1D loops which indicate periodic dynamics, to produce a persistence diagram [37], [38]. To vectorize this diagram, the coordinates are transformed from birth-death (β, δ) to birth-persistence ($\beta, \delta - \beta$). Finally, a continuous surface is created by placing

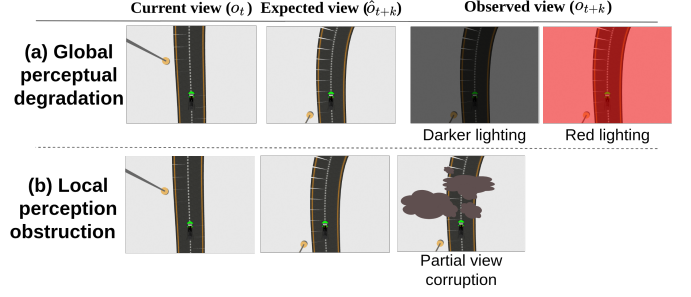


Fig. 3: Perception degradation scenarios considered for adaptive resilience: (a) global perceptual degradation caused by illumination variations and (b) local perceptual degradation caused by partial visual occlusions.

a 2D Gaussian probability density function over each point [39], scaled by a weighting function that typically emphasizes long-lived features, and integrating this surface over a discrete, fixed-size grid to generate the final persistence image (PI) matrix q_t^p .

In this view, the representation that is to be used with the W-JEPA encoder is $q_t \in \{g_t, q_t^s, q_t^p\}$ depending on the use of CSI, spectrogram, or PI. The exemplary representations are illustrated in Fig. 2. The impact of these three different embeddings on the performance is analyzed under the results.

C. Adaptive Resilience Mechanism

Despite of the excessive training during the learning phase discussed earlier, the practical remote robotic systems are likely to encounter environmental changes during the runtime due to undesirable stressors. Such changes have significance differences from the nominal conditions, which consequently affect the control performance. Within the scope of this paper, we only focus on two types of runtime changes affecting on the perception: (i) variations on the illumination that are due to global lighting (intensity and color), and (ii) local visual obstruction, such as mud patches, that partially covers the robot's field of view, as depicted in Fig. 3. An undesirable level of change can result in inconsistencies between the predictions and perceived observations in the latent space, which is to be utilized within the proposed adaptation mechanism discussed next.

We first define the discrepancy between the perceived and prediction in the latent space over K future prediction steps considered for inconsistency evaluation as follows:

$$\Delta_t = \sum_{k=1}^K \alpha_k \|\hat{z}_{t+k|t} - z_{t+k}\|_2, \quad (4)$$

where z_{t+k} denotes the observed latent representation at time $t+k$, and α_k is the weighting coefficient associated with the k -th prediction step. A perception degradation is identified whenever $\Delta_t \geq \delta$ where δ is an empirically selected threshold based on the observed range of latent inconsistencies.

To handle variations on the illumination that are due to global lighting, we first define a finite set of predefined visual transformation parameters $\Theta = \{\theta_1, \theta_2, \dots, \theta_M\}$, where each θ_i denotes a predefined Hue, Saturation, and Value (HSV)

color transformation tuple. Upon noticing a perception degradation, the optimal transformation is selected by minimizing the latent inconsistency as follows:

$$\theta^* = \arg \min_{\theta_i \in \Theta} \sum_{k=1}^K \alpha_k \|\hat{z}_{t+k|t} - \Phi_C(\mathcal{E}^c(\mathcal{T}_{\theta_i}(o_t)))\|_2, \quad (5)$$

where $\mathcal{T}_{\theta_i}(\cdot)$ denotes the HSV color transformation associated with the parameter set θ_i . The selected transformation is subsequently applied to the incoming observations, thereby restoring latent consistency under varying illumination conditions without modifying the learned WM.

For local visual obstruction, to recover the corrupted visual information, a lightweight Variational Autoencoder (VAE) is employed to reconstruct the degraded observation prior to latent encoding, $\hat{o}_t = \text{Dec}_{\psi}(\text{Enc}_{\psi}(o_t))$ where $\text{Enc}_{\psi}(\cdot)$ and $\text{Dec}_{\psi}(\cdot)$ denote the VAE encoder and decoder, respectively. A subset $\mathcal{D} \subset \mathcal{D}_{\text{past}}$ of previously collected observations is utilized for VAE adaptation,

$$r = \frac{|\mathcal{D}|}{|\mathcal{D}_{\text{past}}|}, \quad 0 < r \leq 1, \quad (6)$$

where $\mathcal{D}_{\text{past}}$ denotes the repository of previously collected robot observations, $\mathcal{D}$ is the adaptation dataset, and r is the adaptation data ratio. The VAE parameters are then optimized as

$$\psi^* = \arg \min_{\psi} \mathcal{L}_{\text{VAE}}(\mathcal{D}, E), \quad (7)$$

where E denotes the adaptation epochs and $\mathcal{L}_{\text{VAE}}$ represents the standard VAE reconstruction objective. By jointly controlling the adaptation ratio r and the optimization epochs E , the framework achieves a trade-off between adaptation time and reconstruction performance. The reconstructed observation is subsequently re-encoded by the C-JEPA, thereby restoring latent consistency under localized visual obstruction.

D. Sionna–Gazebo Integration

To evaluate the proposed communication-aware robotic framework under realistic operating conditions, a synchronized robot–wireless simulation environment is developed by integrating the Gazebo robotic simulator with the Sionna RT simulator. Gazebo provides realistic robot dynamics, perception, and navigation, whereas Sionna RT enables physics-based wireless channel modeling through electromagnetic ray tracing. By combining both simulators, the framework enables synchronized generation of robot observations and wireless channel measurements, allowing the C-JEPA and W-JEPA to jointly predict future robot states and communication conditions within a unified simulation environment.

Since Gazebo and Sionna RT employ different scene representations, the simulation environment cannot be directly shared between the two platforms. Gazebo represents the environment using Simulation Description Format (SDF)-based WMs, whereas Sionna RT requires scenes in the Mitsuba Extensible Markup Language (XML) format for RT simulations. Therefore, as illustrated in Fig. 4, the experimental environment is first imported into Blender, where radio material properties are assigned to scene objects before exporting the

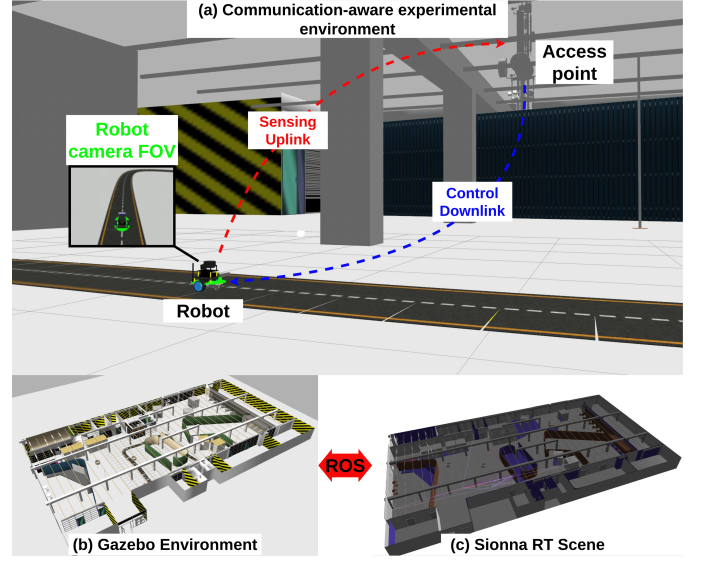


Fig. 4: Experimental setup of the proposed communication-aware robotic framework. (a) Overall communication-aware experimental environment with the robot, onboard RGB observations, and sensing uplink/control downlink communication. (b) Gazebo environment for robot simulation and visual perception. (c) Corresponding Sionna RT scene for physics-based wireless channel generation, synchronized through ROS.

scene into the Mitsuba XML format. This conversion enables both simulators to represent the same physical environment while supporting realistic wireless propagation modeling [40].

The robotic platform is based on the Waveshare JetBot ROS AI Kit, whose Unified Robot Description Format (URDF) model is integrated into the Gazebo environment to provide realistic robot kinematics and onboard Red, Green, Blue (RGB) camera observations [41]. The ROS synchronizes robot states between Gazebo and Sionna RT, enabling the robot pose to be continuously supplied to the ray-tracing engine for CSI generation while simultaneously providing visual observations to the C-JEPA. Consequently, the integrated simulation environment supports synchronized evaluation of robot perception, wireless communication, and communication-aware remote robotic control under realistic operating conditions.

E. Experimental Setup

Within the communication-aware synchronized robot–wireless simulation environment, Gazebo and Sionna RT operate synchronously through ROS, enabling simultaneous generation of robot observations and wireless channel measurements. At each simulation step, the robot pose and robot velocity are shared between both simulators, allowing the RGB observation acquired by the onboard camera and the corresponding CSI generated by Sionna RT to represent the same robot state. These synchronized observations are subsequently processed by the C-JEPA and W-JEPA for joint prediction and communication-aware decision making.

Figure 4 illustrates the overall experimental setup employed throughout the evaluation. As shown in Fig. 4(a), a mobile

robot equipped with an onboard RGB camera performs autonomous navigation within a closed-loop road environment while maintaining bidirectional wireless communication with a fixed base station through the sensing uplink and control downlink. Figures 4(b) and 4(c) present the corresponding Gazebo and Sionna RT environments, respectively, where the same robot state is synchronized between both simulators to jointly generate visual observations and wireless channel measurements.

The implementation is developed using ROS Noetic, Gazebo, Sionna RT, Mitsuba, Blender, Python, and PyTorch. The detailed hardware specifications, software versions, wireless communication parameters, and learning hyperparameters used throughout the experiments are provided in Appendix A.

F. Transfer Learning and Domain Adaptation

Training the C-JEPA directly in the Gazebo environment from random initialization is computationally expensive because each interaction requires realistic physics simulation, robot dynamics, ROS communication, and onboard camera rendering. Consequently, training the navigation model entirely in Gazebo requires several days of continuous interaction before convergence. To improve training efficiency, the C-JEPA is first pretrained in the lightweight Gym CarRacing environment [42], where navigation experiences can be generated rapidly. The pretrained model is then transferred to the Gazebo environment and fine-tuned using Gazebo interaction data rather than training a new model from scratch. After convergence, the adapted C-JEPA is frozen and subsequently used to generate latent control representations for training the W-JEPA.

A major challenge during this transfer process is the mismatch between the observation spaces of the two environments. The pretrained C-JEPA learns visual representations from the Gym CarRacing observation space, whereas the Gazebo robot acquires realistic RGB images from its onboard camera. Therefore, instead of modifying the network architecture, the Gazebo robot observation is transformed into a Gym-style observation before being processed by the C-JEPA, $o_t = \mathcal{T}_\theta(o_t^G)$, where o_t^G denotes the raw RGB observation captured by the Gazebo robot, and $\mathcal{T}_\theta(\cdot)$ is the observation transformation parameterized by the predefined image-processing parameters θ , including the HSV color thresholds and other transformation settings used to generate the Gym-style observations. The transformation extracts the drivable road region, suppresses irrelevant visual information, and generates a normalized Gym-style observation that is compatible with the pretrained C-JEPA.

Unlike the Gym CarRacing environment, the Gazebo simulator does not provide an intrinsic RL reward. Therefore, a progress-based reward function is designed to encourage continuous road following while discouraging inefficient or unsafe robot behaviors. The reference trajectory is partitioned into uniformly distributed virtual crossing markers, and the robot receives a positive reward whenever it crosses a previously unvisited marker. Since the Gazebo control loop operates at approximately 35 ms per simulation step, a small step penalty

is applied at every interaction to encourage efficient navigation and reduce unnecessary exploration. The reward function is defined as

$$r_t = r_{\text{step}} + \frac{R_{\text{lap}}}{N_{\text{cross}}} n_t - R_{\text{fail}} \Pi_{\text{fail}}, \quad (8)$$

where r_{step} denotes the per-step penalty, R_{lap} is the reward assigned for completing one lap, N_{cross} represents the total number of virtual crossing markers, n_t is the number of newly crossed markers at time t , and Π_{fail} is a binary indicator corresponding to episode termination. An episode is terminated when the robot deviates from the road, remains stationary for an extended period due to excessive braking, overturns following a collision or instability, or when the cumulative reward falls below a predefined threshold. Upon termination, an additional failure penalty is assigned to discourage unsafe and undesirable navigation behaviors. This reward formulation preserves the progress-driven objective of Gym CarRacing while adapting it to autonomous navigation in the Gazebo environment.

The pretrained C-JEPA predicts navigation decisions using the discrete action space $\mathcal{A}_d = \{0, 1, 2, 3, 4\}$ adopted by the Gym CarRacing environment, which includes the actions coast, steer right, steer left, accelerate, and brake. However, the Gazebo JetBot is controlled through continuous linear v_t and angular velocity ω_t commands. To bridge this interface mismatch, a discrete-to-continuous action mapping $(v_t, \omega_t) = \mathcal{M}(a_t)$ is introduced, and the linear and angular velocities transmitted through the ROS `cmd_vel` topic. To ensure physically feasible motion, the generated commands are further constrained using smooth acceleration, braking, and steering-rate limits before being executed by the robot. This action conversion enables the policy learned in the discrete Gym environment to be directly deployed in the continuous-control Gazebo environment.

IV. PERFORMANCE EVALUATION

The proposed framework is evaluated and compared with two baseline methods through a comprehensive set of experiments within the synchronized Gazebo–Sionna simulation environment described in Section III. The evaluation investigates the ability of the proposed C-JEPA and W-JEPA to maintain reliable remote robotic control under limited wireless connectivity while reducing communication resource utilization. To this end, we first introduce the experimental evaluation scenarios and baseline methods used for comparison. Furthermore, the experiments analyze diverse wireless channel variations and visual perception degradations to assess the robustness, adaptive resilience, and predictive wireless world modeling capability. Towards this we used an array of evaluation metrics summarized in Table I.

A. Experimental Evaluation Scenarios

To systematically evaluate the proposed communication-aware robotic framework, a comprehensive set of simulation scenarios, referred to as E1-E8, is designed within the synchronized Gazebo–Sionna simulation environment. Throughout all experiments, the robot follows the same predefined

TABLE I: Evaluation metrics used to assess the frameworks.

Metric	Definition
$T_c = t_f^{\text{sim}} - t_0^{\text{sim}}$	Task (navigation) completion time
$N_{\text{comm}} = \sum_{t=1}^T \rho_t$	Communication (uplink) rounds
$E_{\text{tot}} = \sum_{i=1}^{N_{\text{comm}}} P_i \Delta t$	Total transmission (uplink) energy
$R = \sum_{t=1}^T r_t$	Accumulated task reward

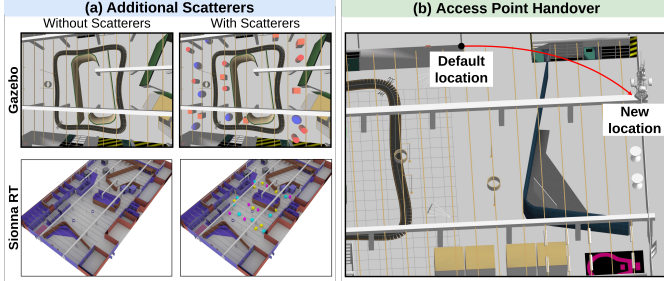


Fig. 5: Wireless evaluation scenarios employed to assess the robustness of the proposed communication-aware framework: (a) Additional scatterers are introduced into both the Gazebo and Sionna RT scenes to generate diverse multipath propagation conditions; and (b) The access-point handover is enforced to modify the geometry of the wireless environment.

closed-loop trajectory, while the wireless communication environment or visual perception conditions are selectively modified according to the evaluation objective.

E1 is the original experiment where training and testing settings are statistically identical. Towards evaluating the robustness against changing wireless channel propagation characteristics, geometry, and line-of-sight conditions, we consider introducing additional scatterers in E2 (see Fig. 5a), simulating access point handover in E3 (see Fig. 5b), and changing carrier frequency of 2.14 GHz used in training to 1.9 GHz and 2.6 GHz for the testing under E4. The advantages of using structured RF representations, spectrogram- and PI-based representations, over the use of the conventional raw CSI with W-JEPA is evaluated in E5. With E6, the predictive capabilities under consecutive connectivity failures are analyzed. Finally, the adaptability to different lighting conditions and visual obstructions discussed in Sec. III-C are evaluated under E7 and E8, respectively.

B. Baseline Methods

To evaluate the effectiveness of the proposed communication-aware robotic framework, two representative navigation baselines are considered: a Deep Q-Network (DQN) and a Proportional Integral Derivative (PID) controller. Both baselines are implemented within the same synchronized Gazebo–Sionna simulation environment and evaluated under identical experimental conditions. To ensure a fair comparison, the DQN baseline follows the same transfer learning strategy adopted by the proposed C-JEPA. This enables the DQN to operate under the same observation space and training protocol as the proposed framework.

The PID controller serves as a conventional feedback-control navigation baseline. It directly follows the predefined

TABLE II: The comparison of the overall performance under E1.

Metric	Proposed	DQN	PID
Completion time (s)	57.1 ± 1.0	58.6 ± 1.6	77.3 ± 0.3
Total reward	775.4 ± 4.4	770.8 ± 3.5	716.1 ± 2.0
Latency Uplink (ms)	0.48 ± 0.02	0.86 ± 0.00	2.63 ± 0.05
Downlink	0.44 ± 0.00	0.44 ± 0.00	1.31 ± 0.02
Total energy (J)	4.74 ± 0.16	9.21 ± 0.32	11.19 ± 0.15

reference trajectory using the robot’s onboard camera observations to generate continuous steering commands without predictive world modeling or communication-aware decision-making. This baseline provides a reference for evaluating the benefits of the proposed predictive and communication-aware control framework.

For both baseline methods, the robot continuously transmits the onboard RGB observations to the remote controller through the sensing uplink, while the corresponding control commands are returned through the control downlink at every control interval. Unlike the proposed framework, neither baseline employs predictive wireless modeling, transmission scheduling, or wireless power prediction. Consequently, they provide communication-unaware references for evaluating the communication efficiency achieved by the proposed framework.

C. Overall Task Performance & Robustness

Table II summarizes the overall navigation and communication performance of the proposed framework in comparison with the DQN and PID baselines within E1 setting. The proposed framework achieves the shortest task completion time of 57.1 s while obtaining the highest cumulative average reward of 775.4, demonstrating efficient and stable navigation. Although DQN exhibits comparable navigation performance, the proposed method further reduces the completion time and improves the cumulative reward. In contrast, the PID controller requires the longest completion time (77.3 s on average) and achieves the lowest average reward of 716.1, indicating inferior navigation performance. Furthermore, the proposed framework attains the lowest communication latency, particularly in the uplink direction with 0.48 ms, while maintaining a comparable downlink latency of 0.44 ms. This communication efficiency is achieved through predictive and selective uplink transmissions, which also result in the lowest cumulative uplink transmission energy of 4.74 J, compared with 9.21 J for DQN and 11.19 J for PID. Overall, the results demonstrate that the proposed communication-aware predictive control framework effectively balances navigation performance, communication latency, and energy efficiency.

The robustness of the proposed communication-aware control framework is evaluated with E4, E2, and E3. Figs. 6 and 7 compare the task completion time and the total uplink transmission energy consumption, respectively, of the proposed method and DQN and PID baselines under two carried frequency changes as per E4 and additional scatterers as per E2. The proposed framework exhibits only minor

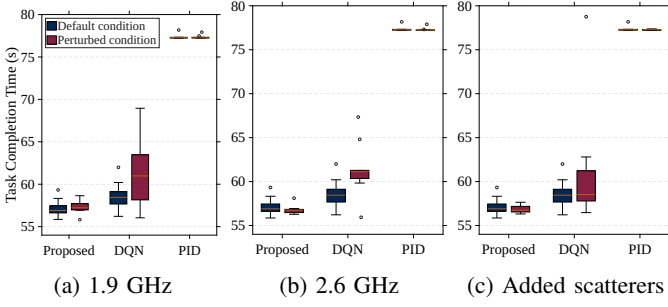


Fig. 6: Task completion time under wireless channel perturbations: (a) carrier frequency shifted from 2.14 GHz to 1.9 GHz, (b) carrier frequency shifted from 2.14 GHz to 2.6 GHz, and (c) additional scatterers introduced into the propagation environment.

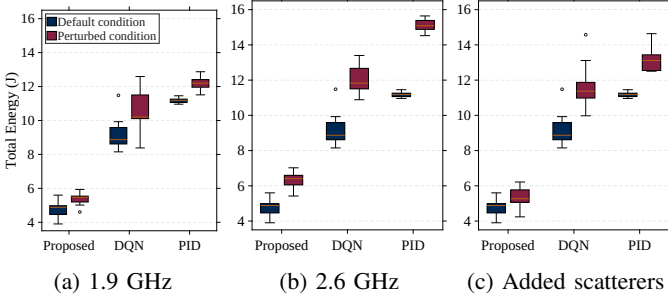


Fig. 7: Total uplink transmission energy under wireless channel perturbations: (a) carrier frequency shifted from 2.14 GHz to 1.9 GHz, (b) carrier frequency shifted from 2.14 GHz to 2.6 GHz, and (c) additional scatterers introduced into the propagation environment.

variations in task completion time across all perturbation scenarios, demonstrating strong generalization to unseen wireless environments. In contrast, the DQN baseline shows larger performance degradation, whereas the PID controller remains relatively unaffected since its control policy does not rely on learned communication-aware representations. Furthermore, the proposed framework consistently achieves the lowest uplink transmission energy by selectively scheduling transmissions according to the predicted communication requirements, while the DQN and PID baselines incur substantially higher energy consumption. Overall, these results demonstrate that the proposed communication-aware predictive control framework preserves navigation performance while maintaining superior communication energy efficiency under varying wireless propagation conditions.

To further evaluate robustness, the serving access point is switched to emulate a handover event in E3, producing a substantial change in wireless coverage. We report that the proposed framework successfully completes (100%) the navigation task despite the access-point handover, whereas both the DQN and PID baselines only manage to complete 56.48% and 58.99% of the lap, respectively. This demonstrates the robustness of the proposed framework under significant changes in the wireless network topology.

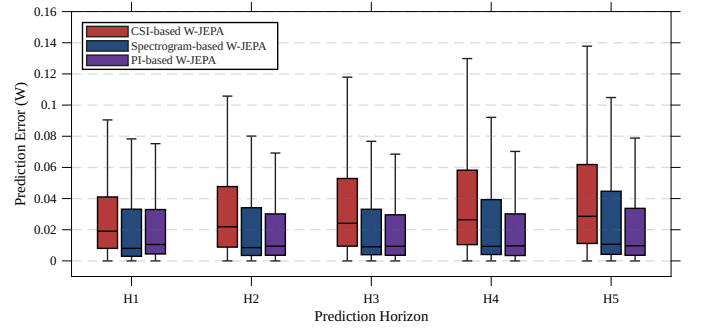


Fig. 8: Prediction error comparison between raw CSI-based and structured representation-based W-JEPA models across multiple prediction horizons.

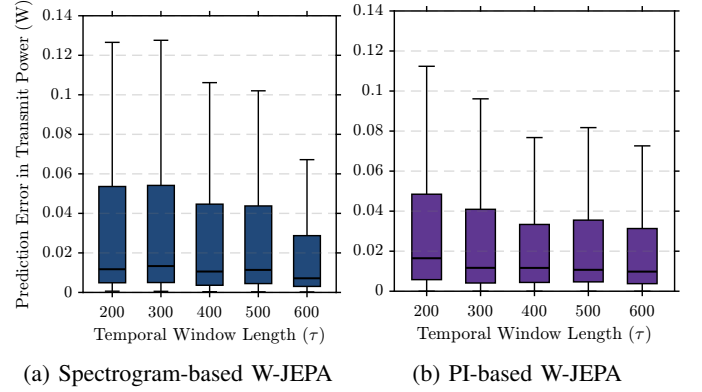


Fig. 9: Impact of temporal window length (τ) on uplink transmit-power prediction error for (a) spectrogram-based W-JEPA and (b) PI-based W-JEPA.

D. Analysis of The Structured RF Representations

While the proposed W-JEPA design relies on the raw CSI measurements as the input, here, we analyze the impact of using two structured RF representations, spectrograms and PIs discussed in Sec. III-B, as alternative inputs within E5.

As shown in Fig. 8 both structured RF representations consistently reduce the prediction error compared with the raw CSI-based W-JEPA across all prediction horizons (H). The improvement becomes more evident as H increases, indicating that the structured RF representations provide richer temporal information for learning future wireless channel dynamics. Among the proposed representations, the PI-based W-JEPA achieves the lowest prediction error distribution, while the spectrogram-based W-JEPA also demonstrates a clear improvement over the raw CSI-based model.

The influence of the temporal window length τ is evaluated in Fig. 9 for both structured RF representations. Increasing the temporal window provides additional historical channel information, leading to improved prediction performance. However, for both representations, longer temporal windows generally result in lower prediction errors and reduced variability, with the lowest error distributions observed at the larger window lengths.

Table III summarizes the impact of the representation-generation parameters and the corresponding computational

TABLE III: Impacts of representation lengths on power prediction errors ($\mathcal{L}_P$) and representation generation times (T_G).

Spectrogram-based W-JEPA			PI-based W-JEPA		
L	$\mathcal{L}_P$ (W)	T_G (ms)	m	$\mathcal{L}_P$ (W)	T_G (ms)
64	0.022 ± 0.026	1.74	5	0.020 ± 0.021	98.84
96	0.014 ± 0.018	1.71	10	0.019 ± 0.020	99.9
128	0.022 ± 0.025	1.66	15	0.025 ± 0.033	102.03
160	0.024 ± 0.027	1.65	20	0.014 ± 0.013	104.46
200	0.024 ± 0.028	1.63	25	0.028 ± 0.030	103.45

complexity of the proposed structured RF representations. For the spectrogram-based representation, the short-time Fourier transform (STFT) segment length (L) influences both the uplink power prediction error ($\mathcal{L}_P$) and the representation generation time (T_G), while the time-delay embedding dimension (m) provides a similar tradeoff for the PI representation. The selected parameter settings achieve an effective balance between prediction accuracy and computational complexity, while both representations remain computationally efficient for online operation. Overall, these results demonstrate that the proposed structured RF representations provide an effective foundation for predictive wireless-world modeling, significantly improving the predictive capability of the W-JEPA without compromising real-time applicability.

These results reveal a tradeoff between representation richness and computational complexity. Raw CSI avoids the additional preprocessing required by the structured RF representations, but exhibits higher prediction errors in our experiments. The spectrogram represents the temporal channel history in the time-frequency domain and achieves improved prediction accuracy with a relatively small representation-generation time. The PI provides a topology-based representation of the temporal channel evolution and achieves the lowest prediction errors, although at a substantially higher representation-generation cost, as shown in Table III. Consequently, raw CSI is attractive when representation-processing overhead is the primary constraint, the spectrogram provides a favorable balance between prediction accuracy and computational complexity, whereas the PI is preferable when improved predictive performance justifies the additional computational cost.

E. Communication Efficiency Through Predictive Latent Embeddings

To evaluate the communication efficiency of the proposed framework, we compare the predictive JEPA latent embeddings with the image token representations employed by the Vision Transformer (ViT)-based baseline within E6. The evaluation therein considers both the transmitted token size and the robustness to consecutive uplink communication losses.

As shown in Fig. 10, the proposed framework employs a fixed latent embedding of 400 dimensions, whereas the x-axis is extended to represent the equivalent token sizes of the ViT-based baseline for comparison. It can be noted that the ViT baseline requires at least 128×196 tokens to achieve comparable performance. This demonstrates that the predictive JEPA embeddings provide a substantially more compact representation, significantly reducing the communication payload

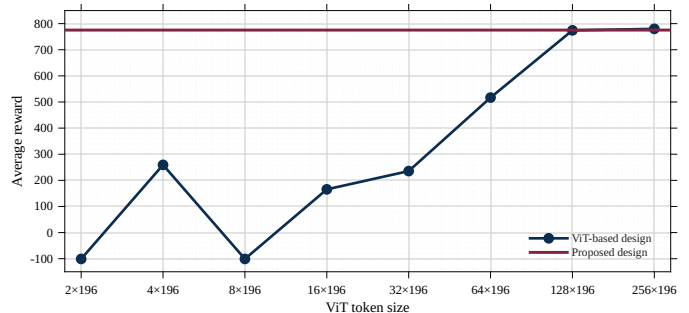


Fig. 10: Impact of transmitted token size on reward for the proposed framework and the ViT-based baseline.

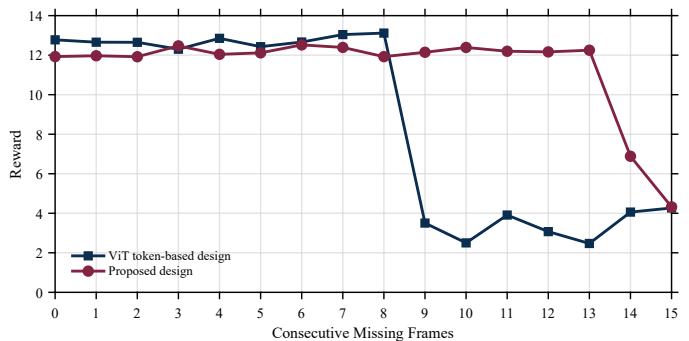


Fig. 11: Impact of consecutive uplink communication losses on the achieved reward for the proposed framework and the ViT-based baseline.

by about 62-folds in terms of the size without sacrificing control performance.

Fig. 11 compares the impact of consecutive uplink communication losses on the achieved reward. The ViT-based baseline maintains reliable performance for approximately 8 consecutive missing transmissions, after which the reward rapidly deteriorates. In contrast, the proposed framework sustains stable performance for approximately 13 consecutive missing transmissions by exploiting predictive latent dynamics learned through the JEPA WM. These results demonstrate that the proposed predictive latent embeddings not only reduce communication overhead but also improve resilience to intermittent wireless connectivity.

F. Adaptive Resilience to Visual Disturbances

The adaptive resilience of the proposed framework is evaluated under E7 and E8. The average reward with and without adaptation under E7 is compared in Fig. 12. Therein, changes in the illumination conditions alter the robot's field of view, causing the controller without adaptability to fail due to the resulting perceptual inconsistency. In contrast, the proposed adaptive resilience mechanism successfully detects the latent inconsistency introduced by the illumination change and restores perceptual consistency through online adaptation as discussed in Sec. III-C. Consequently, the robot is capable of continuing the navigation task with a slight interruption.

The recovery capability under local visual obstruction as per E8 is evaluated in Fig. 13. Therein, we analyze the

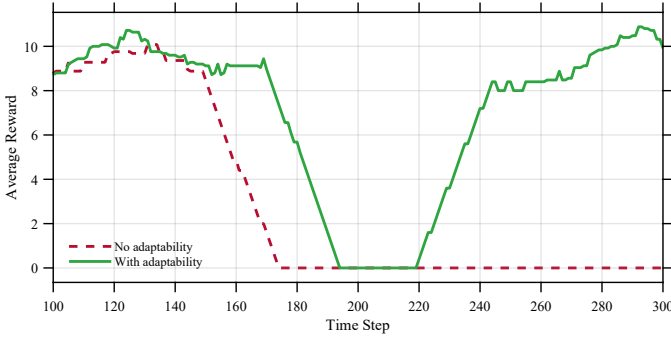


Fig. 12: Impact of adaptive latent representation alignment on reward under global perceptual degradation caused by illumination changes.

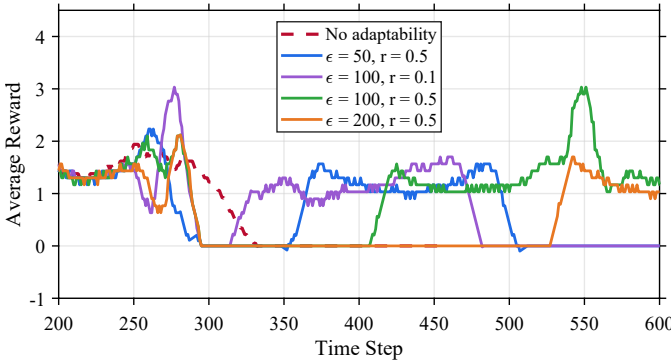


Fig. 13: Impact of historical data ratio (r) and adaptation epochs (ϵ) on recovery from local visual obstruction.

impact of the fraction of historical observations stored on the server used for online adaptation (r) and the number of epochs used for adaptation (ϵ) on the reward. Note that higher the r and/or ϵ , the adaptation time increases due to the need for increased computation. From Fig. 13, it can be seen that the faster recovery (with lower r and ϵ) is not always sustainable. This yields that a significant computation with either one or both of r and ϵ is needed to ensure that the performance is maintained for a longer duration, i.e., an interesting tradeoff between recovery and sustainability with the proposed adaptation mechanism.

Overall, the proposed adaptive resilience mechanism enables reliable recovery from both global perceptual degradation and local visual obstruction without retraining the complete control policy. By restoring latent consistency online, the framework maintains stable robot navigation and improves operational continuity under challenging visual conditions.

V. CONCLUSION AND FUTURE WORK

This paper presented a resilient communication-aware remote robotic control framework based on coupled C-JEPA and W-JEPA predictive WMs. By jointly modeling robot dynamics and wireless channel evolution within a shared latent representation space, the proposed framework enables predictive communication scheduling that reduces unnecessary uplink transmissions while maintaining reliable navigation performance. Furthermore, structured RF representations improve

wireless prediction accuracy, while the adaptive resilience mechanism allows the framework to recover from wireless perturbations and visual perception degradations without re-training the complete control policy. Experimental evaluation in a realistic Gazebo-ROS-Sionna simulation environment demonstrated that the proposed approach consistently outperforms conventional DQN, PID, and raw CSI-based methods in communication efficiency, robustness, resilience, and predictive wireless modeling.

The proposed framework also highlights the practical trade-off between communication efficiency and computational complexity. Although predictive world modeling, structured RF representation generation, and online adaptation introduce additional computation, the measured execution times demonstrate that the framework remains suitable for real-time operation on a single graphics processing unit (GPU). Moreover, the integrated simulation framework provides a practical platform for evaluating communication-aware robotic systems under realistic wireless propagation conditions before physical deployment.

The current study is limited to a single robot operating in simulation over a single wireless link and predefined navigation scenarios. Future work will extend the framework to multi-robot systems, heterogeneous wireless networks, and more diverse operating environments while investigating additional structured RF representations and more efficient online adaptation strategies. Finally, the proposed framework will be validated on physical robotic platforms operating over real wireless networks and extended toward a communication-aware digital twin through continuous synchronization between the physical and virtual environments.

CODE AND DATA AVAILABILITY

The source code of the proposed communication-aware remote robotic control framework is publicly available at <https://github.com/ICONgroupCWC/DreamerV2-Meets-Gazebo>. A demonstration video illustrating the proposed framework and the experimental evaluation presented in this paper is available at https://youtu.be/hw_bdS3P6Oc.

REFERENCES

- [1] L. Pallottino, "Robotics for warehouses and logistics: Technologies, challenges, and future directions," *Annual Review of Control, Robotics, and Autonomous Systems*, vol. 9, pp. 377–401, 2026.
- [2] J. Delmerico, S. Mintchev, A. Giusti, B. Gromov, K. Melo, T. Horvat, C. Cadena, M. Hutter, A. Ijspeert, D. Floreano, L. M. Gambardella, R. Siegwart, and D. Scaramuzza, "The current state and future outlook of rescue robotics," *Journal of Field Robotics*, vol. 36, no. 7, pp. 1171–1191, 2019.
- [3] K. Darvish, L. Penco, J. Ramos, R. Cisneros, J. Pratt, E. Yoshida, S. Ivaldi, and D. Pucci, "Teleoperation of humanoid robots: A survey," *IEEE Transactions on Robotics*, vol. 39, no. 3, pp. 1706–1727, 2023.
- [4] J. Park, S. Samarakoon, H. Shiri, M. K. Abdel-Aziz, T. Nishio, A. Elgabli, and M. Bennis, "Extreme ultra-reliable and low-latency communication," *Nature Electronics*, vol. 5, no. 3, pp. 133–141, 2022.
- [5] W. Saad, M. Bennis, and M. Chen, "A vision of 6g wireless systems: Applications, trends, technologies, and open research problems," *IEEE Network*, vol. 34, no. 3, pp. 134–142, 2020.
- [6] J. Cao, X. Zhu, S. Sun, P. Popovski, S. Feng, and Y. Jiang, "Age of loop for wireless networked control system in the finite blocklength regime: Average, variance and outage probability," *IEEE Transactions on Wireless Communications*, vol. 22, no. 8, pp. 5306–5320, 2023.

- [7] S. Kaul, M. Gruteser, V. Rai, and J. Kenney, “Minimizing age of information in vehicular networks,” in *2011 8th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks*, 2011, pp. 350–358.
- [8] M. Ismet Can Dede and S. Tosunoglu, “Control of teleoperation systems operating under communication line failures,” in *2008 34th Annual Conference of IEEE Industrial Electronics*, 2008, pp. 1602–1607.
- [9] D. Ha and J. Schmidhuber, “World models,” *arXiv preprint arXiv:1803.10122*, vol. 2, no. 3, p. 440, 2018.
- [10] D. Hafner, T. Lillicrap, I. Fischer, R. Villegas, D. Ha, H. Lee, and J. Davidson, “Learning latent dynamics for planning from pixels,” in *International conference on machine learning*. PMLR, 2019, pp. 2555–2565.
- [11] D. Hafner, J. Pasukonis, J. Ba, and T. Lillicrap, “Mastering diverse domains through world models,” *arXiv preprint arXiv:2301.04104*, 2023.
- [12] P. Wu, A. Escontrela, D. Hafner, P. Abbeel, and K. Goldberg, “Daydreamer: World models for physical robot learning,” in *Conference on robot learning*. PMLR, 2023, pp. 2226–2240.
- [13] M. Grieves and J. Vickers, *Digital Twin: Mitigating Unpredictable, Undesirable Emergent Behavior in Complex Systems*. Cham: Springer International Publishing, 2017, pp. 85–113.
- [14] C. B. Chaaya and M. Bennis, “Equivariant multi-agent reinforcement learning for multimodal vehicle-to-infrastructure systems,” *IEEE Transactions on Machine Learning in Communications and Networking*, vol. 4, pp. 706–732, 2026.
- [15] Y. LeCun *et al.*, “A path towards autonomous machine intelligence version,” *Open Review*, vol. 62, no. 1, pp. 1–62, 2022.
- [16] M. Assran, Q. Duval, I. Misra, P. Bojanowski, P. Vincent, M. Rabbat, Y. LeCun, and N. Ballas, “Self-supervised learning from images with a joint-embedding predictive architecture,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2023, pp. 15 619–15 629.
- [17] A. Bardes, Q. Garrido, J. Ponce, X. Chen, M. Rabbat, Y. LeCun, M. Assran, and N. Ballas, “Revisiting feature prediction for learning visual representations from video,” *arXiv preprint arXiv:2404.08471*, 2024.
- [18] C. B. Chaaya, A. M. Girgis, and M. Bennis, “From pixels to csi: Distilling latent dynamics for efficient wireless resource management,” in *2025 IEEE 36th International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC)*. IEEE, 2025, pp. 1–6.
- [19] A. Muralidharan and Y. Mostofi, “Communication-aware robotics: Exploiting motion for communication,” *Annual Review of Control, Robotics, and Autonomous Systems*, vol. 4, no. Volume 4, 2021, pp. 115–139, 2021.
- [20] C. Li, A. Krause, and M. Hutter, “Robotic world model: A neural network simulator for robust policy optimization in robotics,” *arXiv preprint arXiv:2501.10100*, 2025.
- [21] N. Koenig and A. Howard, “Design and use paradigms for gazebo, an open-source multi-robot simulator,” in *2004 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS) (IEEE Cat. No.04CH37566)*, vol. 3, 2004, pp. 2149–2154 vol.3.
- [22] J. Hoydis, S. Cammerer, F. A. Aoudia, A. Vem, N. Binder, G. Marcus, and A. Keller, “Sionna: An open-source library for next-generation physical layer research,” *arXiv preprint arXiv:2203.11854*, 2022.
- [23] M. Quigley, K. Conley, B. Gerkey, J. Faust, T. Foote, J. Leibs, R. Wheeler, A. Y. Ng *et al.*, “ROS: an open-source robot operating system,” in *ICRA workshop on open source software*, vol. 3, no. 3.2. Kobe, 2009, p. 5.
- [24] V. Micheli, E. Alonso, and F. Fleuret, “Transformers are sample-efficient world models,” *arXiv preprint arXiv:2209.00588*, 2022.
- [25] M. Assran, A. Bardes, D. Fan, Q. Garrido, R. Howes, M. Muckley, A. Rizvi, C. Roberts, K. Sinha, A. Zhohus *et al.*, “V-jepa 2: Self-supervised video models enable understanding, prediction and planning,” *arXiv preprint arXiv:2506.09985*, 2025.
- [26] H. P. Madushanka, R. Scaciota, S. Samarakoon, and M. Bennis, “Real-time remote control via VR over limited wireless connectivity,” in *2024 IEEE Symposium on Computers and Communications (ISCC)*, 2024, pp. 1–3.
- [27] A. M. Girgis, J. Park, M. Bennis, and M. Debbah, “Predictive control and communication co-design via two-way gaussian process regression and aoi-aware scheduling,” *IEEE Transactions on Communications*, vol. 69, no. 10, pp. 7077–7093, 2021.
- [28] J. Kober, J. Bagnell, and J. Peters, “Reinforcement learning in robotics: A survey,” *The International Journal of Robotics Research*, vol. 32, pp. 1238–1274, 09 2013.
- [29] J. Bongard, “Probabilistic robotics. sebastian thrun, wolfram burgard, and dieter fox. (2005, mit press.) 647 pages,” *Artificial Life*, vol. 14, no. 2, pp. 227–229, 2008.
- [30] H. Xie and Z. Qin, “A lite distributed semantic communication system for internet of things,” *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 1, pp. 142–153, 2021.
- [31] F. Tao, Q. Qi, L. Wang, and A. Nee, “Digital twins and cyber-physical systems toward smart manufacturing and industry 4.0: Correlation and comparison,” *Engineering*, vol. 5, no. 4, pp. 653–661, 2019.
- [32] D. Gündüz, Z. Qin, I. Estella Aguerri, H. S. Dhillon, Z. Yang, A. Yener, K. K. Wong, and C.-B. Chae, “Guest editorial special issue on beyond transmitting bits: Context, semantics, and task-oriented communications,” *IEEE Journal on Selected Areas in Communications*, vol. 41, no. 1, pp. 1–4, 2023.
- [33] S. Kojima, K. Maruta, Y. Feng, C.-J. Ahn, and V. Tarokh, “Cnn-based joint snr and doppler shift classification using spectrogram images for adaptive modulation and coding,” *IEEE Transactions on Communications*, vol. 69, no. 8, pp. 5152–5167, 2021.
- [34] J. Wu, Y. Zhong, and A. Chen, “Radio modulation classification using stft spectrogram and cnn,” in *2021 7th International Conference on Computer and Communications (ICCC)*, 2021, pp. 178–182.
- [35] N. H. Packard, J. P. Crutchfield, J. D. Farmer, and R. S. Shaw, “Geometry from a time series,” *Phys. Rev. Lett.*, vol. 45, pp. 712–716, Sep 1980.
- [36] S. Emrani, T. Gentimis, and H. Krim, “Persistent homology of delay embeddings and its application to wheeze detection,” *IEEE Signal Processing Letters*, vol. 21, no. 4, pp. 459–463, 2014.
- [37] H. Edelsbrunner and J. Harer, *Computational topology: an introduction*. American Mathematical Soc., 2010.
- [38] H. Edelsbrunner, D. Letscher, and A. Zomorodian, “Topological persistence and simplification,” in *Proceedings 41st Annual Symposium on Foundations of Computer Science*, 2000, pp. 454–463.
- [39] H. Adams, T. Emerson, M. Kirby, R. Neville, C. Peterson, P. Shipman, S. Chepushtanova, E. Hanson, F. Motta, and L. Ziegelmeier, “Persistence images: A stable vector representation of persistent homology,” *Journal of Machine Learning Research*, vol. 18, no. 8, pp. 1–35, 2017.
- [40] H. Madushanka, S. Samarakoon, and M. Bennis, “Gazebo-Sionna RT Integration,” 2025. [Online]. Available: <https://github.com/ICongroupCWC/Gazebo-Sionna-RT-Integration>
- [41] H.P.Madushanka, S. Samarakoon, and M. Bennis, “Waveshare JetBot ROS AI Kit URDF Model,” 2025. [Online]. Available: https://github.com/ICongroupCWC/jetbot_world
- [42] M. Towers, A. Kwiatkowski, J. Balis, G. De Cola, T. Deleu, M. Goulão, K. Andreas, M. Krimmel, A. Kg. R. Perez-Vicente *et al.*, “Gymnasium: A standard interface for reinforcement learning environments,” *Advances in Neural Information Processing Systems*, vol. 38, 2026.

APPENDIX A IMPLEMENTATION DETAILS

TABLE IV: Hardware Configuration

Component	Specification
CPU	Intel 11th Gen Core i5-11600K @ 3.90 GHz (6 cores, 12 threads, up to 4.90 GHz)
GPU	NVIDIA GeForce RTX 2080 Ti
Memory	32 GB RAM
Storage	1 TB NVMe SSD
Operating System	Ubuntu 20.04 LTS

TABLE V: Software & Wireless Configurations

Software Settings		Wireless Communication	
Software	Version	Parameter	Value
ROS	Noetic	Carrier frequency	2.14 GHz
Gazebo	11	Bandwidth	20 MHz
Sionna RT	1.2.1	Subcarriers	16
Mitsuba	3	Base station	3 arrays of
Blender	4.3.2		4 × 2 antennas
Python	3.10	Input	CSI, PI,
PyTorch	2.4.0 (cu121)		Spectrogram
CUDA	12.8	Horizon (H)	5

TABLE VI: Hyperparameters

Control JEPA			
Parameter	Value	Parameter	Value
Learning rate	2×10^{-4}	Discount factor (γ)	0.99
Batch size	32	KL loss scale (β)	0.5
Gradient clipping	100	KL balancing (μ)	0.8
Latent (z_t) dim.	32	Replay memory size	10^6
Wireless JEPA		RL	
Parameter	Value	Parameter	Value
Learning rate	5×10^{-3}	Actor learning rate	4×10^{-5}
Rate decay	0.97	Critic learning rate	10^{-4}
Batch size	100	Return weight (λ)	0.95
EMA decay	0.99	Entropy scale (η)	10^{-3}
Weight decay	3×10^{-3}	Slow target update	1500