

Human-Human & Human-Robot Interaction Transformer (H²INT) for Robot Navigation in Dense and Uncertain Crowds

Ao Shen, Kaixi Chen, Shiwei Liu, Fang Deng, *Fellow, IEEE*, and Chen Chen, *Member, IEEE*

Abstract—Safe robot navigation in dense crowds requires reasoning about pedestrian motion and how it may change in response to a robot. However, many learning-based approaches generate pedestrian motion independently of the robot or assume uniform reciprocity, omitting an important source of interaction uncertainty. This paper presents a Human-Human & Human-Robot Interaction Transformer (H²INT), a reinforcement learning framework that retains robot-conditioned changes in pedestrian motion during policy learning while allowing responsiveness to vary across pedestrians. Responsiveness affects the crowd dynamics when the robot is visible but is not supplied as a policy input; the policy must instead infer its consequences from robot-centered relative positions. A two-stage gated Transformer progressively encodes human-human and human-robot relations, while a recurrent policy captures their temporal evolution. A curriculum gradually reduces pedestrian responsiveness to increase interaction difficulty. Simulation experiments demonstrate improved navigation safety and robustness over representative baselines across response conditions and crowd densities, and show transfer without retraining to structurally distinct crowd-flow layouts. Ablations support the hierarchical relational encoding and gated updates. Real-robot deployment further verifies that the learned policy can operate with sparse observations in a physical environment.

Index Terms—Mobile robot, social navigation, deep reinforcement learning, human-robot interaction

I. INTRODUCTION

SERVICE robots are increasingly deployed in restaurants, hospitals, shopping malls, and other human-populated environments [1]–[4]. In these settings, safe and efficient navigation depends on more than predicting where pedestrians will move. A robot entering a shared path may cause a pedestrian to slow down, yield, or deviate, while another pedestrian may continue without reacting. The robot must therefore act under a feedback loop in which its motion can change pedestrian behavior and the resulting pedestrian motion, in turn, changes the robot’s next decision. This behavioral feedback is difficult to exploit because pedestrian motion is uncertain, locally interactive, and only partially observable [5]–[7].

This work was supported in part by the National Science and Technology Major Project under Grant 2022ZD0119703, the National Natural Science Foundation of China under Grant 62273044, and BIT Kunpeng&Ascend Center of Cultivation. (Corresponding author: Chen Chen.)

Ao Shen, Kaixi Chen, Shiwei Liu, Fang Deng, and Chen Chen are with the School of Automation, Beijing Institute of Technology, Beijing 100081, China, and also with the State Key Laboratory of Autonomous Intelligent Unmanned Systems, Beijing 100081, China (e-mail: 3120235667@bit.edu.cn, 3120250914@bit.edu.cn, 1120222212@bit.edu.cn, dengfang@bit.edu.cn, xiaofan@bit.edu.cn).

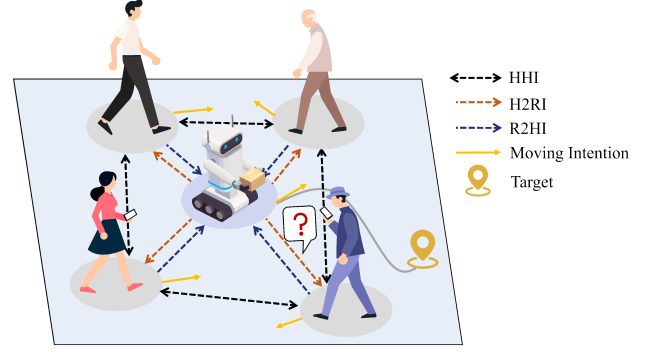


Fig. 1: An illustration of interaction relationships in crowd navigation.

Existing social-navigation research has made substantial progress in trajectory prediction, graph-based interaction reasoning, and human-aware planning. Some studies explicitly use gaze or body orientation to estimate whether a pedestrian perceives the robot [8], [9]. However, many learning-based navigation environments still treat the crowd as an external dynamic obstacle field, assume a fixed reciprocal response, or generate pedestrian trajectories independently of the robot [10]–[12]. These assumptions remove an important source of interaction variability before the policy is trained. A stronger predictor or relational encoder cannot recover feedback that is absent from the environment dynamics; consequently, a policy may perform well under its training assumption yet fail when pedestrians respond differently to the robot.

This work formulates the problem at the behavioral rather than cognitive level. Instead of estimating an explicit human attention label, the crowd dynamics allow a geometrically visible pedestrian either to account for the robot during motion generation or to continue independently. The response tendency varies across pedestrians and its binary realization is temporally persistent, avoiding the assumption that every pedestrian reacts identically at every instant. This state remains latent: the robot observes only relative positions over time and must infer the resulting interaction pattern. The simulator thereby exposes the policy to a closed motion-feedback loop without treating cognitive attention as a policy input or requiring noisy pedestrian velocity estimates.

Learning from these sparse observations creates a second challenge: the policy must recover temporal behavior while resolving simultaneous human-human and human-robot de-

dependencies in a variable-size crowd. Since Transformer encoders are already established in social navigation, self-attention alone is not claimed as the contribution. H²INT instead uses two gated Transformer stages to progressively refine the robot-centered interaction representation. GRU-style residual gates regulate information updates within each stage, while a recurrent policy core integrates the refined representation over time.

Building upon these considerations, a Human-Human & Human-Robot Interaction Transformer (H²INT) is presented for robot navigation in dense and uncertain crowds. The main contributions are summarized as follows:

- A behavior-level crowd formulation closes the interaction loop between robot motion and pedestrian response. It accommodates both robot-conditioned and robot-independent pedestrian motion with heterogeneous, temporally persistent response tendencies, while keeping the underlying response state latent to the policy.
- A two-stage gated Transformer policy encoder progressively refines human-human and human-robot interaction features from relative positions alone. Gated residual updates regulate information flow through the attention and feed-forward sublayers, and recurrent context supports implicit motion inference under partial observability.
- A curriculum progressively reduces pedestrian cooperation during training. Evaluation extends the standard CrowdNav Circle Crossing setting with three structurally distinct test-only flow modes and uses a LiDAR-based real robot to examine geometric transfer and deployment feasibility.

II. RELATED WORK

Classical reaction-based navigation methods, such as the Social Force Model [13], Reciprocal Velocity Obstacles [14], ORCA [15], and DWA [16], compute robot actions from current observations using geometric or rule-based constraints. These methods are efficient and interpretable, but they usually rely on symmetric interaction or complete observability assumptions. As a result, they can be overly conservative in dense crowds and may suffer from freezing behavior when many pedestrians interact simultaneously [17].

Prediction-based methods improve foresight by estimating future pedestrian trajectories before planning. Representative models such as Social GAN [18], Social-STGCNN [19], Trajectron++ [20], SocialVAE [21], and PECNet [22] have improved multi-person motion prediction under uncertainty. However, prediction and control are often optimized separately, and accumulated prediction errors can degrade downstream navigation. Moreover, many formulations still treat human motion as independent of the robot’s presence, which limits their ability to represent different levels of pedestrian responsiveness.

Human-aware navigation has used face direction, body orientation, and social-force cues to estimate whether people perceive or accommodate a robot [8], [9]. H²INT addresses

a complementary learning question: how a policy behaves when the human-side response is heterogeneous, intermittent, and unobserved. Its latent state is therefore not presented as a cognitive attention estimate or as the first treatment of human awareness.

Learning-based navigation methods directly optimize policies from interaction experience. CADRL [23] and SA-CADRL [24] avoid explicit long-horizon prediction, while DS-RNN [25] and IAG Networks [26] introduce structured relational reasoning. Recent Transformer policies encode spatial and temporal interactions: ST² separates global spatial and temporal states [27], NaviSTAR combines a spatio-temporal graph Transformer with multimodal fusion and preference learning [28], and HEIGHT distinguishes heterogeneous relations [29]. H²INT therefore does not claim self-attention as novel; its focus is the interaction feedback exposed during learning and its gated hierarchical encoding from partial observations.

Encoder capacity alone cannot compensate for interaction variability absent from the simulator. H²INT therefore couples two complementary elements: pedestrian response changes the environment transition, while the policy learns its behavioral consequences from robot-centered observations.

III. PROBLEM FORMULATION

A. Environment Modeling

We consider a dynamic crowd environment in which a mobile robot moves among a variable number of pedestrians in a planar space. Unlike prior fully observable settings that assume access to the complete pedestrian states (e.g., positions and velocities), we model the world as partially observable, where the robot perceives only its own kinematic state and the geometric relations to nearby humans. This formulation better reflects real-world perception, where pedestrian velocities are often noisy or unavailable.

The robot state is represented by a 7-dimensional vector

$$w_t = [p_x, p_y, r, g_x, g_y, v_{\text{pref}}, \theta], \quad (1)$$

which encodes its current position, radius, goal coordinates, preferred speed, and heading angle.

Each pedestrian $i \in \{1, \dots, N_t\}$ is not described by a full dynamic state, but rather by a relative edge feature with respect to the robot:

$$e_t^{(i)} = [\Delta x^{(i)}, \Delta y^{(i)}], \quad (2)$$

where $\Delta x^{(i)} = p_x^{(i)} - p_x$ and $\Delta y^{(i)} = p_y^{(i)} - p_y$ denote the relative displacement. This edge-based representation captures spatial configuration while avoiding reliance on uncertain motion estimates.

To represent heterogeneous pedestrian responses, each pedestrian is assigned an episode-level responsiveness probability ρ_i around the mean responsiveness level ρ_{resp} . A pedestrian can respond to the robot only when the robot lies within the pedestrian’s field of view (FOV) and sensing range. The

individual probability and latent binary responsiveness state are sampled as

$$\begin{aligned} \rho_i &\sim \mathcal{U}(\max(0, \rho_{\text{resp}} - \delta_\rho), \min(1, \rho_{\text{resp}} + \delta_\rho)), \\ \xi_t^{(i)} &\sim \text{Bernoulli}(\rho_i \mathbb{I}_t^{(i)}), \end{aligned} \quad (3)$$

where $\mathbb{I}_t^{(i)} = 1$ when the robot is geometrically visible to pedestrian i . A temporal debouncing filter requires K consecutive confirmations before changing $\xi_t^{(i)}$, preventing rapid switching. Here, ρ_i is a behavioral response propensity, not a calibrated cognitive-attention probability or action-conditioned belief. Robot motion affects pedestrian trajectories after response is enabled but does not directly change this propensity.

Pedestrians are controlled by ORCA in the simulation. When $\xi_t^{(i)} = 1$, the observable robot state is included in pedestrian i 's ORCA neighbor set, so the pedestrian action depends on the robot's current motion; when $\xi_t^{(i)} = 0$, it is replaced by a dummy state outside the interaction range. Other pedestrians remain in the neighbor set in both cases. Thus, $\xi_t^{(i)}$ changes only whether the robot participates in the pedestrian motion update rather than serving as an attention estimate observed by the navigation policy.

At each timestep, the robot receives its velocity $v_t^r = [v_x, v_y]$ together with the robot state and relative pedestrian positions:

$$o_t = \{w_t, v_t^r, \{e_t^{(i)}\}_{i=1}^{N_t}\}. \quad (4)$$

This observation defines a robot-centered star-shaped interaction graph whose edges encode only relative spatial features. The latent responsiveness state $\xi_t^{(i)}$ affects pedestrian actions and thus the environment transition, but it is not explicitly provided to the policy. For batch processing, pedestrian features are padded to a fixed size and sorted by their distance to the robot.

B. Reward Function Design

At each timestep, the robot receives a reward that encourages goal progress, collision avoidance, and efficient navigation:

$$r_t = r_t^{\text{main}} + r_t^{\text{time}}. \quad (5)$$

The main reward component r_t^{main} balances goal reaching, collision avoidance, and interpersonal distance maintenance:

$$r_t^{\text{main}} = \begin{cases} +10, & \text{if } d_t^{\text{goal}} \leq \rho_{\text{robot}}, \\ -20, & \text{if } d_t^{\text{min}} \leq 0, \\ 10 \cdot (d_t^{\text{min}} - 0.25), & \text{if } 0 < d_t^{\text{min}} < 0.25, \\ 4 \cdot (d_{t-1}^{\text{goal}} - d_t^{\text{goal}}), & \text{otherwise,} \end{cases} \quad (6)$$

where d_t^{goal} is the robot's distance to its goal, d_t^{min} is the minimum distance to any human, and $\rho_{\text{robot}} = 0.3$ is the success threshold.

In addition, a constant time penalty is applied at every step to promote efficient navigation:

$$r_t^{\text{time}} = -0.025. \quad (7)$$

The policy $\pi_\theta(a_t|o_t)$ is trained to maximize the expected return:

$$\mathbb{E}_{\pi_\theta} \left[\sum_{t=0}^T \gamma^t r_t \right], \quad (8)$$

using Proximal Policy Optimization (PPO) with Generalized Advantage Estimation (GAE). The stochasticity of latent pedestrian responsiveness, crowd density, and motion produces a diverse training distribution for policy learning.

IV. METHODOLOGY

The policy combines relational interaction encoding with an actor-critic reinforcement learning backbone, as illustrated in Fig. 2.

A. Input Encoding and Embedding

At each timestep, the robot receives the partially observable input o_t . Its 7-dimensional state is concatenated with the measured robot velocity to form $\tilde{w}_t = [w_t, v_t^r] \in \mathbb{R}^9$, which is embedded by an MLP into $\phi_r \in \mathbb{R}^d$. Each edge feature $e_t^{(i)} = [\Delta x^{(i)}, \Delta y^{(i)}]$ is processed by a shared MLP to obtain the edge embedding $\phi_e^{(i)} \in \mathbb{R}^d$. To accommodate a variable number of observed pedestrians, we apply dynamic masking and zero-padding to a maximum cardinality N_{max} .

The embeddings are combined into a token sequence

$$X_t = [\phi_r, \phi_e^{(1)}, \dots, \phi_e^{(N_t)}] \in \mathbb{R}^{(N_t+1) \times d}, \quad (9)$$

where the first token corresponds to the robot and the remaining tokens represent relative human-robot relations. Each token is augmented with a type embedding (robot or edge) and a positional encoding to retain structural identity. Self-attention among the robot-relative edge tokens conditions each pedestrian representation on the surrounding crowd, providing implicit human-human context without estimated pedestrian velocities.

B. Hierarchical Gated Transformer Encoder

To progressively aggregate interactions in dense crowds, we employ two stacked gated Transformer stages, as illustrated in Fig. 3. Both stages operate on the same robot-centered token set: the first stage constructs an initial interaction representation, and the second refines it using the relations already encoded in the first-stage features.

1) *Stage-I Interaction Encoding*: For stage $\ell \in \{1, 2\}$, with $X_t^{(0)} = X_t$, the gated sublayer updates are

$$\begin{aligned} Y_t^{(\ell)} &= \text{Gate}_1^{(\ell)} \left(X_t^{(\ell-1)}, \text{MHAtt}^{(\ell)}(\text{LN}(X_t^{(\ell-1)})) \right), \\ X_t^{(\ell)} &= \text{Gate}_2^{(\ell)} \left(Y_t^{(\ell)}, \text{FFN}^{(\ell)}(\text{LN}(Y_t^{(\ell)})) \right). \end{aligned} \quad (10)$$

Here, Gate_1 and Gate_2 are GRU-style residual gates applied after attention and the FFN, respectively. The first regulates relational-message updates and the second regulates non-linear feature updates; both are state-dependent rather than unweighted residual additions. These within-stage gates are distinct from the temporal GRU in the policy core. The first stage allows every valid token to aggregate information from the observed interaction set.

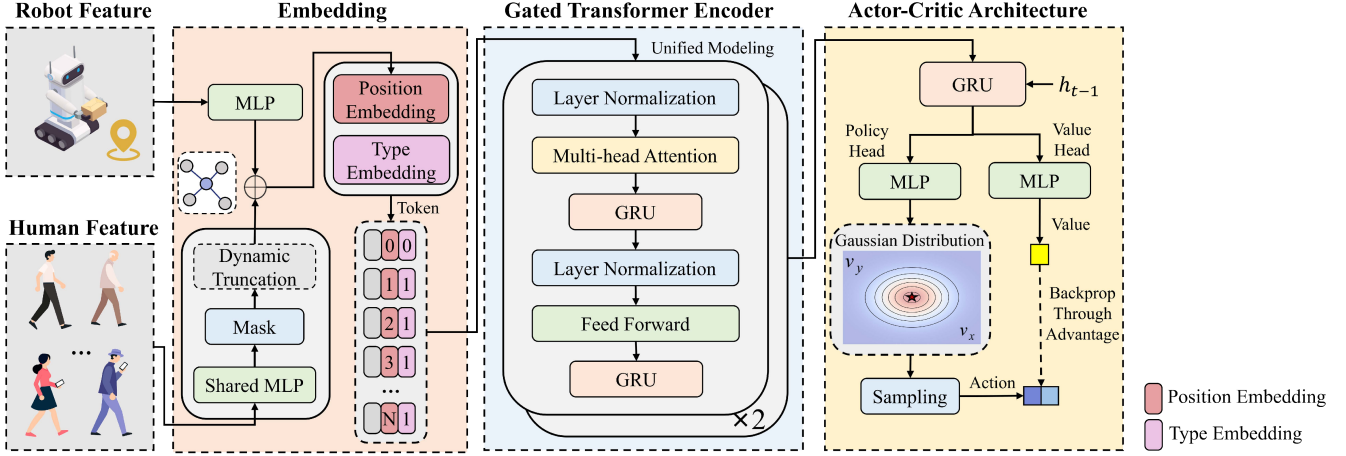


Fig. 2: Overview of the proposed policy learning framework. The robot and pedestrians are represented by relative spatial edges and embedded into a shared latent space. A two-stage gated Transformer progressively refines the interaction representation, and the resulting context vector is processed by an Actor-Critic policy network for navigation.

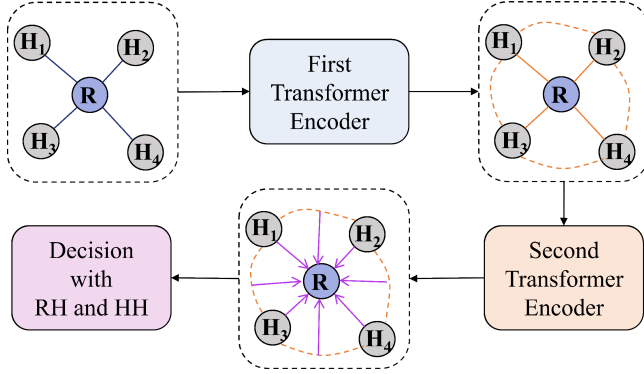


Fig. 3: Two-stage gated Transformer encoder. The first stage constructs an interaction representation, and the second refines the encoded relational features for robot decision making.

2) *Stage-II Relational Refinement*: The second stage applies the same gated update structure to $X_t^{(1)}$. Because these tokens already contain first-stage interaction information, this stage performs relational refinement and produces a crowd-level representation for decision making.

3) *Attention Computation and Masking*: For each head k , attention is computed as

$$\text{Attn}_k(X) = \text{softmax} \left(\frac{Q_k K_k^\top}{\sqrt{d_k}} + M \right) V_k, \quad (11)$$

where $M_{ij} = 0$ if both tokens are valid and $-\infty$ otherwise. This ensures that padded tokens and invisible agents do not contribute to the aggregation.

4) *Context Extraction*: After the two-stage encoding, the updated robot token is extracted as the context-aware state representation:

$$z_t = X_0^{(2)}, \quad (12)$$

which summarizes the interaction information available at timestep t .

C. Actor-Critic Policy Network

The context vector z_t is passed to a recurrent Actor-Critic policy network. A GRU maintains temporal memory:

$$h_t = \text{GRU}(z_t, h_{t-1}), \quad (13)$$

and the hidden state h_t is shared between the policy and value branches. The policy head outputs the mean action for a Gaussian distribution:

$$a_t \sim \mathcal{N}(\mu(h_t), \Sigma), \quad (14)$$

where Σ is a fixed diagonal covariance, and the value head estimates the expected return $V(o_t)$ under the current observation.

The entire architecture, including the Transformer encoder and policy core, is trained end-to-end using PPO with generalized advantage estimation.

D. Computational Complexity

The main computational cost of H²INT comes from the Transformer encoder. For a sequence length $S = N + 1$, hidden dimension d , and encoder depth L , its attention and feed-forward operations have complexity

$$\mathcal{O}(LS^2d + LSd^2). \quad (15)$$

Here, the additional token represents the robot. In practice, the sequence length is bounded by the sensing range and the maximum padded crowd size $N_{\max}$. Masking prevents padded tokens from affecting the representation, although the dense attention computation still scales with the padded sequence length. Unlike prediction-based planners that explicitly roll out pedestrian trajectories, H²INT directly maps the current robot-centered observation to an action distribution, keeping the online inference pipeline compact.

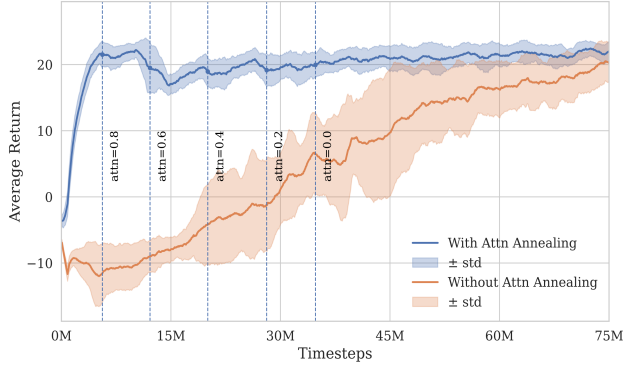


Fig. 4: Training performance with and without responsiveness annealing. Dashed lines mark reductions of ρ_{resp} from 0.8 to 0.0. The annealed policy (blue) converges faster and more stably than the non-annealed baseline (orange); shaded regions denote $\pm$ one standard deviation.

E. Training Strategy with Responsiveness Annealing

To expose the policy gradually to different levels of human responsiveness, we employ a curriculum-inspired responsiveness annealing strategy. Let $\rho_{\text{resp}} \in [0, 1]$ denote the mean probability that a pedestrian responds to a geometrically visible robot. Training begins with a relatively high value $\rho_{\text{resp}}^{\text{init}}$, providing a more responsive crowd during early learning.

During training, if the agent consistently achieves a success rate above a threshold η_{succ} , and a cooldown interval is satisfied, ρ_{resp} is decreased by a fixed amount $\Delta\rho$. This annealing continues until a minimum value $\rho_{\text{resp}}^{\text{min}}$ is reached:

$$\rho_{\text{resp}} \leftarrow \max(\rho_{\text{resp}} - \Delta\rho, \rho_{\text{resp}}^{\text{min}}). \quad (16)$$

Each phase in Fig. 4 increases the proportion of non-responsive pedestrians and hence the interaction difficulty. The annealed policy improves its average return faster and with lower variance than training under an abrupt, fixed difficulty, suggesting that the curriculum stabilizes policy optimization.

V. EXPERIMENTS AND RESULTS

We evaluate H²INT against representative classical and learning-based baselines, including ORCA [15], Social Force (SF) [13], CADRL [23], SARL [24], DS-RNN [25], and AIG-GST [26]. The evaluation covers different pedestrian response regimes, crowd densities, and unseen crowd layouts. For each setting, 500 test episodes are used, and success rate, collision rate, timeout rate, navigation time, path length, and maximum velocity change are reported. The response-regime study evaluates robustness to changes in human-side feedback; it is not intended as evidence that the policy explicitly recognizes cognitive attention.

A. Evaluation under Different Response Regimes

We first test navigation with 20 pedestrians under three crowd responsiveness regimes, denoted as High, Medium, and Low. These regimes correspond to mean responsiveness probabilities ρ_{resp} of 0.7, 0.5, and 0.3, respectively, where

TABLE I: Comparison under Different Response Regimes

Set	Method	$r_s \uparrow$	$r_c \downarrow$	$r_t \downarrow$	$t_s \downarrow$	$l_p \downarrow$	$\Delta v \downarrow$
High	ORCA	97	3	0	14.68	18.14	1.00
	SF	65	32	3	20.77	21.47	0.99
	CADRL	84	13	3	15.12	19.98	1.21
	SARL	88	10	2	14.01	19.11	1.15
	DS-RNN	91	8	1	16.36	22.23	1.58
	AIG-GST	92	6	2	15.77	22.48	1.63
	H ² INT	99	1	0	13.39	19.77	1.07
Medium	ORCA	91	9	0	14.47	18.46	1.00
	SF	46	52	2	18.72	18.83	1.00
	CADRL	71	24	5	16.33	20.45	1.28
	SARL	79	18	3	15.82	20.17	1.20
	DS-RNN	81	18	1	15.81	21.69	1.55
	AIG-GST	86	14	0	16.69	22.13	1.59
	H ² INT	97	3	0	13.88	20.10	1.09
Low	ORCA	78	22	0	14.57	18.00	1.00
	SF	31	69	0	19.27	17.01	0.99
	CADRL	65	29	6	18.92	21.03	1.35
	SARL	73	22	5	17.53	20.88	1.27
	DS-RNN	72	27	1	16.32	21.34	1.59
	AIG-GST	82	18	0	17.07	21.79	1.61
	H ² INT	94	6	0	14.46	20.49	1.22

Notes: High, Medium, and Low denote $\rho_{\text{resp}} = 0.7, 0.5$, and 0.3 , respectively. r_s , r_c , and r_t are success, collision, and timeout rates (%); t_s is successful-navigation time (s), l_p is path length (m), and Δv is the mean episode-wise maximum linear-velocity change (m/s).

ρ_{resp} controls the probability that a pedestrian responds when the robot is geometrically visible. Thus, the parameter is used to generate controllable response regimes rather than to represent calibrated cognitive attention. Lower responsiveness reduces the likelihood that pedestrians respond to the robot, placing a greater collision-avoidance burden on the learned policy. The results are shown in Table I.

Table I shows that H²INT maintains the highest success rate and the lowest collision rate across all response regimes. Even in the Low regime, the success rate remains 94%, while the collision rate is limited to 6%. Navigation time and path length increase moderately in the harder settings, indicating a safety-oriented trade-off. Although rule-based methods produce smaller velocity changes, H²INT remains competitive in motion smoothness among the learning-based policies without using an explicit smoothness reward.

B. Evaluation under Different Crowd Scales

To evaluate scalability under a stringent setting, we fix the environment to the non-responsive regime ($\rho_{\text{resp}} = 0$) and vary the crowd size from 10 to 30 pedestrians. The results are summarized in Table II.

As shown in Table II, all methods degrade as the crowd becomes denser, but H²INT remains the most robust. With 30 pedestrians, it achieves an 88% success rate and a 12% collision rate, outperforming the classical and learning-based baselines. It also records the shortest navigation time in this setting and maintains the smallest velocity change among the learning-based methods.

The density study deliberately uses non-responsive pedestrians, removing cooperative yielding from the evaluation. The widening gap at $N = 30$ therefore supports the hierarchical interaction representation under dense conflicts where human-side assistance cannot be assumed.

TABLE II: Comparison under Different Crowd Scales

Set	Method	$r_s \uparrow$	$r_c \downarrow$	$r_t \downarrow$	$t_s \downarrow$	$l_p \downarrow$	$\Delta v \downarrow$
$N = 10$	ORCA	93	7	0	12.14	17.61	1.00
	SF	60	40	0	16.31	18.41	1.00
	CADRL	85	10	5	13.91	19.50	1.10
	SARL	93	7	0	13.10	18.05	1.16
	DS-RNN	89	11	0	12.39	18.69	1.04
	AIG-GST	95	5	0	14.37	20.48	1.51
	H ² INT	98	2	0	12.31	19.04	1.07
$N = 20$	ORCA	69	30	1	13.82	17.51	1.00
	SF	27	72	1	18.68	16.08	0.99
	CADRL	61	28	11	16.01	20.12	1.22
	SARL	53	46	1	14.52	21.50	1.15
	DS-RNN	81	18	1	15.81	21.69	1.55
	AIG-GST	89	11	0	15.03	21.31	1.59
	H ² INT	95	5	0	14.50	20.60	1.13
$N = 30$	ORCA	43	49	8	18.54	20.27	0.94
	SF	12	85	3	29.62	17.40	0.96
	CADRL	35	50	15	19.50	19.00	1.34
	SARL	45	51	4	20.34	19.68	1.48
	DS-RNN	45	52	3	22.34	24.40	1.90
	AIG-GST	70	28	2	19.58	24.29	1.72
	H ² INT	88	12	0	16.46	24.49	1.22

Notes: N is the number of pedestrians. All settings use the non-responsive regime ($\rho_{\text{resp}} = 0$). Metric definitions are the same as in Table I.

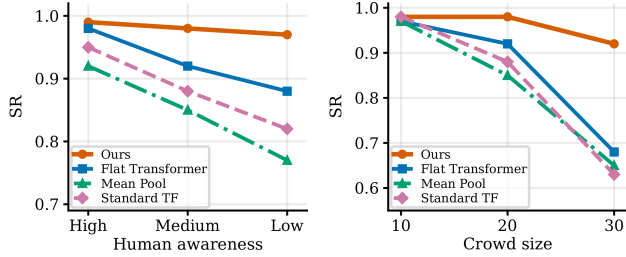


Fig. 5: Ablation trends under different pedestrian response regimes and crowd sizes. High, Medium, and Low correspond to mean responsiveness probabilities ρ_{resp} of 0.7, 0.5, and 0.3, respectively.

C. Ablation Studies

To isolate the effect of the main network components, three variants are evaluated under the same protocol as H²INT. *Flat Transformer* reduces the interaction encoder to a single stage. *Mean Pool* replaces attention-based relational aggregation with mean pooling over pedestrian features. *Standard TF* replaces the gated updates with standard Transformer residual connections. Their success-rate trends under varying response regimes and crowd sizes are shown in Fig. 5.

The results indicate that all three components contribute to robust navigation. Mean pooling causes the largest degradation under the Low response regime, showing the value of attention-based relational aggregation when pedestrians are less responsive. The single-stage Transformer remains below H²INT across all settings, supporting the additional relational-refinement stage. At the highest crowd density, Standard TF degrades most sharply, indicating that gated updates are beneficial when interaction complexity increases. Overall, the complete model maintains the most consistent success rate across both response-regime and crowd-size changes.

TABLE III: Comparison in Unseen Crowded Environments

Set	Method	$r_s \uparrow$	$r_c \downarrow$	$r_t \downarrow$	$t_s \downarrow$	$l_p \downarrow$	$\Delta v \downarrow$
High	ORCA	93	5	2	17.39	22.16	0.99
	SF	56	32	12	23.91	26.04	0.94
	CADRL	77	17	6	18.23	24.19	1.25
	SARL	85	11	4	16.59	23.51	1.20
	DS-RNN	76	16	8	23.57	32.38	1.93
	AIG-GST	91	8	1	16.18	25.48	1.62
	H ² INT	99	1	0	14.00	22.85	1.13
Medium	ORCA	89	7	4	20.18	24.03	0.99
	SF	35	53	12	22.91	23.16	0.94
	CADRL	68	22	10	19.51	25.38	1.30
	SARL	76	15	9	17.83	24.73	1.22
	DS-RNN	73	21	6	24.59	31.60	1.92
	AIG-GST	86	12	2	16.38	22.98	1.64
	H ² INT	93	7	0	14.25	20.36	1.17
Low	ORCA	72	26	2	20.59	23.33	0.99
	SF	24	69	7	21.91	20.98	0.95
	CADRL	61	28	11	21.36	26.58	1.35
	SARL	70	21	9	18.52	25.14	1.25
	DS-RNN	55	35	10	22.12	29.86	1.90
	AIG-GST	83	15	2	17.44	23.73	1.69
	H ² INT	91	9	0	14.97	20.79	1.20

Notes: Results are evaluated with 30 pedestrians in unseen layouts. High, Medium, and Low follow the same definitions as in Table I. Other metric definitions are the same as in Table I.

D. Generalization to Unseen and More Diverse Environments

All policies are trained exclusively in Circle Crossing, whose antipodal goals produce a radial, center-focused conflict pattern. To separate transferable interaction learning from adaptation to this geometry, we add three unseen layouts: Intersection creates orthogonal boundary streams, Split Flow creates opposing horizontal traffic, and Random Wander disperses starts and goals into less structured paths. These test-only modes break the rotational regularity of Circle Crossing and distribute conflicts across the scene. No retraining is performed; tests use 30 pedestrians under the High, Medium, and Low response regimes.

Table III shows that H²INT retains the highest success rate and records no timeouts in the unseen layouts. Its advantage persists as responsiveness decreases, suggesting reduced dependence on radial flow or cooperative yielding. Since the three added modes alter both traffic directionality and the spatial distribution of encounters, this result is stronger than testing new random seeds in the original Circle Crossing geometry. Figure 6 illustrates the corresponding trajectories in all four flow patterns.

E. Real-World Deployment

To examine feasibility beyond simulation, we deploy the learned policy on a mobile robot in an indoor exhibition venue. LiDAR-based DR-SPAAM [30] supplies relative pedestrian positions; no velocity, gaze estimate, response label, or latent state is provided. The policy’s planar velocity output is transformed into the robot frame and converted to bounded linear and angular commands published through the ROS `cmd_vel` interface. The deployment thus retains the policy’s sparse observation interface instead of assuming a real-world attention sensor.



Fig. 6: Navigation trajectories in four crowd layouts. The robot and goal are shown in yellow and red, respectively; red and multicolored dashed curves denote the robot and pedestrian trajectories.

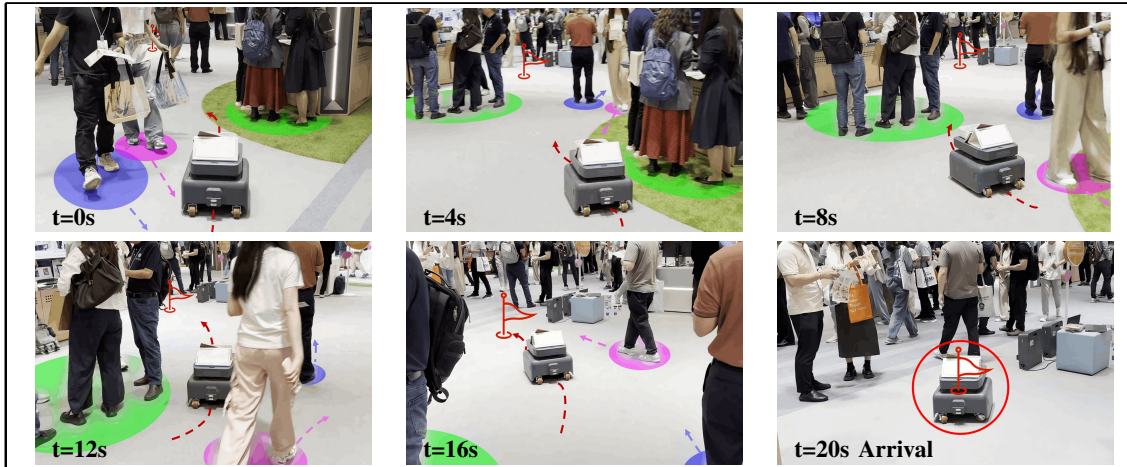


Fig. 7: Snapshots of real-world indoor navigation at successive timesteps. The illustrated run is completed without collision among naturally moving pedestrians.

In Fig. 7, the robot reaches its goal without collision while naturally moving pedestrians cross its path. The run complements simulation by exercising LiDAR detection and

policy inference under noise, partial occlusion, and unmodeled motion. It verifies a deployable observation interface rather than statistical superiority; broader quantitative field

studies are still required.

VI. CONCLUSIONS

This work presented H²INT for navigation in dense and uncertain crowds. The framework models pedestrian responsiveness at the behavioral level while keeping the response state latent, and combines a two-stage gated Transformer with recurrent policy memory to infer interactions from relative positions. Simulations, component ablations, transfer to unseen crowd flows, and a LiDAR-based robot trial collectively support the proposed formulation.

Future work will extend the compact response model with interaction-dependent cues, such as distance, relative motion, and body orientation, while retaining robustness to missing or noisy measurements. Quantitative field trials across multiple venues and crowd densities will evaluate success, pedestrian clearance, motion comfort, and runtime under repeatable protocols. Sparse interaction encoding and uncertainty-aware temporal inference will also be explored to improve scalability, together with tighter integration of nonholonomic control and multimodal perception for long-term deployment.

REFERENCES

- [1] S. Pieska, M. Luimula, J. Jauhainen, and V. Spiz, "Social service robots in wellness and restaurant applications," *Journal of Communication and Computer*, vol. 10, no. 1, pp. 116–123, 2013.
- [2] S. Silva, N. Verdezoto, D. Paillacho, S. Millan-Norman, and J. D. Hernández, "Online social robot navigation in indoor, large and crowded environments," in *2023 IEEE international conference on robotics and automation (ICRA)*. IEEE, 2023, pp. 9749–9756.
- [3] C. S. González-González, V. Violant-Holz, and R. M. Gil-Iranzo, "Social robots in hospitals: a systematic review," *Applied Sciences*, vol. 11, no. 13, p. 5976, 2021.
- [4] M. Shiomi, T. Kanda, D. F. Glas, S. Satake, H. Ishiguro, and N. Hagita, "Field trial of networked social robots in a shopping mall," in *2009 IEEE/RSJ international conference on intelligent robots and systems*. IEEE, 2009, pp. 2846–2853.
- [5] T. Kruse, A. K. Pandey, R. Alami, and A. Kirsch, "Human-aware robot navigation: A survey," *Robotics and Autonomous Systems*, vol. 61, no. 12, pp. 1726–1743, 2013.
- [6] P. Trautman, J. Ma, R. M. Murray, and A. Krause, "Robot navigation in dense human crowds: Statistical models and experimental studies of human-robot cooperation," *The International Journal of Robotics Research*, vol. 34, no. 3, pp. 335–356, 2015.
- [7] C. Mavrogiannis, F. Baldini, A. Wang, D. Zhao, P. Trautman, A. Steinfeld, and J. Oh, "Core challenges of social robot navigation: A survey," *ACM Transactions on Human-Robot Interaction*, vol. 12, no. 3, pp. 1–39, 2023.
- [8] P. Ratsamee, Y. Mae, K. Ohara, M. Kojima, and T. Arai, "Social navigation model based on human intention analysis using face orientation," in *2013 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2013, pp. 1682–1687.
- [9] G. Ferrer, A. Garrell, and A. Sanfeliu, "Robot companion: A social-force based approach with human awareness-navigation in crowded environments," in *2013 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2013, pp. 1688–1694.
- [10] T. D. Ngo, X.-T. Truong, et al., "Socially aware robot navigation framework: Where and how to approach people in dynamic social environments," *IEEE Transactions on Automation Science and Engineering*, vol. 20, no. 2, pp. 1322–1336, 2022.
- [11] X.-T. Truong, V. N. Yoong, and T.-D. Ngo, "Socially aware robot navigation system in human interactive environments," *Intelligent Service Robotics*, vol. 10, no. 4, pp. 287–295, 2017.
- [12] B. Xue, F. Zhou, C. Wang, M. Gao, and L. Yin, "Robot mapless navigation in vuca environments via deep reinforcement learning," *IEEE Transactions on Industrial Electronics*, vol. 72, no. 1, pp. 639–649, 2025.
- [13] D. Helbing and P. Molnar, "Social force model for pedestrian dynamics," *Physical review E*, vol. 51, no. 5, p. 4282, 1995.
- [14] J. Van den Berg, M. Lin, and D. Manocha, "Reciprocal velocity obstacles for real-time multi-agent navigation," in *2008 IEEE international conference on robotics and automation*. IEEE, 2008, pp. 1928–1935.
- [15] J. Van den Berg, J. Snape, S. J. Guy, and D. Manocha, "Reciprocal n-body collision avoidance," *Springer Tracts in Advanced Robotics (STAR)*, vol. 70, pp. 3–19, 2011.
- [16] D. Fox, W. Burgard, and S. Thrun, "The dynamic window approach to collision avoidance," *IEEE robotics & automation magazine*, vol. 4, no. 1, pp. 23–33, 2002.
- [17] P. Trautman and A. Krause, "Unfreezing the robot: Navigation in dense, interacting crowds," in *2010 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2010, pp. 797–803.
- [18] A. Gupta, J. Johnson, L. Fei-Fei, S. Savarese, and A. Alahi, "Social gan: Socially acceptable trajectories with generative adversarial networks," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 2255–2264.
- [19] A. Mohamed, K. Qian, M. Elhoseiny, and C. Claudel, "Social-stgcnn: A social spatio-temporal graph convolutional neural network for human trajectory prediction," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2020, pp. 14 424–14 432.
- [20] T. Salzmann, B. Ivanovic, P. Chakravarty, and M. Pavone, "Trajectron++: Dynamically-feasible trajectory forecasting with heterogeneous data," in *European Conference on Computer Vision*. Springer, 2020, pp. 683–700.
- [21] P. Xu, J.-B. Hayet, and I. Karamouzas, "Socialvae: Human trajectory prediction using timewise latents," in *European Conference on Computer Vision*. Springer, 2022, pp. 511–528.
- [22] K. Mangalam, H. Girase, S. Agarwal, K.-H. Lee, E. Adeli, J. Malik, and A. Gaidon, "It is not the journey but the destination: Endpoint conditioned trajectory prediction," in *European conference on computer vision*. Springer, 2020, pp. 759–776.
- [23] Y. F. Chen, M. Liu, M. Everett, and J. P. How, "Decentralized non-communicating multiagent collision avoidance with deep reinforcement learning," in *2017 IEEE international conference on robotics and automation (ICRA)*. IEEE, 2017, pp. 285–292.
- [24] Y. F. Chen, M. Everett, M. Liu, and J. P. How, "Socially aware motion planning with deep reinforcement learning," in *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2017, pp. 1343–1350.
- [25] S. Liu, P. Chang, W. Liang, N. Chakraborty, and K. Driggs-Campbell, "Decentralized structural-rnn for robot crowd navigation with deep reinforcement learning," in *2021 IEEE international conference on robotics and automation (ICRA)*. IEEE, 2021, pp. 3517–3524.
- [26] S. Liu, P. Chang, Z. Huang, N. Chakraborty, K. Hong, W. Liang, D. L. McPherson, J. Geng, and K. Driggs-Campbell, "Intention aware robot crowd navigation with attention-based interaction graph," *arXiv preprint arXiv:2203.01821*, 2022.
- [27] Y. Yang, J. Jiang, J. Zhang, J. Huang, and M. Gao, "ST²: Spatial-temporal state transformer for crowd-aware autonomous navigation," *IEEE Robotics and Automation Letters*, vol. 8, no. 2, pp. 912–919, 2023.
- [28] W. Wang, R. Wang, L. Mao, and B.-C. Min, "Navistar: Socially aware robot navigation with hybrid spatio-temporal graph transformer and preference learning," in *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2023, pp. 11 348–11 355.
- [29] S. Liu, H. Xia, F. C. Pouria, K. Hong, N. Chakraborty, Z. Hu, J. Biswas, and K. Driggs-Campbell, "Height: Heterogeneous interaction graph transformer for robot navigation in crowded and constrained environments," *arXiv preprint arXiv:2411.12150*, 2024.
- [30] D. Jia, A. Hermans, and B. Leibe, "Dr-spaam: A spatial-attention and auto-regressive model for person detection in 2d range data," in *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2020, pp. 10 270–10 277.