

BifrostUMI: Bridging Robot-Free Demonstrations and Humanoid Whole-Body Manipulation

Chenhao Yu[†], Hongwu Wang[†], Youhao Hu[†], Jiachen Zhang, Yuanyuan Li and Shaqi Luo^{*}
Beijing Academy of Artificial Intelligence

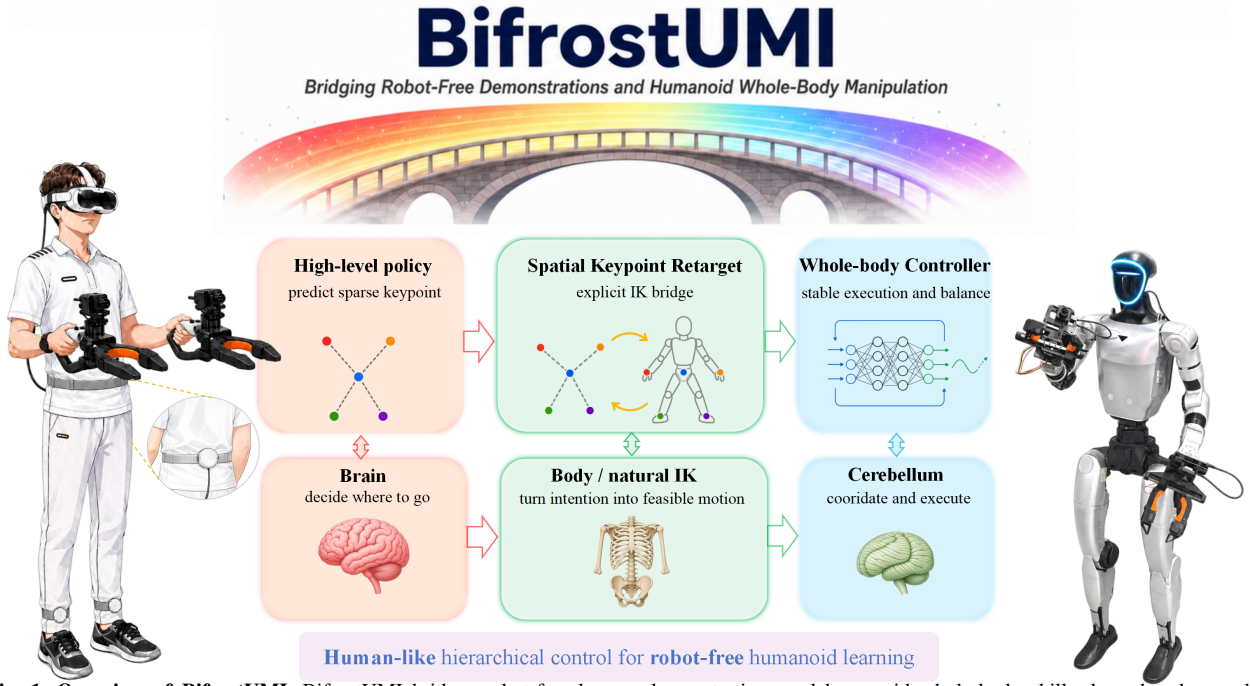


Fig. 1. Overview of BifrostUMI. BifrostUMI bridges robot-free human demonstrations and humanoid whole-body skills through a human-like hierarchical control structure. The framework mirrors the organization of human motor behavior: a high-level policy predicts sparse task-relevant keypoint motions, analogous to the brain forming movement intent; a Spatial Keypoint Retargeting module explicitly converts this intent into feasible whole-body motion, analogous to the body’s natural inverse-kinematics process; a low-level whole-body controller executes the retargeted motion with stability and balance, analogous to the coordinating role of the cerebellum. By decomposing visuomotor control into these three stages, BifrostUMI provides an interpretable bridge from natural human demonstrations to executable humanoid whole-body behaviors.

Abstract—High-quality data collection is a fundamental cornerstone for training humanoid whole-body visuomotor policies. Current data acquisition paradigms predominantly rely on robot teleoperation, which is often hindered by limited hardware accessibility and low operational efficiency. Inspired by the Universal Manipulation Interface (UMI), we propose BifrostUMI, a portable, efficient, and robot-free data collection framework tailored for humanoid robots. BifrostUMI leverages lightweight VR devices to capture human demonstrations as sparse keypoint trajectories while simultaneously recording wrist-mounted visual data. These multimodal data are subsequently utilized to train a high-level policy network that predicts future keypoint trajectories conditioned on the captured visual features. Through a robust keypoint retargeting pipeline, keypoint trajectories are precisely mapped onto the robot’s morphology and executed via a whole-body controller. This approach enables the seamless transfer of diverse and agile

behaviors from natural human demonstrations to humanoid embodiments. We demonstrate the efficacy and versatility of the proposed framework across two distinct experimental scenarios.

Index Terms—Humanoid Robot, Robot-Free Demonstration, Whole-Body Manipulation

I. INTRODUCTION

Data are becoming a central substrate for embodied intelligence [1], [2]. Recent progress in visuomotor policy learning has shown that large-scale, task-relevant demonstrations can substantially improve the generalization and robustness of robotic manipulation policies. For humanoid robots, however, collecting such data remains particularly challenging. Most existing systems still rely on robot-in-the-loop teleoperation, where human operators directly control the humanoid platform to generate demonstrations [2]–[9].

[†] Equal Contribution

^{*} Send all correspondence to sqluo@baai.ac.cn

Although effective, this paradigm is labor-intensive, time-consuming, and costly: it often requires multiple trained operators, careful synchronization between the robot and the demonstrator, and repeated use of the physical robot during data collection. These constraints limit the scalability of data acquisition for whole-body humanoid learning.

Robot-free human demonstration has recently emerged as an attractive alternative [10]–[12]. The UMI series of works [13]–[17] demonstrated that portable, low-cost data collection devices together with human demonstration can replace conventional teleoperation for robotic manipulation, enabling efficient acquisition of in-the-wild demonstrations for robot learning. This paradigm has been highly successful for robot arms, where the demonstrator’s hand motion and wrist-mounted visual observations can be directly mapped to end-effector actions. Beyond robotic arms, UMI-style data collection has also been successfully applied to other embodied platforms, including quadruped robots and aerial robots, further suggesting the generality of this robot-free demonstration paradigm [18], [19]. More recently, HOMMI extended the UMI-style data collection framework to dual-arm mobile manipulation and showed promising results on mobile robotic platforms [20]. However, whether such a robot-free data collection paradigm can support whole-body humanoid control remains underexplored. HuMI further investigated humanoid data collection by combining Vive tracking devices with UMI-style grippers [11]. While this approach demonstrates the feasibility of human demonstration for humanoid policies, Vive-based systems are relatively expensive, require nontrivial initialization and calibration, and are less convenient for portable and scalable deployment.

Inspired by these developments, we propose **BifrostUMI**, a portable, low-cost, and robot-free data collection framework for whole-body humanoid imitation and visuomotor policy learning. Instead of collecting demonstrations through a physical humanoid robot, BifrostUMI captures human whole-body motion using a PICO 4 VR system and represents the motion as a compact set of five spatial keypoints. This keypoint representation preserves the essential geometric structure of the demonstrated motion, providing a suitable intermediate representation for subsequent retargeting to a humanoid robot. To collect manipulation-relevant visual and action information, we design a pair of UMI-inspired hand-held grippers equipped with wrist-mounted RGB cameras. Each gripper is rigidly attached to a PICO controller, allowing us to recover the real-time motion of the human-operated gripper. In addition, we integrate a motor-driven rack-and-pinion mechanism into the gripper, enabling active gripper actuation while obtaining the gripper width from encoder feedback during demonstration. Together, these components allow BifrostUMI to record synchronized whole-body motion, wrist-centric visual observations, and gripper states without requiring access to the target robot during data collection.

On top of the collected data, we design a hierarchical policy architecture for humanoid deployment. The high-level policy is a diffusion-based visuomotor policy that takes wrist

camera images and robot proprioceptive states as input, and predicts future changes in the keypoint trajectory together with the desired gripper width. The predicted keypoints are then passed to a lightweight keypoint retargeting module, which converts the spatial keypoint representation into a full humanoid motion command. Specifically, the retargeting module produces a 36-dimensional robot-native motion representation consisting of the root position, root orientation, and 29 joint positions. Finally, a low-level whole-body controller tracks the retargeted motion while incorporating robot proprioception, enabling dynamically feasible execution on the humanoid platform. This decomposition separates task-level visuomotor prediction, spatial motion retargeting, and low-level whole-body control, resulting in a modular and interpretable framework for humanoid imitation learning.

We validate BifrostUMI on the Unitree G1 humanoid robot through a series of real-world experiments, including pick-and-place and mobile manipulation tasks, which demonstrate that robot-free human demonstrations collected with our portable system can be effectively transformed into executable whole-body humanoid behaviors.

Our main contributions are threefold:

- 1) We introduce **BifrostUMI**, a portable and low-cost VR-UMI data collection system for robot-free whole-body humanoid demonstration acquisition.
- 2) We propose a **keypoint-based retargeting** method that preserves the spatial structure of human demonstrations and provides an explicit inverse-kinematics interface to the humanoid whole-body controller.
- 3) We design a hierarchical policy framework that combines diffusion-based high-level prediction, spatial keypoint retargeting, and low-level whole-body control, and validate it on real-world humanoid tasks.

II. RELATED WORKS

A. Humanoid Data Collection

Recent advances in humanoid learning have led to a growing number of data-collection frameworks. Robot-in-the-loop teleoperation methods collect demonstrations by directly controlling the target robot platform [2], [4], [7], [21], [22]. For humanoids, systems such as TWIST2, CLONE, and Touch Dreaming further extend this paradigm to whole-body or humanoid manipulation settings. These approaches provide embodiment-consistent trajectories, but they are often costly and inefficient, as data collection requires access to the physical robot, trained operators, careful safety supervision, and repeated hardware operation.

Another line of work explores robot-free or human-centric demonstration collection. EgoHumanoid [23] can be viewed as an egocentric human-demonstration and human-to-humanoid transfer framework, such methods need to bridge the embodiment gap between human motion and humanoid-executable actions, which remains challenging for precise whole-body manipulation.

UMI-style interfaces provide a more portable and economical alternative for collecting manipulation demonstrations [13]. HoMMI extends this paradigm to dual-arm mobile

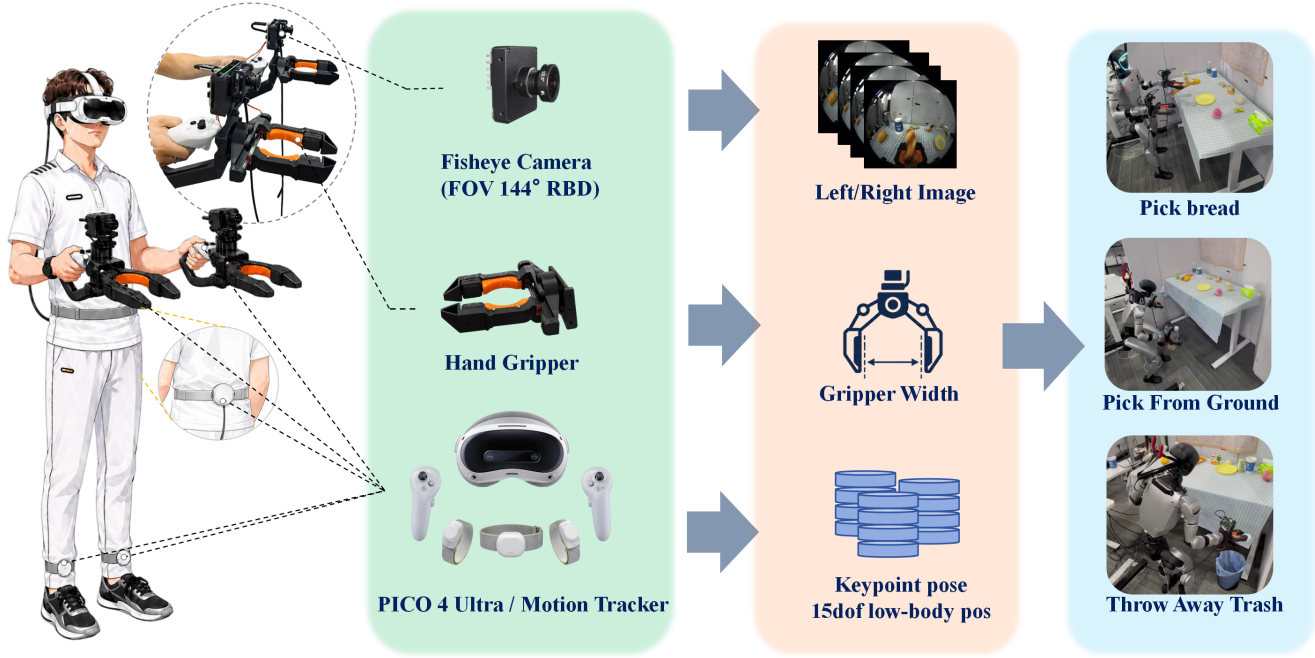


Fig. 2. **BifrostUMI Data Acquisition System.** The data acquisition platform consists of a Pico4-based motion capture setup, including two foot-mounted trackers and one waist-mounted tracker, together with two instrumented grippers, each equipped with a fisheye camera. The system synchronously records multimodal observations, including wrist-view images from the fisheye camera, human keypoint states obtained via the Pico SDK, and gripper aperture measurements derived from motor encoder readings. These heterogeneous data streams are jointly used to train a high-level policy, which is subsequently deployed for real-time control of robot motion.

manipulation [20], but it does not address full-body humanoid control. HuMI demonstrates the feasibility of UMI-style data collection on humanoid robots [11]; however, its Vive-based tracking setup introduces additional hardware cost and calibration complexity, and its retargeting process is tightly coupled with the downstream whole-body controller.

In contrast, our proposed **BifrostUMI** aims to provide a portable, low-cost, and robot-free framework for whole-body humanoid data collection by combining VR-based full-body sensing with UMI-inspired grippers.

B. Whole-Body Visuomotor Policies

Recent work has explored whole-body visuomotor policy learning for humanoid robots. TWIST2 and Touch dreaming [2], [7] adopt teleoperation-based data collection and learn policies that directly predict robot-level actions, such as joint commands or joint targets. While this design provides an end-to-end interface from perception to control, it tightly couples high-level task reasoning with low-level embodiment-specific control, which can make policy learning more sensitive to robot morphology and controller design.

HuMI [11] takes a different approach by predicting task-space keypoints and training a low-level controller to convert these keypoint commands into executable whole-body motions. However, in this formulation, the inverse-kinematics and retargeting process is largely embedded within the learned low-level controller, making the intermediate motion representation less explicit.

In contrast, our framework separates whole-body policy learning into three interpretable stages. The high-level diffusion policy predicts spatial keypoint trajectories and gripper width from visual observations and robot proprioception. An explicit keypoint retargeting module then maps the predicted keypoints to robot-level whole-body motion, including root pose and joint positions. Finally, a general whole-body controller tracks the retargeted motion on the humanoid robot. This hierarchy resembles biological motor control: high-level planning specifies desired task-space goals, an intermediate module resolves kinematic correspondence, and low-level control executes stable whole-body motion.

III. METHOD

A. Robot-free Data Collection System

We design a robot-free data collection system for acquiring whole-body humanoid manipulation demonstrations without requiring the physical robot to be present during data collection. The system records human whole-body motion, local wrist-view visual observations, and hand-level manipulation commands in a synchronized and robot-compatible format. The collected demonstrations are processed for high-level diffusion policy learning.

Data-collection hardware: As illustrated in Fig. 2, the system consists of two main components: a portable VR-based whole-body motion capture system and two handheld manipulation interfaces. The VR component is built on a PICO-based setup, including a headset, handheld controllers, and three lower-body trackers. It provides real-time estimates

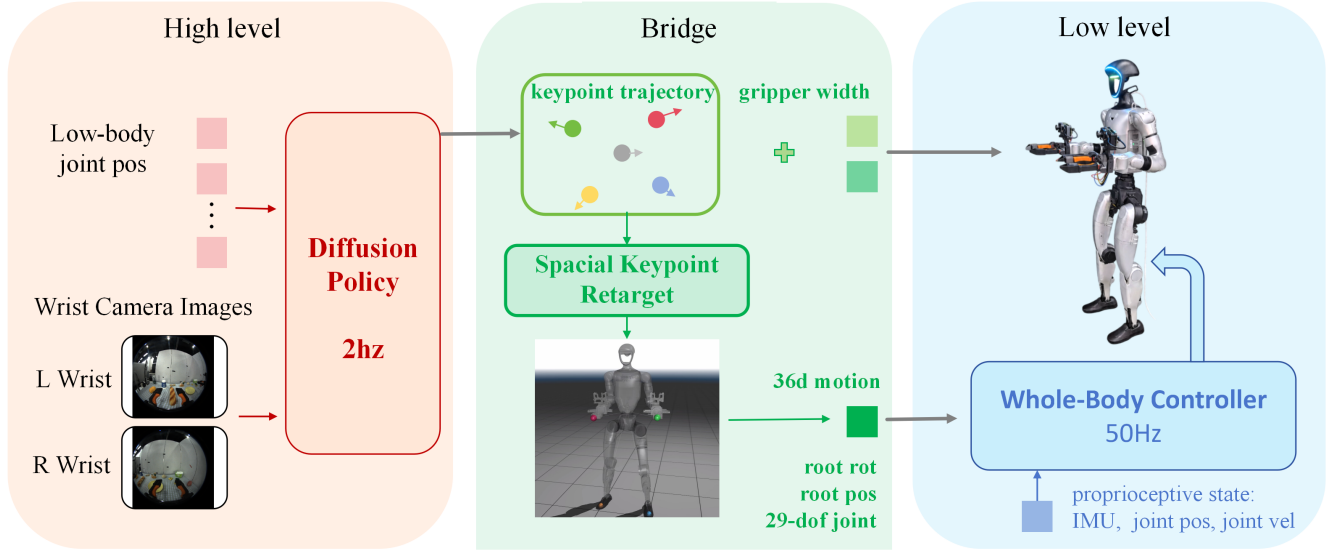


Fig. 3. **BifrostUMI Hierarchical Visuomotor Control.** BifrostUMI formulates humanoid visuomotor control as a three-stage hierarchy. A diffusion-based high-level policy infers task-space keypoint trajectories and gripper commands from wrist-view images and partial proprioception. The spatial keypoint retargeting bridge maps these commands to robot-native 36-dimensional robot-native motion representation, including root pose and joint configurations. A low-level whole-body controller then tracks the retargeted motion using proprioceptive feedback, enabling stable humanoid execution from robot-free demonstrations.

of the operator’s whole-body motion in a portable manner with lightweight calibration. By fusing inertial, geomagnetic, and active infrared sensing, the PICO tracking pipeline provides stable 6-DoF body-motion estimates in a standardized skeleton representation. This fused representation improves the reliability of the recorded human motion and facilitates its conversion into transferable keypoint trajectories for humanoid retargeting. The handheld manipulation interfaces follow the design principles of UMI-style systems and are implemented with a self-developed gripper. Each interface integrates a fisheye camera and a motor-driven rack-and-pinion gripper mechanism, together with a handle that includes a dedicated mounting slot for a PICO controller. This design enables stable grasping while simultaneously capturing wrist-view visual observations and gripper width measurements.

Recorded data modalities: During robot-free data collection, the operator wears the VR device and holds two handheld manipulation interfaces, each attached to a VR controller. Full-body human motion is streamed in real time from the PICO-based VR system and accessed through XRRobotoolkit [24]. Through the PICO SDK, we acquire the 6-DoF poses of the handheld controllers together with the pelvis, left-foot, and right-foot poses estimated from the SMPL-format body representation. After applying fixed coordinate transformations to align these measurements with the keypoint frames defined in the robot coordinate system, we store them as the recorded whole-body keypoint poses.

In parallel, the keypoint trajectories are converted into robot motion references through the proposed Spatial Keypoint Retargeting (SKR) module introduced in Sec. III-C. The resulting lower-body joint configurations are also

recorded during data collection. This design provides two practical advantages. First, it allows the operator to visualize the retargeted motion on the humanoid model during data collection, making it possible to check whether the human motion is retargeted to the robot in a natural and kinematically plausible manner. Second, the recorded lower-body states provide proprioceptive conditioning for training the high-level diffusion policy, enabling the policy to condition its future keypoint predictions on the current support and posture configuration of the robot.

In addition to motion data, the handheld grippers record synchronized wrist-view images using fisheye cameras. The gripper width is measured by the magnetic encoder of the motor drive, providing continuous gripper-state annotations for policy learning.

Overall, the proposed data collection system provides a scalable and portable pipeline for humanoid whole-body manipulation learning. By avoiding robot-in-the-loop data collection, it reduces hardware risk and operator burden. By synchronizing whole-body motion, wrist-view visual observations, and gripper commands, it produces structured demonstrations that can be directly used for visuomotor policy learning.

B. High Level: Diffusion Policy

We instantiate the high-level policy as a whole-body extension of Diffusion Policy [25] that operates on a sparse task-space rather than the full joint configuration. At each decision step t , the policy predicts a receding-horizon action chunk $\mathbf{a}_{t+1:t+H}$ of length $H=48$ over the same five keypoints used during data collection – the pelvis, the left and right TCPs, and the left and right feet – accompanied by two gripper-width commands. The pelvis encodes the global root motion,

the feet specify the support configuration, and the TCPs specify the manipulation endpoints.

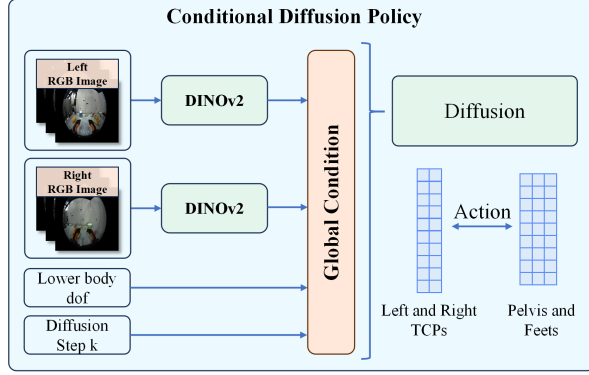


Fig. 4. **Conditional diffusion policy architecture.** The left and right wrist-view RGB images are encoded by DINOv2 and fused with lower-body DoF states and the diffusion step into a global condition. Conditioned on this representation, the diffusion model predicts action trajectories for the left/right TCPs and body-support keypoints.

Action space. The action $\mathbf{a}_\tau \in \mathbb{R}^{47}$ specifies the 6-DoF poses of the five keypoints – each as a 3-D translation and a 6-D rotation in the continuous representation of [26], totaling $5 \times 9 = 45$ dimensions – together with two scalar gripper widths for the left and right TCPs. We adopt the 6-D rotation parameterization because it is continuous over $SO(3)$, unlike Euler angles or unit quaternions, and therefore does not introduce discontinuities into the diffusion regression target.

Action chunk preparation. We construct the supervision target from the absolute keypoint trajectory $\{\mathbf{T}_{k,t}^{\text{abs}}\}$ recorded in the dataset. First, we adopt the standard UMI causal convention $\mathbf{a}_t \leftarrow \text{state}_{t+1}$: the controller pose at frame t semantically specifies where the robot *should* go at frame $t+1$, so the policy is asked to predict future states rather than to reconstruct the present. Second, for each of the five keypoints k , the future pose is re-expressed in that keypoint’s own frame at the query time,

$$\mathbf{T}_{k,\tau}^{\text{rel}} = (\mathbf{T}_{k,\tau}^{\text{abs}})^{-1} \mathbf{T}_{k,\tau}^{\text{abs}}, \quad \tau = t+1, \dots, t+H, \quad (1)$$

where k ranges over the five keypoints; the two gripper widths are kept as absolute scalars and are not affected by Eq. 1. This per-keypoint local pose encoding removes the dependence on the world frame chosen at recording time and decouples each keypoint from the noise in the other keypoints’ base frames, which we find essential for cross-episode generalization. Third, translations and gripper widths are min–max normalized to $[-1, 1]$, while the 6-D rotation components are left unscaled, since per-component rescaling would destroy the orthogonality required to recover a valid rotation matrix.

Observation. The policy is conditioned on 1 frame of synchronized 224×224 left/right wrist-view RGB images and 3 historical frames of a 15-D lower-body proprioceptive vector covering the 12 leg joints and 3 waist joints; upper-body joints are omitted, as their effect is already encoded by the predicted TCP keypoints. Because this vector is not

directly observable on the human side during robot-free data collection, we recover it during data collection by passing the five recorded keypoints through SKR (Sec. III-C) and store the retargeted joint angles in each demonstration. At deployment, the corresponding values are read from the robot encoders via the Unitree SDK; since the robot continuously tracks SKR-derived commands, the runtime measurements occupy the same representation space as the SKR outputs used at training time.

Inference. At each control cycle, the diffusion policy denoises an action chunk in normalized per-keypoint relative form, which is then inverse-normalized and converted to absolute $SE(3)$ targets via the inverse of Eq. 1 and forwarded to the SKR module (Sec. III-C) for whole-body retargeting.

C. Bridge: Keypoint Retargeting System

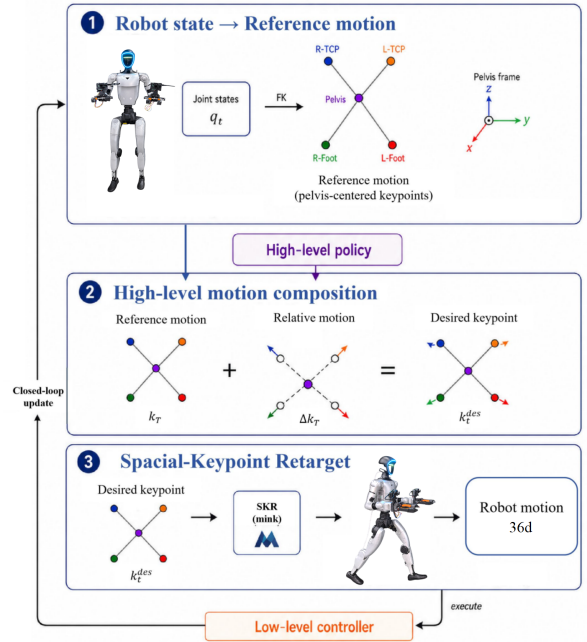


Fig. 5. **Spatial Keypoint Retargeting (SKR).** SKR bridges high-level keypoint prediction and low-level whole-body control by converting five task-space keypoints, including the pelvis, two TCPs, and two feet, into robot-native whole-body references. Unlike global motion rescaling, SKR preserves metric spatial relationships among the keypoints and only scales the vertical pelvis-to-foot distance to compensate for human–robot height differences. The resulting inverse-kinematics solution provides executable joint-level motion commands for the humanoid robot.

In robot-free human demonstration scenarios, human-to-robot motion retargeting is challenging due to the morphological and scale discrepancies between the demonstrator and the robot. General Motion Retargeting (GMR) [27] methods typically address such embodiment differences by introducing global or local scale transformations between human and robot motion spaces. However, this strategy is not suitable for our setting, since the demonstrated motion contains metric task-space information that should be preserved. Once the motion is rescaled, the spatial relationships among the hands, feet, and pelvis may be altered, which can lead to the loss of task-relevant geometric information.

As shown in Fig. 5, we propose Spatial Keypoint Retargeting (SKR), a keypoint-based retargeting method that represents the motion using five task-relevant keypoints: the pelvis, left tool center point (left TCP), right tool center point (right TCP), left foot, and right foot. Here, the tool center point (TCP) denotes the center point of the corresponding gripper end-effector. SKR performs retargeting based on the position and orientation of these keypoints. Unlike conventional retargeting methods that rescale the entire motion, SKR only scales the vertical distance along the z-axis from each foot keypoint to the pelvis to compensate for the height difference between the human and the robot. All other metric spatial information is preserved, enabling the retargeted robot motion to maintain the geometric structure of the original demonstration.

The proposed SKR module serves as an interface between the high-level policy and the low-level controller. During deployment, the system first reads the robot joint states from the Unitree SDK and computes the forward kinematics using the pelvis frame as the reference frame. The poses of the left TCP, right TCP, left foot, and right foot relative to the pelvis are then obtained and used as the reference motion. Given the output of the high-level module, the desired pose of each keypoint is further computed. SKR is subsequently applied to formulate the inverse kinematics problem, which is solved using mink [28], a MuJoCo-based inverse kinematics solver, to obtain the corresponding joint-level robot motion. The resulting motion commands are sent to the low-level controller for execution. This procedure is repeated in a closed-loop manner, enabling continuous motion generation from high-level decision making to low-level robot control.

D. Low Level: Whole-Body Controller

Recent advances in learning-based humanoid control have substantially improved the ability of humanoid robots to track complex full-body motions and transfer the learned behaviors from simulation to real hardware [29]–[32]. Inspired by these advances, we design our own learned whole-body controller (WBC) as the execution layer of BifrostUMI.

After the desired robot motion is obtained by SKR and inverse kinematics, it is executed by the WBC trained in MJLab [33]. The WBC tracks a short horizon of robot-native full-body reference motion, consisting of the root pose and the 29-DoF joint configuration, while maintaining dynamic consistency and robustness to sim-to-real discrepancies.

At each high-level update, the reference motion is represented as a motion chunk

$$\mathcal{M}_{\text{ref}} = \left\{ \mathbf{p}_t^r, \mathbf{q}_t^r, \mathbf{q}_t^j \right\}_{t=1}^T, \quad (2)$$

where $\mathbf{p}_t^r \in \mathbb{R}^3$ denotes the root position, $\mathbf{q}_t^r \in \mathbb{R}^4$ denotes the root orientation in quaternion form, and $\mathbf{q}_t^j \in \mathbb{R}^{29}$ denotes the reference joint positions. The root quaternion follows the *wxyz* convention.

This input format is central to our retargeting adaptation. Unlike HuMI [11], which feeds keypoint-level commands to the low-level controller and relies on the learned policy to implicitly resolve inverse kinematics, our system

first converts keypoint motion into robot-native generalized motion through SKR. This explicitly decouples kinematic retargeting from dynamic motion tracking: SKR generates a standard full-body reference in the form of root pose and joint configuration, while the WBC only needs to track this reference in a dynamically stable manner.

The high-level policy operates at a lower frequency, while the low-level whole-body controller runs at 50 Hz. Therefore, the generated motion chunk is resampled to the low-level control frequency before execution. Linear interpolation is used for root positions and joint positions, while spherical linear interpolation is used for root orientations.

The input observation of the low-level controller consists of two parts: the proprioceptive input and the motion-command input,

$$\mathbf{o}_t = [\mathbf{o}_t^{\text{prop}}, \mathbf{o}_t^{\text{cmd}}]. \quad (3)$$

The proprioceptive input $\mathbf{o}_t^{\text{prop}}$ describes the current physical state of the robot and its short-term history. It is defined as

$$\mathbf{o}_t^{\text{prop}} = [h_t^r, \mathbf{g}_t, \mathcal{H}(\boldsymbol{\omega}_t), \mathcal{H}(\mathbf{q}_t^j), \mathcal{H}(\dot{\mathbf{q}}_t^j), \mathcal{H}(\mathbf{a}_{t-1})], \quad (4)$$

where h_t^r denotes the root height, $\mathbf{g}_t \in \mathbb{R}^3$ denotes the projected gravity vector in the robot base frame, $\boldsymbol{\omega}_t \in \mathbb{R}^3$ denotes the IMU angular velocity, $\mathbf{q}_t^j \in \mathbb{R}^{29}$ and $\dot{\mathbf{q}}_t^j \in \mathbb{R}^{29}$ denote the current joint positions and velocities, respectively, and $\mathbf{a}_{t-1} \in \mathbb{R}^{29}$ denotes the previous action. The operator $\mathcal{H}(\cdot)$ denotes the temporal history of the corresponding quantity.

The motion-command input $\mathbf{o}_t^{\text{cmd}}$ specifies the desired full-body motion from the reference chunk. For each temporal offset k , the command is defined as

$$\mathbf{c}_{t+k} = [\mathbf{c}_{t+k}^r, \mathbf{c}_{t+k}^j]. \quad (5)$$

$$\mathbf{c}_{t+k}^r = [\Delta \mathbf{p}_{t+k}^r, \Delta \mathbf{q}_{t+k}^r, h_{t+k}^{r,\text{ref}}, \mathbf{g}_{t+k}^{\text{ref}}]. \quad (6)$$

$$\mathbf{c}_{t+k}^j = \mathbf{q}_{t+k}^{j,\text{ref}}. \quad (7)$$

Here, $\Delta \mathbf{p}_{t+k}^r$ and $\Delta \mathbf{q}_{t+k}^r$ are the relative root position and orientation with respect to the current robot state, $h_{t+k}^{r,\text{ref}}$ is the reference root height, $\mathbf{g}_{t+k}^{\text{ref}}$ is the reference projected gravity, and $\mathbf{q}_{t+k}^{j,\text{ref}}$ is the target joint configuration.


To improve tracking stability and anticipation, the motion-command input contains both future and historical reference frames. In our implementation, the temporal reference window uses the offsets

$$\mathcal{K} = \{0, 1, 2, 3, 4, -1, -2, -4, -8, -12, -16\}, \quad (8)$$

where positive indices correspond to future reference frames and negative indices correspond to historical reference frames. The complete motion-command input is therefore written as

$$\mathbf{o}_t^{\text{cmd}} = [\mathbf{c}_{t+k}]_{k \in \mathcal{K}}. \quad (9)$$

(a) Cluttered table pick-place

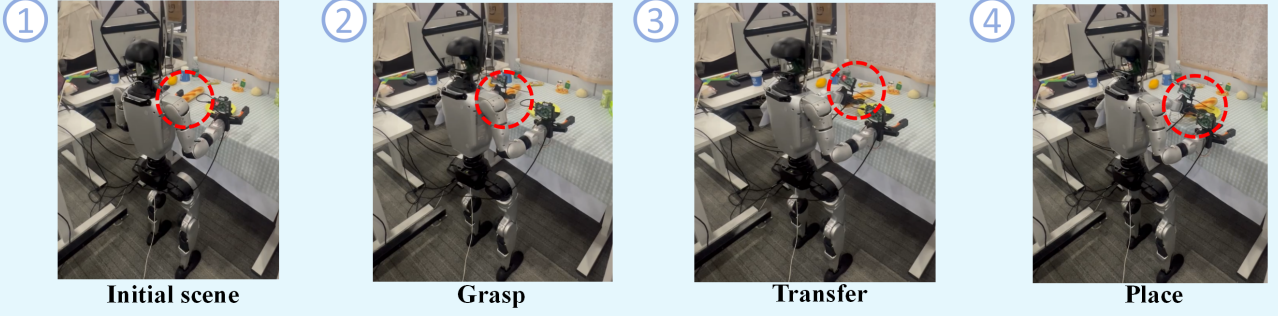

(b) Whole-body under-table waste disposal

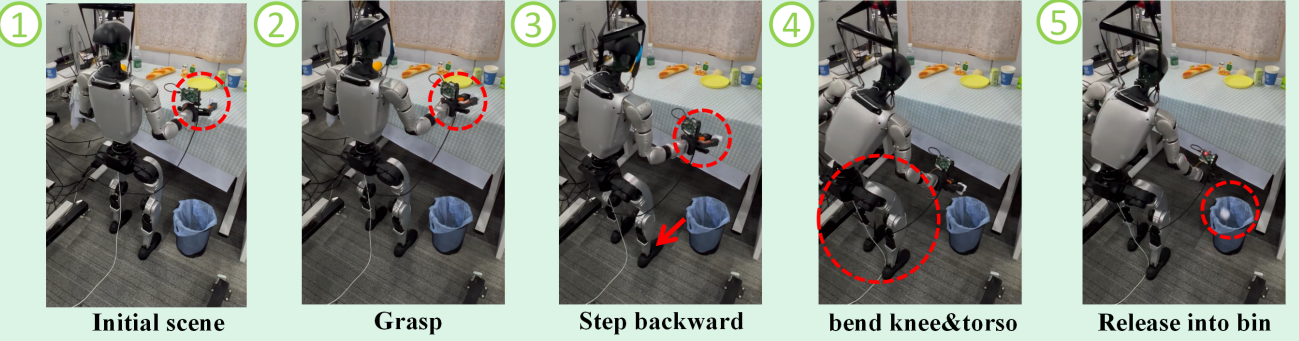


Fig. 6. **Real-world evaluation of BifrostUMI on two humanoid manipulation tasks with a Unitree G1 robot.** (a) Cluttered tabletop pick-and-place: the robot localizes, grasps, transfers, and places a piece of bread onto a target plate, demonstrating end-to-end transfer from robot-free VR-UMI demonstrations to physical humanoid execution. (b) Whole-body under-table waste disposal: the robot grasps a crumpled paper ball, steps backward, bends its knees and torso, and releases the object into a waste bin, demonstrating coordinated whole-body manipulation across the hands, waist, and legs. Numbered frames indicate the execution sequence, and red dashed circles highlight the task-relevant manipulation regions.

The low-level controller is implemented as an ONNX policy. Given the observation $\mathbf{o}_t$, the tracking policy outputs a 29-dimensional action

$$\mathbf{a}_t = \pi_{\theta}(\mathbf{o}_t) \in \mathbb{R}^{29}. \quad (10)$$

The action is interpreted as a joint position residual around the default robot posture. After clipping and scaling, the desired joint position command is computed as

$$\mathbf{q}_t^{\text{des}} = \mathbf{q}^0 + \mathbf{s} \odot \text{clip}(\mathbf{a}_t, -a_{\max}, a_{\max}), \quad (11)$$

where $\mathbf{q}^0$ is the default joint posture, $\mathbf{s}$ is the joint-wise action scale, $\odot$ denotes element-wise multiplication, and $a_{\max}$ is the action clipping bound. The resulting desired joint positions are then sent to the robot as joint-space PD targets:

$$\boldsymbol{\tau}_t = \mathbf{K}_p(\mathbf{q}_t^{\text{des}} - \mathbf{q}_t) - \mathbf{K}_d\dot{\mathbf{q}}_t. \quad (12)$$

The overall execution follows a receding-horizon scheme. The high-level policy periodically predicts a new motion chunk, which is retargeted by SKR and converted into joint-level reference motion through inverse kinematics. The low-level controller maintains a reference buffer and continuously tracks the resampled reference trajectory at 50 Hz. This design decouples task-level motion generation from real-time

whole-body control: the high-level policy focuses on task-space behavior, SKR adapts the robot-free demonstration into a metric-preserving robot motion representation, and the MJLab-trained low-level controller ensures stable and responsive whole-body execution on the physical robot.

IV. EXPERIMENTS

We evaluate BifrostUMI on real-world humanoid manipulation tasks with a Unitree G1 robot. Our experiments address two central questions:

- **Effectiveness of the robot-free data collection and training framework.** Can robot-free demonstrations collected by the VR-UMI interface be transformed into deployable humanoid visuomotor policies?
- **Whole-body manipulation capability of BifrostUMI.** Can a sparse five-keypoint representation drive coordinated whole-body behaviors across the hands, feet, and waist?

A. Effectiveness of the robot-free data collection and training framework

We first evaluate the effectiveness of the complete BifrostUMI data collection and training pipeline on a cluttered

tabletop pick-and-place task. In this experiment, the humanoid robot is required to visually localize a piece of bread on a cluttered table, grasp it, and place it onto a target plate. The task provides a direct test of whether demonstrations collected without the target robot can be transformed into an executable closed-loop manipulation policy on a physical humanoid platform.

Although pick-and-place is a standard benchmark in robotic manipulation, this setting is substantially more challenging than conventional arm-based manipulation. The policy is trained from robot-free human demonstrations rather than robot teleoperation, and must therefore bridge the embodiment gap between human motion and humanoid execution. In addition, the robot cannot treat the task as an isolated end-effector reaching problem: throughout grasping, lifting, and placing, it must maintain a dynamically feasible whole-body posture while coordinating the arms, torso, and lower body.

As shown in Fig. 6(a), the robot successfully completes the full manipulation sequence in a cluttered tabletop scene, including object localization, grasping, transfer, and placement. In the initial scene, the target bread is surrounded by multiple distractor objects, requiring the policy to extract task-relevant visual cues from the wrist-view observations rather than relying on a clean or prearranged workspace. During the grasping phase, the robot moves its hand toward the target object and establishes contact at the correct tabletop location, indicating that the high-level visuomotor policy can predict meaningful future keypoint motions from robot-free demonstrations. The subsequent transfer and placement frames show that the predicted sparse keypoint trajectories can be retargeted into executable whole-body robot motions, while the low-level controller accurately tracks the retargeted motion and maintains balance during object lifting and arm movement.

This result provides qualitative evidence that the BifrostUMI pipeline can transform robot-free human demonstrations into deployable humanoid visuomotor policies. The successful execution verifies the cooperation of all stages of the framework: the high-level policy predicts task-directed sparse keypoint trajectories, the Spatial Keypoint Retargeting module converts them into robot-native whole-body references, and the low-level controller tracks the references while preserving balance during physical interaction.

B. Whole-body manipulation capability of BifrostUMI.

We further evaluate the whole-body coordination capability of BifrostUMI in a challenging under-table waste-disposal task. In this experiment, the humanoid robot first grasps a crumpled paper ball from the tabletop and takes a step backward. It then bends its waist and knees to lower its body, reaches toward a waste bin placed underneath the table, and finally releases the object into the bin. This task is designed to test whether the proposed framework can generate coordinated motions across the arms, waist, and legs, rather than relying on arm motion alone.

As shown in Fig. 6(b), the robot successfully completes the full under-table waste-disposal sequence, including grasping, stepping backward, whole-body lowering, reaching, and releasing. In the initial and grasping frames, the robot localizes and picks up the crumpled paper ball from the tabletop while maintaining an upright support posture. After grasping the object, the robot steps backward to create sufficient space for the subsequent under-table motion, indicating that the generated behavior is not limited to static manipulation but also involves coordinated body repositioning. In the following frames, the robot bends its knees and torso to lower the end effector toward the waste bin, which requires the arms, waist, and legs to move cooperatively rather than independently. Finally, the robot releases the object into the bin while maintaining a stable support configuration.

This qualitative result demonstrates that the sparse five-keypoint representation can encode not only hand-level manipulation intent, but also the whole-body posture changes required for reaching targets outside the arm-only workspace. The successful execution across the five stages suggests that BifrostUMI can generate physically executable whole-body manipulation behaviors involving object interaction, stepping motion, torso bending, knee flexion, and balance maintenance. Therefore, the under-table waste-disposal task provides evidence that the proposed framework extends beyond tabletop arm manipulation and can support coordinated humanoid whole-body behaviors in more spatially constrained scenarios.

V. CONCLUSION

We introduced BifrostUMI, a robot-free framework for learning humanoid whole-body manipulation from natural human demonstrations. The key idea is to decouple data acquisition from the target humanoid embodiment: human operators provide demonstrations through a portable VR-UMI interface, while the recorded wrist-view observations, gripper states, and whole-body keypoint trajectories are later transformed into executable humanoid behaviors. This formulation addresses a central bottleneck in humanoid learning, where collecting high-quality demonstrations directly on the robot is often expensive, inefficient, and hardware-intensive.

BifrostUMI achieves this transfer through a hierarchical visuomotor-control architecture. A diffusion-based high-level policy predicts future motions of five task-relevant keypoints, including the pelvis, two feet, and two tool center points. These sparse predictions are then converted by Spatial Keypoint Retargeting into robot-native whole-body references, which are tracked by a low-level controller on the physical humanoid. By making the retargeting stage explicit, the framework preserves metric task-space structure from human demonstrations while separating visuomotor decision making from embodiment-specific motion execution.

Our real-world experiments on a Unitree G1 robot show that this design can produce deployable humanoid behaviors from robot-free demonstrations. In a cluttered tabletop pick-and-place task, the robot performs visual localization,

grasping, transfer, and placement of the target object, demonstrating end-to-end transfer from human demonstration to humanoid manipulation. In an under-table waste-disposal task, the robot coordinates grasping, stepping backward, torso bending, knee flexion, reaching, and release, showing that the five-keypoint representation can support manipulation that requires substantial whole-body reconfiguration. These results suggest that sparse spatial keypoints can serve as an effective intermediate representation for bridging human motion and humanoid whole-body control.

The present system is a step toward scalable humanoid data collection and policy learning, but it also leaves open several challenges. Future work should extend the framework to larger and more diverse datasets, longer-horizon tasks, richer object interactions, and less structured environments. Incorporating richer tactile or force feedback, online correction, and larger-scale diverse demonstrations may further improve robustness and generalization. More broadly, Bifrost-UMI suggests that robot-free human demonstration, when coupled with explicit spatial retargeting and stable whole-body control, can provide a practical path toward data-driven humanoid robots that learn complex physical skills from natural human behavior.

REFERENCES

- [1] A. Khazatsky and K. Pertsch, “Droid: A large-scale in-the-wild robot manipulation dataset,” 2025. [Online]. Available: <https://arxiv.org/abs/2403.12945>
- [2] Y. Ze, S. Zhao, W. Wang, A. Kanazawa, R. Duan, P. Abbeel, G. Shi, J. Wu, and C. K. Liu, “Twist2: Scalable, portable, and holistic humanoid data collection system,” *arXiv preprint arXiv:2511.02832*, 2025.
- [3] Z. Fu, Q. Zhao, Q. Wu, G. Wetzstein, and C. Finn, “Humanplus: Humanoid shadowing and imitation from humans,” 2024. [Online]. Available: <https://arxiv.org/abs/2406.10454>
- [4] Y. Li, Y. Lin, J. Cui, T. Liu, W. Liang, Y. Zhu, and S. Huang, “Clone: Closed-loop whole-body humanoid teleoperation for long-horizon tasks,” 2025. [Online]. Available: <https://arxiv.org/abs/2506.08931>
- [5] J. Li, X. Cheng, T. Huang, S. Yang, R.-Z. Qiu, and X. Wang, “Amo: Adaptive motion optimization for hyper-dexterous humanoid whole-body control,” 2025. [Online]. Available: <https://arxiv.org/abs/2505.03738>
- [6] C. Lu, X. Cheng, J. Li, S. Yang, M. Ji, C. Yuan, G. Yang, S. Yi, and X. Wang, “Mobile-television: Predictive motion priors for humanoid whole-body control,” 2025. [Online]. Available: <https://arxiv.org/abs/2412.07773>
- [7] Y. Niu, Z. Fang, B. Chen, S. Zhou, R. Senthilkumaran, H. Zhang, B. Chen, C. Qiu, H. E. Tseng, J. Francis, and D. Zhao, “Learning versatile humanoid manipulation with touch dreaming,” 2026. [Online]. Available: <https://arxiv.org/abs/2604.13015>
- [8] T. He, Z. Luo, W. Xiao, C. Zhang, K. Kitani, C. Liu, and G. Shi, “Learning human-to-humanoid real-time whole-body teleoperation,” 2024. [Online]. Available: <https://arxiv.org/abs/2403.04436>
- [9] T. He, Z. Luo, X. He, W. Xiao, C. Zhang, W. Zhang, K. Kitani, C. Liu, and G. Shi, “OmniH2o: Universal and dexterous human-to-humanoid whole-body teleoperation and learning,” 2024. [Online]. Available: <https://arxiv.org/abs/2406.08858>
- [10] C. Wang, L. Fan, J. Sun, R. Zhang, L. Fei-Fei, D. Xu, Y. Zhu, and A. Anandkumar, “Mimicplay: Long-horizon imitation learning by watching human play,” 2023. [Online]. Available: <https://arxiv.org/abs/2302.12422>
- [11] R. Nai, B. Zheng, J. Zhao, H. Zhu, S. Dai, Z. Chen, Y. Hu, Y. Hu, T. Zhang, C. Wen, *et al.*, “Humanoid manipulation interface: Humanoid whole-body manipulation from robot-free demonstrations,” *arXiv preprint arXiv:2602.06643*, 2026.
- [12] H. Weng, Y. Li, N. Sobanbabu, Z. Wang, Z. Luo, T. He, D. Ramanan, and G. Shi, “Hdmi: Learning interactive humanoid whole-body control from human videos,” 2025. [Online]. Available: <https://arxiv.org/abs/2509.16757>
- [13] C. Chi, Z. Xu, C. Pan, E. Cousineau, B. Burchfiel, S. Feng, R. Tedrake, and S. Song, “Universal manipulation interface: In-the-wild robot teaching without in-the-wild robots,” in *Proceedings of Robotics: Science and Systems (RSS)*, 2024.
- [14] S. Luo, Y. Li, Y. Hu, C. Yu, C. Xu, J. Zhang, G. Yao, T. Huang, R. He, and Z. Wang, “Omniumi: Towards physically grounded robot learning via human-aligned multimodal interaction,” *arXiv preprint arXiv:2604.10647*, 2026.
- [15] F. Lin, Y. Hu, P. Sheng, C. Wen, J. You, and Y. Gao, “Data scaling laws in imitation learning for robotic manipulation,” *arXiv preprint arXiv:2410.18647*, 2024.
- [16] H. Choi, Y. Hou, C. Pan, S. Hong, A. Patel, X. Xu, M. R. Cutkosky, and S. Song, “In-the-wild compliant manipulation with umi-ft,” IEEE, 2026. [Online]. Available: <https://arxiv.org/abs/2601.09988>
- [17] Q. Zeng, C. Li, J. S. John, Z. Zhou, J. Wen, G. Feng, Y. Zhu, and Y. Xu, “Activeumi: Robotic manipulation with active perception from robot-free human demonstrations,” 2025. [Online]. Available: <https://arxiv.org/abs/2510.01607>
- [18] H. Ha, Y. Gao, Z. Fu, J. Tan, and S. Song, “Umi on legs: Making manipulation policies mobile with manipulation-centric whole-body controllers,” 2024. [Online]. Available: <https://arxiv.org/abs/2407.10353>
- [19] H. Gupta, X. Guo, H. Ha, C. Pan, M. Cao, D. Lee, S. Scherer, S. Song, and G. Shi, “Umi-on-air: Embodiment-aware guidance for embodiment-agnostic visuomotor policies,” 2026. [Online]. Available: <https://arxiv.org/abs/2510.02614>
- [20] X. Xu, J. Park, H. Zhang, E. Cousineau, A. Bhat, J. Barreiros, D. Wang, and S. Song, “Hommi: Learning whole-body mobile manipulation from human demonstrations,” 2026. [Online]. Available: <https://arxiv.org/abs/2603.03243>
- [21] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning fine-grained bimanual manipulation with low-cost hardware,” 2023. [Online]. Available: <https://arxiv.org/abs/2304.13705>
- [22] Z. Fu, T. Z. Zhao, and C. Finn, “Mobile aloha: Learning bimanual mobile manipulation with low-cost whole-body teleoperation,” 2024. [Online]. Available: <https://arxiv.org/abs/2401.02117>
- [23] M. Shi, S. Peng, J. Chen, H. Jiang, Y. Li, D. Huang, P. Luo, H. Li, and L. Chen, “Egohumanoid: Unlocking in-the-wild loco-manipulation with robot-free egocentric demonstration,” 2026. [Online]. Available: <https://arxiv.org/abs/2602.10106>
- [24] Z. Zhao, L. Yu, K. Jing, and N. Yang, “Xrobotoolkit: A cross-platform framework for robot teleoperation,” in *2026 IEEE/SICE International Symposium on System Integration (SII)*. IEEE, 2026, pp. 15–20.
- [25] C. Chi, S. Feng, Y. Du, Z. Xu, E. Cousineau, B. Burchfiel, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” in *Proceedings of Robotics: Science and Systems (RSS)*, 2023.
- [26] Y. Zhou, C. Barnes, J. Lu, J. Yang, and H. Li, “On the continuity of rotation representations in neural networks,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 5745–5753.
- [27] J. P. Araujo, Y. Ze, P. Xu, J. Wu, and C. K. Liu, “Retargeting matters: General motion retargeting for humanoid motion tracking,” *arXiv preprint arXiv:2510.02252*, 2025.
- [28] K. Zakka, “Mink: Python inverse kinematics based on MuJoCo,” <https://github.com/kevinzakka/mink>, Feb. 2026, version 1.1.0.
- [29] Q. Liao, T. E. Truong, X. Huang, Y. Gao, G. Tevet, K. Sreenath, and C. K. Liu, “Beyondmimic: From motion tracking to versatile humanoid control via guided diffusion,” 2025. [Online]. Available: <https://arxiv.org/abs/2508.08241>
- [30] T. He, J. Gao, W. Xiao, Y. Zhang, Z. Wang, J. Wang, Z. Luo, G. He, N. Sobanbab, C. Pan, Z. Yi, G. Qu, K. Kitani, J. Hodgins, L. J. Fan, Y. Zhu, C. Liu, and G. Shi, “Asap: Aligning simulation and real-world physics for learning agile humanoid whole-body skills,” 2025. [Online]. Available: <https://arxiv.org/abs/2502.01143>
- [31] Q. Lu, Y. Feng, B. Shi, M. Pisen, Z. Bao, and C. K. Liu, “Gentlehumanoid: Learning upper-body compliance for contact-rich human and object interaction,” 2025. [Online]. Available: <https://arxiv.org/abs/2511.04679>
- [32] G. Li, Q. Shi, Y. Hu, J. Hu, Z. Wang, X. Wang, and S. Luo, “Thor: Towards human-level whole-body reactions for

intense contact-rich environments,” 2025. [Online]. Available:
<https://arxiv.org/abs/2510.26280>

- [33] K. Zakka, Q. Liao, B. Yi, L. Le Lay, K. Sreenath, and P. Abbeel, “mjlab: A Lightweight Framework for GPU-Accelerated Robot Learning,” 2026.