

Preprint Version

Tripody: An Overconstrained 3-SPR-like Parallel Robot for High-Reach Construction Tasks

Accepted in IEEE Robotics and Automation Letters on July 2, 2026

©2026 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

DOI: 10.1109/LRA.2026.3713724

Please cite this publication as:

J. Kindle, J. Raczy, R. Balbi, A. Alessandretti, C. Cadena and M. Hutter, “*Tripody: An Overconstrained 3-SPR-like Parallel Robot for High-Reach Construction Tasks*,” in IEEE Robotics and Automation Letters, vol. 11, no. 9, pp. 10497-10504, Jul. 2026, doi: 10.1109/LRA.2026.3713724.

BibTeX entry:

```
@ARTICLE{kindle_tripody,
  author={Kindle, Julien and Raczy, Jakub and Balbi, Riccardo and Alessandretti, Andrea and Cadena, Cesar
    and Hutter, Marco},
  journal={IEEE Robotics and Automation Letters},
  title={{Tripody: An Overconstrained 3-S\underline{P}R-like Parallel Robot for High-Reach Construction
    Tasks}},
  year={2026},
  volume={11},
  number={9},
  pages={10497-10504},
  keywords={Robotics and Automation in Construction;Mechanism Design;Parallel Robots},
  doi={10.1109/LRA.2026.3713724}
}
```

Tripody: An Overconstrained 3-SPR-like Parallel Robot for High-Reach Construction Tasks

Julien Kindle^{1,2}, Jakub Racz², Riccardo Balbi², Andrea Alessandretti², Cesar Cadena¹ and Marco Hutter¹

Abstract—Many ceiling construction tasks still rely on heavy serial manipulators that are difficult to deploy in cluttered interiors, motivating lightweight, field-ready alternatives that reach ceiling height while maintaining millimeter-level accuracy and the stiffness demanded by overhead tool loads. We introduce *Tripody*, a wheeled 3-DoF parallel robot for high-reach tasks that replaces the base spherical joints of a classical 3-SPR (3 legs; S: base spherical joint; P: actuated prismatic joint; R: end-effector revolute joint) morphology with universal joints, intentionally overconstraining the mechanism; small, distributed elastic deflections absorb the resulting incompatibilities, preserving predominantly translational motion. The 33 kg system extends from 1.7 m to 3.4 m in height, supports a continuous 32 kg payload, and offers a modular end-effector interface for ceiling operations. We detail the mechanical design - including custom linear actuators and a kinematic-compatibility analysis - and a control stack for accurate positioning that combines SE(3) state estimation, forward kinematics, and task-space control. In experiments, *Tripody* exhibits similar in-plane stiffness to a spherical-base variant but substantially higher torsional stiffness - an increase of 67 % at 1.7 m, 196 % at 2.6 m, and 454 % at 3.4 m - while maintaining negligible cross-axis coupling. Closed-loop positioning with a total station converges below 0.6 mm across the entire workspace; pure model extrapolation achieves a 95th-percentile error of 2.7 mm (max 3.6 mm). Finally, we demonstrate task-level ceiling-drilling feasibility in an open-loop study by drilling a 15-hole pattern with 4.5 mm maximum relative hole-position error after rigid alignment. These results support overconstrained, compliance-absorbing 3-SPR-like architectures as a practical path to lightweight, high-reach, millimeter-accurate construction robots.

Index Terms—Robotics and Automation in Construction; Mechanism Design; Parallel Robots

I. INTRODUCTION

MANY construction tasks involve sustained overhead ceiling work at significant heights, increasing both the immediate risk of injury and the likelihood of long-term musculoskeletal strain. In the United States, an estimated 76% of construction workers perform work at elevation at least monthly, and 37% climb ladders or scaffolds for half their work time or more [1]. Falls remain the leading cause of fatal injuries in the construction industry, accounting for 39% of worker deaths in 2023, and rank second among all unintentional injury deaths worldwide, claiming roughly



Fig. 1: Tripody equipped with a drilling end-effector shown in transportation, retracted, and extended configurations. Insets highlight the base and end-effector assemblies.

684,000 lives each year [2], [3]. Beyond the immediate danger of falls, repeated overhead work exerts substantial ergonomic stress on the neck, shoulders, and upper back. Tasks that require holding the arms above shoulder level - such as ceiling installation or overhead drilling - force workers into awkward, non-neutral postures that elevate joint loading and compromise circulation [4]. When combined with hand-arm vibration (from drilling or grinding) and exposure to respirable crystalline silica, these factors lead to both acute injuries and chronic musculoskeletal disorders.

Robotic systems have begun to alleviate these hazards by automating high-elevation tasks. Commercial platforms like the *Hilti Jaibot* [5] and *fischer Baubot* [6] autonomously mark and drill anchor points, significantly reducing manual overhead drilling. However, these robots typically exceed 500 kg, demand on-site cranes for deployment, and struggle to access confined or cluttered renovation environments.

This motivates a lightweight platform capable of reaching ceiling heights in confined spaces while maintaining millimeter-level accuracy and the stiffness required for overhead construction tasks. In response, we introduce *Tripody* (Fig. 1), a lightweight, wheeled, and field-deployable 3-DoF parallel robot with UPR legs (U: base universal joint; P: actuated prismatic joint; R: end-effector revolute joint) that resembles a classic 3-SPR topology but is intentionally overconstrained by replacing the base spherical joints with universal joints. The resulting overconstraint is absorbed by small elastic deflections, preserving predominantly translational end-

Manuscript received: March 13, 2026; Revised May 28, 2026; Accepted July 2, 2026.

This paper was recommended for publication by Editor Cosimo Della Santina upon evaluation of the Associate Editor and Reviewers' comments.

This work was supported by Hilti AG, Schaan, Liechtenstein.

¹Affiliated with the Robotic Systems Lab, ETH Zurich, Switzerland

²Affiliated with Hilti AG, Schaan, Liechtenstein

Correspondence: jkindle@ethz.ch

Digital Object Identifier (DOI): see top of this page.

effector motion while markedly increasing resistance to tool-induced twisting and vibration. Tripody can be carried by two workers, extends from 1.7 m to 3.4 m in height, sustains a continuous payload of 32 kg, and reaches horizontal end-effector speeds up to 1.3 m s^{-1} .

The main contributions of this work are:

- a lightweight, wheeled, and field-deployable robot for high-reach ceiling tasks that intentionally removes one passive rotational degree of freedom per leg from a 3-SPR morphology; the resulting overconstraint is absorbed by structural compliance.
- a control stack for high-accuracy positioning, combining SE(3) state estimation, geometric forward kinematics solved via Levenberg–Marquardt, and task-space control mapped via the Jacobian to joint commands.
- an experimental comparative static-stiffness study isolating the effect of universal vs. spherical base joints, confirming markedly higher torsional stiffness about the vertical axis without degrading in-plane stiffness - critical to suppress twist and vibration under tool loads.
- an experimental workspace-scale positioning accuracy study with total-station ground truth, demonstrating millimeter-level closed-loop convergence across heights and spans, and accurate forward kinematics.
- an experimental open-loop ceiling drilling study establishing task feasibility by drilling a 15-hole pattern with 4.5 mm maximum relative hole-position error.

Tripody deliberately trades workspace volume and full 6-DoF dexterity for lightweight deployment and stable quasi-static operation over a compact footprint. It is best suited to high-reach ceiling tasks that require accurate tool-point positioning, such as drilling, anchoring, screwing and marking, as well as process tasks with modest pose demands such as grinding or sanding. Manipulator-based systems remain preferable when tasks require large lateral coverage, reach-around in clutter, or substantial tool orientation freedom and complex tool trajectories, i.e., full 6-DoF end-effector pose control.

II. RELATED WORK

For interior finishing tasks on construction sites, diverse robotic designs have been explored for operations on ceilings. These include aerial drones, climbing robots, and ground-based manipulators, each trading off reachability, payload capacity, stiffness, and deployment complexity.

Aerial drones offer virtually unrestricted workspace and high agility, and have demonstrated brick-stacking for architectural installations [7], aerial additive manufacturing of cementitious materials [8], precise ceiling layout and marking [9], and wall-perching drilling [10]. Indoor deployment for finishing work is nonetheless impeded by rotor-induced downdrafts that resuspend dust and debris, degrading visibility, posing respiratory risks, and spreading contaminants across the workspace.

Climbing robots maintain close surface contact and generate minimal airflow disturbance, with examples including magnetic-footed legged robots for steel frameworks [11],

suction-footed legged robots for smooth walls [12], and vacuum-driven crawlers [13]. In practice, however, ceilings are often cluttered with pre-installed elements (e.g., piping, ducts, fixtures), which obstruct traversal and severely restrict accessible work areas.

Most ground-based systems for interior construction tasks are serial manipulators mounted on wheeled or tracked bases. Such platforms have been used for overhead drilling [5], [6], [14], drywall finishing [15], spray-painting [16], cooperative timber assembly [17], robotic concrete formwork [18], and modular multi-task operation including wall drilling [19]. Ceiling-reaching serial-chain systems are heavy - often hundreds of kilograms - with payload-to-weight ratios well below 10%, which limits on-site deployability and mobility.

Parallel robots enable comparatively lightweight yet stiff structures by distributing loads across multiple limbs [20]. Representative families include: (i) the Stewart platform (six prismatic legs) providing full 6-DoF positioning, widely used in flight simulation [21] and telescope subsystems [22]; (ii) cable-driven parallel robots that replace compressive links with cables held in positive tension, reducing moving mass and enabling large workspaces - used for stadium cameras [23] and proposed for building-envelope installation [24], [25]; and (iii) delta robots employing lightweight parallelogram chains that kinematically constrain end-effector orientation, widely adopted for high-speed pick-and-place in assembly and packaging [26].

For lightweight system design, platforms that realize full 3-DoF positioning with three connections between the base and end-effector are particularly attractive. For example, 3-UPU architectures are theoretically capable of pure translation but are notoriously sensitive to manufacturing tolerances and alignment, complicating practical realization [20]. In contrast, 3-RPS and 3-SPR families are more practical and have seen diverse uses, including wave compensation on ships [27], self-levelling camera tripods [28], and force/torque sensing [29]. In tall, narrow configurations - i.e., when the base is small relative to the working height - the long legs behave like cantilevers, reducing Cartesian stiffness, with the most pronounced degradation in torsion. This limitation is particularly acute in ceiling operations subject to tool-induced loads - such as overhead drilling and screw-driving - where inadequate torsional stiffness causes twist, chatter, and accuracy degradation. This trend is captured by stiffness/compliance models for lower-mobility parallel robots with flexible limbs [30].

Leveraging elasticity to desensitize assemblies to geometric errors - so-called elastic averaging - is a well-established design principle in precision mechanisms [31]. In parallel micro-robots, this is commonly realized by replacing kinematic joints with flexures [32], [33], or by relying on structural compliance of the mechanism itself rather than only the joints [30], [34].

Taken together, this review motivates a lightweight, wheeled, and deployable 3-DoF parallel platform that maintains high torsional stiffness at tall, slender aspect ratios without the mass and deployment overhead of heavy serial manipulators. Accordingly, we replace the spherical base joints of a 3-SPR parallel robot with universal joints, intentionally removing one passive rotational DoF per leg; the induced

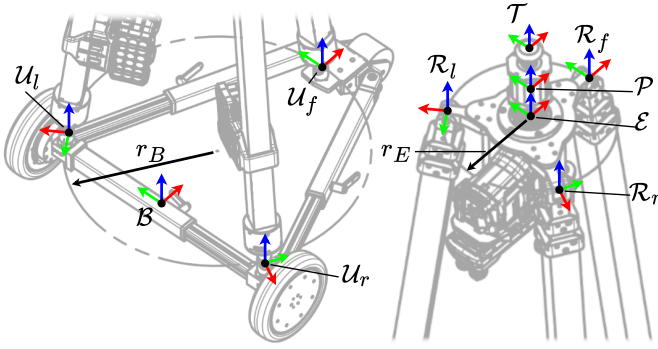


Fig. 2: Reference frames used in this work.

overconstraint is absorbed via elastic averaging. We instantiate this idea in *Tripody*, a 33 kg 3-SPR-like parallel robot with predominantly translational motion and a modular end-effector. In Section III, we detail the system design and control architecture; Section IV then quantifies torsional stiffness and positioning accuracy, and validates task-level feasibility through ceiling-drilling experiments.

III. SYSTEM DESIGN

We first give an overview of the system (Section III-A), then detail the linear actuator design (Section III-B), followed by the implications of using universal joints (Section III-C), and finally the control architecture (Section III-D).

In the following, scalars are denoted by regular letters (e.g. a , A), vectors by bold lowercase (e.g. $\mathbf{a}$), and matrices by bold uppercase (e.g. $\mathbf{A}$). We use $\mathbf{T}_{A,B} \in \text{SE}(3)$ to denote the rigid transform that maps coordinates from frame B to frame A , with $[\mathbf{T}_{A,B}]_P = \mathbf{p}_{A,B} \in \mathbb{R}^3$ and $[\mathbf{T}_{A,B}]_R = \mathbf{R}_{A,B} \in \text{SO}(3)$ denoting the translation and rotation parts, respectively. We adopt right-multiplicative composition, i.e., $\mathbf{T}_{A,C} = \mathbf{T}_{A,B} \mathbf{T}_{B,C}$. With this convention, the action of a rigid transform on a point, denoted by $\odot$, is $\mathbf{p}_{A,C} = \mathbf{T}_{A,B} \odot \mathbf{p}_{B,C} = \mathbf{R}_{A,B} \mathbf{p}_{B,C} + \mathbf{p}_{A,B}$. The reference frames used throughout are shown in Fig. 2. In this work, we use the term *task-space* to refer to the 3-DoF Cartesian position of the end-effector.

A. System Overview

Tripody (Fig. 1) is a wheeled 3-DoF parallel robot whose kinematic chains resemble a classic 3-SPR configuration. Each of the three identical legs comprises a prismatic actuator connected to the mobile base by a universal joint and to the end-effector by a revolute joint. By varying the three prismatic extensions, the end-effector motion is predominantly translational in $\mathbb{R}^3$, with small parasitic rotations.

A deliberate departure from a conventional 3-SPR architecture is the use of universal rather than spherical joints at the base, removing rotation about each joint's vertical axis without altering the intended 3-DoF task-space. The substitution introduces a small, workspace-dependent kinematic incompatibility that we deliberately accommodate through distributed structural compliance (elastic averaging). The practical implications

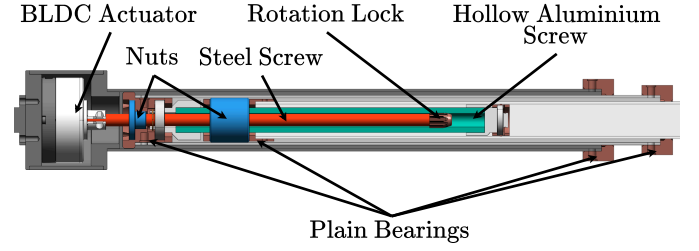


Fig. 3: Section view of one custom linear actuator, composed of an integrated BLDC motor and a two-stage trapezoidal lead-screw transmission.

of this joint selection are discussed in Section III-C and empirically characterized in Section IV-A.

Built primarily from aluminium with a total mass of 33 kg, *Tripody* can be carried by two people, making it highly mobile on construction sites. The telescopic base is approximately equilateral and can be adjusted manually from a transport footprint with 57 cm side length to 80 cm, increasing static stability and expanding the usable horizontal workspace at height. The system supports a continuous payload of 32 kg (Section III-B), yielding a payload-to-weight ratio of nearly 1, and reaches nominal end-effector speeds of 1.3 m s^{-1} horizontally and 0.20 m s^{-1} vertically.

The reachable workspace is primarily limited by static stability under quasi-static operation and therefore depends on the mounted end-effector. In the present prototype equipped with the drilling end-effector, we constrain planar motion to an equilateral triangle with side length 50 cm, ensuring the combined center of mass remains within the support polygon. To maintain this stability margin during motion, we cap horizontal accelerations such that inertial effects do not compromise stability. The vertical reach is set by the telescopic linear actuators (Section III-B) and spans from 1.7 m to 3.4 m. Within this workspace, deformations remain in the elastic regime (Section III-C).

These workspace limits assume operation on a firm, approximately planar support surface, as typically expected for indoor ceiling tasks, and quasi-static interaction forces; on uneven or compliant flooring, or near the stability boundary at extended heights, stability margins and positioning accuracy may degrade due to base tilt and lateral tool loads.

The end-effector interface is modular. In Fig. 1, a drilling end-effector with a mass of 4.5 kg is depicted, allowing ceiling work up to 3.5 m owing to the tool's standoff.

Because the base is small relative to the working height, small changes in the leg-length map to larger in-plane motion. We quantify this with the planar sensitivity $s := \|\Delta \mathbf{w}_{xy}\| / \|\Delta l\|$ (with l the actuator length and $\mathbf{w}_{xy}$ the end-effector position in the xy -plane), which rises from about 2.8 at 1.7 m to about 5.9 at 3.4 m. Practically, this implies actuator length must be controlled at least $\sim 6\times$ finer than the targeted xy positioning accuracy.

B. Linear Actuator Design

Fig. 3 shows a section view of one leg's custom prismatic joint. Each leg is driven by a MyActuator

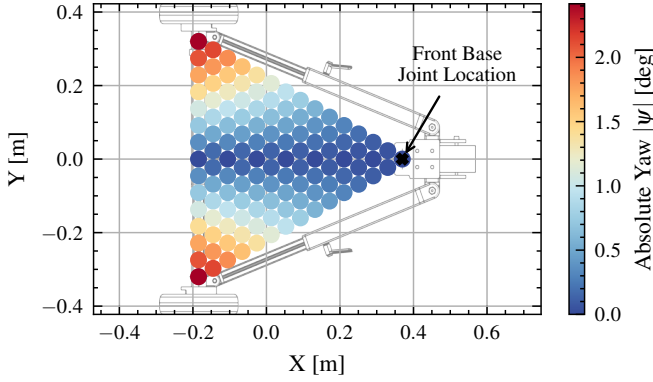


Fig. 4: Virtual yaw $|\psi|$ about the front base joint's vertical axis that a virtual spherical joint would require for end-effector positions in the base-frame xy -plane at 1.7 m height, computed via the Tait-Bryan decomposition in Eq. (2) to quantify kinematic incompatibility.

RMD-L-7015-23T [35] integrated BLDC actuator, directly coupled to a two-stage lead-screw transmission. Both stages use trapezoidal threads; the first screw is steel, the second is a hollow aluminum screw. The corresponding nuts are made of Polyoxymethylene (POM). A keyed sleeve locks the two coaxial screws in rotation (co-rotate) while allowing axial sliding, enabling relative translation between them. Each stage has a 10 mm lead, resulting in an effective 20 mm linear travel per actuator revolution. Linear guidance relies on Nylon-12 (PA12) plain bearings with clearance adjustable via set screws, tuned to minimize backlash.

Static drive parameters were identified with a two-point vertical load test: two known masses (no load and 5 kg) were attached at the actuator tip and the steady-state motor torques were recorded. We model the drive force as $F_d(\tau) = \frac{2\pi e}{L} \tau$ with transmission efficiency e and lead L . With drive velocity $\dot{q}$ and Coulomb threshold F_c , the net axial force is

$$F(\tau, \dot{q}) = \begin{cases} 0 & \dot{q} = 0 \wedge |F_d(\tau)| \leq F_c \\ F_d(\tau) - \text{sgn}(\dot{q}) F_c & \text{otherwise} \end{cases} \quad (1)$$

resulting in $e = 0.24$ and $F_c = 30$ N. Let $\tau_n = 1.0$ N m and $\tau_p = 4.0$ N m denote the nominal and peak motor torques. Since Coulomb friction opposes lifting, the nominal and peak lifting forces are $F_d(\tau_n) - F_c = 44$ N and $F_d(\tau_p) - F_c = 266$ N, respectively. For static payload support, Coulomb friction resists back-driving and thus adds to the holding force; distributing $F_d(\tau_n) + F_c$ across three legs gives a payload of $m_{\text{payload}} = \frac{3}{g} \left(\frac{2\pi e}{L} \tau_n + F_c \right) = 32$ kg.

C. Kinematic Compatibility Map

In this work, we replace the base spherical joints of a conventional 3-SPR architecture with universal joints. This removes yaw about each base joint's vertical axis (z) while preserving the intended 3-DoF translational task space. To quantify the resulting kinematic incompatibility, we compute, for each sampled end-effector position, the yaw angle ψ that the base joint would require if modeled as a virtual spherical joint. This yaw captures the rotational mismatch introduced by

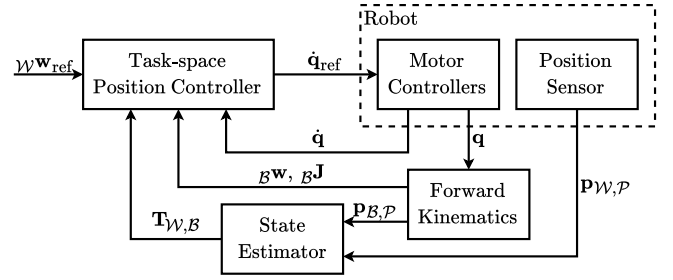


Fig. 5: Block diagram of the control architecture employed to position the end-effector of Tripody.

the universal-joint constraint and is accommodated by elastic deformation of the structure.

To compute ψ , we express the virtual joint orientation with a ZYX Tait-Bryan decomposition:

$$\mathbf{R}(\psi, \theta, \phi) = \mathbf{R}_z(\psi) \mathbf{R}_y(\theta) \mathbf{R}_x(\phi) \quad (2)$$

where $\mathbf{R}_i(x)$ denotes a rotation by angle x about axis i , and ψ, θ, ϕ denote yaw, pitch, and roll, respectively.

Fig. 4 maps $|\psi|$ for the front base joint at an end-effector height of 1.7 m. The worst case is 2.4° (when the end-effector lies above one of the other base joints). At 3.4 m height, the worst case decreases to roughly 0.6° .

Because yaw at the base is blocked, the kinematically required ψ is realized as elastic twist of the structure; the small values observed ($\leq 2.4^\circ$) indicate limited compatibility-induced deformation.

D. Control Architecture

The closed-loop end-effector position controller runs at 200 Hz and is illustrated in Fig. 5. Our goal is to regulate the tool position ${}_{\mathcal{W}}\mathbf{w} = {}_{\mathcal{W}}\mathbf{p}_{\mathcal{T}}$ of a user-defined tool frame $\mathcal{T}$ to a reference ${}_{\mathcal{W}}\mathbf{w}_{\text{ref}}$. A high-accuracy position sensor (e.g. a total-station as in [14]) provides the position ${}_{\mathcal{W}}\mathbf{p}_{\mathcal{P}}$ of a frame $\mathcal{P}$ colocated near the tool frame $\mathcal{T}$, expressed in the world frame $\mathcal{W}$. We denote joint positions and velocities by $\mathbf{q}$ and $\dot{\mathbf{q}}$; the end-effector position and Jacobian in the base frame $\mathcal{B}$ by ${}_{\mathcal{B}}\mathbf{w} = {}_{\mathcal{B}}\mathbf{p}_{\mathcal{E}}$ and ${}_{\mathcal{B}}\mathbf{J}$; the sensor position in the base frame by ${}_{\mathcal{B}}\mathbf{p}_{\mathcal{P}}$; the reference joint velocity by $\dot{\mathbf{q}}_{\text{ref}}$; and the base pose in the world frame by $\mathbf{T}_{\mathcal{W},\mathcal{B}}$. All controller gains were empirically tuned on the prototype for fast, stable convergence with minimal overshoot.

1) *Forward Kinematics*: Forward kinematics for parallel robots is generally involved, and only special architectures admit analytic closed-form solutions [20]. For a general 3-SPR or 3-RPS manipulator, the forward kinematics reduces to a polynomial system with generic algebraic degree 16 [36] and is solved numerically in practice [20], [37]. Although Tripody uses a UPR morphology, we employ a classical 3-SPR kinematic model that treats the base universal joint as spherical at the kinematic level and absorbs structural compliance into the residuals. We estimate the end-effector pose $\mathbf{T}_{\mathcal{B},\mathcal{E}} \in \text{SE}(3)$ via damped least squares (Levenberg-Marquardt) by minimizing

$$\hat{\mathbf{T}}_{\mathcal{B},\mathcal{E}} = \underset{\mathbf{T}_{\mathcal{B},\mathcal{E}}}{\text{argmin}} \left\| \left[\mathbf{c}^{(f)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}), \mathbf{c}^{(l)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}), \mathbf{c}^{(r)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}) \right] \right\|_2^2 \quad (3)$$

where the per-leg residuals $\mathbf{c}^{(i)}$ with $i \in \{f, l, r\}$ indexing the front, left, and right legs, enforce that the universal-joint location, expressed in the i -th revolute-joint frame $\mathcal{R}_i$, lies in the joint's rotation plane at a radial distance equal to the measured prismatic extension l_i

$$\mathbf{c}^{(i)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}) = \left[l_i - \left\| \mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i}^{(x,z)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}) \right\|_2, \mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i}^{(y)}(\mathbf{T}_{\mathcal{B},\mathcal{E}}) \right] \quad (4)$$

$$\mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i}(\mathbf{T}_{\mathcal{B},\mathcal{E}}) = (\mathbf{T}_{\mathcal{B},\mathcal{E}} \mathbf{T}_{\mathcal{E},\mathcal{R}_i})^{-1} \odot \mathbf{p}_{\mathcal{B}, \mathcal{U}_i}$$

with $\mathbf{T}_{\mathcal{E},\mathcal{R}_i}$ the pose of the i -th revolute joint in the end-effector frame and $\mathbf{p}_{\mathcal{B}, \mathcal{U}_i}$ the position of the i -th universal joint in the base frame. Here, $\mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i} = [p_x, p_y, p_z]^\top$, $\mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i}^{(x,z)} = [p_x, p_z]^\top$, and $\mathbf{p}_{\mathcal{R}_i, \mathcal{U}_i}^{(y)} = p_y$.

2) *State Estimator*: To transform the setpoint from world to base frame, we estimate the base pose at time k , $\mathbf{X}_k = \mathbf{T}_{\mathcal{W},\mathcal{B}}^{(k)} \in \text{SE}(3)$, using an Invariant Extended Kalman Filter (IEKF) on $\text{SE}(3)$ [38]. Assuming instantaneous planar motion of the mobile base, the body-frame twist input (ordered as $[\omega_x, \omega_y, \omega_z, v_x, v_y, v_z]$) is $\mathbf{u}_{k-1} = [0, 0, \omega_{k-1}^{(z)}, v_{k-1}^{(x)}, 0, 0]^\top$. The discrete-time left-invariant propagation and the total-station position update are modeled as

$$\mathbf{X}_{k+1} = \mathbf{X}_k \text{Exp}(\mathbf{u}_k \Delta t) \text{Exp}(\mathbf{w}_k), \quad \mathbf{w}_k \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}) \quad (5)$$

$$\mathbf{z}_k = \mathbf{X}_k \odot \mathbf{p}_{\mathcal{B},\mathcal{P}}^{(k)} + \mathbf{v}_k, \quad \mathbf{v}_k \sim \mathcal{N}(\mathbf{0}, \mathbf{R})$$

where $\text{Exp} : \mathfrak{se}(3) \rightarrow \text{SE}(3)$ is the group exponential, Δt is the delta time from the last state, $\mathbf{p}_{\mathcal{B},\mathcal{P}}^{(k)}$ is the forward-kinematics position of the sensor frame $\mathcal{P}$ expressed in $\mathcal{B}$ at time k , $\mathbf{Q}$ is the covariance of body-frame twist noise in $\mathfrak{se}(3)$ units, and $\mathbf{R}$ is the covariance of the position measurement $\mathbf{z}_k \in \mathbb{R}^3$ in world coordinates.

3) *Task-space Position Controller*: The task-space position controller implements a PD feedback law of the form

$$\begin{aligned} {}_{\mathcal{B}}\dot{\mathbf{w}}_{\text{ref}} &= \mathbf{K}_P^{(\mathbf{w})}({}_{\mathcal{B}}\mathbf{w}_{\text{ref}} - {}_{\mathcal{B}}\mathbf{w}) - \mathbf{K}_D^{(\mathbf{w})} {}_{\mathcal{B}}\dot{\mathbf{w}} \\ {}_{\mathcal{B}}\mathbf{w}_{\text{ref}} &= \mathbf{T}_{\mathcal{W},\mathcal{B}}^{-1} \odot {}_{\mathcal{W}}\mathbf{w}_{\text{ref}} \\ \dot{\mathbf{q}}_{\text{ref}} &= {}_{\mathcal{B}}\mathbf{J}^{-1} {}_{\mathcal{B}}\dot{\mathbf{w}}_{\text{ref}} \end{aligned} \quad (6)$$

where $\mathbf{K}_P^{(\mathbf{w})}, \mathbf{K}_D^{(\mathbf{w})} \in \mathbb{R}^{3 \times 3}$ are the Cartesian proportional and derivative gain matrices, and ${}_{\mathcal{B}}\mathbf{J}$ denotes the end-effector Jacobian. Using diagonal gains with identical entries and the differential kinematics ${}_{\mathcal{B}}\dot{\mathbf{w}} = {}_{\mathcal{B}}\mathbf{J} \dot{\mathbf{q}}$, Eq. (6) simplifies to

$$\dot{\mathbf{q}}_{\text{ref}} = K_P^{(\mathbf{w})} {}_{\mathcal{B}}\mathbf{J}^{-1} ({}_{\mathcal{B}}\mathbf{w}_{\text{ref}} - {}_{\mathcal{B}}\mathbf{w}) - K_D^{(\mathbf{w})} \dot{\mathbf{q}} \quad (7)$$

with $K_P^{(\mathbf{w})}, K_D^{(\mathbf{w})} \in \mathbb{R}$ denoting the scalar proportional and derivative gains.

4) *Motor Controllers*: Velocity and current regulation on each actuator are implemented via a cascade of two PI loops embedded in the motor-drive electronics, running at 5 kHz (velocity loop) and 15 kHz (current loop). Denoting the measured joint/motor speed by $\dot{q}$ and the phase current by I , the outer velocity loop computes the current reference I_{ref} , and the inner current loop the voltage command U_{ref} :

$$\begin{aligned} I_{\text{ref}} &= K_P^{(\dot{q})} (\dot{q}_{\text{ref}} - \dot{q}) + K_I^{(\dot{q})} \int (\dot{q}_{\text{ref}} - \dot{q}) dt \\ U_{\text{ref}} &= K_P^{(I)} (I_{\text{ref}} - I) + K_I^{(I)} \int (I_{\text{ref}} - I) dt \end{aligned} \quad (8)$$

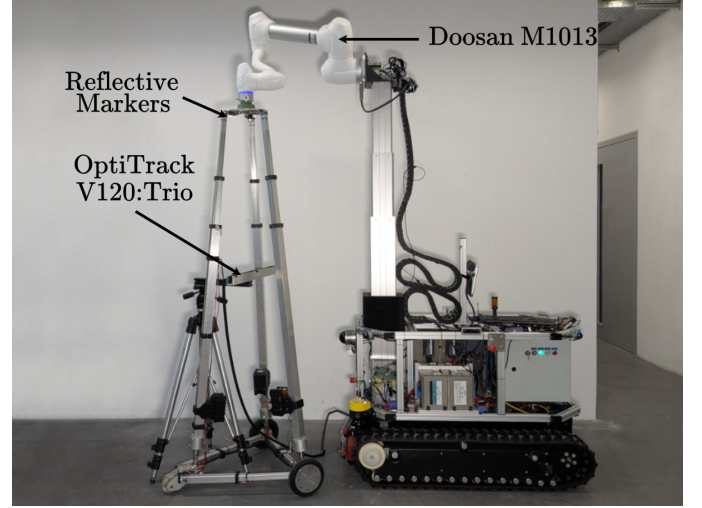


Fig. 6: Stiffness measurement setup. An external wrench is applied to Tripody's end-effector with a *Doosan M1013*; the resulting displacement is measured with an *OptiTrack V120:Trio*.

where $K_P^{(\dot{q})}$, $K_I^{(\dot{q})}$, $K_P^{(I)}$, and $K_I^{(I)}$ are the proportional and integral gains for the velocity and current loops, respectively.

IV. EXPERIMENTAL VERIFICATION

This section validates the proposed mechanical design and control architecture through two task-agnostic characterization experiments and a representative system-level demonstration. First, we quantify static stiffness and show the torsional-stiffness benefit of replacing spherical with universal base joints (Section IV-A). Second, we evaluate closed-loop tool-positioning accuracy using total-station feedback and compare forward-kinematics residuals against a serial construction robot baseline across representative heights and spans (Section IV-B). Finally, we validate task-level ceiling-drilling feasibility by evaluating relative hole-pattern accuracy under realistic tool-material interaction, including open-loop positioning, compliance, and drilling-induced deviations (Section IV-C). In all experiments, the two actuated wheels are commanded to fixed angles and held with high stiffness via position control, so the base does not roll during measurement.

A. Static Stiffness Experiments

For tasks such as overhead drilling and other on-tool operations, end-effector stiffness - especially in torsion - governs how much the structure twists or deflects under external tool loads; higher stiffness suppresses oscillations and supports better accuracy. Representative commercial tool specifications suggest that quasi-static tool reaction torques can range from a few to several tens of N m, e.g. a few N m for concrete grinding/polishing tools, around 10 N m to 15 N m for compact drills, around 20 N m to 25 N m for hand-held core drills, and around 40 N m for compact screwdriving/driver-drill tools.¹ This makes torsion about the vertical axis a limiting case.

¹Order-of-magnitude estimates from representative tool specifications, using $\tau \approx P/\omega$, where τ is torque, P is power, and ω is spindle speed.

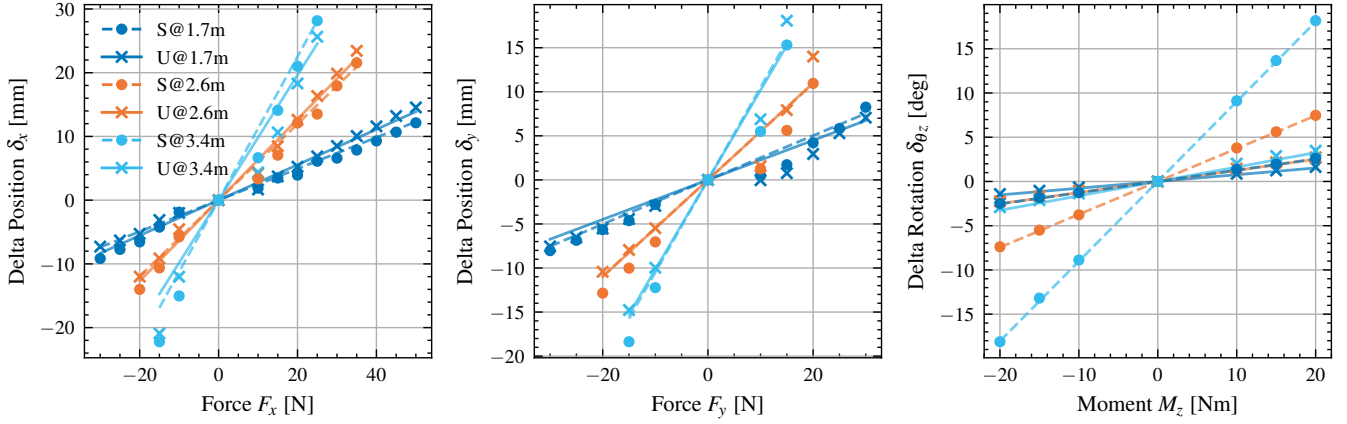


Fig. 7: In-axis Cartesian stiffness at the workspace center. Force–displacement along x and y and moment–rotation about z are shown for three tool heights and both the Universal (U) and Spherical (S) joint configurations. Lines depict least-squares fits to the measurements.

Motivated by this, we compare our universal-joint base design against a spherical-joint variant via quasi-static, in-axis stiffness identification at three end-effector heights.

As depicted in Fig. 6, for both joint configurations we apply external wrenches at the end-effector at heights of 1.7 m, 2.6 m, and 3.4 m using a *Doosan M1013* with joint torque sensors and measure the resulting quasi-static pose change with an *OptiTrack V120:Trio* motion-capture system.

Stiffness is identified by fitting a straight line to the measurements and taking the inverse slope. Concretely,

$$\delta_i \approx m_i F_i \rightarrow k_i = \frac{1}{m_i} \quad (9)$$

where δ_i denotes the translational displacement (x or y) or the rotational displacement (θ_z), F_i the applied force (F_x or F_y) or moment (M_z), m_i the fitted slope (compliance), and k_i the resulting in-axis stiffness (least-squares fit with zero intercept).

Fig. 7 depicts the in-axis Cartesian stiffness analysis for the linear x and y axes as well as rotational z axis. The universal-joint configuration yields similar stiffness in x and y and a markedly higher torsional stiffness about z : k_{θ_z} increases by 67% at 1.7 m (from 7.9 Nm/deg to 13.1 Nm/deg), by 196% at 2.6 m (from 2.7 Nm/deg to 8.0 Nm/deg), and by 454% at 3.4 m (from 1.1 Nm/deg to 6.1 Nm/deg). Cross-axis effects were negligible over the tested range.

At maximum height, tool reaction torques of 10 N m to 30 N m correspond to quasi-static yaw deflections of 1.6° to 4.9°, indicating feasibility for moderate-torque ceiling operations in the range of compact drilling and screwdriving.

B. Positioning Accuracy Experiments

We evaluate Tripody’s closed-loop tool-positioning accuracy using a total station as the position sensor, consistent with mm-level site instrumentation in construction [5], [9], [14], [17], [25], [39]. Specifically, we use a *Hilti PLT 400-2* [40] with a static position RMS of 0.3 mm and a 95th-percentile error of 0.5 mm.

For a total of 90 reference positions distributed across the workspace (Fig. 8), Tripody converges to each setpoint under

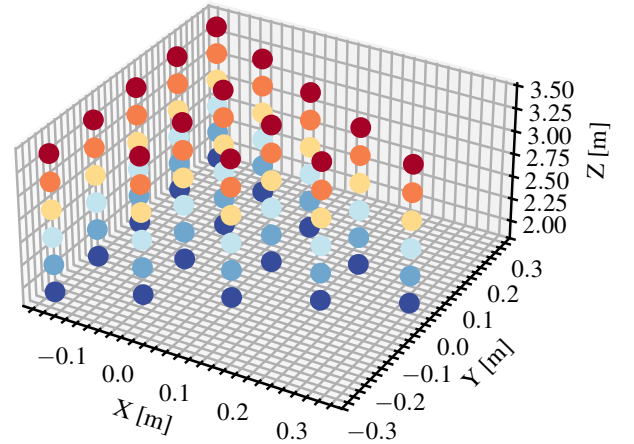


Fig. 8: A total of 90 setpoints arranged on 2D uniform triangular grids within the workspace at six heights between 1.9 m and 3.4 m.

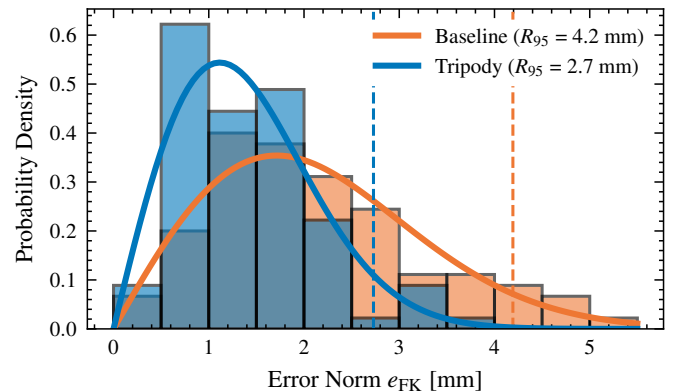


Fig. 9: Density histograms of the forward-kinematics prism-position residual magnitude e_{FK} (Eq. (11)) over 90 workspace setpoints. Solid line: Rayleigh fit; dashed line: fitted 95th-percentile threshold.

closed-loop control with total-station feedback. Positioning error is computed as the Euclidean norm between the measured



Fig. 10: Drilled hole pattern produced in the open-loop drilling experiment. Tripody drilled 15 holes ($\varnothing 8$ mm) on a triangular grid with 50 cm side length.

prism position and its reference,

$$e_p = \|\mathcal{W}\mathbf{w}_{\text{ref}} - \mathbf{p}_{\mathcal{W},\mathcal{P}}\|_2 \quad (10)$$

where we identify the tool frame $\mathcal{T}$ with the prism frame (*i.e.*, $\mathcal{P} \equiv \mathcal{T}$) since we command the prism position directly. Across all setpoints, the closed-loop controller converges with an RMS error of 0.4 mm and a maximum observed error below 0.6 mm. Given the total station noise level, these results suggest that the measured residuals are largely sensor-noise-limited.

We additionally assess the forward-kinematics model using these data. We fit the base radius r_B , end-effector radius r_E , prism z -offset $t_{\mathcal{E},\mathcal{P}}^{(z)}$, and the base pose $\mathbf{T}_{\mathcal{W},B}$ by least squares, and then evaluate the prism-position residuals

$$e_{\text{FK}} = \|\mathbf{p}_{\mathcal{W},\mathcal{P}} - \hat{\mathbf{p}}_{\mathcal{W},\mathcal{P}}(\mathbf{q})\|_2 \quad (11)$$

where $\hat{\mathbf{p}}_{\mathcal{W},\mathcal{P}}(\mathbf{q}) = \mathbf{T}_{\mathcal{W},B} \odot \mathbf{p}_{B,\mathcal{P}}(\mathbf{q})$ is the forward-kinematics-predicted prism position in $\mathcal{W}$, and $\mathbf{p}_{B,\mathcal{P}}(\mathbf{q})$ is the corresponding base-frame prediction from the 3-SPR model (Section III-D1).

As a baseline, we repeated the same 90-setpoint pure forward-kinematics evaluation with a robot used in prior work on ceiling-task accuracy [14]. The histogram of 3D prediction errors is shown in Fig. 9. Over all points, Tripody's error was at most 3.6 mm with no notable height dependence. A Rayleigh fit to the error norms yields a 95th-percentile of 2.7 mm, compared with 4.2 mm for the serial robot under the same evaluation protocol. This indicates that Tripody remains accurate for quasi-static tasks even when extrapolating from a known end-effector pose via forward kinematics.

C. Drilling Experiments

To evaluate task-level performance under realistic tool-material interaction, we conducted drilling experiments with Tripody equipped with the end-effector drill (Fig. 1). The employed drill requires the structure to withstand up to 10 N m of applied reaction torque during operation, corresponding to a quasi-static yaw deflection of approximately 1.6° at maximum height (Section IV-A). Throughout the experiment, the system remained stable while drilling under this loading regime.

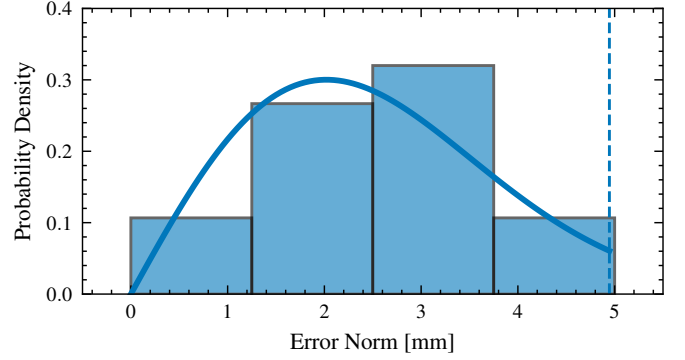


Fig. 11: Density histogram of the 2D relative hole-position error over 15 drilled holes. Solid line: Rayleigh fit; dashed line: fitted 95th-percentile threshold.

Unlike the accuracy experiments in Section IV-B, drilling introduces additional process-dependent effects that directly affect the realized hole location, including play of the drill bit in the chuck and transient “jumping” or walking of the drill at the onset of contact. This experiment therefore evaluates relative hole-pattern accuracy under realistic tool-material interaction, complementing the absolute tool-positioning and forward-kinematics evaluations in Section IV-B.

In this experiment, Tripody drilled 15 holes of diameter 8 mm in open loop at a height of 3.2 m (Fig. 10). Target locations were arranged on a triangular grid with side length 50 cm; the robot visited each target sequentially and executed an identical drilling cycle at each site, with an average cycle time of 13 s per hole over the full pattern. To evaluate the local pattern fidelity targeted by this experiment, we report relative hole-center errors after factoring out a global rigid alignment in 2D, computed via the Kabsch algorithm [41]. This removes the common translation and rotation of the drilled pattern while retaining hole-to-hole errors from open-loop positioning and drilling-induced deviations, thereby quantifying local pattern consistency. Consequently, this experiment does not directly evaluate absolute drilled-hole accuracy in the world or building frame, which remains a limitation of the present evaluation.

The histogram of 2D relative hole-position errors is shown in Fig. 11. Across all 15 holes, the maximum hole-center error after rigid alignment was 4.5 mm. Fitting a Rayleigh distribution to the error magnitudes yields a 95th-percentile error of 4.9 mm, indicating that the drilled pattern remains tightly consistent even in the presence of drilling-process disturbances (*e.g.*, initial bit walking and chuck/bit play).

V. CONCLUSION

We presented Tripody, a lightweight, wheeled, and field-deployable 3-DoF parallel robot whose UPR legs each intentionally remove one passive rotational DoF of a classical 3-SPR morphology. The resulting overconstraint is absorbed by small elastic deflections, preserving predominantly translational motion while substantially increasing torsional stiffness - critical for many high-reach ceiling tasks.

A comparative stiffness study between the proposed universal-base design and a classical 3-SPR variant shows large torsional gains about z without degrading in-plane stiffness: 67 % at 1.7 m, 196 % at 2.6 m, and 454 % at 3.4 m, with negligible cross-axis coupling.

We proposed a closed-loop estimation-and-control framework tailored to high-accuracy positioning - combining state estimation, forward kinematics, and task-space control - that achieves a maximum observed closed-loop positioning error below 0.6 mm. Pure model extrapolation attains a 95th-percentile position error of 2.7 mm (max 3.6 mm) across the tested workspace.

Finally, we validated task-level feasibility in ceiling drilling with Tripody by executing a 15 hole pattern. After rigid alignment, the relative hole-position errors yield a maximum error of 4.5 mm, indicating consistent pattern execution despite drilling disturbances such as initial bit walking and chuck/bit play. These findings support overconstrained large-scale 3-SPR designs as practical and precise for high-reach construction tasks.

REFERENCES

- [1] CPWR, "The construction chart book: The u.s. construction industry and its workers," Tech. Rep., Feb. 2018. [Online]. Available: https://www.cpwrr.com/wp-content/uploads/The_6th_Edition_Construction_eChart_Book.pdf
- [2] Occupational Safety and Health Administration. (2025) Fall prevention campaign. [Online]. Available: <https://www.osha.gov/stop-falls>
- [3] World Health Organization, "Falls," <https://www.who.int/news-room/fact-sheets/detail/falls>, Apr. 2021, accessed: 2026-05-21.
- [4] L. E. Charles, C. C. Ma, C. M. Burchfiel, and R. G. Dong, "Vibration and ergonomic exposures associated with musculoskeletal disorders of the shoulder and neck," *Saf. Health Work*, vol. 9, no. 2, pp. 125–132, 2018.
- [5] H. Halvorsen, T. A. Henningsen, and K. Fagertun, "Mobile robotic drilling apparatus and method for drilling ceilings and walls," U.S. Patent No. US20220001461A1, 2022.
- [6] G. Mieth, "Mobile robot with configurable adapter," European Patent No. EP4574354A1, 2025.
- [7] F. Augugliaro *et al.*, "The Flight Assembled Architecture installation: Cooperative construction with flying machines," *IEEE Control Syst. Mag.*, vol. 34, no. 4, pp. 46–64, Aug. 2014.
- [8] K. Zhang *et al.*, "Aerial additive manufacturing with multiple autonomous robots," *Nature*, vol. 609, no. 7928, pp. 709–717, Sep. 2022.
- [9] C. Lanegger, M. Pantic, R. Bähmann, R. Siegwart, and L. Ott, "Chasing millimeters: design, navigation and state estimation for precise in-flight marking on ceilings," *Auton. Robots*, vol. 47, no. 8, pp. 1405–1418, 2023.
- [10] R. Dautzenberg *et al.*, "A Perching and Tilting Aerial Robot for Precise and Versatile Power Tool Work on Vertical Walls," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst. (IROS)*. Detroit, MI, USA: IEEE, Oct. 2023, pp. 1094–1101.
- [11] S. Hong, Y. Um, J. Park, and H.-W. Park, "Agile and versatile climbing on ferromagnetic surfaces with a quadrupedal robot," *Sci. Robot.*, vol. 7, no. 73, p. eadd1017, Dec. 2022.
- [12] M. Hernando, E. Gambao, C. Prados, D. Brito, and A. Brunete, "ROMERIN: A new concept of a modular autonomous climbing robot," *Int. J. Adv. Robot. Syst.*, vol. 19, no. 5, Sep. 2022.
- [13] Z. Abry, N. Abraham, and J. Cornes, "Wall climbing device," U.K. Patent Application No. GB2637023A, 2025.
- [14] J. Kindle, M. Loetscher, A. Alessandretti, C. Cadena, and M. Hutter, "Enhancing Robotic Precision in Construction: A Modular Factor Graph-Based Framework to Deflection and Backlash Compensation Using High-Accuracy Accelerometers," *IEEE Robot. Autom. Lett.*, vol. 10, no. 1, pp. 288–295, Jan. 2025.
- [15] K. B. Albert *et al.*, "Automated drywall sanding system and method," U.S. Patent Application No. US20180281143A1.
- [16] E. Asadi, B. Li, and I.-M. Chen, "Pictobot: A Cooperative Painting Robot for Interior Finishing of Industrial Developments," *IEEE Robot. Autom. Mag.*, vol. 25, no. 2, pp. 82–94, Jun. 2018.
- [17] E. V. Alexi, J. C. Kenny, L. Atanasova, G. Casas, K. Dörfler, and D. Mitterberger, "Cooperative augmented assembly (CAA): augmented reality for on-site cooperative robotic fabrication," *Constr. Robot.*, vol. 8, no. 2, p. 28, Oct. 2024.
- [18] N. Hack *et al.*, "Structural stay-in-place formwork for robotic in situ fabrication of non-standard concrete structures," *Autom. Constr.*, vol. 115, p. 103197, Jul. 2020.
- [19] L. Rossini *et al.*, "CONCERT: A Modular Reconfigurable Robot for Construction," *J. Field Robotics*, vol. 43, no. 3, pp. 1332–1362, 2026.
- [20] J.-P. Merlet, *Parallel robots*, 2nd ed., ser. Solid mechanics and its applications. Dordrecht: Springer, 2006, no. volume 128.
- [21] J. Pradipta, M. Klünder, M. Weickgenannt, and O. Sawodny, "Development of a pneumatically driven flight simulator Stewart platform using motion and force control," in *Proc. IEEE/ASME Int. Conf. Adv. Intell. Mechatronics (AIM)*, Jul. 2013, pp. 158–163.
- [22] Y. X. Su and B. Y. Duan, "The application of the Stewart platform in large spherical radio telescopes," *J. Robot. Syst.*, vol. 17, no. 7, pp. 375–383, 2000.
- [23] C. Passarini, D. Zanotto, and G. Boschetti, "Dynamic Trajectory Planning for Failure Recovery in Cable-Suspended Camera Systems," *J. Mech. Robot.*, vol. 11, no. 2, p. 021001, Apr. 2019.
- [24] K. Iturralde *et al.*, "Cable-driven parallel robot for curtain wall module installation," *Autom. Constr.*, vol. 138, p. 104235, Jun. 2022.
- [25] Y. Liu, N. W. Hayes, B. Selvakumar, D. Hun, and B. P. Maldonado, "Development of a lab-scale prototype of a cable-driven parallel robot for automated installation of prefabricated building envelopes," in *Proc. 4th Workshop Future Construction, IEEE ICRA Workshops*, 2025, extended abstract. [Online]. Available: <https://construction-robots.github.io/papers/83.pdf>
- [26] ABB Robotics, "IRB 360 FlexPicker," Product Page, <https://one.robots.abb.com/en/robots/p/IRB-360> Accessed: 2026-05-21.
- [27] Y. Zhan, H. Tian, J. Xu, S. Wu, and J. Fu, "A Novel Three-SPR Parallel Platform for Vessel Wave Compensation," *J. Mar. Sci. Eng.*, vol. 8, no. 12, p. 1013, Dec. 2020.
- [28] Edelkrone, "Tripod X," Product Page, <https://edelkrone.com/products/tripod-x> Accessed: 2026-05-21.
- [29] L. Bi, W. Jia, Y. Sun, S. Ma, and H. Liu, "Stiffness analysis and verification of one 3 - RPS parallel sensor," in *Proc. IEEE Int. Conf. Mechatronics Automat. (ICMA)*, Aug. 2017, pp. 1457–1462.
- [30] A. Pashkevich, D. Chablat, and P. Wenger, "Stiffness Analysis of Overconstrained Parallel Manipulators," *Mech. Mach. Theory*, vol. 44, no. 5, pp. 966–982, May 2009.
- [31] S. Awtar, K. Shimotsu, and S. Sen, "Elastic averaging in flexure mechanisms: A three-beam parallelogram flexure case study," *J. Mech. Robot.*, vol. 2, no. 4, p. 041006, 09 2010.
- [32] F. Cui, Y. Li, and J. Qian, "Development of a 3-DOF Flexible Micro-Motion Platform Based on a New Compound Lever Amplification Mechanism," *Micromachines*, vol. 12, no. 6, p. 686, Jun. 2021.
- [33] B. B. Gallagher *et al.*, "Characterization and calibration of the James Webb space telescope mirror actuators fine stage motion," in *Proc. SPIE, Space Telescopes and Instrum.*, vol. 10698, 2018, p. 106983S.
- [34] X. Ma, Z. Xu, Y. Xu, Y. Wang, J. Yao, and Y. Zhao, "Evaluation on Configuration Stiffness of Overconstrained 2R1T Parallel Mechanisms," *Chin. J. Mech. Eng.*, vol. 37, no. 1, p. 62, Jul. 2024.
- [35] MyActuator, "RMD-L-7015-23T," Product Page, <https://www.myactuator.com/l-7015-details> Accessed: 2026-05-21.
- [36] J. Schadlbauer, D. Walter, and M. Husty, "The 3-RPS parallel manipulator from an algebraic viewpoint," *Mech. Mach. Theory*, vol. 75, pp. 161–176, May 2014.
- [37] Y. Wang, J. Yu, and X. Pei, "Fast forward kinematics algorithm for real-time and high-precision control of the 3-RPS parallel mechanism," *Front. Mech. Eng.*, vol. 13, no. 3, pp. 368–375, Sep. 2018.
- [38] F. Dellaert and Contributors, "GTSAM 4.3a0," May 2025, Git Repository, <https://github.com/borglab/gtsam> Accessed: 2026-05-21.
- [39] S. Ercan, S. Meier, F. Gramazio, and M. Kohler, "Automated Localization of a Mobile Construction Robot with an External Measurement Device," in *Proc. 36th Int. Symp. Automat. Robot. Constr. (ISARC)*, 2019, pp. 929–936.
- [40] Hilti, "PLT 400-2," Product Page, <https://www.hilti.com/r16318483> Accessed: 2026-05-21.
- [41] W. Kabsch, "A solution for the best rotation to relate two sets of vectors," *Acta Crystallogr. A*, vol. 32, no. 5, pp. 922–923, 1976.