

Morphology-Aware Human Motion Retargeting for Wheeled-Humanoid Loco-Manipulation

Chenbo Xia¹ Chao Ye¹

¹Harbin Institute of Technology

Abstract

Human-to-humanoid retargeting has largely been studied on legged platforms, while comparatively few wheeled-humanoid systems support coupled locomotion and manipulation from general human motion. Building on GMR’s configurable general-motion retargeting and BeyondMimic’s physically simulated R1 Pro learning framework, we present a reproducible pipeline that converts multi-dataset SMPL-X motion into executable loco-manipulation behavior for the Galaxea R1 Pro wheeled humanoid. The robot has a planar three-wheel base, a serial torso, and two arms but no leg joints, so human lower-body motion must be redistributed across base motion and torso posture without sacrificing manipulation-relevant arm geometry. Our pipeline combines canonical body-shape preprocessing, planar-base normalization, morphology-aware differential inverse kinematics, shoulder-rooted hierarchical arm retargeting, and continuous torso substitution for bending and squatting. A reference-twist-driven planning layer then decodes planar base motion into continuous three-wheel steering and rolling commands subject to hysteresis, kinematic continuity, acceleration, and actuator-rate limits. Finally, a 21-dimensional BaseDecode policy is trained in Isaac Lab with directional joint-limit scaling, focused upper-body tracking, and a staged wheel-contact reward. The resulting system provides a complete bridge from human motion data to physically trackable wheeled-humanoid loco-manipulation rather than a visualization-only retargeter; quantitative policy comparisons remain scheduled for a later revision.

1 Introduction

Human motion datasets provide a scalable source of full-body behavior for humanoid robots. Recent systems use motion capture, monocular human pose estimation, or parametric body models to generate robot references, followed by inverse kinematics (IK), imitation learning, or reinforcement-learning (RL) tracking [11, 10, 6, 5, 1, 13]. These systems have achieved strong results on legged humanoids such as the Unitree G1 and H1. However, the assumptions that make retargeting well-conditioned on legged humanoids do not hold for wheeled humanoids, especially when locomotion and manipulation must be performed simultaneously.

The Galaxea R1 Pro (R1 Pro) has a planar three-wheel mobile base, four serial torso joints, and two seven-degree-of-freedom arms. It has no knee, ankle, or leg translation degrees of freedom. Consequently, a human squat cannot be copied by mapping knee flexion to corresponding robot joints. The robot must instead distribute the human motion among planar base displacement, torso folding, and upper-body posture while preserving the end-effector behavior needed for manipulation. This distribution creates two coupled challenges. First, the kinematic topology from the pelvis to a robot shoulder differs substantially from the human topology, so a global pelvis-rooted scale can produce a physically meaningful arm orientation but an invalid arm position. Second, wheel and steering variables are not present in the output of a conventional whole-body IK solver and must be generated from a planar base trajectory without introducing discontinuities or wheel-ground violations.

Our design follows five structural principles. (i) The four-joint torso is treated as a limited resource: upright motion prioritizes the human spine and upper-body chain, whereas squat motion reallocates those joints to the missing lower-body fold. (ii) The pelvis, rather than a rapidly moving leg link, anchors the free base so that translation and yaw remain stable. (iii) Shoulder and distal arm links retain direct correspondences because manipulation quality depends on their relative geometry. (iv) The squat reallocation is driven by a symmetric knee-height feature and a filtered continuous gate, so changing correspondence

does not create a discontinuity. (v) The resulting behavior is intentionally asymmetric: normal walking can preserve base motion and arm swing, but cannot reproduce leg swing; squat mode instead prioritizes the center-height change and the closest available whole-body appearance under the R1 Pro morphology.

We address these challenges with a complete data and control pipeline. The first stage standardizes SMPL-X inputs, solves morphology-aware IK, and produces versioned planar-base motion files. The second stage converts the planar base reference into three-wheel commands and learns a physical tracking policy in Isaac Lab using a low-dimensional base decoder. Each transformation has an explicit data contract, and every evaluation uses fixed inputs, metrics, and configuration.

The standard GMR formulation is an important starting point, but its direct leg-to-robot mapping is poorly matched to the R1 Pro morphology: leg motion is transferred to a wheeled base without corresponding leg joints, which leads to weak translation behavior and poor dynamic stability, including a higher tendency to fall. We therefore modify the retargeting and planning stages to redistribute lower-body motion through the planar base and torso. For physical execution, we follow the single-motion PPO training setup provided by BeyondMimic and use it to learn stable tracking of each resulting reference action.

Our contributions are:

- A canonical SMPL-X preprocessing and planar-base normalization procedure that separates body-shape variation from robot morphology and removes the unobservable absolute-height component of a wheeled base.
- A morphology-aware retargeting method for R1 Pro that uses shoulder-rooted hierarchical arm scaling and task-partitioned differential IK to handle the non-human pelvis-to-shoulder topology.
- A continuous torso-substitution mechanism that maps human lower-body folding to the R1 Pro torso using a knee-height feature, sigmoid gating, temporal smoothing, and arm re-IK.
- A scalable feasibility pipeline and reference-twist-driven three-wheel planner/decoder that transform raw retargeted motion into bounded, continuous base commands for loco-manipulation.
- A BaseDecode PPO formulation that preserves a compact 21-dimensional action contract while combining directional joint-limit scaling, manipulation-focused tracking rewards, and staged wheel-contact regularization.
- A reproducible evaluation protocol spanning geometric retargeting, motion smoothness, feasibility, and policy tracking, with fixed manifests for the completed front-end and qualitative PPO evidence.

2 Related Work

Human motion representations. SMPL-X represents a human body with articulated pose, body shape, hands, and facial parameters [11]. AMASS unifies motion capture datasets in a common representation and provides a large source of motion diversity [10]. Our input stage uses the SMPL-X body model for forward kinematics, but replaces dataset-dependent body shapes with a canonical shape before robot retargeting.

Humanoid motion retargeting and tracking. General Motion Retargeting (GMR) provides a configurable MuJoCo/Mink differential-IK interface for multiple humanoid morphologies [1]. TWIST, H2O, and OmniH2O demonstrate that retargeted or estimated human motion can serve as the reference layer for learned whole-body controllers [13, 6, 5]. ExBody2 and Mobile-TeleVision emphasize physical filtering and upper/lower-body decomposition for robust tracking [7, 9]. Our focus is complementary: the target is a wheeled humanoid whose torso must substitute for missing leg joints.

Wheeled humanoids and whole-body control. Recent work studies wheeled humanoid teleoperation, trajectory transfer, and dynamics adaptation [8, 2, 3]. Most existing wheeled-humanoid whole-body systems focus on online teleoperation from a human operator. In contrast, this work targets offline, large-scale retargeting from pre-captured SMPL-X motion datasets and builds a complete reference-generation and physical-tracking pipeline. Online teleoperation is a relevant extension, but is outside the scope of the

present study. These systems motivate separating manipulation-relevant upper-body motion from mobile-base execution; we make this separation explicit in the retargeting and decoder contracts and connect it to a physical BaseDecode PPO policy. Direct numerical comparison with conventional GMR is not meaningful for this specialized task: the R1 Pro must reproduce arm swing while driving, despite having no human-like leg swing, and must reproduce full-body bending and squatting while stationary. A direct leg-to-torso GMR mapping cannot represent this locomotion–posture split, which is the motivation for our morphology-aware redistribution.

IK and reinforcement learning. Our IK solver follows task-based differential IK with damping, limits, and iterative integration, in the tradition of hierarchical whole-body control [12, 4]. The physical tracker is trained with PPO; the policy receives a compact base-plus-upper-body action while the decoder handles wheel kinematics and rate constraints.

3 Problem Formulation

Let a human motion sequence be

$$\mathcal{H} = \{(\mathbf{p}_{j,t}^h, \mathbf{R}_{j,t}^h)\}_{j,t}, \quad (1)$$

where j indexes SMPL-X joints and $t \in \{1, \dots, T\}$. The target robot state is

$$\mathbf{q}_t^r = [x_t, y_t, \psi_t, \mathbf{q}_t^{\text{body}}, \mathbf{q}_t^{\text{wheel}}], \quad (2)$$

where (x, y, ψ) is the planar base pose, $\mathbf{q}^{\text{body}}$ contains four torso and fourteen arm joints, and $\mathbf{q}^{\text{wheel}}$ contains three steering and three rolling variables. The retargeting stage produces a raw state without wheel variables; the wheel decoder produces those variables from the base trajectory.

For each configured body correspondence, a FrameTask compares a robot link pose with a transformed human target. The per-frame IK objective is represented abstractly as

$$\min_{\mathbf{v}} \sum_i w_i \|J_i \mathbf{v} + \mathbf{e}_i\|^2 + \lambda \|\mathbf{v}\|^2, \quad \mathbf{q}_{t+1} = \text{Integrate}(\mathbf{q}_t, \mathbf{v}, \Delta t), \quad (3)$$

subject to robot joint and velocity limits. Here J_i is the task Jacobian, $\mathbf{e}_i$ is the pose error, and λ is the damping coefficient.

4 System Overview

The implementation is based on the public GMR codebase and the companion R1 Pro training framework. We describe the interfaces between the reference generation and physical tracking stages explicitly because they use different state representations. Figure 1 summarizes the complete pipeline. The implementation has five explicit interfaces:

1. canonical SMPL-X frames at a fixed target frame rate;
2. raw R1 Pro PKL with planar base pose and 18 torso/arm joints;
3. NPZ reference with 24 active joints and FK-derived body states;
4. BaseDecode policy action with 3 virtual base dimensions and 18 upper-body dimensions;
5. physical rollout with recorded configuration, input identity, and evaluation metrics.

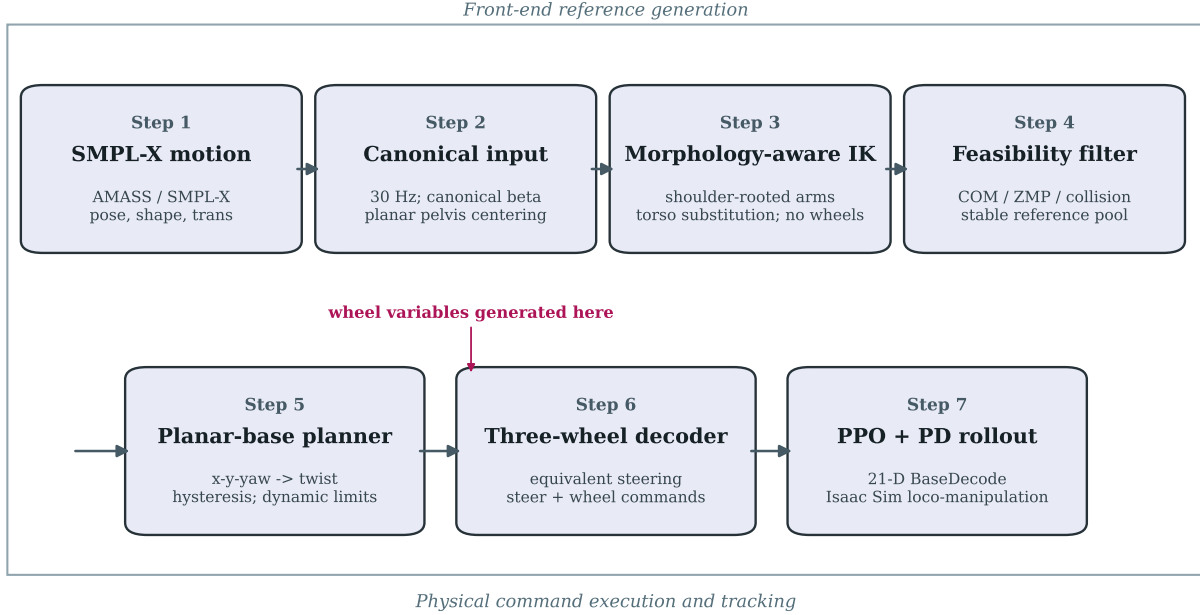


Figure 1: Overview of the proposed human-to-wheeled-humanoid motion pipeline. Canonical SMPL-X preprocessing and morphology-aware IK produce a filtered planar reference without wheel variables. The planner and three-wheel decoder then generate executable steering and rolling commands for PPO and PD physical tracking.

5 Canonical Human Motion and Planar-Base Preprocessing

5.1 Canonical body shape

Different AMASS and OMOMO sequences can contain different SMPL-X shape parameters β . A fixed scale table cannot simultaneously account for body-shape variation and the morphology difference between a human and R1 Pro. We therefore choose one reference shape β_{can} and recompute body-model FK with

$$\beta \leftarrow \beta_{\text{can}}, \quad (\mathbf{p}_{j,t}^h, \mathbf{R}_{j,t}^h) \leftarrow \text{FK}_{\text{SMPL-X}}(\boldsymbol{\theta}_t, \beta_{\text{can}}, \boldsymbol{\tau}_t). \quad (4)$$

The original shape is retained for visualization and audit, while the canonical sequence is used for R1 Pro IK. This operation is a conditioning step; its benefit must be measured against an otherwise identical non-canonical baseline.

5.2 Frame-rate alignment and planar centering

All sequences are resampled to a target rate of 30 Hz. Since the R1 Pro base has no vertical translation degree of freedom, the absolute pelvis height in AMASS is not observable by the base. For R1 Pro only, we subtract the first-frame pelvis position from every human body position:

$$\tilde{\mathbf{p}}_{j,t}^h = \mathbf{p}_{j,t}^h - \mathbf{p}_{\text{pelvis},1}^h. \quad (5)$$

The operation preserves all relative body geometry while making the planar base start at a stable origin. Planar centering is a required part of the R1 Pro input contract, rather than an optional ablation: removing it raises the reference root (the human pelvis) away from the base and leaves the nominal base height inconsistent with the robot’s half-humanoid morphology. In upright mode the robot substitutes only the upper body, so the pelvis must remain near the base/ground; placing the ankle on the ground would impose a legged-robot assumption that R1 Pro does not satisfy. The base yaw is kept as a separate semantic coordinate and is never inferred from a legacy quaternion field.

6 Morphology-Aware Retargeting

6.1 Task-partitioned differential IK

The R1 Pro configuration contains two task tables. The first table establishes the base, torso, shoulder, elbow, and wrist correspondence; the second refines the same state with task-specific weights. Position weights are intentionally asymmetric: the planar base carries the absolute position task, while torso and arm links primarily carry orientation tasks when their absolute positions are not kinematically reachable. Mink solves each table iteratively with MuJoCo Jacobians, damping, configuration limits, and optional velocity limits. The exact position and orientation weights, together with the associated scale factors, are listed in Appendix 5.

This partition avoids forcing an unreachable human position onto a robot link with a different topology. It also allows the configuration to be versioned independently from the solver implementation.

6.2 Shoulder-rooted hierarchical arm scaling

The default pelvis-rooted transformation is

$$\mathbf{p}_j^{\text{target}} = \mathbf{p}_{\text{root}} + s_j(\mathbf{p}_j^h - \mathbf{p}_{\text{root}}^h). \quad (6)$$

This assumes that the human and robot chains have a stable global similarity transform. It is poorly conditioned for R1 Pro because the robot arms are mounted at the top of a tall torso, while human arms are attached near the shoulder and often hang below the pelvis frame used by the global transform.

We instead define a parent map for the arm chain and scale each segment locally:

$$\mathbf{p}_j^{\text{target}} = \mathbf{p}_{\pi(j)}^{\text{target}} + s_j(\mathbf{p}_j^h - \mathbf{p}_{\pi(j)}^h), \quad \pi(\text{elbow}) = \text{shoulder}, \quad \pi(\text{wrist}) = \text{elbow}. \quad (7)$$

The shoulder itself remains connected to the torso/pelvis transform, but elbow and wrist targets are no longer contaminated by the pelvis-to-shoulder displacement. The configuration uses an independent three-axis shoulder scale and separate local segment scales for the elbow and wrist; their values are reported in Appendix 5. A dedicated ablation of this three-axis shoulder scale is reserved for the planned follow-up evaluation.

6.3 Yaw decomposition safeguard

The R1 Pro planar yaw and the fourth torso joint can represent partially redundant rotations around the vertical axis. We diagnose and correct leakage into the fourth torso joint so that global yaw is represented by the base whenever possible. This safeguard is evaluated as a regression condition rather than as a separate learned component.

7 Continuous Torso Substitution for Bending and Squatting

The torso mapping is mode-dependent because the R1 Pro has only four serial torso joints and no leg joints. A direct human spine-to-torso correspondence is therefore appropriate for upright motion, but it cannot simultaneously represent the human shoulder, lumbar, pelvis, knee, and ankle chain during a squat. Table 1 makes the two contracts explicit. The entries marked “synthesized” are not one-to-one knee IK targets: they are generated from the symmetric pelvis–knee height signal defined below.

The names in Table 1 follow the native schemas of the two models. Names in the first column, such as `base_link`, `torso_link1`, and `right_arm_link2`, are link names from the Galaxea R1 Pro URDF; the accompanying `torso_joint1--4` labels are the corresponding URDF revolute-joint names. Names in the second and third columns, such as `pelvis`, `spine1`, and `right_shoulder`, are joint labels in the SMPL-X body-model representation used by the AMASS sequences. Thus an entry such as `right_shoulder → right_arm_link2` means that the SMPL-X shoulder target is used to constrain the URDF arm link; it does not assert that the two models share the same kinematic topology. This notation also distinguishes a robot *link* (a rigid body in the URDF)

from a robot *joint* (the actuator connecting adjacent links), which is important for interpreting the torso rows.

Table 1: SMPL-X to R1 Pro correspondence in upright and squat modes. “Synthesized” denotes a posture generated from the filtered pelvis–knee height signal rather than a one-to-one IK target.

R1 Pro link / joint	Upright mode	Squat mode
base_link	pelvis (root pose)	pelvis (root pose)
torso_link1 / joint 1	spine1	synthesized from pelvis–knee height; no direct spine task
torso_link2 / joint 2	spine2	synthesized from pelvis–knee height; no direct spine task
torso_link3 / joint 3	no independent correspondence; solved through the spine chain	no direct spine task; synthesized posture
torso_link4 / joint 4	spine3	spine3 remains a residual orientation task before the synthesized posture is blended
left_arm_link2	left_shoulder	left_shoulder
left_arm_link4	left_elbow	left_elbow
left_arm_link7	left_wrist	left_wrist
right_arm_link2	right_shoulder	right_shoulder
right_arm_link4	right_elbow	right_elbow
right_arm_link7	right_wrist	right_wrist
torso_joint1--3	determined by the spine IK solution	blended toward morphology-specific squat angles using the continuous gate

In upright mode, the pelvis is used as the mobile-base root rather than a human knee, ankle, or other rapidly varying leg link. This choice gives the free base a stable translational and yaw reference while preserving the upper-body chain: the shoulder links (for example, right_shoulder→right_arm_link2) and the elbow/wrist links retain their direct correspondences. The resulting mapping faithfully tracks the upper body during standing and ordinary walking. The structural limitation is intentional: the R1 Pro can reproduce the base motion and arm swing, but it has no leg chain with which to reproduce human hip, knee, or ankle swing.

When the human body folds, directly preserving spine1 and spine2 would spend the limited torso degrees of freedom on lumbar orientation and leave no reliable mechanism for reducing the robot’s center height. Squat mode therefore removes those two direct spine constraints, retains the pelvis root and the manipulation-critical arm correspondences, and uses both knees only through a symmetric height feature. The three torso joints then act as a low-dimensional surrogate for the missing hip–knee–ankle chain. This partition prioritizes the physically observable quantity (body height) while allowing the arm targets to be re-solved after the torso is folded. It is the reason the same system handles precise upright arm motion and also produces a more human-like squat, without claiming that the robot reproduces human leg kinematics.

7.1 Lower-body folding signal

The robot cannot reproduce human knee and ankle rotations directly. We use a morphology-specific lower-body folding feature:

$$h_t = p_{\text{pelvis},t,z}^h - \frac{1}{2} (p_{\text{left knee},t,z}^h + p_{\text{right knee},t,z}^h). \quad (8)$$

The feature is not intended to be a physical estimate of knee angle; it is a task signal indicating when the human body is folded.

7.2 Smooth mode activation

The raw activation is a sigmoid,

$$\alpha_t^{\text{raw}} = \frac{1}{1 + \exp((h_t - h_{\text{mid}})/\sigma)}, \quad (9)$$

Algorithm 1 R1 Pro morphology-aware retargeting for one motion sequence

Require: SMPL-X sequence $\mathcal{H}$, canonical shape β_{can} , R1 Pro model and task configuration

Ensure: raw R1 Pro sequence $\mathcal{Q}$

- 1: Recompute SMPL-X FK with β_{can} and resample to the target rate
 - 2: Center all body positions by the first-frame pelvis position
 - 3: Initialize the MuJoCo/Mink configuration from the previous frame (or the default pose)
 - 4: **for** $t = 1$ to T **do**
 - 5: Transform torso targets and arm targets using the configured scale and offsets
 - 6: Replace global arm scaling by shoulder-rooted segment scaling
 - 7: Update the height gate α_t from pelvis and knee heights
 - 8: Solve the primary and refinement IK task tables with limits and damping
 - 9: **if** $\alpha_t > \alpha_{\text{guard}}$ **then**
 - 10: Blend torso joints toward $q_{\text{max}}^{\text{squat}}$
 - 11: Recompute FK and solve an arm-only IK correction
 - 12: **end if**
 - 13: Apply yaw decomposition safeguard and save the 24-DoF joint state
 - 14: **end for**
 - 15: Apply optional EMA to the saved sequence
-

followed by an exponential moving average,

$$\alpha_t = \beta \alpha_t^{\text{raw}} + (1 - \beta) \alpha_{t-1}. \quad (10)$$

The continuous activation avoids a hard switch between a walking mode and a squat mode. A guard and ramp determine when the torso override is applied:

$$\rho_t = \text{clip} \left(\frac{\alpha_t - \alpha_{\text{guard}}}{\alpha_{\text{ramp}}}, 0, 1 \right). \quad (11)$$

7.3 Torso override and arm re-IK

At activation ρ_t , the torso joints are blended toward morphology-specific folding targets:

$$q_t^{\text{torso}} = (1 - \rho_t) q_t^{\text{IK}} + \rho_t q_{\text{max}}^{\text{squat}}. \quad (12)$$

After the torso override, the robot FK is updated and a constrained arm-only IK pass re-solves the shoulder, elbow, and wrist tasks. This ordering is essential: it prevents the ordinary spine task from immediately pulling the torso back upright and prevents the arms from remaining attached to the pre-folding shoulder position. Because α_t is sigmoid-filtered and the override is blended rather than switched, the mapping transition is continuous in both joint position and end-effector target. The same continuity mechanism also prevents a false squat trigger during normal walking.

8 Feasibility Filtering and Motion Contracts

8.1 Layered filtering

To generate a large reference library, we evaluate each retargeted sequence with a short-circuit filter pipeline:

1. COM stability: the projected center of mass lies inside the R1 Pro support polygon;
2. ZMP stability: the dynamic zero-moment point lies inside the support polygon;
3. self-collision and ground penetration: MuJoCo forward kinematics and contact checks;
4. optional full MuJoCo dynamics rollout for the most expensive final check.

Each layer returns the number of passed and failed frames, failure indices, and a human-readable reason. A sequence-level decision allows a configured failure fraction but never hides the total number of input sequences. The output report includes the safety margin, tolerated failure fraction, code commit, configuration hash, and processing time.

This filtering is especially important for R1 Pro. Unlike a legged humanoid such as G1, the free-base R1 Pro is not a self-righting system: after a fall it cannot reliably stand up without external intervention. We therefore train and evaluate the policy only from the screened, stable or approximately stable pool. Motions with large transient torques or a center of mass that leaves the support region are rejected before training; otherwise PPO would spend capacity learning from references that cannot be recovered physically.

At the retargeting interface, each frame contains a planar base pose (x, y, ψ) and 18 torso/arm joint positions, together with the frame rate, sequence identity, and configuration metadata needed for reproducibility. Wheel steering and rolling values are deliberately absent at this interface; they are generated by the planning and decoding stage from the planar base trajectory. This separation keeps geometric reference data distinct from executable wheel commands and avoids ambiguity between planar yaw and a quaternion root representation.

9 Planning Layer and Three-Wheel Base Decoder

9.1 Reference-twist planning from the planar base

The reference sequence provides a planar base pose $(x_t^{\text{ref}}, y_t^{\text{ref}}, \psi_t^{\text{ref}})$, from which a reference twist $(v_{x,t}^{\text{ref}}, v_{y,t}^{\text{ref}}, \omega_t^{\text{ref}})$ is obtained after yaw unwrapping and finite differences. The planning layer combines this feedforward twist with bounded pose feedback. In the base frame, let

$$\mathbf{e}_{p,t}^b = R(\psi_t)^\top (\mathbf{p}_t^{\text{ref}} - \mathbf{p}_t), \quad e_{\psi,t} = \text{wrap}(\psi_t^{\text{ref}} - \psi_t). \quad (13)$$

The desired twist is

$$\boldsymbol{\xi}_t^* = \boldsymbol{\xi}_t^{\text{ref}} + K_p \begin{bmatrix} e_{x,t}^b & e_{y,t}^b & e_{\psi,t} \end{bmatrix}^\top, \quad \boldsymbol{\xi}_t = \text{RateLimit}(\text{LPF}(\text{Sat}_\xi(\boldsymbol{\xi}_t^*))), \quad (14)$$

where $\boldsymbol{\xi}_t = [v_{x,t}, v_{y,t}, \omega_t]^\top$. The saturation and rate-limit operators enforce velocity and linear/angular acceleration bounds, while the low-pass filter suppresses frame-to-frame command noise. This is a planning-and-decoding layer: it changes the executable wheel commands but does not reparameterize the geometric x - y -yaw path.

9.2 Kinematic inversion

For a planar base twist (v_x, v_y, ω) and wheel location (x_i, y_i) in the base frame, the contact-point velocity is

$$v_{i,x} = v_x - \omega y_i, \quad v_{i,y} = v_y + \omega x_i. \quad (15)$$

The steering angle and rolling velocity are

$$\phi_i = \text{atan2}(v_{i,y}, v_{i,x}), \quad \dot{\phi}_i = \frac{\sqrt{v_{i,x}^2 + v_{i,y}^2}}{r_w}. \quad (16)$$

The implementation chooses the equivalent representation $(\phi_i + \pi, -\dot{\phi}_i)$ when it is closer to the previous steering target. This preserves the physical wheel velocity while avoiding artificial π jumps.

9.3 Planner stability and staged wheel-contact curriculum

The planner applies a speed hysteresis to avoid repeatedly entering and leaving a near-zero-velocity singularity. With $s_t = \sqrt{v_{x,t}^2 + v_{y,t}^2}$, its state is

$$h_t = \begin{cases} 1, & s_t \geq s_{\text{on}}, \\ 0, & s_t \leq s_{\text{off}}, \\ h_{t-1}, & s_{\text{off}} < s_t < s_{\text{on}}, \end{cases} \quad s_{\text{on}} = 0.06 \text{ m/s}, \quad s_{\text{off}} = 0.02 \text{ m/s}. \quad (17)$$

When a wheel is moving, the planner chooses between the two physically equivalent representations $(\phi_i, \dot{\phi}_i)$ and $(\text{wrap}(\phi_i + \pi), -\dot{\phi}_i)$ by minimizing the wrapped distance to the previous steering target. When the deadband is active, the previous steering target is held rather than allowing noisy π -scale changes. Finally, wheel acceleration, steering rate, and base linear/angular acceleration are bounded explicitly:

$$|\Delta\dot{\phi}_i|/\Delta t \leq a_{w,\max}, \quad |\Delta\phi_i|/\Delta t \leq \dot{\phi}_{\max}, \quad |\Delta\xi_t|/\Delta t \leq a_{\xi,\max}. \quad (18)$$

These operations are part of the active planner/decoder used by the reported policy and are applied online as the base command is decoded.

The physical PPO policy uses 21 actions: three virtual local base targets (x, y, ψ) and 18 torso/arm joint actions. The base action is decoded into a commanded pose, bounded twist feedback, reference-twist feedforward, and three wheel targets. The root pose is not teleported into the simulator; the free base moves only through wheel-ground contacts. This contract allows the policy to learn whole-body coordination without asking the actor to emit six wheel variables directly.

The stability profile adds an entering/exiting speed hysteresis, twist low-pass filtering, bounded feedback, linear and angular acceleration limits, steering-rate limits, and steering joint limits. These constraints are applied in the decoder and therefore remain compatible with the 21-dimensional actor interface.

10 Physics-Based Tracking with PPO

We train the BaseDecode task in Isaac Lab with PPO. At each step the actor emits $a_t \in \mathbb{R}^{21}$ and the explicit action bound is

$$\bar{a}_{t,k} = \text{clip}(a_{t,k}, -1, 1), \quad (19)$$

with unit magnitude. The first three dimensions are virtual base targets and the remaining 18 dimensions are torso/arm commands. The base dimensions are passed to the planner above; they are not written directly into the simulator root pose.

For an upper-body joint j , directional joint-limit scaling applies a direction-dependent map from the default pose q_j^{def} to the simulator limits:

$$q_{j,t}^{\text{cmd}} = q_j^{\text{def}} + \bar{a}_{j,t} \begin{cases} \gamma(q_j^{\text{max}} - q_j^{\text{def}}), & \bar{a}_{j,t} \geq 0, \\ \gamma(q_j^{\text{def}} - q_j^{\text{min}}), & \bar{a}_{j,t} < 0, \end{cases} \quad \gamma = 0.95. \quad (20)$$

This preserves the action contract while reducing systematic excursions beyond the usable joint range.

The three principal tracking terms are written as exponential errors:

$$r_t^{\text{base}} = \exp\left(-\|\mathbf{p}_t - \mathbf{p}_t^{\text{ref}}\|_{\Sigma_p}^2 - \lambda_\psi e_{\psi,t}^2\right), \quad (21)$$

$$r_t^{\text{joint}} = \frac{1}{|\mathcal{J}|} \sum_{j \in \mathcal{J}} \exp\left(-\lambda_j (q_{j,t} - q_{j,t}^{\text{ref}})^2\right), \quad (22)$$

$$r_t^{\text{focus}} = \frac{1}{|\mathcal{J}_{\text{focus}}|} \sum_{j \in \mathcal{J}_{\text{focus}}} \exp\left(-\lambda_j (q_{j,t} - q_{j,t}^{\text{ref}})^2\right). \quad (23)$$

The focus set emphasizes manipulation-critical torso and arm joints. In the evaluated configuration, the corresponding weights are $w_b = 2.0$, $w_j = 2.0$, and $w_f = 6.0$, respectively.

The wheel-ground contact term penalizes each wheel whose measured contact-force norm is below a threshold. Its per-frame value is

$$r_t^{\text{contact}} = -\sum_{i=1}^3 \mathbb{I}[\|\mathbf{f}_{i,t}^{\text{contact}}\| < f_{\min}] \in \{0, -1, -2, -3\}. \quad (24)$$

We use a two-stage curriculum with $K = 1500$ iterations:

$$w_c(k) = \begin{cases} 0, & 0 \leq k < 750, \\ 0.2, & 750 \leq k \leq 1500. \end{cases} \quad (25)$$

Table 2: Verified BaseDecode PPO configuration.

Parameter	Value	Parameter	Value
Parallel environments	4096	Iterations	1500
Motion speed scale	0.51724	Added base mass	30 kg
Initial noise std.	0.25	Base noise std.	0.02
Learning rate	3×10^{-4}	Entropy coefficient	0.005
Action clip	1.0	Joint-limit scale	0.95
Base-pose reward	2.0	Joint-tracking reward	2.0
Focused tracking reward	6.0	Contact reward (stage 2)	0.2
Contact curriculum	750+750	Reference	fixed training motion

The environment, actor/critic, optimizer, contact sensors, and observation/action dimensions remain unchanged at the switch. Thus the staged wheel-contact term is a reward curriculum within the standard PPO objective, rather than a new PPO algorithm. Together with the hysteresis, equivalent-steering selection, and dynamic limits above, it forms the planner-and-contact stability layer evaluated below.

$$r_t = w_b r_t^{\text{base}} + w_j r_t^{\text{joint}} + w_f r_t^{\text{focus}} + w_c(k) r_t^{\text{contact}}, \quad (26)$$

where $w_c(k)$ follows the schedule above.

11 Experiments

11.1 Datasets and protocol

We use motion sequences from ACCAD, GRAB, BMLmovi, BMLrub, CMU, KIT, EKUT, Eyes Japan Dataset, WEIZMANN, and HDM05 converted to SMPL-X stage-II files. Sequence identity, subject, frame count, frame rate, action class, and integrity checks are retained for each evaluation. Splits are made by subject or sequence, never by adjacent frames from the same sequence.

The motion data use the public SMPL-X body model and AMASS “SMPL-X N” sequences, converted to a common stage-II representation while retaining the original dataset and subject identifiers. All sequences are evaluated with the same retargeting and error definitions. The 16,268-sequence screening pool is the source pool for the fixed evaluation sets: A–U (21 motions) are sampled at random from sequences that pass the feasibility filter, while B1–B5 are randomly selected from that same passing pool subject to large pairwise SMPL-X shape-parameter distance. Thus A–U is the main front-end and planned full-ablation set; B1–B5 are reserved for the shape-stressed canonicalization diagnostic. Neither set mixes rejected motions into its reported averages.

The physical tracker uses the BaseDecode configuration in Table 2, with 4096 parallel environments and 1500 training iterations. The additional base-link mass is 30 kg. References are replayed with the fixed speed scale 0.51724 specified by the training protocol; the unscaled motion can contain transiently large torques, so this common reduction avoids unnecessarily aggressive dynamics while keeping comparisons on the same time scale.

11.2 GMR baseline on the fixed A–U set

Before the policy experiments, we evaluate the GMR front end on the 21 fixed A–U motions with the R1 Pro target, rate limiting, squat handling, and error evaluation enabled. Table 3 reports the macro-average across motions; each motion first contributes its own mean error, so long sequences do not dominate the aggregate. These measurements are a front-end reference for the later PPO study, not an ablation result.

For each motion, torso error is averaged over the three spine links and shoulder error over the two shoulder links. Elbow and wrist position errors are averaged over the left and right sides using the shoulder-referenced table; their rotations are averaged over both sides using the ground-referenced table. The reported mean and standard deviation are then computed over the 21 per-motion category means.

Table 3: GMR baseline on the fixed A-U motion set ($n = 21$). Torso and shoulder errors are ground-referenced; elbow and wrist position errors are shoulder-referenced, while their rotations are ground-referenced. Values are macro-averaged per-motion means; ranges are across motions.

Metric	Mean	Std.	Range	Unit
Torso ground position error	0.1070	0.0603	0.0691–0.3522	m
Torso ground rotation error	87.42	9.51	79.2–112.7	°
Shoulder ground position error	0.1527	0.1378	0.0498–0.7192	m
Shoulder ground rotation error	22.65	12.66	4.9–47.7	°
Elbow shoulder-relative position error	0.0864	0.0271	0.0530–0.1552	m
Elbow ground rotation error	21.59	27.51	4.3–78.5	°
Wrist shoulder-relative position error	0.0777	0.0459	0.0410–0.1848	m
Wrist ground rotation error	2.03	2.56	0.4–10.9	°

Figure 2 provides one representative middle-frame snapshot for each of the same 21 A-U motions. These images are produced by the baseline MuJoCo visualization and IK-retargeting command; they are not Isaac Sim rollouts and do not include gravity or rigid-body dynamics. The R1 Pro rendering is therefore a purely kinematic result that evaluates pose correspondence rather than physical stability. The green body skeleton is the result of applying the original GMR code to the same reference motion at the same frame, providing a direct visual comparison with the G1 morphology.

All 21 selected motions retain their principal human action characteristics in the R1 Pro representation. Arm raising and manipulation, planar translation, turning, bending, and squatting are all reproduced with the available base, torso, and arm degrees of freedom. In particular, the squat and forward-bend examples achieve a close qualitative approximation through the continuous torso substitution, even though the R1 Pro has no human-like leg chain. During walking the retargeter does not map human leg swing onto nonexistent robot leg joints; locomotion is represented by planar base motion while the torso and arms track the upper body. This avoids injecting unnecessary leg-swing commands and gives the subsequent physical controller a more stable reference. Red markers in C, G, H, and K indicate entry into squat mode and the smooth transition of the mapping chain.

The colored triads attached to the R1 Pro are SMPL-X reference frames. Because the robot and human have different kinematic structures, bending can place an arm reference triad away from the corresponding robot joint; this positional separation is expected and is not a failure criterion. The relevant visual check is that each triad has a similar orientation to its corresponding joint. Accordingly, the pose interpretation here uses ground-referenced orientation error, whereas absolute position coincidence is not required for these structurally different chains. Together with Table 3, the snapshots show that the modified front end achieves a GMR-like retargeting quality while accommodating the R1 Pro morphology.

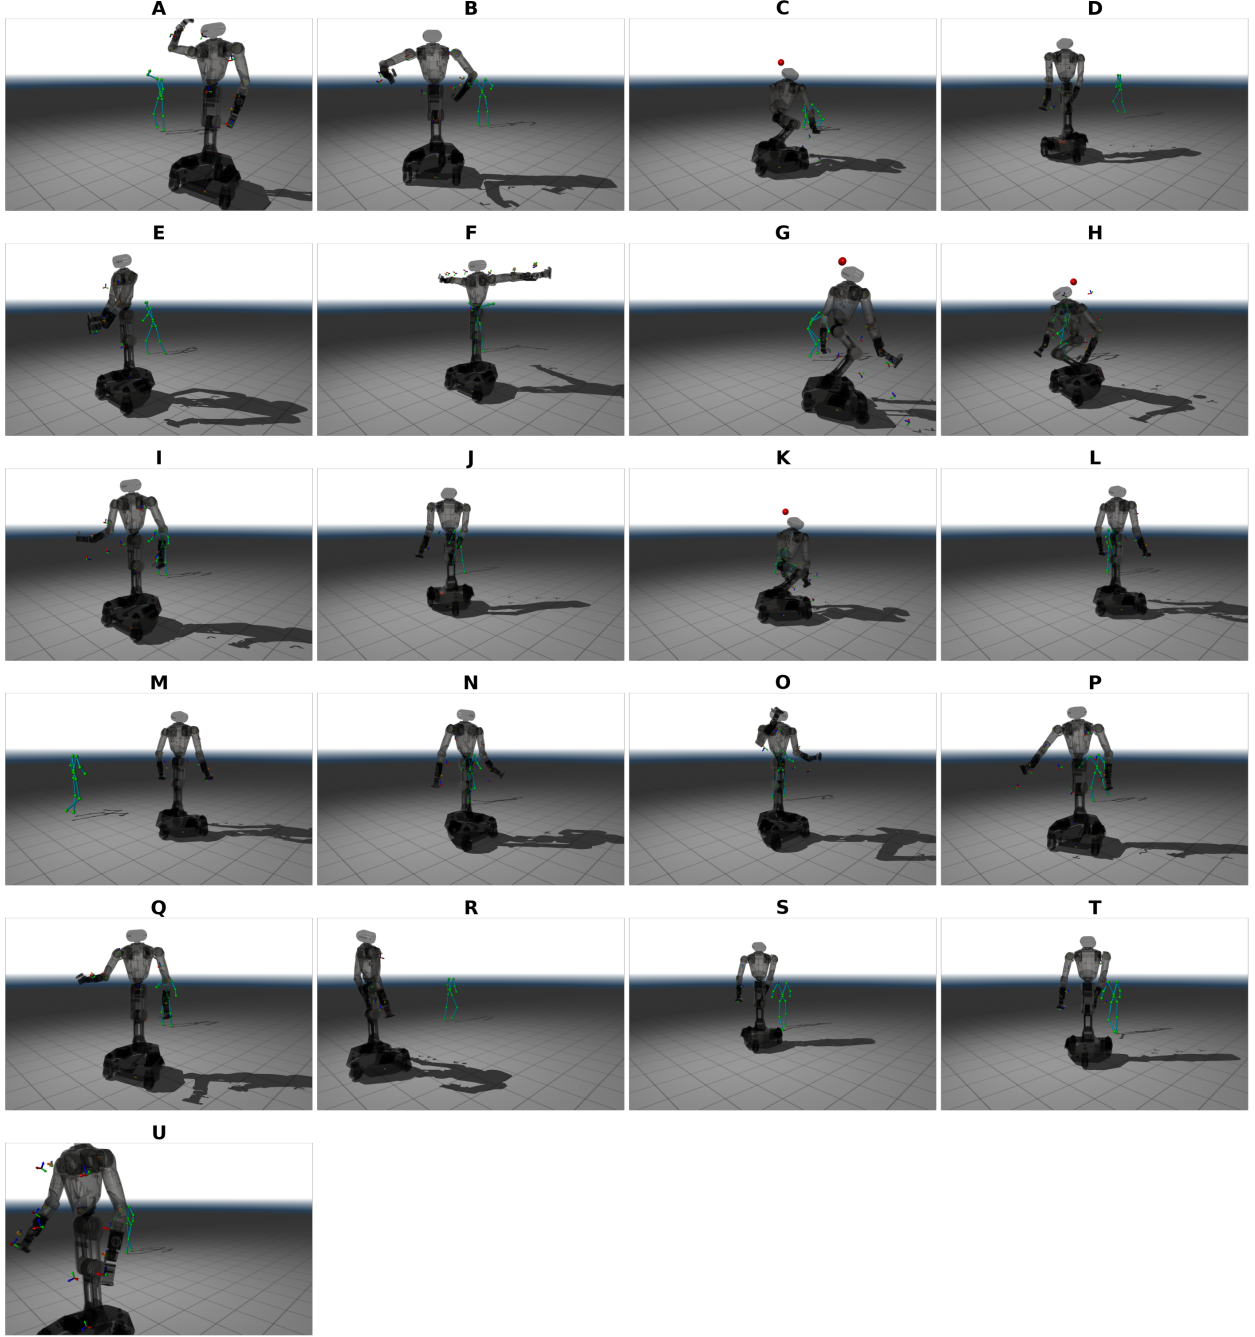


Figure 2: Representative center-frame snapshots for the fixed A–U GMR baseline set, arranged in six rows and four columns (U occupies the first cell of the last row). Each cell shows the IK-only R1 Pro result and the green G1 result from the original GMR code at the same reference frame; the 21 motions correspond directly to Table 3. Red dots in C, G, H, and K mark smooth squat-mode entry.

11.3 Shoulder-rooted arm-scaling ablation

We next compare the default shoulder-rooted hierarchical arm scaling with an otherwise identical variant that scales all arm targets from the common pelvis root. Both conditions use the same fixed A–U motions, IK tasks, three-axis shoulder scale, and automatically selected evaluation intervals. For each motion we record the mean position error of the elbow and wrist relative to their corresponding shoulder, together with their

ground-referenced rotation error. Position errors are reported in centimeters and rotation errors in degrees. Raw human joint positions and orientations cannot be compared directly with the R1 Pro links because the two skeletons have different morphology, scale, and local frame conventions. We therefore first apply the configured body scaling, root/segment transformation, orientation offsets, and ground alignment to the SMPL-X sequence. All errors below are computed against these transformed SMPL-X targets. In particular, the target used by the uniform-root ablation may already be geometrically distorted by its incorrect pelvis-rooted scaling; this distortion is part of the ablation and explains why its measured error can become large. The resulting position and orientation errors should therefore be read primarily as IK tracking errors: they test whether the R1 Pro links can reach the scaled and transformed targets supplied to IK, rather than directly measuring the discrepancy between the raw human motion and the robot.

Figure 3 uses a relative-height visualization so that the position and rotation metrics can be shown compactly despite their different absolute ranges. In every small panel, the red baseline bar is normalized to height one for each metric, while the blue bar has height $E_{\text{uniform}}/E_{\text{shoulder}}$. Thus a blue height above one means that the uniform-root variant has a larger error, and its height is the error ratio rather than a new physical unit. The labels retain the underlying physical values: position labels are integer centimeters and rotation labels have one decimal degree. The x-axis abbreviations are LEP/LER (left elbow position/rotation), REP/RER (right elbow position/rotation), LWP/LWR (left wrist position/rotation), and RWP/RWR (right wrist position/rotation). Each panel uses an independent y limit to keep the ratios readable.

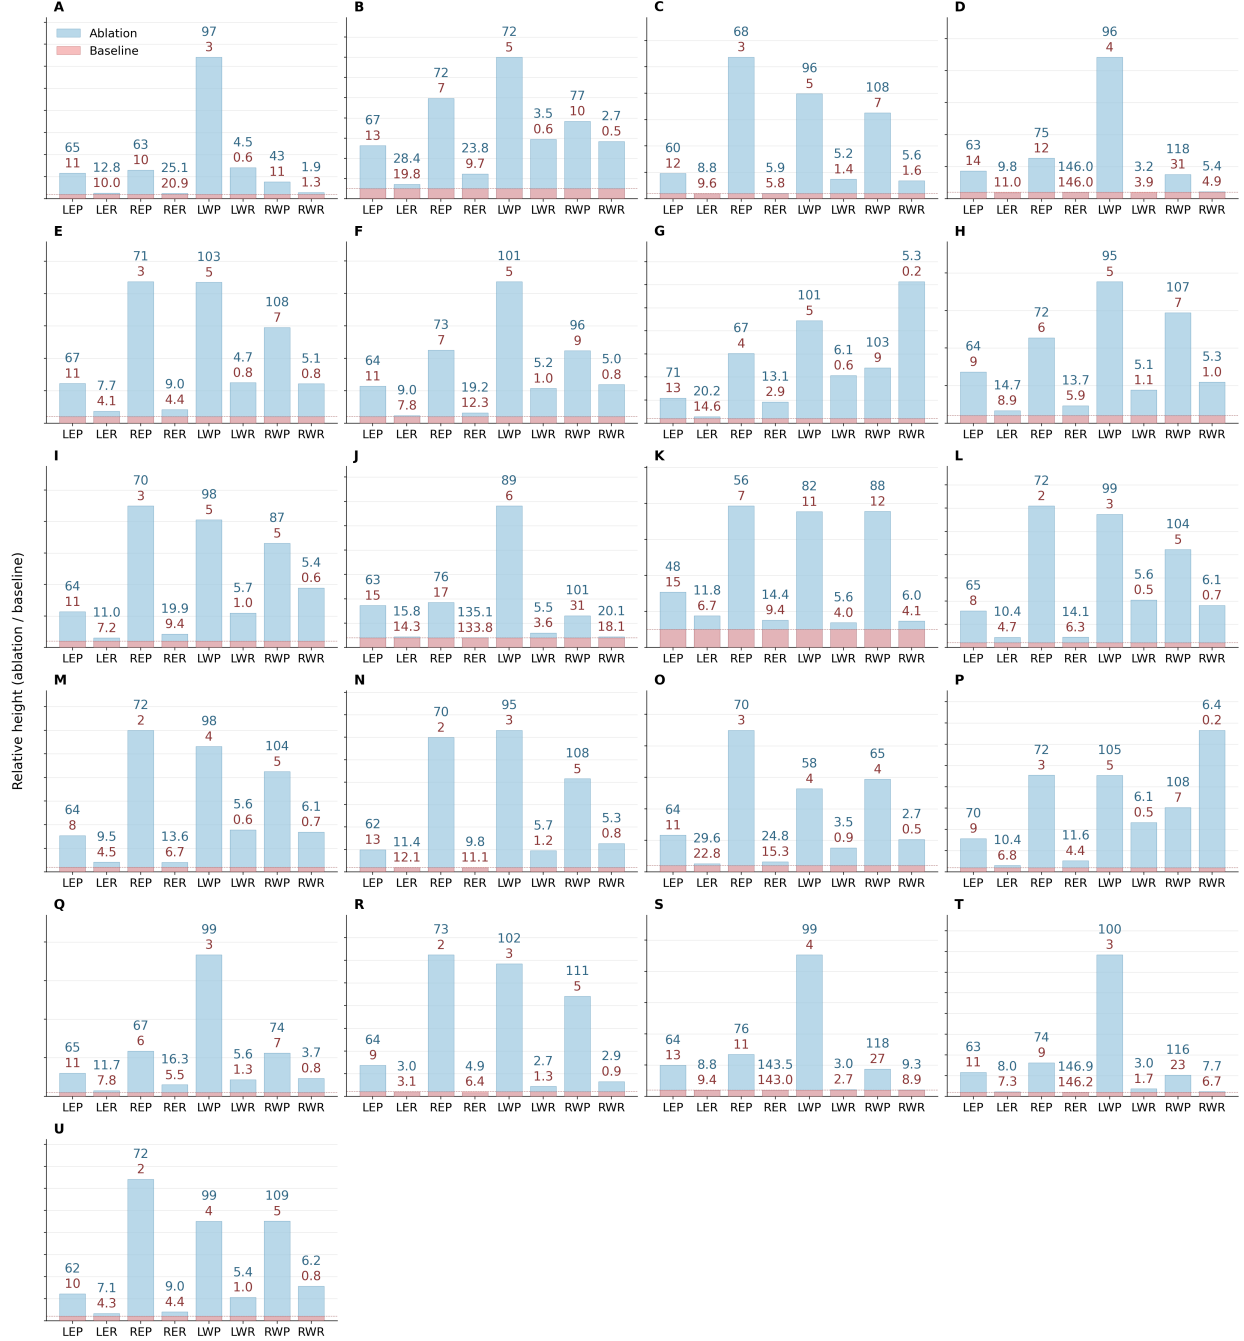


Figure 3: Relative-error comparison of shoulder-rooted hierarchical arm scaling and the uniform-pelvis-root ablation on the fixed A-U set. Red bars denote the baseline and are fixed to one; blue bars show the ablation-to-baseline error ratio. Labels report the underlying position values in cm or rotation values in degrees.

11.4 Dataset-scale feasibility screening

We also summarize the existing feasibility screening of 16,268 stage-II motions from ten AMASS subsets. The screening applies COM stability, ZMP stability, and self-collision checks with a 100% safety margin and zero frame-failure tolerance. Table 4 reports counts and first-failure categories from the archived per-dataset reports. Overall, 6,636 motions (40.8%) pass all checks. ZMP is the dominant rejection source (7,904 motions, 48.6%), followed by self-collision (970, 6.0%) and skipped/failed retargeting or length limits (758,

Table 4: Archived feasibility screening by AMASS subset.

Dataset	Input	Pass	Pass rate	Dominant rejection
GRAB	1340	940	70.1%	ZMP / collision
BMLmovi	1864	1229	65.9%	ZMP / collision
EKUT	349	214	61.3%	ZMP / collision
KIT	4232	2358	55.7%	ZMP / collision
Eyes Japan	750	247	32.9%	ZMP / skip
CMU	1983	619	31.2%	ZMP / skip
BMLrub	3061	693	22.6%	ZMP
ACCAD	252	43	17.1%	ZMP
WEIZMANN	2222	285	12.8%	ZMP / skip
HDM05	215	8	3.7%	ZMP / skip
Total	16268	6636	40.8%	–

4.7%). These counts record the first failed check for each motion, so the categories overlap: motions that also violate the COM condition have generally already been removed by an earlier check. Thus COM contributes no new first-failure count in this summary; it remains an active and necessary feasibility condition. The pass rate varies from 70.1% for GRAB to 3.7% for HDM05, indicating that the executable wheeled-body constraints strongly depend on motion distribution. The screening is a data-quality and feasibility filter, not a claim about the quality of the original datasets.

11.5 Canonical-shape normalization diagnostic

The canonical-shape diagnostic uses five randomly selected, high-beta-distance motions (B1–B5) from the screened pool. The baseline and normalized runs use identical R1 Pro settings and per-motion evaluation intervals; planar centering is enabled in both conditions because it is a required reference-frame operation, not an optional component. For each link and motion, the plotted improvement is

$$I = 100 \frac{E_{\text{no-norm}} - E_{\text{canonical}}}{E_{\text{no-norm}}}, \quad (27)$$

where E is the mean pelvis-relative position or rotation error. Positive values indicate lower error after canonical-shape normalization. The heatmaps show the per-motion diagnostic.

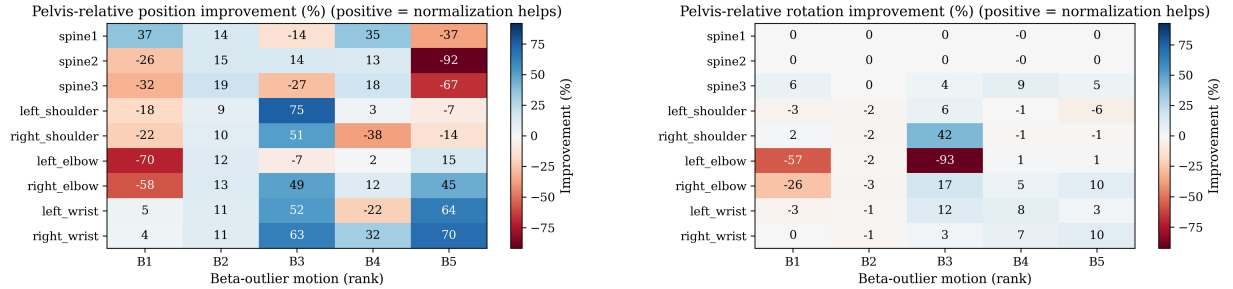


Figure 4: Per-motion beta-outlier diagnostic on B1–B5. Each cell reports $100(E_{\text{no-norm}} - E_{\text{canonical}})/E_{\text{no-norm}}$ for a pelvis-relative mean error; positive values indicate lower error after canonical-shape normalization.

11.6 Qualitative PPO rollouts

To assess the complete reference-to-simulation path, we selected 16 representative motions after first-stage retargeting and executed their references with the PPO tracker, the planar base planner, and the PD command interface. The set emphasizes four behaviors that are important for loco-manipulation: arm-dominant manipulation, base translation, base turning, and torso bending or squatting. For each motion, eleven frames

were sampled at equal temporal intervals after omitting the initial reset frame. Figure 5 shows only the PPO replay; the left panel contains motions A–H and the right panel motions I–P. Within each row, time increases from t_1 to t_{11} from left to right.

The rollouts generally preserve the intended arm, base, and torso behavior, but occasional falls remain in the unconstrained physics simulation. Two mechanisms explain the observed failures. First, some reference transitions induce large instantaneous torques; the free-base R1 Pro is dynamically unstable under such impulses and can lose support. Second, the policy does not emit wheel speed and steering angle directly: it predicts planar (x, y, ψ) targets, which the downstream planner and PD interface convert to wheel commands. This extra decoding layer introduces morphology and actuator mismatch that is not fully represented by the policy action. In the current test, 15 of the 16 selected rollouts complete without a fall, showing that the PPO–planner–PD chain can execute the screened references reliably while retaining the expected arm, base, and torso behavior.

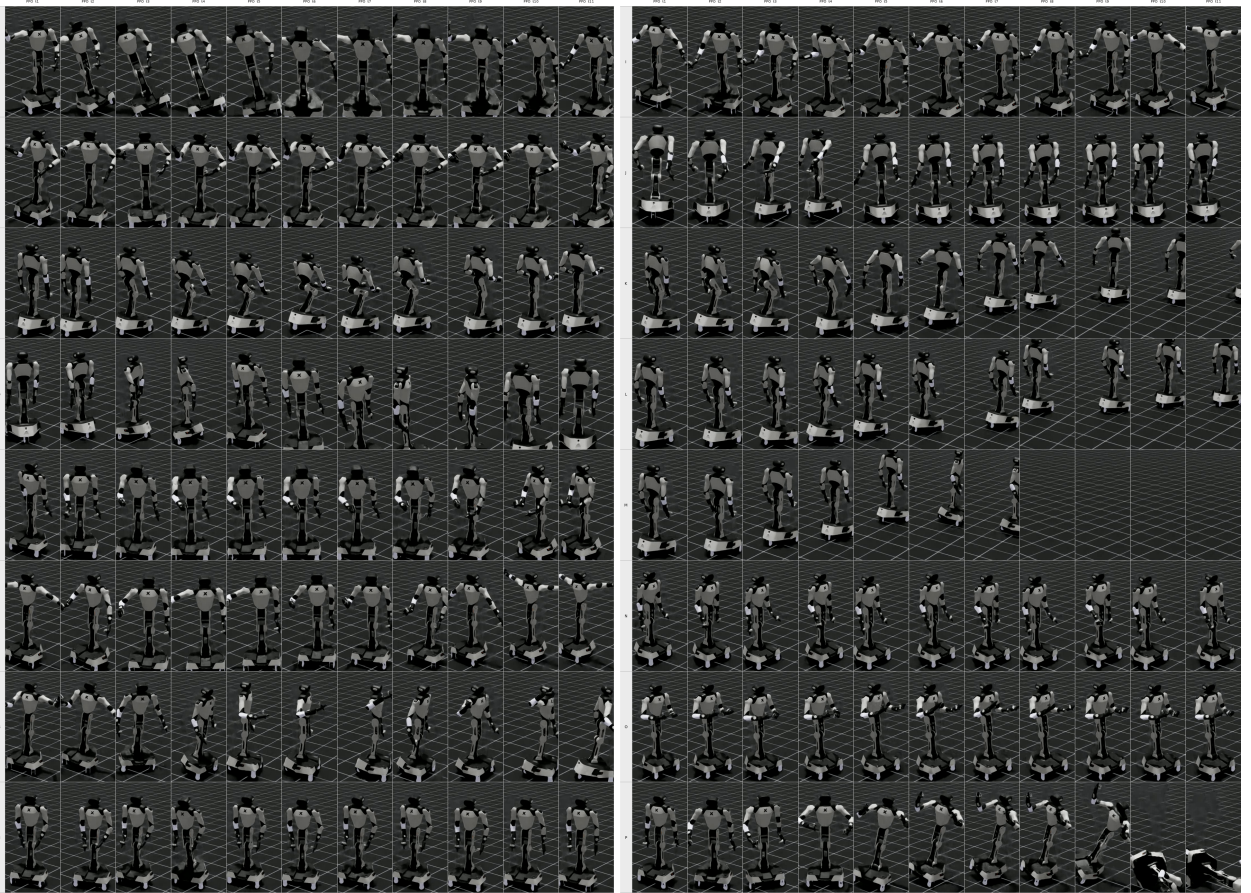


Figure 5: Qualitative PPO replay for 16 representative retargeted motions. The left panel contains A–H and the right panel I–P; each row is one motion and each panel has eleven equally spaced temporal samples t_1 – t_{11} . The panels are the two halves of a 22-column by 8-row layout; only the PPO replay is shown. The selected motions are a fixed subset of the screened A–U pool and emphasize arm manipulation, base translation and turning, and torso bending/squatting. Each reference was first retargeted, then tracked by PPO through the planning layer and PD controller. The figure provides qualitative evidence for the complete PPO–planner–PD execution path.

11.7 Planner-and-contact stability ablation

We ablate the combined stability layer consisting of the Section 9.3 hysteresis, equivalent-steering selection, and dynamic limits together with the staged wheel-contact curriculum. The comparison uses motion D from the fixed A–U evaluation set (the BMLrub “circle walk” sequence listed in Appendix 6). The reference and simulated execution are compared at twelve equally spaced times, with the same action shown in the baseline

and ablation rows of Figure 6. We inspect whether all three wheels remain in ground contact, whether turning induces body or base tilt, and whether the planar base follows the intended x - y -yaw trajectory.

With the complete planner/contact layer, R1 Pro maintains stable three-wheel contact during large-range translation and turning and follows the commanded planar motion comparatively reliably. Removing these measures produces visible instability during translation and steering: wheel contact becomes less consistent, the base tends to rotate or tilt, and the realized x - y -yaw motion deviates from the target. This confirms that the planner/contact stability layer is effective and necessary for reliable large-range motion and turning on the R1 Pro.

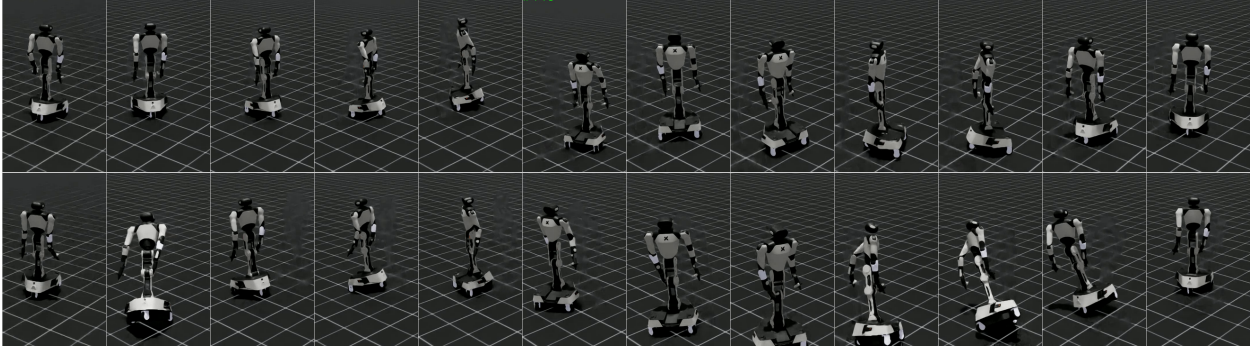


Figure 6: Qualitative ablation of the combined Section 9.3 planner stability measures and the staged wheel-contact curriculum on motion D from Appendix 6. The upper row is the complete stability layer and the lower row removes the ablated measures; each row contains twelve equally spaced times. The comparison highlights three-wheel ground contact, turning-induced tilt, and planar x - y -yaw tracking.

11.8 Direct wheel-steer action ablation

We further test the action-interface choice motivated by the planning layer. The baseline keeps the PPO action and reward tied to the planar base pose (x, y, ψ) ; the planner then computes the six steering and rolling commands. The ablation removes the planar action and asks PPO to track all six wheel and steering degrees of freedom directly. Both conditions use motion D from Appendix 6, with its base yaw fixed to zero to remove turning-induced base-wheel coupling. In the ablation, the wheel and steering reference is still generated by the same planner, so the direct controller is given a reachable target.

The complete interface remains upright and tracks the intended motion. Direct wheel-steer tracking instead causes the wheel commands to constrain one another, destabilizing the base and eventually producing a fall, as shown in Figure 7. This supports learning planar (x, y, ψ) and decoding wheel commands downstream rather than exposing six coupled wheel variables to PPO.

This experiment also exposes a data-side limitation of direct wheel control. Some human references do not satisfy the base planner’s physical constraints; they must be slowed by TOPP (time-optimal path parameterization) before their wheel and steering trajectories become feasible. In many cases the required slowdown exceeds a factor of 40, which materially distorts the original motion. This further argues for retaining planar actions and the planner/decoder interface when constructing references. Together, these observations show that directly exposing six coupled wheel and steering variables is not a stable replacement for planner-based decoding.

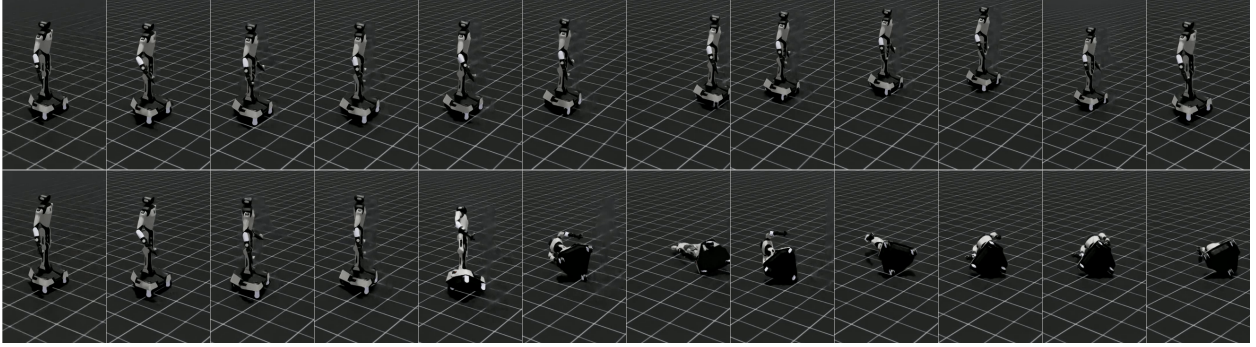


Figure 7: Direct wheel-steer action ablation on motion D with base yaw fixed to zero. The upper row uses planar (x, y, ψ) PPO actions followed by planner decoding; the lower row directly tracks six steering and rolling variables. Both rows contain twelve equally spaced frames and show only the right camera view. Direct wheel-steer tracking causes mutually conflicting wheel commands and a subsequent fall.

12 Limitations and Reproducibility

The torso substitution is a task-level approximation of human lower-body folding, not a biomechanically equivalent leg model. The wheel decoder assumes a planar three-wheel geometry and relies on contact to move the free base; it does not by itself guarantee no slip under arbitrary dynamics. The R1 Pro is not a self-righting system like a legged humanoid that can recover from a fall, so data screening is a central prerequisite rather than a cosmetic preprocessing step. Motions with large transient torques can tip the center of mass outside the support region, and failed motions cannot be rescued by a subsequent stand-up behavior. The current evidence is based entirely on Isaac Sim simulation and generated reference motion; no hardware experiment is included.

13 Conclusion

We presented a reproducible modification of GMR for the non-legged morphology and mobile-manipulation demands of the Galaxea R1 Pro. Canonical SMPL-X preprocessing, planar centering, shoulder-rooted arm IK, and continuous torso substitution replace the unstable direct leg mapping with a base-and-torso representation. Feasibility screening is essential because the R1 Pro cannot recover from a fall. The planner and three-wheel decoder convert planar references into bounded commands, while PPO and PD tracking provide physical execution in Isaac Sim.

Three qualitative studies support the design. The PPO rollouts complete 15 of 16 selected references without a fall. The combined hysteresis, equivalent-steering, dynamic-limit, and staged-contact layer preserves wheel contact and planar tracking during large translations and turns. Directly learning six wheel/steering variables instead of planar (x, y, ψ) causes mutually conflicting wheel commands and a fall; the planner-decoder interface is therefore the appropriate action contract. These results establish a practical bridge from screened human motion to wheeled- humanoid loco-manipulation. Future work will enlarge the screened training and evaluation pool and extend the SMPL-X input stage to additional motion formats, including BVH, with hardware validation.

References

- [1] Joao Pedro Araujo, Yanjie Ze, Pei Xu, Jiajun Wu, and C. Karen Liu. Retargeting matters: General motion retargeting for humanoid motion tracking. *arXiv preprint arXiv:2510.02252*, 2025.
- [2] Donghoon Baek and Joao Ramos. Whole-body bilateral teleoperation for wheeled humanoid locomotion. *arXiv preprint arXiv:2508.09846*, 2025.

- [3] Donghoon Baek, Youngwoo Sim, Amartya Purushottam, Saurabh Gupta, and Joao Ramos. Toward control of wheeled humanoid robots with unknown payloads: Equilibrium point estimation via real-to-sim adaptation. *arXiv preprint arXiv:2403.10948*, 2024.
- [4] Paolo Baerlocher and Ronan Boulic. An inverse kinematics architecture enforcing an arbitrary number of strict priority levels. *The Visual Computer*, 20:402–417, 2004.
- [5] Tairan He, Zhengyi Luo, Xialin He, Wenli Xiao, Chong Zhang, Weinan Zhang, Kris Kitani, Changliu Liu, and Guanya Shi. Omnih2o: Universal and dexterous human-to-humanoid whole-body teleoperation and learning. In *Conference on Robot Learning*, 2024.
- [6] Tairan He, Zhengyi Luo, Wenli Xiao, Chong Zhang, Kris Kitani, Changliu Liu, and Guanya Shi. Learning human-to-humanoid real-time whole-body teleoperation. *arXiv preprint arXiv:2403.04436*, 2024.
- [7] Mazeyu Ji, Xuanbin Peng, Fangchen Liu, Jialong Li, Ge Yang, Xuxin Cheng, and Xiaolong Wang. Exbody2: Advanced expressive humanoid whole-body control. *arXiv preprint arXiv:2412.13196*, 2024.
- [8] Jiacheng Liu, Pengxiang Ding, Qihang Zhou, Yuxuan Wu, Da Huang, Zimian Peng, Xiao Wei, Weinan Zhang, Xin Yang, Cewu Lu, and Donglin Wang. Trajbooster: Boosting humanoid whole-body manipulation via trajectory-centric learning. *arXiv preprint arXiv:2509.11839*, 2025.
- [9] Chenhao Lu, Xuxin Cheng, Jialong Li, Shiqi Yang, Mazeyu Ji, Chengjing Yuan, Ge Yang, Sha Yi, and Xiaolong Wang. Mobile-television: Predictive motion priors for humanoid whole-body control. *arXiv preprint arXiv:2412.07773*, 2024.
- [10] Naureen Mahmood, Nima Ghorbani, Nikolaus F. Troje, Gerard Pons-Moll, and Michael J. Black. Amass: Archive of motion capture as surface shapes. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5442–5451, 2019.
- [11] Georgios Pavlakos, Vasileios Choutas, Nima Ghorbani, Timo Bolkart, Ahmed A. Osman, Dimitrios Tzionas, and Michael J. Black. Expressive body capture: 3d hands, face, and body from a single image. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(10):3365–3380, 2019.
- [12] Luis Sentis and Oussama Khatib. Synthesis of whole-body behaviors through hierarchical control of behavioral primitives. *International Journal of Humanoid Robotics*, 2(4):505–518, 2005.
- [13] Yanjie Ze, Zixuan Chen, Joao Pedro Araujo, Zi-ang Cao, Xue Bin Peng, Jiajun Wu, and C. Karen Liu. Twist: Teleoperated whole-body imitation system. *arXiv preprint arXiv:2505.02833*, 2025.

A IK Weights and Arm Scaling Configuration

This appendix records the values used by the two-stage differential-IK configuration in our retargeting implementation. Each pair is written as (w_p, w_R) for position and orientation weight, respectively. The final column gives the local scale used when constructing the target: a scalar is a segment scale, whereas a triple is the independent (x, y, z) shoulder scale. The translation offsets in both task tables are zero; their fixed quaternion alignment is omitted because it is an orientation convention rather than a weight.

Table 5: Two-stage IK weights and morphology-aware arm scales used for R1 Pro retargeting.

R1 Pro link	SMPL-X target	Human scale	Stage 1 (w_p, w_R)	Stage 2 (w_p, w_R)	Local arm scale
base_link	pelvis	1.0	(100, 10)	(100, 5)	–
torso_link4	spine3	3.8	(0, 10)	(10, 5)	–
left_arm_link2	left_shoulder	3.3	(0, 10)	(10, 5)	(1.55, 1.50, 3.22)
left_arm_link4	left_elbow	3.0	(0, 10)	(10, 5)	1.24
left_arm_link7	left_wrist	3.0	(0, 10)	(10, 5)	1.09
right_arm_link2	right_shoulder	3.3	(0, 10)	(10, 5)	(1.55, 1.50, 3.36)
right_arm_link4	right_elbow	3.0	(0, 10)	(10, 5)	1.24
right_arm_link7	right_wrist	3.0	(0, 10)	(10, 5)	1.09

B Evaluation Motion Index

This appendix identifies the fixed evaluation motions by their public dataset, subject, action label, and dataset-relative path. The letter identifiers are used in the A–U baseline table and do not imply a ranking by performance.

Table 6: Fixed A–U motions used for the GMR baseline.

ID	Dataset	Subject	Action	Relative path
A	BMLmovi	Subject_1_F_MoSh	Subject_1_F_20	BMLmovi/ Subject_1_F_MoSh/ Subject_1_F_20
B	GRAB	s2	apple_eat_1	GRAB/s2/apple_eat_1
C	ACCAD	Male2General_c3d	Pick up box	ACCAD/Male2General_c3d/ A5_Pick_up_box
D	BMLrub	rub104	circle walk	BMLrub/rub104/ 0027_circle_walk
E	GRAB	s3	mouse pick all	GRAB/s3/mouse_pick_all
F	GRAB	s3	elephant pass 1	GRAB/s3/elephant_pass_1
G	HDM05	dg	dynamic sequence	HDM05/dg/ HDM_dg_02-03_03_120
H	BMLmovi	Subject_19_F_MoSh	Subject_19_F_6	BMLmovi/ Subject_19_F_MoSh/ Subject_19_F_6
I	GRAB	s10	teapot_pour_2	GRAB/s10/teapot_pour_2
J	BMLrub	rub012	throwing hard 1	BMLrub/rub012/ 0022_throwing_hard1
K	ACCAD	Female1Walking_c3d	crouch to walk 1	ACCAD/ Female1Walking_c3d/ B25_-_crouch_to_walk1
L	ACCAD	Female1Walking_c3d	stand to walk	ACCAD/ Female1Walking_c3d/ B1_-_stand_to_walk
M	ACCAD	Female1Walking_c3d	walk turn right (90)	ACCAD/ Female1Walking_c3d/ B12_-_walk_turn_right_(90)
N	BMLrub	rub022	normal walk 4	BMLrub/rub022/ 0008_normal_walk4
O	CMU	13	sequence 13_07	CMU/13/13_07
P	GRAB	s1	binoculars see 1	GRAB/s1/binoculars_see_1
Q	GRAB	s5	wineglass drink 1	GRAB/s5/wineglass_drink_1

ID	Dataset	Subject	Action	Relative path
R	KIT	4	WalkInClockwise Circle09	KIT/4/ WalkInClockwiseCircle09
S	KIT	183	walking slow 03	KIT/183/walking_slow03
T	KIT	359	walking slow 08	KIT/359/walking_slow08
U	WEIZMANN	67	Slow SShapeLR (30)	WEIZMANN/67/ Slow_SShapeLR(30)

C Shape-Stressed Ablation Motions

The canonical-shape normalization ablation uses five randomly sampled, high-beta-distance motions from the feasibility-screened pool before evaluating either variant. They are denoted B1–B5 only within this ablation; they are not additional members of the A–U main evaluation set.

Table 7: B1–B5 motions used for the canonical-shape ablation.

ID	Dataset	Subject	Action	Relative path
B1	BMLrub	rub035	treadmill norm	BMLrub/rub035/ 0000_treadmill_norm
B2	ACCAD	Male1General.c3d	lie down to crouch	ACCAD/Male1General.c3d/ General_A10_-_Lie_Down_ to_Crouch
B3	Eyes Dataset	Japan aita	dodge fast	Eyes_Japan_Dataset/aita/ accident-02-dodge_fast-aita
B4	BMLmovi	Subject_5_F_MoSh	Subject_5_F_10	BMLmovi/ Subject_5_F_MoSh/ Subject_5_F_10
B5	BMLrub	rub009	treadmill norm	BMLrub/rub009/ 0000_treadmill_norm