

CARLAverson: A Highly Modular, Distributed, and Multimodal Framework for Human-in-the-Loop Simulation

Patrick Rebling, Philipp Nenninger, Reiner Kriesten

Institute of Energy Efficient Mobility

Karlsruhe University of Applied Sciences

{patrick.rebling, philipp.nenninger, reiner.kriesten}@h-ka.de

Abstract—The development of autonomous driving demands comprehensive testing in mixed-traffic scenarios involving vulnerable road users (VRUs), where purely artificial agents often fail to capture authentic human social negotiations. While human-in-the-loop (HITL) simulators enable safe investigation of these interactions, existing multi-agent platforms struggle with the network latency and synchronization constraints required for high-fidelity haptic feedback. To resolve this, we present CARLAverson, an open-source, multimodal simulation ecosystem. Extending modular hardware abstraction, CARLAverson integrates driving (DrivoCARLA), cycling (CycloCARLA), and pedestrian (WalkoCARLA) simulators into a shared virtual environment. Its core methodological contribution is a distributed physics architecture: latency-critical ego dynamics and high-frequency force feedback are computed locally on client nodes, while a central CARLA server orchestrates non-player character (NPC) physics and global traffic. By decoupling haptic control loops from network bottlenecks, CARLAverson enables scalable, cross-institutional HITL experiments without compromising physical immersion. Code and documentation: <https://git.ieem-ka.de/simulator-environments/carlaverson>.

Index Terms—CARLA, Multimodal Simulation, Distributed Simulation, Human-in-the-Loop

I. INTRODUCTION

Over the past decade, ambitious timelines and predictions have driven the development of autonomous driving [1], [2]. Despite considerable technological progress, achieving fully autonomous vehicles capable of reliably navigating all potential driving conditions remains a persistent challenge [3]. One major challenge is the variety of mixed traffic scenarios in which automated vehicles must coexist with human-driven cars and Vulnerable Road Users (VRUs), such as cyclists and pedestrians. Consequently, observing, predicting, and accurately modeling human behavior within these complex, dynamic environments has become a pivotal focus of autonomous driving research. Addressing this issue is essential not only for operational safety, but also for gaining broader public acceptance [4] and trust [5] in Artificial Intelligence (AI)-driven transportation systems [6]. In this context, Human-in-the-Loop (HITL) simulation is a crucial methodology that enables the safe and repeatable investigation of human behavior in complex traffic interactions without exposing participants to physical risk.

However, effectively deploying HITL driving simulators introduces significant technical challenges. Ecological validity

relies heavily on the system’s ability to achieve a high degree of realism. Visual, auditory, and tactile feedback must be closely synchronized and authentic to generate natural responses from drivers [7], [8]. Furthermore, minimizing latency between user input and simulator response is essential. Delays can induce simulator sickness, disrupt the human sensorimotor loop, and compromise the integrity of the collected behavioral data. Finally, integrating heterogeneous hardware and software subsystems is challenging due to the varying communication protocols and data standards of input and output devices.

To mitigate the complexity of constructing individualized simulator setups, our previous work introduced a modular hardware abstraction framework based on the Car-Learning-to-Act (CARLA) simulation environment [9]. While this architecture successfully reduces the overhead associated with deploying standalone, immersive simulators, a comprehensive study of mixed traffic requires observing concurrent interactions among multiple human participants. Existing solutions to this multi-agent problem often have limitations: commercial connected simulators are usually too expensive [10], [11], and current open-source alternatives usually lack the necessary immersion and streamlined hardware integration for a cohesive multi-actor ecosystem [12], [13]. Therefore, there is a persistent need for a comprehensive simulation framework that can seamlessly integrate various road users into a shared, responsive virtual environment [13], [14].

To address this gap, this paper introduces CARLAverson, an open, multimodal, and connected simulation ecosystem. The primary contribution of this work is the overarching system architecture, software framework, and cross-domain integration methodology that enables heterogeneous HITL nodes to interact within a shared virtual environment. While the paper includes technical descriptions of individual subsystems (including bicycle dynamics, spatial audio, force-feedback haptics, motion cueing, pedestrian Virtual Reality (VR), and vision-based pose estimation), these sections serve to document their integration interfaces, data pipelines, and operational system roles within the distributed ecosystem. CARLAverson integrates various HITL simulators within a unified CARLA-based infrastructure. Expanding upon our previously established modular architecture, CARLAverson currently supports three interaction domains: vehicle (DrivoCARLA), bicycle (CycloCARLA), and pedestrian (WalkoCARLA) sim-

ulators. A core methodological contribution of this ecosystem is its distributed physics architecture. To support high-fidelity force feedback and low-latency interaction for human participants in complex urban simulations, physics computation is structurally decoupled. Each participant's node-specific ego physics is calculated locally on dedicated local nodes, while the central CARLA server manages Non-Player Characters (NPCs) physics and centrally coordinated global traffic simulation. This distributed paradigm addresses the trade-off between localized haptic realism and centralized environmental synchronization, and is intended to support scalable, connected, multi-agent experiments. This paper documents the architecture, implementation, and integration principles of CARLAverse. Detailed synchronization mechanisms and quantitative validation of individual physical and perceptual subsystems are addressed in dedicated companion publications and ongoing work.

The remainder of this paper is organized as follows: Section II reviews the state of the art and related work in connected simulation frameworks. Section III details the distributed software architecture and networking paradigm of the CARLAverse. Section IV outlines cross-cutting technological integrations, such as the CARLAcoustics audio engine. Section V presents the individual multimodal simulation nodes, specifically DrivoCARLA, WalkoCARLA, and CycloCARLA. Finally, Section VI summarizes the findings and highlights directions for future research.

II. RELATED WORK AND STATE OF THE ART

This section reviews existing approaches in hardware abstraction, the current state of mixed-traffic simulation, and the technical challenges associated with distributed physics and latency management in multi-agent environments to contextualize the framework of the CARLAverse ecosystem.

A. Modular Software and Hardware Abstraction

The modularization of software for the purpose of achieving hardware abstraction is an established paradigm designed to ensure flexibility and reusability. The implementation of Hardware Abstraction Layers (HALs) [15] facilitates the development of reconfigurable software architectures. Virtual machines are a prominent HAL technology that simulate operating systems across diverse host environments [16]. The Robot Operating System (ROS) [17] is extensively used for hardware abstraction, enabling modular development where hardware-specific components can be seamlessly interchanged. In the automotive sector, the AUTomotive Open System ARchitecture (AUTOSAR) standard [18] provides a formalized methodology for hardware abstraction. Furthermore, recent advancements have introduced HALs for embedded systems that use time-triggered hardware access to ensure deterministic execution [19].

On the hardware level, modularization has traditionally been achieved through interchangeable mock-up modules [20]. For instance, Realtime Technologies offers RDS-Modular simulator mock-ups [21], which allow for customized assembly from predefined components. However, commercial simulation

solutions typically present a high financial barrier to entry and rely on proprietary interfaces, which can restrict users to specific vendor ecosystems for hardware integration [10], [11]. Conversely, while modern open-source frameworks deliver high visual fidelity, they frequently lack native support for physical immersion (e.g., motion platforms or force-feedback systems) and necessitate extensive source code modifications to interface with customized hardware [12].

B. Open-Source Simulators and Mixed-Traffic Integration

Simulation environments, such as CARLA in the open-source domain or the driving simulation software SILAB (WIVW GmbH) [22] in the commercial sector, typically use a modular architecture focused on software interfaces for testing autonomous driving functions and Advanced Driver Assistance Systems (ADAS). For driving simulators, MATLAB/SIMULINK-based approaches have been employed to customize vehicle dynamics within HITL setups [23]. While modular software-based architectures exist for model-based testing of automated driving functions [24], they are often optimized for specific simulator configurations or lack open-source accessibility.

The academic community heavily relies on open-source platforms to establish reproducible testing environments, with the landscape largely divided by application scale. Microscopic traffic flow simulators like Eclipse Simulation of Urban MObility (SUMO) [25] are highly efficient at simulating large-scale urban mobility and vehicle routing, yet they lack high-fidelity 3D rendering and complex ego-vehicle dynamics. Conversely, 3D simulators built upon game engines, such as LG Silicon Valley Lab (LGSVL) simulator [26], AirSim [27], and CARLA, have become standard for sensor simulation and Autonomous Vehicle (AV) software testing. Frameworks like JOAN [28] leverage CARLA to provide excellent environments for single-ego HITL setups. However, they are primarily engineered to test a single human driver or AV algorithm against a computer-controlled environment.

Transitioning from single-ego to mixed-traffic scenarios highlights a primary limitation in current open-source simulators: the behavioral modeling of VRUs. In platforms like CARLA or SUMO, VRUs are typically represented as NPCs governed by rule-based algorithms, finite-state machines, or Foundation Models (FMs) [29]. These artificial agents often exhibit a behavioral gap during complex social negotiations. Subtle dynamics such as eye contact, yielding behavior, body language, and hesitation [30], [31] are nuanced human traits that current AI systems struggle to replicate authentically.

To address this, recent research has used co-simulation, integrating CARLA with SUMO via Traffic Control Interface (TraCI) [32], [33]. While effective for orchestrating artificial agents, co-simulation does not fully address the synchronization constraints required for distributed HITL testing, where multiple human participants require real-time haptic and vestibular feedback without experiencing simulator sickness [34]. Overcoming this gap requires multi-agent HITL setups capable of placing multiple human participants in a shared virtual space to capture genuine interactions. Recent frameworks, such as CARla-Based, Multi-Agent Immersive Road

TABLE I
SUMMARY OF NON-CARLA MULTI-AGENT SIMULATION STUDIES AND FRAMEWORKS (ADAPTED FROM [13])

Study	Agents	Agent Types	Simulation Platforms	Architecture & Hardware Dependency
Lehsing & Feldstein (2018) [36]	2	Driver, Pedestrian	Full cabin sim, CAVE	Centralized, proprietary hardware lock-in
Perez et al. (2019) [37]	2	Driver (Pod), Pedestrian	Desktop sim, VR / AR	Centralized
Lindner et al. (2022) [38]	2	AV, Pedestrian	Desktop sim	Centralized
Sabeti et al. (2024) [39]	3	Driver, Pedestrian, Cyclist	Desktop sim, VR	Localized distributed VR
Crosato et al. (2024) [40]	2	Driver, Pedestrian	Desktop sim, VR	Centralized single-node physics
Yang et al. (2024) [41]	2	Driver, Pedestrian	Full cabin sim, CAVE	Distributed, hardware-specific
Simulation for All (2025) [13]	4	Driver, Ped., Cyclist, Transit	Motion Cockpit, Treadmill, Bike Trainer	Localized UDP; hardware-specific

Environment Simulation (CARMEn) [35], have introduced multi-agent environments focusing on VR and spatial audio to facilitate driver-pedestrian coexistence. However, CARMEn relies on a centralized architecture and standard middleware, which may introduce serialization latency that can affect the fidelity of mechanical feedback systems. A holistic approach must support heterogeneous nodes, such as pedestrian VR simulators and physical bicycle trainers, while maintaining stringent physical synchronization.

To fully appreciate the structural requirements of the CARLAverse, it is essential to examine the broader landscape of multi-agent HITL simulators outside the CARLA ecosystem. As summarized in Table I (adapted from a recent review [13]), several platforms have attempted to bridge the gap in multi-agent interactions. However, they share distinct limitations regarding scalability and hardware abstraction.

First, the majority of these studies are limited to only two interacting agents (typically a driver and a pedestrian) operating within centralized, single-node physics environments. Second, while the recently proposed *Simulation for All* framework [13] significantly advances the field by integrating up to four agent types (including public transit), it remains fundamentally constrained by its network architecture and rigid hardware dependencies. The system mandates specific, physical infrastructure, such as proprietary omnidirectional treadmills and high-end VR headsets, operating exclusively over a localized UDP network. Consequently, it is not primarily designed for hardware-agnostic integration of custom simulator mock-ups. Furthermore, its localized architecture does not describe support for geographically distributed deployments across Wide Area Networks (WANs) while maintaining rigorous haptic synchronization. This critical gap underscores the necessity for the distributed physics and modular abstraction paradigm introduced by the CARLAverse.

C. Distributed Architectures and Latency Management

Operating a multi-agent HITL ecosystem introduces substantial computational and networking bottlenecks. For immersive simulators, mechanical, visual, and communication latencies must be strictly minimized to ensure valid behavioral data [8], [42]. Rendering visual environments, calculating

multi-body physics, and computing force feedback necessitate extremely high frequencies (often >100 Hz, up to 1000 Hz for stable haptics) [43].

Historically, modular simulator frameworks have relied on middleware like ROS or ROS 2 for node orchestration. However, latency profiling of distributed ROS systems indicates structural bottlenecks for time-critical haptic applications [44]. While higher transmission frequencies in ROS 2 can reduce median latency via active thread scheduling, the framework introduces considerable baseline computational overhead. Routing control signals through the ROS 2 stack and its underlying Data Distribution Service (DDS) can add up to 50% more latency compared to raw socket communication for small payloads. This compounding overhead scales linearly with node count, degrading the fidelity of mechanical systems such as direct-drive steering wheels or resistance motors. Traditional latency mitigation strategies, including predictive algorithms or robust control techniques, struggle with high-frequency dynamic feedback, such as self-aligning torque or collision impulses. To contextualize these challenges within the current state of the art, Table II provides an analysis of recent co-simulation and multi-agent frameworks developed within the CARLA ecosystem.

As synthesized in the table, frameworks such as Distributed Multi-Autonomous Vehicle Architecture (DMAVA) [52], Co-operative Driving Automation - Highway Driving Simulator (CDA-HDS) [48], [47], and Sky-Drive [50] successfully scale autonomous agents, typically by layering communication middleware (e.g., ROS 2, Zenoh, TENA) over centralized physics engines. Transmitting high-frequency human control inputs over middleware to a central server may introduce latency overhead for haptic multi-agent research. Similarly, while GrokWalks [46] excels in visual VRU synchronization, and CARJAN [53] introduces semantic reasoning, these platforms are not primarily designed for coupled high-frequency force-feedback across WANs.

D. Synthesis: The CARLAverse Differentiation

The literature indicates that centralized physics architectures relying on intermediary middleware may introduce latency

TABLE II
COMPARISON OF CARLA CO-SIMULATION AND MULTI-AGENT FRAMEWORKS.

Framework	Primary Focus	Tech Stack	Dist. Physics	Drive	Bike	Ped.	Key Limitations for HITL
DReyeVR [45] (2022)	Single-Ego VR / Behavior	CARLA fork + Unreal Engine / VR	No	✓	–	–	Designed primarily for single-node VR; does not describe support for distributed multi-agent haptic interactions.
JOAN (2023) [28]	Single-Ego HITL & Human Factors	CARLA (Native API / USB)	No	✓	–	–	Focuses on single-node setups; does not describe support for distributed multi-agent deployment across wide-area networks.
GrokWalks (2024) [46]	VRU, Driver-Pedestrian Interaction	CARLA + Mozilla Hubs (WebRTC)	No	✓	–	✓	WebRTC architecture optimizes for visual XR sync, but is not primarily designed for the high-frequency physical coupling required for rigid-body haptics.
CDA-HDS (2025) [47], [48]	Highway V2X & SIL/HITL	CARMA/CARLA (ROS, TENA [49])	No	†	–	–	Reliance on high-level TENA middleware may introduce serialization overhead, presenting challenges for closed-loop haptic synchronization.
Sky-Drive (2025) [50], [51]	Socially-aware Multi-agent	CARLA (ROS / Custom Sync)	No	✓	–	✓	Centralized physics over standard network middleware is not primarily designed for low-latency remote haptic control loops.
CARMEn (2026) [35]	Multi-Agent Immersive XR	CARLA + UE Multiplayer (Client-Server)	No	✓	–	✓	Standard UE client-server model centralizes physics; high XR and audio bandwidth may introduce latency that affects real-time haptic feedback.
DMAVA (2026) [52]	Distributed Multi-AV Stacks	AWSIM / CARLA (ROS 2, Zenoh)	No	–	–	–	Distributes AV software stacks rather than physics calculation; middleware layers may introduce overhead for high-frequency haptic control loops.
CARLAverson (Ours)	Multimodal HITL Interaction	CARLA (Direct API / RPC)	Yes	✓	✓	✓	Requires high-performance simulation computer at local node for rendering and local physics

Note: ✓ = explicitly documented human-operated HITL node; × = explicitly unsupported; – = no evidence for or against identified; † = HITL capability specified or targeted, but no implemented node verified. Symbols refer to human-operated nodes, not NPC capabilities. *Key Limitations for HITL* are source-reported limitations or conservative inferences from undocumented capabilities; they do not imply that a framework cannot be extended. *Dist. Physics* refers to distributed local ego-physics for latency-critical human control and haptic feedback.

and jitter challenges when supporting high-frequency, globally connected force-feedback simulators. The CARLAverson ecosystem is engineered specifically to address these structural trade-offs. By bypassing middleware translation layers for active control in favor of native orchestration, the CARLAverson distinguishes itself through three foundational pillars.

Unlike co-simulations reliant on AI-driven NPCs, the CARLAverson integrates multiple human participants into a shared, synchronous, and multimodal HITL system. It provides specialized, open-source nodes for vehicles (DrivoCARLA), physical bicycles connected via Bluetooth Low Energy (BLE) trainers (CycloCARLA), and pedestrians tracked via OpenXR [54] (WalkoCARLA), enabling researchers to capture authentic human-human interactions in mixed traffic. Standard simulators calculate both ego-vehicle and environmental physics

on a single machine, creating a severe bottleneck for multi-agent expansion. The CARLAverson implements a decoupled, distributed physics architecture. Latency-critical ego physics (e.g., tire friction, gyroscopic forces, and force feedback) are calculated locally on dedicated client local nodes. Concurrently, the centrally coordinated global traffic and collision matrices are managed by a central server. By localizing high-frequency control loops, the architecture inherently tolerates WAN latency, facilitating cross-institutional simulator connections. To circumvent the latency constraints of ROS and DDS in distributed control loops, the CARLAverson uses direct CARLA API RPCs, which is designed to reduce latency between human input and virtual execution. Middleware like ROS is strategically delegated to background data logging (e.g., rosbags), ensuring robust data acquisition without com-

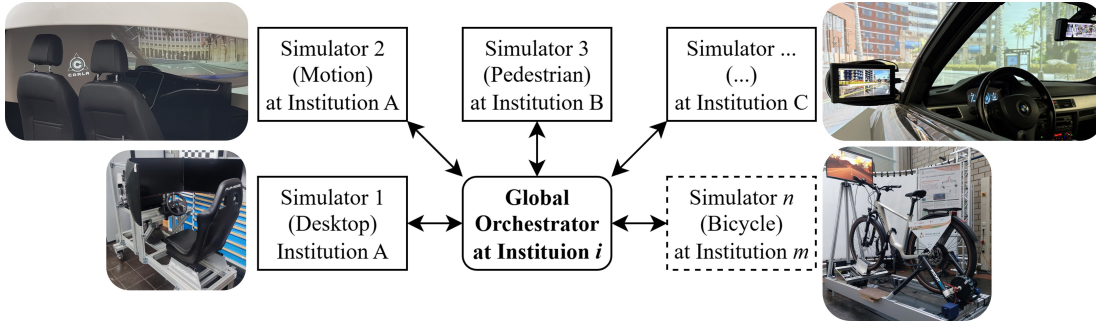


Fig. 1. The CARLAverse multi-server topology. A central global orchestrator synchronizes heterogeneous simulator nodes (e.g., desktop, motion, bicycle, and pedestrian setups) that can be geographically distributed across multiple cooperating research institutions.

promising the haptic fidelity of the multimodal simulation nodes.

III. CARLAVERSE ARCHITECTURE

To facilitate a high-fidelity, multi-agent mixed traffic environment without compromising the latency required for HITL immersion, the CARLAverse relies on a specialized, distributed software and hardware architecture.

A. System Architecture Overview

The CARLAverse ecosystem’s core topology follows CARLA’s strict server-client paradigm, but is extended to support multiple, heterogeneous simulator clients simultaneously. At the center of the architecture is a dedicated central server running the CARLA Unreal Engine environment. Various client machines are connected to this central server via a network. Each local node hosts a specific multimodal simulator setup, such as a DrivoCARLA driving simulator, a CycloCARLA bicycle simulator, or a WalkoCARLA pedestrian setup.

Crucially, this topology overcomes the physical limitations of a single laboratory. As shown in Figure 1, the CARLAverse allows for geographically distributed, cross-institutional co-simulation. For instance, researchers at Institution A can operate a desktop and a high-fidelity vehicle simulator while participants at Institutions B and C interact simultaneously as cyclists or pedestrians within an identical virtual intersection via a WAN. While this interconnected configuration unlocks unprecedented possibilities for large-scale, naturalistic, mixed-traffic research, routing real-time simulator data across vast physical distances presents severe latency and synchronization challenges. To overcome these limitations, the CARLAverse employs a strictly distributed physics architecture.

B. Distributed Physics Calculation

The most significant technical challenge in networked multi-agent simulators is managing the computational load while reducing latency for human participants. In the CARLAverse, the architecture addresses the trade-off between centralized traffic management and low-latency local execution by strictly decoupling the physics calculations into global and local domains, as illustrated in Figure 2. To maintain global consistency across the distributed network, the central server

acts as an authoritative orchestrator. Rather than relying on a middleware bridge to broadcast the global traffic state, the central server operates in a direct server–client orchestration model. It establishes direct RPC client connections to every local node.

The central server is exclusively responsible for computing the centrally coordinated elements of the simulation. This includes the CARLA Traffic Manager, the Traffic Light Manager, the behavior and physics of all NPCs (AI vehicles and pedestrians), weather conditions (synchronization across local nodes), and the global collision matrix. By centralizing these tasks, the environment remains globally synchronized and consistent for all connected participants. Conversely, the complex and latency-critical dynamics of the human actors are calculated locally on their respective local nodes. For instance, in DrivoCARLA and CycloCARLA, tire-road interactions, the resulting self-aligning torques for force feedback, and motion cueing algorithms are calculated entirely on local workstations. Similarly, WalkoCARLA processes its vision-based pose estimation and VR visualization locally to avoid network latency when transmitting high-resolution images.

This distributed physics approach supports high-frequency local control loops, which often require update rates of several hundred Hertz to feel realistic to a human operator, without being bottlenecked by network latency or the central server’s load. To maintain the synchronized global world state, the local nodes only exchange essential, lightweight telemetry (such as absolute position and rotation updates) and receive discrete collision notifications (impulse events) from the central CARLA server in case of a collision with an NPC or other ego vehicle. To mitigate the visual impact of transient network instability or bandwidth fluctuations, the framework employs client-side position interpolation for all external actors, including NPCs and other ego vehicles. This ensures smooth rendering even during minor packet loss. In the event of a severe connection loss or a prolonged timeout between a local node and the central orchestrator, the disconnected instance is automatically despawned from the global simulation. This fail-safe mechanism prevents unpredictable collisions resulting from stale telemetry and maintains the integrity of the scenario for all remaining participants. The architecture is designed to accommodate additional local domains, subject to available server and network resources.

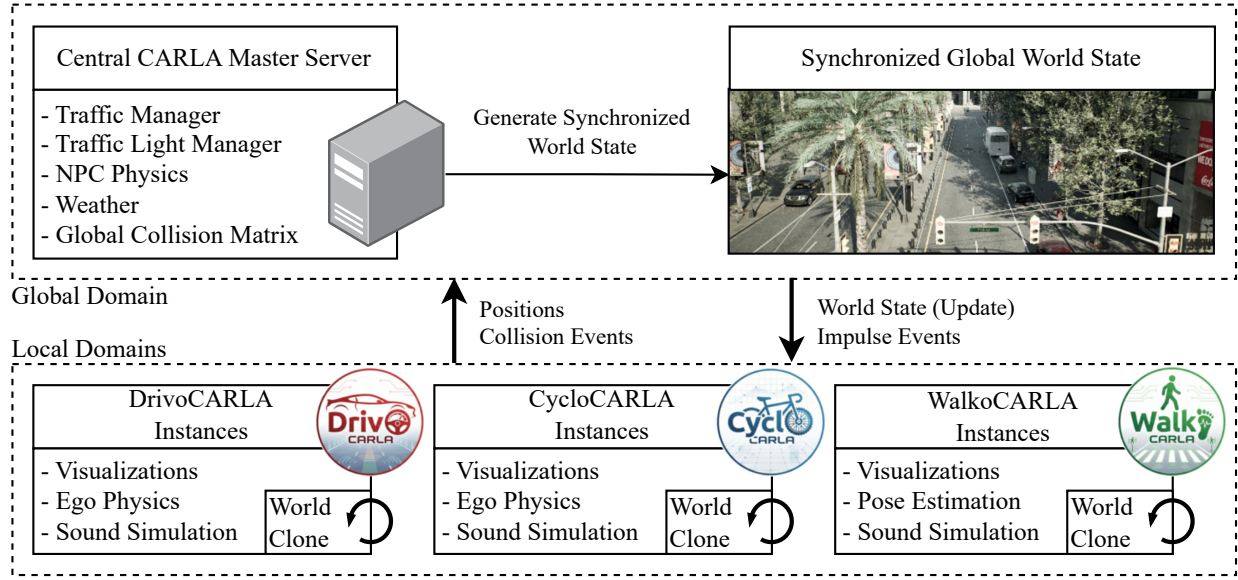


Fig. 2. The distributed physics architecture of the CARLAverse. The central server handles the global domain (centrally coordinated traffic and collisions), while local nodes independently compute latency-critical ego-physics and pose estimation, exchanging only synchronized world states and impulse events over the network.

C. Communication Protocols and Data Logging

In early iterations of modular simulator frameworks, middleware such as the ROS was used for orchestrating the various software modules. However, as previously established, routing high-frequency control signals through ROS nodes introduces unwanted communication overhead, serialization latency, and DDS jitter, which severely degrades the fidelity of mechanical feedback systems.

To eliminate this overhead, the CARLAverse architecture, as illustrated in Figure 3, completely bypasses ROS for simulator control and orchestration. Instead, all interconnected subsystems communicate directly using the native CARLA API via RPC over Transmission Control Protocol (TCP)/Internet Protocol (IP) for reliable transactional state updates. Furthermore, latency-critical hardware telemetry (such as high-frequency force feedback and motion cueing) is routed via dedicated, connectionless UDP streams. This decoupling supports high-frequency local control loops by bypassing the transmission overhead of TCP. In a traditional centralized architecture, the total haptic loop latency T_{central} includes significant network components:

$$T_{\text{central}} = t_{\text{input}} + t_{\text{network,tx}} + t_{\text{physics}} + t_{\text{network,rx}} + t_{\text{actuation}} \quad (1)$$

In contrast, the CARLAverse’s localized physics architecture eliminates the network transmission delays ($t_{\text{network,tx}}$ and $t_{\text{network,rx}}$) from the time-critical loop, resulting in a strictly localized haptic delay T_{local} :

$$T_{\text{local}} = t_{\text{input}} + t_{\text{physics,local}} + t_{\text{actuation}} \quad (2)$$

By removing the intermediary publish-subscribe middleware and leveraging these direct, specialized network protocols alongside distributed physics, the architecture is designed to reduce transport delay and promote haptic stability, mitigating

the risk of transient network jitter translating into erratic physical force spikes or steering wheel oscillations.

While ROS is not used for active control by humans, it still plays a vital role in the ecosystem as a passive, background data-logging engine and interface to automated driving functions (see Figure 8). During a simulation, the local nodes asynchronously publish their state data to ROS topics. By using *rosbags*, the CARLAverse can synchronously record vast amounts of experimental data, including human control inputs, eye-tracking coordinates, globally synchronized traffic states, and sensor data, across all connected multimodal simulators simultaneously. Because this publication is handled asynchronously, it enables robust, time-stamped data acquisition for post-experiment analysis without blocking or interfering with the low-latency requirements of the HITL physics loop.

IV. CROSS-CUTTING FRAMEWORKS AND ORCHESTRATION

Creating a cohesive, shared virtual environment for multiple human actors requires more than just distributed physics. To ensure high modularity and valid experimental results across all nodes, the CARLAverse relies on cross-cutting technologies that manage system orchestration, telemetry visualization, and sensory augmentation uniformly across the framework. In accordance with the system-level focus of this paper, the following subsections outline the software architecture, abstraction layers, and integration interfaces of these cross-cutting subsystems (such as spatial audio, force feedback, and motion cueing), whereas their domain-specific mathematical modeling and validation are addressed in companion works.

A. The CARLAverse Tools Library

To facilitate rapid development and ensure standardized interactions with the central CARLA server, the

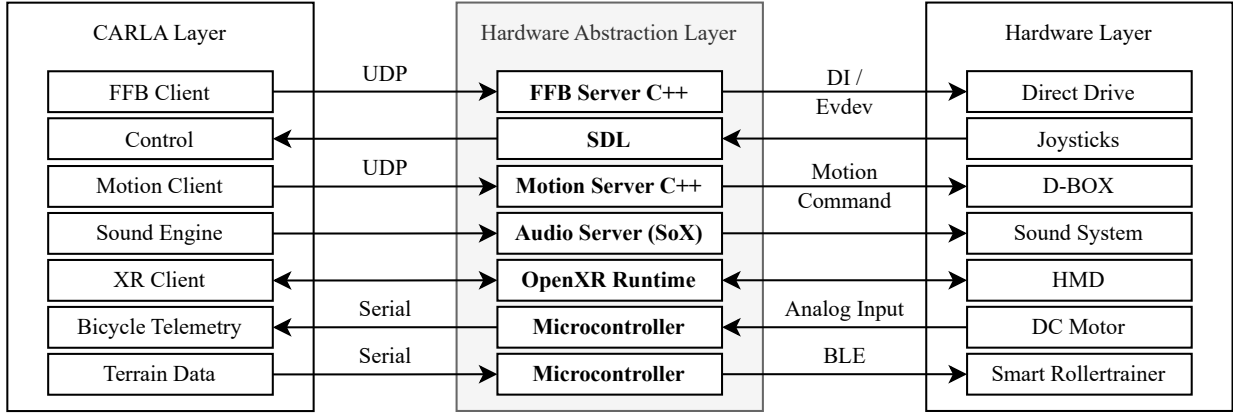


Fig. 3. System architecture of the multimodal HITL simulation ecosystem. The framework illustrates the strict decoupling of the high-level simulation core (CARLA Layer) from the physical testbed (Hardware Layer). A dedicated HAL acts as specialized middleware, translating network-based simulation telemetry (e.g., UDP, Serial) into low-level hardware protocols (e.g., DirectInput (DI)/Evdev, BLE, OpenXR). This modular approach concurrently supports diverse feedback modalities, including automotive interfaces (motion platforms, direct drive), immersive audiovisual rendering (HMD, SoX), and bicycle-specific physical interfaces (smart rollertrains, DC motors).

ecosystem provides a centralized Python library called `carlaverse_tools`. This library abstracts repetitive API calls and provides shared utility classes used by all multimodal nodes. Furthermore, a Graphical User Interface (GUI) launcher is provided to make installation, setup and configuration changes more user-friendly.

- **Launcher:** Provides a comprehensive graphical interface for initializing, configuring, and terminating the simulator instances. A streamlined one-click installer facilitates the rapid deployment of the driving, bicycle, and pedestrian simulators. Furthermore, integrated diagnostic tools enable the testing of hardware peripherals, such as Force Feedback (FFB) modules, joystick axes, and buttons (see Figure 4).
- **ConfigManager:** Manages the loading, parsing, and exporting of the YAML Ain't Markup Language (YAML) configuration files (see Section IV-B). It supports dynamic path resolution (e.g., loading from absolute paths or a centralized `configs` directory) and ensures that all modules instantiate with the correct parameters.
- **SetupManager:** Handles the lifecycle of the virtual environment, including world state management and the safe spawning and destruction of actors across the distributed network.
- **SharedMemory:** Manages interprocess communication between the CARLaverse modules for state variables that must bypass the CARLA server.
- **Vehicle Physics and Control:** Provides standardized wrappers to extract latency-critical telemetry (such as velocity, engine RPM, and wheelbase dimensions) and seamlessly manage actuator commands, such as vehicle lighting and turn signals.
- **Utilities:** A suite of helper functions designed to streamline actor and sensor management. This includes fail-safes for retrieving specific actors, ensuring the unique spawning of sensors (preventing duplicate data streams or API crashes), and robust error handling during runtime.

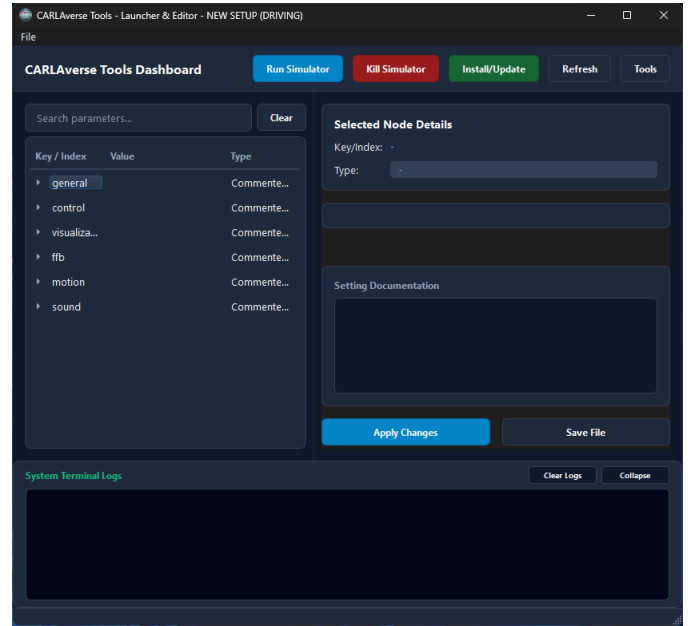


Fig. 4. UI of the CARLaverse launcher. The dashboard features controls for managing the simulator lifecycle, an integrated tree-view editor for intuitive adjustment of module configurations (e.g., control, FFB, motion), and a terminal log panel for real-time system monitoring.

B. Rapid Prototyping and YAML-Based Orchestration

A frequent limitation of custom simulator software is the tight coupling of hardware mappings, where transitioning from a basic desktop setup to a high-fidelity motion platform necessitates extensive source code modifications. To address this, the CARLaverse adheres to the principle of separation of concerns by implementing a *Single Source of Truth* architecture. Executable modules, such as control, force feedback, and visualization, are fundamentally hardware-agnostic. Instead, the instantiation of each simulator node is governed entirely by a comprehensive YAML configuration file, facilitating rapid prototyping and streamlined reconfiguration across multiple

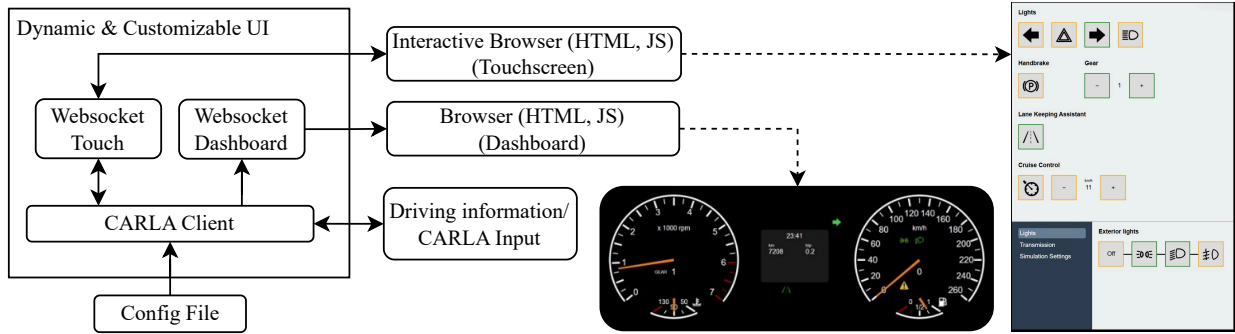


Fig. 5. Architecture of the Dynamic and Customizable UI. The diagram illustrates the data flow and system components connecting the CARLA Client to web-based user interfaces via WebSockets. Configured via an external file, the system drives two distinct browser displays: an interactive touchscreen for inputting vehicle controls (e.g., lights, gear selection, cruise control) and a dashboard display for visualizing real-time driving information (e.g., speedometer and tachometer).

domains.

Furthermore, strict experimental reproducibility is a fundamental requirement for behavioral and human factors research. By archiving this central YAML configuration file alongside the experimental `rosvbag` data logs, researchers can ensure that the specific hardware state, physics models, environmental profiles, and control mappings are accurately preserved and can be consistently reconstructed long after an experiment concludes.

C. Web-Based HMI and Telemetry Framework

Instead of relying on hardcoded Unreal Engine widgets that break during version updates, the CARLAverson employs a decoupled, web-based Human-Machine Interface (HMI) framework. Driven dynamically by the local ego-vehicle’s telemetry via API callbacks, this framework hosts a local web server to display real-time simulation data as shown in Figure 5.

While initially developed to render dynamic dashboards (speedometer, tachometer, ADAS status indicators) for the DrivoCARLA vehicle cabins, its cross-cutting nature allows it to be used universally, especially in CycloCARLA. Researchers can rapidly prototype and overlay new infotainment interfaces, VRU warning signals, or external experimenter control panels using standard web technologies (HyperText Markup Language (HTML)/JavaScript) without recompiling the simulator.

D. Spatial Audio Rendering

In mixed-traffic scenarios, auditory cues are just as critical as visual information. For pedestrians (WalkoCARLA) and cyclists (CycloCARLA), acoustic localization of approaching vehicles is a primary mechanism for situational awareness and risk assessment. For drivers (DrivoCARLA), realistic engine and environmental sounds are essential for speed perception and immersion. Native simulation environments often lack the sophisticated, dynamic sound propagation models required for high-fidelity HITL testing. To address this, the CARLAverson integrates a scalable sub module. This module acts as a centralized spatial audio engine that generates a highly realistic,

multi-channel soundscape for each connected client based on their absolute position in the virtual world.

- **Geo-Spatial Sound Generation:** The engine extracts metadata from the active OpenDRIVE map and the Unreal Engine environment to generate context-aware ambient noise. For example, it calculates the proximity to virtual vegetation to generate wind rustling, or proximity to water bodies for ocean acoustics.
- **Dynamic Emitters:** Localized events, such as construction noise, sirens, or the tire-road friction of surrounding AI traffic, are spawned as dynamic audio emitters in the 3D space.
- **Client-Specific Rendering:** The central server calculates the spatial coordinates of all sound emitters and transmits them to the respective local nodes. Each simulator node then renders the audio mix locally. This can be done from simple stereo systems (e.g. headsets) to multi-channel.

While this geo-spatial sound generation significantly enhances immersion, the detailed acoustic modeling, frequency masking, and subjective validation of the CARLAacoustics module are highly complex and will be addressed in a dedicated future publication.

E. Force Feedback Server

To bridge the gap between the local physics engine and the physical hardware, the CARLAverson uses a custom, standalone C++ FFB server. The local physics engine calculates the required steering resistance and counter-torques, continuously streaming these parameters to the C++ server via a non-blocking UDP connection. To eliminate memory padding and minimize serialization overhead, the commands are tightly packed into a strict 40-byte C++ struct using 1-byte memory alignment, as detailed in Table III.

The server parses this incoming 40-byte stream and translates the individual 32-bit integers into either `DirectInput` (windows) or `evdev` (linux) commands. This pipeline allows for the simultaneous application of complex haptic layers, including spring offsets for autopilot centering, viscous dampers, mechanical friction for tire scrubbing, and periodic vibrations for micro-terrain surfaces. Because this C++ server is entirely hardware-agnostic at the simulation level, it operates as a

TABLE III
UDP PAYLOAD STRUCTURE FOR FFB COMMANDS

Byte	Type	Parameter / Description
0–3	int32_t	Spring Stiffness: Strength of the pull towards the target offset (0 to 10000).
4–7	int32_t	Spring Offset: Target center position for the spring (-10000 to 10000).
8–11	int32_t	Spring Deadband: Zero-force zone around the target to prevent oscillation.
12–15	int32_t	Spring Saturation: Maximum force ceiling for safety.
16–19	int32_t	Constant Force: Directional sustained force (e.g., G-forces in corners).
20–23	int32_t	Damper: Viscous rotation resistance to add weight to movement.
24–27	int32_t	Friction: Constant mechanical friction (e.g., tire scrubbing).
28–31	int32_t	Inertia: Resistance to acceleration/changes in direction.
32–35	int32_t	Vibration Magnitude: Strength of the rumble effect (e.g., engine RPM).
36–39	int32_t	Vibration Frequency: Frequency of the vibration cycle in Hz.

shared core module used by both DrivoCARLA (for automotive steering bases) and CycloCARLA (for bicycle front-fork motors). Furthermore, it can also be used in custom simulation environments as a standalone extension.

Crucially, to ensure participant safety during HITL experiments, the FFB server features a built-in hardware watchdog mechanism. If the simulation crashes or the network connection drops for longer than a predefined timeout threshold, the server automatically engages a safety stop. This routine instantaneously zeros out all active forces (including constant, spring, and damper forces) to prevent the high-torque direct-drive motors from locking up or spinning uncontrollably. Furthermore, the server is configurable via command-line arguments, enabling researchers to quickly assign UDP ports, select specific hardware devices, and adjust watchdog timeouts without needing to recompile the C++ source code.

F. Motion Platform Server

Similar to the force feedback pipeline, the CARLAverse uses a standalone C++ Motion Platform Server to translate simulation telemetry into physical motion. This server receives real-time spatial parameters from the local physics engine via a low-latency, connectionless UDP stream, ensuring zero head-of-line blocking. To maximize performance and minimize serialization overhead, the telemetry commands are tightly packed into a strict 21-byte binary payload using little-endian byte order, as detailed in Table IV.

Under the hood, this server parses incoming datagrams and integrates directly with the D-BOX LiveMotion SDK to actuate the motion rig. Because it interfaces specifically with D-BOX hardware, operating this particular server module requires a valid D-BOX software license. However, the system architecture is intentionally designed to be hardware-agnostic at the simulation level. If researchers wish to use a different motion platform, only this C++ backend server

TABLE IV
UDP PAYLOAD STRUCTURE FOR FRAME_UPDATE COMMANDS OF THE MOTION PLATFORM SERVER

Byte	Type	Parameter / Description
0	uint8_t	Command ID: Identifier for the action (e.g., 0x04 for FRAME_UPDATE).
1–4	float	Roll: Kinematic roll value of the simulated vehicle.
5–8	float	Pitch: Kinematic pitch value of the simulated vehicle.
9–12	float	Heave: Vertical displacement (heave) of the simulated vehicle.
13–16	float	Engine RPM: Current engine revolutions per minute for haptic vibration.
17–20	float	Engine Torque: Current engine torque output for dynamic haptic effects.

needs to be exchanged. The client-side implementation within the physics engine remains completely untouched, as it will continue to broadcast the exact same standard UDP binary protocol regardless of the physical hardware in use. Because this motion client already provides pre-processed, washout-filtered telemetry, the custom server only needs to map these commands into hardware-specific instructions.

For continuous motion simulation, the server relies on a FRAME_UPDATE command (0x04) transmitted at high frequencies. This payload carries five 32-bit floats representing roll, pitch, heave, engine RPM, and torque. To facilitate rapid deployment and testing, the server is configurable via command-line arguments, allowing researchers to assign custom UDP ports and toggle verbose logging without needing to recompile the C++ source code. Furthermore, the server features built-in safety checks; if a packet is received that is shorter than expected (e.g., missing floats), a warning is logged and the data is safely ignored to prevent erratic hardware behavior.

G. Visualization

The visualization module is shared across DrivoCARLA, CycloCARLA, and WalkoCARLA (when not operating in VR mode). Upon initialization, camera sensors are attached to the simulated vehicle or pedestrian. There are three distinct modes for camera configuration: *simple*, *physical*, and *manual*. While the simple mode assumes a single continuous screen where multiple camera views can be projected for parallel rendering, the manual mode enables custom setups, such as a Cave Automatic Virtual Environment (CAVE) environment or specific monitor mountings. In the physical mode, the number of cameras M is equal to the number of monitors or video projectors used in the simulator. This value is specified in the configuration file which also contains information about other parameters, such as the resolution, the width of the monitor b , the width of the side monitor frame k , and the distance between the screens and the driver’s head d as described in Figure 6. The visualization module uses these values to calculate the horizontal Field of View (FOV) f for each monitor and the horizontal rotation angles ϕ_i of the camera

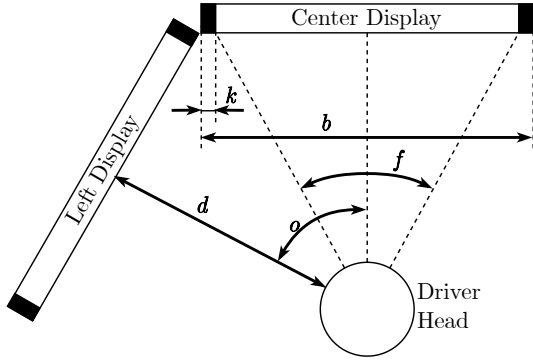


Fig. 6. Example of offset compensation in physical mode for simulators with displays. An automatically calculated offset based on the user-defined parameters resulting in a seamless image on the custom hardware setup.

sensors, ensuring that the simulated scene is displayed in a realistic manner.

$$f = 2 \cdot \arctan \left(\frac{\left(\frac{b}{2} - k\right)}{d} \right) \quad (3)$$

where b is the width of a single monitor, d is the distance from the driver's head to the monitor surface, and k is defined by the frame width of the monitor. While the horizontal FOV f remains constant for all camera sensors with identical monitors, the rotation angles o_i of these cameras vary by a factor i , where i is calculated based on whether the number of displays M is an even or odd integer. Thus, i represents a list of numbers for the partial rotation of each monitor:

$$o_i = i \cdot 2 \cdot \arccos \left(\frac{d}{\sqrt{\left(\frac{b}{2}\right)^2 + d^2}} \right) \quad \text{with} \quad (4)$$

$$i = \begin{cases} \pm n \text{ and } n \in \mathbb{N}_0, n \leq \frac{M-1}{2}, & M \bmod 2 = 1 \\ \pm \frac{n}{2} \text{ and } n \in \mathbb{N}, n \leq \frac{M}{2}, & M \bmod 2 = 0 \end{cases}$$

For example, three monitors result in $i = \{-1, 0, 1\}$. The position of the camera sensors is identical to the position of the driver's head in the vehicle coordinate system, as specified in the configuration file. They are then displayed side by side with a total resolution of the screens as shown in Figure 6. Taking into account the monitor frames, rotations and distances, the image from the camera sensors will appear smooth and without shifting on the driver's monitor.

V. MULTIMODAL SIMULATION NODES IN THE CARLAVERSE

The theoretical architecture of distributed physics and direct API communication forms the backbone of the CARLAverse. However, the physical manifestation of this ecosystem consists of specialized, multimodal simulator nodes. Each node acts as a highly immersive client designed to replicate the specific perceptual cues (visual, auditory, haptic, and vestibular) required for a particular type of road user. The ecosystem currently encompasses three primary domains: DrivoCARLA (vehicles), CycloCARLA (bicycles), and WalkoCARLA (pedestrians). The descriptions in this section document the integration

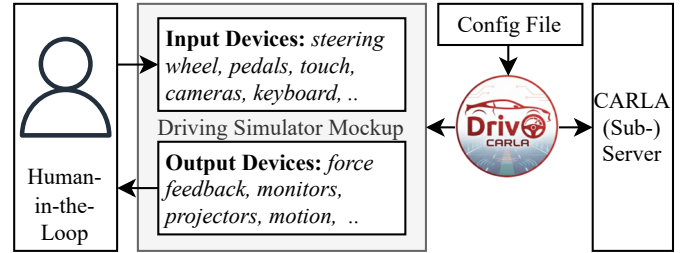


Fig. 7. System architecture of the DrivoCARLA framework. DrivoCARLA serves as the central orchestrator for the HITL driving simulator, directly bridging human input devices (e.g., steering wheels, pedals, and cameras) with the CARLA server. By managing this closed-loop communication, DrivoCARLA translates real-time simulation data into immersive visual rendering and force feedback haptics for the driver.

interfaces, hardware abstractions, and operational roles of each simulator node within the connected ecosystem (including bicycle dynamics, motion cueing, VR rendering, and pose estimation); standalone model-level validation of these individual nodes is reserved for companion publications.

A. DrivoCARLA: Vehicle Simulator

DrivoCARLA serves as the flagship automotive node within the CARLAverse. It is designed as a scalable framework capable of adapting to any level of simulator immersion, ranging from simple single-monitor desktop setups to fully enclosed, multi-display vehicle cabin mock-ups (see Figure 7). Because cross-cutting systems like visualization, spatial audio, and haptic FFB interfaces are provided globally by the ecosystem, this section of the DrivoCARLA node focuses entirely on vehicle control, hardware abstraction, and automotive systems integration.

To orchestrate components, DrivoCARLA employs a comprehensive internal software architecture, as illustrated in Figure 8. The local Simulation PC hosts dedicated modules for multi-device vehicle interfaces, dynamic UI generation, motion cueing, and hardware-specific abstractions such as force feedback. It communicates bidirectionally with the central CARLA server while optionally routing sensor and driving telemetry to an asynchronous ROS-based logging container, supporting robust data capture without interfering with the real-time haptic control loops. An early iteration of this

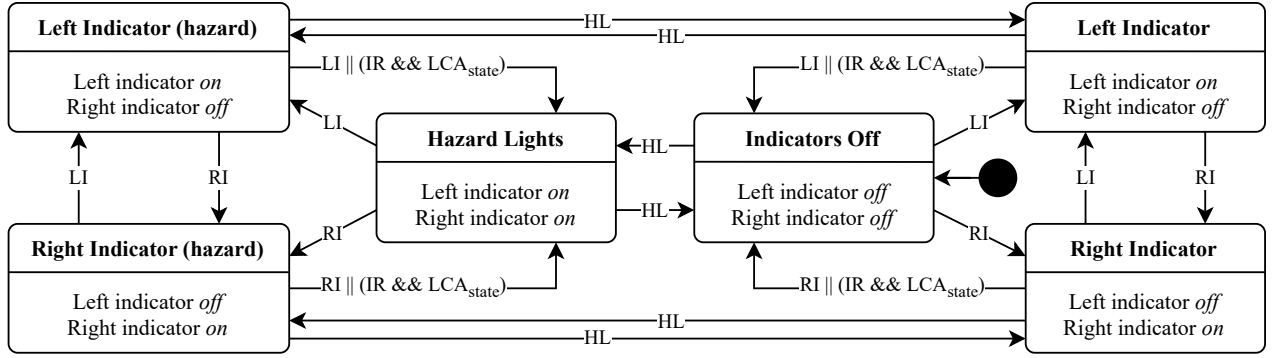


Fig. 9. Indicator System State Machine. State transitions are triggered by rising edge events: Hazard Light (HL), Left Indicator (LI), Right Indicator (RI), and Indicator Reset (IR). The diagram illustrates that directional resets via the IR event are conditional and only execute if the Lane Change Assist (LCA_{state}) is active.

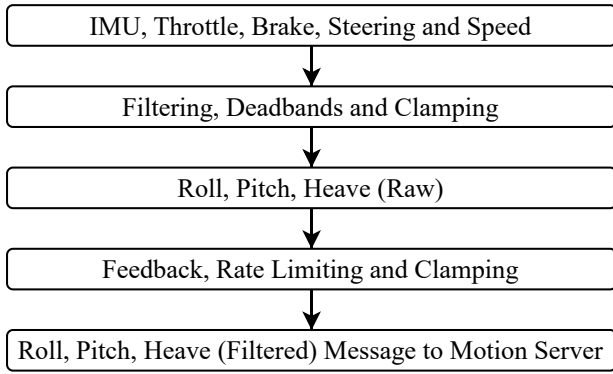


Fig. 10. Signal processing pipeline of the Motion Cueing Algorithm, illustrating the transformation of raw CARLA telemetry into clamped, filtered, and washout-regulated Pitch, Roll, and Heave commands.

ble and singular at near-zero velocities, the physics engine implements a speed-dependent safety blending mechanism. Below a threshold of 15 km/h, the dynamic Pacejka physics are smoothly faded out and replaced by a synthetic, high-resistance parking spring and friction force. This ensures mathematical stability during urban maneuvers like parallel parking or stopping at crosswalks, preventing erratic steering wheel oscillations.

3) *Motion Cueing*: To enhance physical immersion beyond force feedback, DrivoCARLA integrates a signal-based Motion Cueing Algorithm (MCA) to actuate a 3-Degree-of-Freedom (DOF) (Pitch, Roll, Heave) motion platform (see Figure 10). Since a reduced DOF system cannot physically reproduce the full range of real-world vehicle movements, the MCA focuses on a perception-oriented representation of the vehicle dynamics extracted from CARLA’s inertial measurement unity (IMU) and vehicle telemetry.

The algorithm maps specific driving states to the available platform axes through a combination of continuous and transient movement components. To ensure stability and prevent the motion platform from reaching its mechanical limits, the raw telemetry data must be pre-processed. As a foundational step, all incoming accelerations a_x , a_y , and a_z are smoothed using a first-order low-pass filter (LPF) to reduce high-

frequency noise.

The Pitch angle θ is primarily derived from the low-pass filtered longitudinal acceleration $a_{x,LPF}$, normalized by a reference acceleration a_{ref} . To prevent unrealistic oscillations at a standstill, the acceleration component is scaled by a speed-dependent function $f_{scale}(v)$ that suppresses the signal at low speeds. Furthermore, the pitch calculation incorporates the brake pedal input as both a continuous proportion and a transient impulse derived from its rate of change to emphasize hard stops:

$$\theta = \frac{a_{x,LPF}}{a_{ref}} \cdot f_{scale}(v) + k_b \cdot b_{LPF} + k_{impulse} \cdot \dot{b} \quad (7)$$

where b_{LPF} is the low-pass filtered brake pedal input, $\dot{b}$ is its rate of change, and k_b and $k_{impulse}$ are their respective tuning gains.

The Roll angle ϕ is driven by a combination of the filtered lateral acceleration $a_{y,LPF}$, normalized by a reference lateral acceleration $a_{y,ref}$, and the low-pass filtered steering input s_{LPF} scaled by a tuning gain k_s . The inclusion of the steering signal allows the platform to react to steering maneuvers proactively, before lateral forces have fully accumulated:

$$\phi = \frac{a_{y,LPF}}{a_{y,ref}} + k_s \cdot s_{LPF} \quad (8)$$

Finally, the Heave axis z simulates vertical dynamics, such as driving over curbs or road bumps. Instead of relying on constant vertical states, the Heave is generated by evaluating the dynamic changes, or jerk $j_x = \dot{a}_{x,LPF}$ and $j_z = \dot{a}_{z,LPF}$. These jerk signals are processed through a deadband to suppress minor noise, clamped to a maximum value, and low-pass filtered to create smooth vertical impulses:

$$z = k_{jx} \cdot \tilde{j}_x + k_{jz} \cdot \tilde{j}_z + z_{brake} \quad (9)$$

where $\tilde{j}_x$ and $\tilde{j}_z$ represent the conditioned jerk signals after applying the deadband, clamping, and low-pass filtering, while k_{jx} and k_{jz} are their respective scaling factors. The term z_{brake} represents an additional negative heave impulse triggered exclusively during emergency braking.

To conclude the motion cycle, washout filters continuously and smoothly return the platform axes to their neutral positions

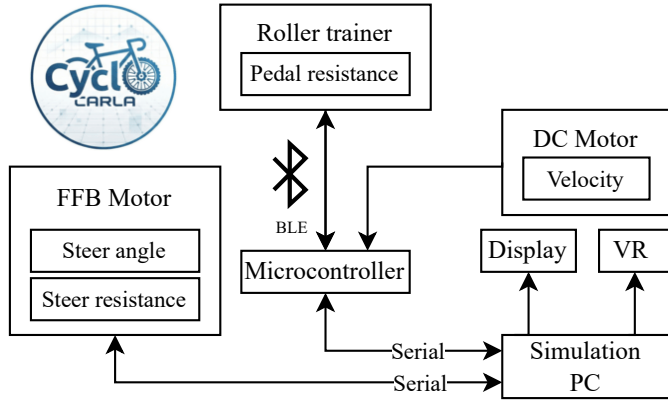


Fig. 11. Hardware and data flow architecture of the CycloCARLA simulator node. A microcontroller (e.g. ESP32) processes high-frequency velocity telemetry to bypass standard BLE bottlenecks, while a DirectInput serial connection handles the latency-critical steering force feedback.

after an acceleration event. The rate of this return is dynamically adapted based on the vehicle's speed, ensuring the motion cues remain plausible and comfortable for the driver.

B. CycloCARLA: Bicycle Simulator

Bicycles represent a critical class of VRUs. The kinematics and control strategies of a bicycle are fundamentally different from those of a four-wheeled vehicle. Because CARLA's native physics engine is inherently built around four-wheeled Ackermann steering, CycloCARLA actively overrides the default vehicle dynamics. Instead, it calculates a custom single-track kinematic bicycle model locally and enforces the resulting movement by directly injecting absolute target velocity and angular velocity vectors into the simulation every frame. CycloCARLA is designed to capture these interactions within a stationary HITL setup using a physical bicycle frame mounted on a smart resistance roller trainer. The data flow and hardware abstraction, as illustrated in Figure 11, are divided into three primary components: bicycle speed capture via a DC motor, pedal resistance adaptation via BLE, and steering angle sensing via Simple DirectMedia Layer (SDL) and force feedback via DirectInput/Evdev. The comprehensive mathematical validation of the single-track vehicle dynamics and force feedback loops implemented in CycloCARLA falls outside the scope of this architectural overview and is presented in a dedicated companion study [57] (to appear).

1) *Propulsion and Resistance*: The user's pedaling power is captured to drive the virtual bicycle. Because commercial smart roller trainers typically broadcast telemetry at a low frequency (e.g., 1 Hz), this latency is insufficient for real-time physics. To overcome this, CycloCARLA uses a microcontroller to capture high-frequency wheel speed data, which is designed to reduce latency in longitudinal acceleration within the CARLA world. Simultaneously, the local physics engine calculates the physical forces acting on the virtual bicycle [58], computing the combined longitudinal resistance F_{res} as the sum of rolling resistance F_{roll} with friction coefficient f_R , resistance due to road slope $F_{\text{slope}}(\theta)$, and aerodynamic drag F_{drag} :

$$F_{\text{res}} = \underbrace{f_R mg \cos(\theta)}_{F_{\text{roll}}} + \underbrace{mg \sin(\theta)}_{F_{\text{slope}}} + \underbrace{\frac{1}{2} \rho_{\text{air}} c_W A (v_{\text{bike}} - v_{\text{wind}})^2}_{F_{\text{drag}}} \quad (10)$$

Based on this calculation, the system must translate the total physical force F_{res} into a resistance percentage (0-100%) expected by the proprietary smart trainer hardware. To bridge this gap between pure physics and closed-source hardware constraints, CycloCARLA uses a calibrated 2D Lookup Table (LUT). The system applies bilinear interpolation across the LUT, cross-referencing the current forward velocity and the computed F_{res} to dynamically generate a smooth, fractional resistance percentage. This mapped command is then sent back to the trainer over BLE to physically simulate the gradients and environment with high fidelity.

2) *Steering and Haptics*: Since physical leaning is constrained in the stationary frame, lateral control depends entirely on the steering interface. The front fork is connected to a commercial FFB motor that is controlled via the CARLAverse Force Feedback Server (see Section IV-E). The local physics engine computes trail-induced self-centering forces and sends constant force commands to the motor, providing realistic steering resistance. Additionally, the interface enables the addition of high-frequency vibration effects, which simulate road surface textures and sudden collision impulses (e.g., caused by curbs).

3) *Visual Immersion*: Although VR headsets can provide a 360-degree field of view for over-the-shoulder checks, stationary bicycle setups often cause visual-vestibular conflict and simulator sickness when using VR. Therefore, CycloCARLA's primary visualization uses a monitor positioned directly in front of the test subject to ensure comfort during prolonged studies. However, the system's modular architecture allows researchers to seamlessly switch to VR rendering based on the principle of WalkoCARLA or add additional monitors if a specific experimental design strictly requires peripheral immersion.

C. WalkoCARLA: Pedestrian Simulator

Pedestrians represent the most unpredictable and vulnerable elements in urban mixed traffic. Including them in HITL simulations is important for validating crosswalk yielding behaviors and intent recognition algorithms. WalkoCARLA is a VR-based pedestrian node. Unlike vehicles or bicycles, pedestrians do not possess a fixed mechanical interface. Therefore, WalkoCARLA relies entirely on spatial tracking and bodily representation. To ensure future compatibility and hardware abstraction, WalkoCARLA uses a strict *API-only* software architecture, just as DrivoCARLA and CycloCARLA do. This is illustrated in Figure 12. By interacting with the local CARLA instance exclusively through the native Python API, rather than relying on hardcoded modifications to the Unreal Engine source code, the node remains modular and can

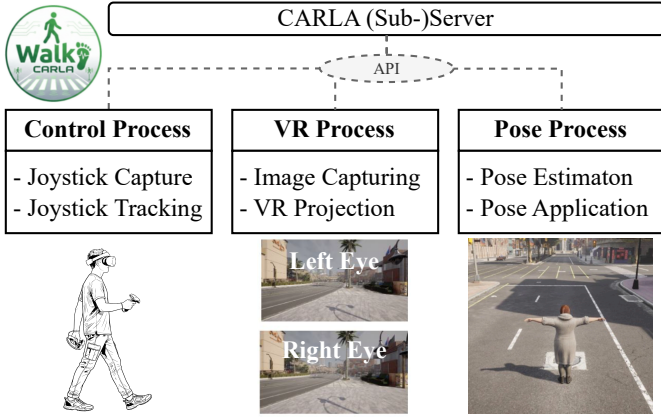


Fig. 12. Software architecture of the WalkoCARLA pedestrian node. By strictly using the native CARLA API to manage the Control, VR, and Pose processes, the system avoids hardcoded engine modifications, supporting compatibility with future CARLA updates.

be easily migrated to newer CARLA releases. The architecture is divided into three parallel processes.

1) *Control Process*: While natural walking can be mapped one-to-one in the physical laboratory space, traversing larger virtual intersections requires artificial locomotion. The Control Process handles joystick capture and tracking via standard VR controllers. To maintain hardware abstraction and avoid dependency on proprietary manufacturer SDKs, WalkoCARLA uses standard OpenXR Action Bindings. These 2D hardware vectors are read dynamically and mapped directly to absolute direction vectors based on the pedestrian’s current forward orientation in the world. This allows the user to navigate the expansive CARLA environment fluidly without encountering physical room-scale boundaries, regardless of the specific VR hardware used. Future work will include implementing omnidirectional treadmills to provide a more immersive control experience.

2) *VR Process*: To maximize visual fidelity and prevent simulator sickness, the VR Process manages the dual-camera image capturing and VR projection (Left Eye / Right Eye). Because modern VR headsets demand extremely high display resolutions to maintain immersion, rendering two distinct stereoscopic viewpoints simultaneously represents a massive computational bottleneck. To sustain the high frame rates required for valid HITL research, the WalkoCARLA architecture is optimized for Multi-Graphics Processing Unit (GPU) configurations, allowing the rendering load to be split by dedicating a separate GPU to compute each eye’s viewport independently.

A critical challenge in executing native VR rendering via the Python API is the geometric mismatch between the display hardware and the simulation engine. Modern VR hardware, such as the Meta Quest 3, uses an asymmetric FOV [59] to account for human facial anatomy, typically rendering a wider angle towards the outside and a narrower angle towards the nose. Conversely, CARLA cameras strictly accept a single, symmetric FOV parameter. Naively projecting CARLA’s symmetric output onto asymmetric lenses results in excessive image overlap and severe stereoscopic double vision.

To resolve this without altering CARLA’s underlying C++ source code, WalkoCARLA implements a mathematical geometric correction pipeline. The system queries the HMD’s asymmetric angles ($\theta_{\text{left}}, \theta_{\text{right}}, \theta_{\text{top}}, \theta_{\text{bottom}}$) via OpenXR and commands CARLA to render an expanded, symmetric FOV_{sym} that fully encapsulates the largest required viewing angle:

$$\text{FOV}_{\text{sym}} = 2 \cdot \max(|\theta_{\text{left}}|, |\theta_{\text{right}}|) \quad (11)$$

The image data generated on the nasal side is subsequently cropped dynamically during the OpenGL rendering loop, matching the exact asymmetric parameters expected by the headset. Crucially, this OpenGL-based dynamic cropping introduces zero CPU or rendering overhead, as the coordinate clipping is executed entirely within the graphics hardware pipeline.

Beyond rendering geometry, the VR Process must actively resolve a fundamental coordinate system mismatch between OpenXR and Unreal Engine to track head movements correctly. OpenXR uses a right-handed coordinate system ($-Z$ forward, $+Y$ up, $+X$ right), whereas CARLA expects left-handed coordinates ($+X$ forward, $+Z$ up, $+Y$ right). To synchronize the HMD pose to the virtual cameras without inducing gimbal lock or disorientation, WalkoCARLA transforms the raw OpenXR tracking quaternions into intrinsic YZX Euler angles, negating the pitch and roll axes to invert the handedness before applying them via the CARLA API.

To further reduce rendering latency, the pipeline optimizes texture uploads to the GPU. By using OpenGL Pixel Buffer Objects (PBOs) and delegating the heavy BGRA to RGB format conversion directly to the GPU instead of processing it via NumPy arrays, the architecture significantly reduces frame processing time, elevating the rendering loop from seven to 36 Frames per Second (FPS) on an average desktop computer.

3) *Pose Process*: The most critical element for naturalistic HITL interaction is the Pose Process, which features a fully implemented 6-DOF estimation pipeline. Because this pipeline relies on vision-based tracking algorithms rather than expensive, specialized full-body tracking suits, it remains accessible and can support older or standard consumer-grade hardware.

To bridge the behavioral gap between artificial NPCs and authentic human body language, WalkoCARLA integrates Google’s MediaPipe framework [60]. Using a standard webcam, the system extracts 33 three-dimensional skeletal landmarks of the user in real time, as illustrated in Figure 13. Because these raw coordinates are bound to the absolute, global space of the physical camera, they must be mathematically transformed before they can animate the CARLA avatar.

The system constructs a local, relative coordinate system for the user’s torso. It calculates a shoulder vector v_{shoulder} and a body longitudinal vector v_{body} , extending from the neck to the mid-hip landmark, taking the cross product of the two to determine the depth normal vector of the body v_{back} .

$$v_{\text{back}} = v_{\text{shoulder}} \times v_{\text{body}} \quad (12)$$

Using these vectors, an optimal rotation matrix R_{body} is derived, describing the exact orientation of the torso. By applying the inverse of this matrix (R_{body}^{-1}) to the vectors of



Fig. 13. Real-time pose estimation mapping. Three-dimensional landmarks are extracted from a standard RGB webcam via MediaPipe (right) and kinematically transformed to manipulate the skeletal mesh of the pedestrian avatar in the CARLA simulation (left).

the arms, the arm movements are systematically isolated into the local coordinate space of the body.

$$v_{\text{arm,local}} = R_{\text{body}}^{-1} \cdot v_{\text{arm,global}} \quad (13)$$

These relative directional vectors are then converted into Euler angles (Yaw, Pitch, Roll) for spherical joints like the shoulder, and 1D hinge angles for the elbows. These kinematic parameters are continuously streamed via the API to update the skeletal mesh of the ego-pedestrian.

To prevent the computationally demanding vision inference from bottlenecking the critical VR rendering loop, the Pose Process is executed entirely in parallel via Python multiprocessing. This bi-directional avatar synchronization ensures that drivers in DrivoCARLA can accurately perceive where the pedestrian is looking and gesturing. Capturing this non-verbal communication is a critical factor for studying naturalistic traffic negotiations that AI models fundamentally fail to replicate.

VI. CONCLUSION AND FUTURE WORK

Developing automated driving systems for urban environments requires detailed insight into mixed-traffic dynamics. HITL simulators provide a safe and repeatable method for investigating such interactions without exposing participants to physical risk. However, a key limitation of traditional simulator setups has often been their operational isolation; studying mixed traffic benefits fundamentally from the synchronous interaction of multiple human actors, including VRUs.

This paper introduced the CARLAverson, a highly modular, distributed, and multimodal simulation ecosystem. Building upon previous work that established a hardware-agnostic abstraction layer for standalone driving simulators [9], the CARLAverson expands this concept into a networked, multi-agent simulation ecosystem. By integrating vehicle simulators (DrivoCARLA), bicycle simulators (CycloCARLA), and pedestrian virtual reality nodes (WalkoCARLA) into a shared, centrally coordinated virtual world, the framework addresses the behavioral gap typically exhibited by AI-driven NPCs.

A core technical contribution of this work is the implementation of a distributed physics architecture. By strictly decoupling the computationally intensive global traffic simulation (handled by a central server) from the latency-critical ego dynamics (calculated locally on dedicated local nodes), the CARLAverson is designed to reduce latency. Furthermore, by transitioning from middleware-routed control signals to direct CARLA API communication, the system supports high-frequency local control loops necessary for realistic haptic feedback and motion cueing, while using ROS exclusively as a background data-logging engine. Enhanced by cross-cutting technologies such as rapid YAML-based reconfiguration and the spatial CARLAacoustics engine, the CARLAverson is designed to provide an immersive, scalable, and reproducible platform for advanced traffic research.

A. Scientific Utility

The primary scientific use of the CARLAverson lies in its capacity to facilitate ecologically valid, multi-agent behavioral research that transcends the physical boundaries of a single laboratory. By providing a scalable, low-latency framework for synchronized interactions between diverse human actors, the ecosystem enables researchers to conduct naturalistic studies on critical factors such as social negotiations, intent recognition, and trust dynamics in mixed traffic scenarios. This environment addresses the behavioral gap inherent in purely AI-driven NPCs and supports the collection of human response data in controlled mixed-traffic interactions. Furthermore, its hardware-agnostic, open-source architecture lowers the financial and technical barriers to entry, thereby enabling cross-institutional collaboration and fostering rigorous reproducibility in complex HITL experiments.

B. Future Work

While the foundational architecture of the CARLAverson has been successfully implemented and deployed, several avenues

for future research, validation, and system enhancement remain.

First, the physical models underlying the VRU nodes require empirical validation. The longitudinal bicycle dynamics and force feedback implemented in CycloCARLA have been mathematically validated in a dedicated study [57] (to appear). Similarly, the spatial audio propagation and frequency masking algorithms within the CARLAacoustics module will be evaluated in an upcoming publication to quantify their impact on participant immersion and localization accuracy.

To further elevate the physical immersion of the simulator nodes, several hardware extensions are currently under development. For the bicycle simulator, a motion platform is being built to simulate uneven surfaces and slopes, alongside a dedicated wind simulation system. Concurrently, an omnidirectional treadmill is being integrated to support natural, unconstrained locomotion for the pedestrian node.

Enhancing visual fidelity and performance is another critical focus area. A rigorous evaluation of the current VR render pipeline is planned, which will systematically compare it against different rendering methodologies. As part of this effort, the potential of using neural rendering techniques as an alternative to the default CARLA render engine is being actively investigated to achieve higher levels of photorealism.

With the infrastructure now operational and continuously evolving, future work will also focus on conducting large-scale, synchronous HITL experiments. Extending previous single-node evaluations [55], planned studies will use standardized OpenSCENARIO files [61] to investigate yielding behaviors and trust dynamics in three-way negotiations between human-driven vehicles, human cyclists, and pedestrians at urban intersections. Furthermore, future work will explore the feasibility of fine-tuning FM-based Sim-Agents using these data.

Finally, in alignment with the principles of open science, while core modules and tooling are already publicly available, the ongoing effort focuses on completing full system integration and releasing all remaining components of the CARLaverse framework. By providing the complete suite of hardware-agnostic Python modules, YAML templates, and synchronization scripts to the global research community, we aim to lower the barrier to entry for immersive, connected simulator research and foster collaborative advancements in the field of automated mobility

ACKNOWLEDGMENTS

This work was developed in the projects KIIWI (reference number: 16DHBKI060) which is funded by the German Federal Ministry of Research, Technology and Space (BMFTR) and Real2Sim (reference number: BW7_2199/2) which is funded by the Baden-Wuerttemberg Ministry of Economic Affairs, Labor and Tourism.

During the preparation of this work, the authors used Google Gemini for language editing and to assist in generating visual assets (e.g., project logos). The authors reviewed and edited the content and take full responsibility for the publication.

DEFINITIONS, ACRONYMS, ABBREVIATIONS

ADAS	Advanced Driver Assistance System
AI	Artificial Intelligence
API	Application Programming Interface
AUTOSAR	AUTomotive Open System ARchitecture
AV	Autonomous Vehicle
BLE	Bluetooth Low Energy
CARLA	Car-Learning-to-Act
CARMEn	CARla-Based, Multi-Agent Immersive Road Environment Simulation
CAVE	Cave Automatic Virtual Environment
CC	Cruise Control
CDA-HDS	Cooperative Driving Automation - Highway Driving Simulator
DC	Direct Current
DDS	Data Distribution Service
DMAVA	Distributed Multi-Autonomous Vehicle Architecture
DOF	Degree-of-Freedom
FFB	Force Feedback
FM	Foundation Model
FOV	Field of View
FPS	Frames per Second
GPU	Graphics Processing Unit
GUI	Graphical User Interface
HAL	Hardware Abstraction Layer
HITL	Human-in-the-Loop
HMD	Head-Mounted Display
HMI	Human-Machine Interface
HTML	HyperText Markup Language
IMU	inertial measurement unity
IP	Internet Protocol
LGSVL	LG Silicon Valley Lab
LKAS	Lane Keeping Assist System
LPF	low-pass filter
LUT	Lookup Table
MCA	Motion Cueing Algorithm
NPC	Non-Player Character
PBO	Pixel Buffer Object
ROS	Robot Operating System
RPC	Remote Procedure Call
SDL	Simple DirectMedia Layer
SIL	Software-in-the-Loop
SUMO	Simulation of Urban MObility
TCP	Transmission Control Protocol
TENA	Test and Training Enabling Architecture
TraCI	Traffic Control Interface
UDP	User Datagram Protocol
UE	Unreal Engine
UI	User Interface
USB	Universal Serial Bus
V2X	Vehicle-to-Everything
VR	Virtual Reality
VRU	Vulnerable Road User
WAN	Wide Area Network
XR	Extended Reality
YAML	YAML Ain't Markup Language

REFERENCES

- [1] Interview with Elon Musk at Code Conference 2016. 2016. URL: <https://www.youtube.com/watch?v=wsixsRI-Sz4> (visited on 09/10/2026).
- [2] Keshav Bimbraw. "Autonomous Cars: Past, Present and Future - A Review of the Developments in the Last Century, the Present Scenario and the Expected Future of Autonomous Vehicle Technology". In: *ICINCO 2015 - 12th International Conference on Informatics in Control, Automation and Robotics, Proceedings 1* (Jan. 1, 2015), pp. 191–198. DOI: 10.5220/0005540501910198.
- [3] B. Padmaja et al. "Exploration of Issues, Challenges and Latest Developments in Autonomous Cars". In: *Journal of Big Data* 10.1 (May 6, 2023), p. 61. ISSN: 2196-1115. DOI: 10.1186/s40537-023-00701-y.
- [4] Sage Kelly, Sherrie-Anne Kaye, and Oscar Oviedo-Trespalacios. "What Factors Contribute to the Acceptance of Artificial Intelligence? A Systematic Review". In: *Telematics and Informatics* 77 (Feb. 2023), p. 101925. ISSN: 07365853. DOI: 10.1016/j.tele.2022.101925.
- [5] Nicole Gillespie et al. *Trust in Artificial Intelligence: A Global Study*. Brisbane, Australia: The University of Queensland; KPMG Australia, Feb. 16, 2023. URL: <http://doi.org/10.14264/00d3c94> (visited on 09/10/2026).
- [6] Lisa J. Molnar et al. "Understanding Trust and Acceptance of Automated Vehicles: An Exploratory Simulator Study of Transfer of Control between Automated and Manual Driving". In: *Transportation Research Part F: Traffic Psychology and Behaviour* 58 (Oct. 2018), pp. 319–328. ISSN: 13698478. DOI: 10.1016/j.trf.2018.06.004.
- [7] Yuki Sawada et al. "Effects of Synchronised Engine Sound and Vibration Presentation on Visually Induced Motion Sickness". In: *Scientific Reports* 10.1 (May 12, 2020), p. 7553. ISSN: 2045-2322. DOI: 10.1038/s41598-020-64302-y. URL: <https://www.nature.com/articles/s41598-020-64302-y> (visited on 09/10/2026).
- [8] Andras Kemeny and Francesco Panerai. "Evaluating Perception in Driving Simulation Experiments". In: *Trends in Cognitive Sciences* 7.1 (Jan. 1, 2003), pp. 31–37. ISSN: 1364-6613. DOI: 10.1016/S1364-6613(02)00011-6. URL: <https://www.sciencedirect.com/science/article/pii/S1364661302000116> (visited on 09/10/2026).
- [9] Patrick Rebling et al. "Highly-Modular and Immersive Human-in-the-Loop Driving Simulators Using the CARLA Simulation Environment". In: *SIMUL 2025, The Seventeenth International Conference on Advances in System Modeling and Simulation*. Sept. 28, 2025, pp. 9–14. ISBN: 978-1-68558-300-2. URL: https://personales.upv.es/thinkmind/SIMUL/SIMUL_2025/simul_2025_1_20_50017.html (visited on 09/10/2026).
- [10] Ivo Silva et al. "Realistic 3D Simulators for Automotive: A Review of Main Applications and Features". In: *Sensors* 24.18 (Sept. 10, 2024), p. 5880. ISSN: 1424-8220. DOI: 10.3390/s24185880. URL: <https://www.mdpi.com/1424-8220/24/18/5880> (visited on 09/10/2026).
- [11] Jakob Rodseth et al. "A Novel Low-Cost Solution for Driving Assessment in Individuals with and without Disabilities". In: *Applied Ergonomics* 65 (Nov. 2017), pp. 335–344. ISSN: 00036870. DOI: 10.1016/j.apergo.2017.07.002. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0003687017301564> (visited on 09/10/2026).
- [12] Quinate Chioma Ihemedu-Steinke et al. "Development and Evaluation of a Virtual Reality Driving Simulator". In: *Mensch Und Computer 2015 - Workshopband*. Ed. by Anette Weisbecker, Michael Burmester, and Albrecht Schmidt. DE GRUYTER, Aug. 28, 2015, pp. 491–500. ISBN: 978-3-11-044333-2. DOI: 10.1515/9783110443905-070. URL: <https://www.degruyter.com/document/doi/10.1515/9783110443905-070/html> (visited on 09/10/2026).
- [13] Shiva Azimi and Arash Tavakoli. *Simulation for All: A Step-by-Step Cookbook for Developing Human-Centered Multi-Agent Transportation Simulators*. Version 2. 2025. DOI: 10.48550/ARXIV.2507.09367. URL: <https://arxiv.org/abs/2507.09367> (visited on 09/10/2026).
- [14] Jacob Crewe et al. "SLAV-Sim: A Framework for Self-Learning Autonomous Vehicle Simulation". In: *Sensors* 23.20 (Oct. 23, 2023), p. 8649. ISSN: 1424-8220. DOI: 10.3390/s23208649. URL: <https://www.mdpi.com/1424-8220/23/20/8649> (visited on 09/10/2026).
- [15] Anthony J. Massa. "The Hardware Abstraction Layer". In: *Embedded Software Development with E-Cos*. Bruce Perens' Open Source Series. Upper Saddle River, NJ: Prentice Hall, 2003. ISBN: 978-0-13-035473-0.
- [16] Yunfa Li, Wanqing Li, and Congfeng Jiang. "A Survey of Virtual Machine System: Current Technology and Future Trends". In: *2010 Third International Symposium on Electronic Commerce and Security*. 2010, pp. 332–336. DOI: 10.1109/ISECS.2010.80.
- [17] Morgan Quigley et al. "ROS: An Open-Source Robot Operating System". In: *IEEE International Conference on Robotics and Automation*. Vol. 3. Jan. 2009. URL: <https://api.semanticscholar.org/CorpusID:6324125> (visited on 09/10/2026).
- [18] Stefan Voget. "AUTOSAR and the Automotive Tool Chain". In: *Proceedings of the Conference on Design, Automation and Test in Europe* (Dresden, Germany). DATE '10. Leuven, BEL: European Design and Automation Association, 2010, pp. 259–262. ISBN: 978-3-9810801-6-2.
- [19] Gabriel Simmann, Vinay Veeranna, and Reiner Kriesten. "Design of an Alternative Hardware Abstraction Layer for Embedded Systems with Time-Controlled Hardware Access". In: *2024 Stuttgart International Symposium*. SAE International, July 2, 2024. DOI: 10.4271/2024-01-2989.
- [20] F. De Filippo et al. "A Modular Architecture for a Driving Simulator Based on the FDMU Approach". In: *International Journal on Interactive Design and Manufacturing (IJIDeM)* 8.2 (May 2014), pp. 139–150. ISSN: 1955-2513, 1955-2505. DOI: 10.1007/s12008-013-0182-3.
- [21] Realtime Technologies. *RDS-Modular*. 2024. URL: <https://www.faac.com/realtime-technologies/> (visited on 09/10/2026).
- [22] H. Krueger et al. "SILAB - A Task Oriented Driving Simulation". In: 2005. URL: <https://api.semanticscholar.org/CorpusID:11019771> (visited on 09/10/2026).
- [23] Marco Cipelli, Werner Schiehlen, and Federico Cheli. "Driver-in-the-Loop Simulations with Parametric Car Models". In: *Vehicle System Dynamics* 46 (sup1 Sept. 1, 2008), pp. 33–48. ISSN: 0042-3114. DOI: 10.1080/00423110701882280.
- [24] Martin Fischer et al. "Modular and Scalable Driving Simulator Hardware and Software for the Development of Future Driver Assistance and Automation Systems". In: *New Developments in Driving Simulation Design and Experiments*. Driving Simulation Conference 2014. Ed. by Andras Kemeny, Stéphane Espié, and Frédéric Mérienne. Paris, Frankreich, Sept. 4, 2014, pp. 223–229. URL: <https://elib.dlr.de/90638/> (visited on 09/10/2026).
- [25] Pablo Alvarez Lopez et al. "Microscopic Traffic Simulation Using SUMO". In: *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*. 2018 21st International Conference on Intelligent Transportation Systems (ITSC). Maui, HI: IEEE, Nov. 2018, pp. 2575–2582. ISBN: 978-1-7281-0321-1. DOI: 10.1109/ITSC.2018.8569938. URL: <https://ieeexplore.ieee.org/document/8569938/> (visited on 09/10/2026).
- [26] Guodong Rong et al. "LGSVL Simulator: A High Fidelity Simulator for Autonomous Driving". In: *2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC)*. 2020 IEEE 23rd International Conference on Intelligent Transportation Systems (ITSC). Rhodes, Greece:

- IEEE, Sept. 20, 2020, pp. 1–6. ISBN: 978-1-7281-4149-7. DOI: 10.1109/ITSC45102.2020.9294422. URL: <https://ieeexplore.ieee.org/document/9294422/> (visited on 09/10/2026).
- [27] Shital Shah et al. *AirSim: High-Fidelity Visual and Physical Simulation for Autonomous Vehicles*. Version 2. 2017. DOI: 10.48550/ARXIV.1705.05065. URL: <https://arxiv.org/abs/1705.05065> (visited on 09/10/2026).
- [28] Nick Beckers et al. “JOAN: A Framework for Human-Automated Vehicle Interaction Experiments in a Virtual Reality Driving Simulator”. In: *Journal of Open Source Software* 8.82 (Feb. 1, 2023), p. 4250. ISSN: 2475-9066. DOI: 10.21105/joss.04250. URL: <https://joss.theoj.org/papers/10.21105/joss.04250> (visited on 09/10/2026).
- [29] Felix Rampf et al. “Modelling Autonomous Vehicle Interactions with Bicycles in Traffic Simulation”. In: *Frontiers in Future Transportation* 3 (Jan. 4, 2023), p. 894148. ISSN: 2673-5210. DOI: 10.3389/ffutr.2022.894148. URL: <https://www.frontiersin.org/articles/10.3389/ffutr.2022.894148/full> (visited on 09/10/2026).
- [30] Aisha Sahaï et al. “Crossing the Street in Front of an Autonomous Vehicle: An Investigation of Eye Contact between Drivengers and Vulnerable Road Users”. In: *Frontiers in Psychology* 13 (Oct. 28, 2022), p. 981666. ISSN: 1664-1078. DOI: 10.3389/fpsyg.2022.981666. URL: <https://www.frontiersin.org/articles/10.3389/fpsyg.2022.981666/full> (visited on 09/10/2026).
- [31] Laura Quante et al. “Measuring and Describing Cooperation Between Road Users—Results from CoMove”. In: *Cooperatively Interacting Vehicles*. Ed. by Christoph Stiller et al. Cham: Springer International Publishing, 2024, pp. 565–608. ISBN: 978-3-031-60493-5. DOI: 10.1007/978-3-031-60494-2_20. URL: https://link.springer.com/10.1007/978-3-031-60494-2_20 (visited on 09/10/2026).
- [32] Talha Azfar et al. “Traffic Co-Simulation Framework Empowered by Infrastructure Camera Sensing and Reinforcement Learning”. In: *Journal of Intelligent Transportation Systems* (Sept. 15, 2025), pp. 1–19. ISSN: 1547-2450, 1547-2442. DOI: 10.1080/15472450.2025.2559410. URL: <https://www.tandfonline.com/doi/full/10.1080/15472450.2025.2559410> (visited on 09/10/2026).
- [33] Axel Wegener et al. “TraCI: An Interface for Coupling Road Traffic and Network Simulators”. In: *Proceedings of the 11th Communications and Networking Simulation Symposium*. SCS SSM’08: Spring Simulation Multiconference. Ottawa Canada: ACM, Apr. 14, 2008, pp. 155–163. ISBN: 978-1-56555-318-7. DOI: 10.1145/1400713.1400740. URL: <https://dl.acm.org/doi/10.1145/1400713.1400740> (visited on 09/10/2026).
- [34] Poorendra Ramlall, Ethan Jones, and Subhadeep Roy. “Development of a Networked Multi-Participant Driving Simulator with Synchronized EEG and Telemetry for Traffic Research”. In: *Systems* 13.7 (July 10, 2025), p. 564. ISSN: 2079-8954. DOI: 10.3390/systems13070564. URL: <https://www.mdpi.com/2079-8954/13/7/564> (visited on 09/10/2026).
- [35] Dário Machado et al. “CARMen: CARla-Based, Multi-Agent Immersive Road Environment Simulation.” in: *Proceedings of the 21st International Conference on Computer Graphics, Interaction and Visualization Theory and Applications*. 21st International Conference on Computer Graphics, Interaction and Visualization Theory and Applications. Marbella, Spain: SCITEPRESS - Science and Technology Publications, 2026, pp. 120–130. ISBN: 978-989-758-803-7. DOI: 10.5220/0014467600004728. URL: <https://www.scitepress.org/DigitalLibrary/Link.aspx?doi=10.5220/0014467600004728> (visited on 09/10/2026).
- [36] Christian Lehsing and Ilja T. Feldstein. “Urban Interaction – Getting Vulnerable Road Users into Driving Simulation”. In: *UR:BAN Human Factors in Traffic*. Ed. by Klaus Bengler et al. Wiesbaden: Springer Fachmedien Wiesbaden, 2018, pp. 347–362. ISBN: 978-3-658-15417-2. DOI: 10.1007/978-3-658-15418-9_19. URL: http://link.springer.com/10.1007/978-3-658-15418-9_19 (visited on 09/10/2026).
- [37] Daniel Perez et al. “AR-PED: A Framework of Augmented Reality Enabled Pedestrian-in-the-Loop Simulation”. In: *Simulation Modelling Practice and Theory* 94 (July 2019), pp. 237–249. ISSN: 1569190X. DOI: 10.1016/j.simpat.2019.03.005. URL: <https://linkinghub.elsevier.com/retrieve/pii/S1569190X19300292> (visited on 09/10/2026).
- [38] Johannes Lindner et al. “A Coupled Driving Simulator to Investigate the Interaction between Bicycles and Automated Vehicles”. In: *2022 IEEE 25th International Conference on Intelligent Transportation Systems (ITSC)*. 2022 IEEE 25th International Conference on Intelligent Transportation Systems (ITSC). Macau, China: IEEE, Oct. 8, 2022, pp. 1335–1341. ISBN: 978-1-6654-6880-0. DOI: 10.1109/ITSC55140.2022.9922400. URL: <https://ieeexplore.ieee.org/document/9922400/> (visited on 09/10/2026).
- [39] Sepehr Sabeti et al. “MAD-IVE: Multi-Agent Distributed Immersive Virtual Environments for Vulnerable Road User Research—Potential, Challenges, and Requirements”. In: *Computing in Civil Engineering 2023*. ASCE International Conference on Computing in Civil Engineering 2023. Corvallis, Oregon: American Society of Civil Engineers, Jan. 25, 2024, pp. 1113–1120. ISBN: 978-0-7844-8524-8. DOI: 10.1061/9780784485248.133. URL: <https://ascelibrary.org/doi/10.1061/9780784485248.133> (visited on 09/10/2026).
- [40] Luca Crosato et al. “A Virtual Reality Framework for Human-Driver Interaction Research: Safe and Cost-Effective Data Collection”. In: *Proceedings of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*. HRI ’24: ACM/IEEE International Conference on Human-Robot Interaction. Boulder CO USA: ACM, Mar. 11, 2024, pp. 167–174. ISBN: 979-8-4007-0322-5. DOI: 10.1145/3610977.3634923. URL: <https://dl.acm.org/doi/10.1145/3610977.3634923> (visited on 09/10/2026).
- [41] Yue Yang et al. “Using Distributed Simulations to Investigate Driver-Pedestrian Interactions and Kinematic Cues: Implications for Automated Vehicle Behaviour and Communication”. In: *Transportation Research Part F: Traffic Psychology and Behaviour* 107 (Nov. 2024), pp. 84–97. ISSN: 13698478. DOI: 10.1016/j.trf.2024.08.027. URL: <https://linkinghub.elsevier.com/retrieve/pii/S1369847824002341> (visited on 09/10/2026).
- [42] François Saidi, Guillaume Millet, and Gilles Gallée. “Transport Delay Characterization of SCANer Driving Simulator”. In: (2010).
- [43] Xue-Jian He and Kup-Sze Choi. “Stable Haptic Rendering For Physics Engines Using Inter-Process Communication and Remote Virtual Coupling”. In: *International Journal of Advanced Computer Science and Applications* 4.1 (2013). ISSN: 2158107X, 21565570. DOI: 10.14569/IJACSA.2013.040103. URL: <http://thesai.org/Publications/ViewPaper?Volume=4&Issue=1&Code=IJACSA&SerialNo=3> (visited on 09/10/2026).
- [44] Tobias Kronauer et al. *Latency Analysis of ROS2 Multi-Node Systems*. Version 3. 2021. DOI: 10.48550/ARXIV.2101.02074. URL: <https://arxiv.org/abs/2101.02074> (visited on 09/10/2026).
- [45] Gustavo Silveira, Abhijat Biswas, and Henny Admoni. “DReyeVR: Democratizing Virtual Reality Driving Simulation for Behavioural & Interaction Research”. In: *Proceedings of the 2022 ACM/IEEE International Conference on Human-Robot Interaction*. Hri ’22. Sapporo, Hokkaido, Japan: IEEE Press, 2022, pp. 639–643.
- [46] Debargha Dey et al. “GrokWalks: A Portable Virtual Reality Platform to Facilitate Studying Driver-Pedestrian Interactions”. In: *Adjunct Proceedings of the 16th International Conference on Automotive User Interfaces and Interactive Vehicular Applications*. AutomotiveUI ’24: 16th International Conference on Automotive User Interfaces and Interactive Vehicular Applications. Stanford CA USA: ACM, Sept. 22, 2024, pp. 284–288. ISBN: 979-8-4007-0520-5. DOI: 10.1145/

- 3641308.3685013. URL: <https://dl.acm.org/doi/10.1145/3641308.3685013> (visited on 09/10/2026).
- [47] John Stark et al. *Cooperative Driving Automation — Highway Driving Simulator Architecture: High-Level Architecture Design*. May 1, 2025. URL: <https://rosap.ntl.bts.gov> (visited on 09/10/2026).
- [48] Xu Han. “A Parallel Development and Testing Framework for Cooperative Driving Automation”. UCLA, 2024. URL: <https://escholarship.org/uc/item/0bd7d5wv> (visited on 09/10/2026).
- [49] J. Russell Noseworthy. “The Test and Training Enabling Architecture (TENA) Supporting the Decentralized Development of Distributed Applications and LVC Simulations”. In: *2008 12th IEEE/ACM International Symposium on Distributed Simulation and Real-Time Applications*. 2008 12th IEEE International Symposium on Distributed Simulation and Real-Time Applications (DS-RT). Vancouver, BC, Canada: IEEE, Oct. 2008, pp. 259–268. ISBN: 978-0-7695-3425-1. DOI: 10.1109/DS-RT.2008.35. URL: <http://ieeexplore.ieee.org/document/4700128/> (visited on 09/10/2026).
- [50] Zilin Huang et al. *Sky-Drive: A Distributed Multi-Agent Simulation Platform for Human-AI Collaborative and Socially-Aware Future Transportation*. Version 2. 2025. DOI: 10.48550/ARXIV.2504.18010. URL: <https://arxiv.org/abs/2504.18010> (visited on 09/10/2026).
- [51] Sky-Drive Project. *Sky-Drive: A Distributed Multi-Agent Simulation Platform for Human-AI Collaborative and Socially-Aware Future Transportation*. 2025. URL: <https://sky-lab-uw.github.io/Project%20SkyDrive/> (visited on 09/10/2026).
- [52] Zubair Islam and Mohamed El-Daraby. *DMAVA: Distributed Multi-Autonomous Vehicle Architecture Using Autoware*. Version 2. 2026. DOI: 10.48550/ARXIV.2601.16336. URL: <https://arxiv.org/abs/2601.16336> (visited on 09/10/2026).
- [53] Leonard Frank Neis, Andre Antakli, and Matthias Klusch. *CARJAN: Agent-Based Generation and Simulation of Traffic Scenarios with AJAN*. Version 1. 2025. DOI: 10.48550/ARXIV.2508.21411. URL: <https://arxiv.org/abs/2508.21411> (visited on 09/10/2026).
- [54] The Khronos Group. *OpenXR Specification*. The Khronos Group Inc., 2024. URL: <https://www.khronos.org/openxr/> (visited on 09/10/2026).
- [55] Patrick Rebling, Metehan Alphan, and Philipp Nenninger. “Mind the Gap: Quantifying Behavioral Fidelity in CARLA Using Naturalistic Drone Data”. In: *2026 Stuttgart International Symposium*. Stuttgart, Germany, July 1, 2026, pp. 2026-01–0771. DOI: 10.4271/2026-01-0771. URL: <https://saemobilus.sae.org/papers/mind-gap-quantifying-behavioral-fidelity-carla-using-naturalistic-drone-data-2026-01-0771> (visited on 07/10/2026).
- [56] Pete Shinnars, Lenard Lindstrom, René Dudfield, et al. *Pygame*. Pygame Community, 2026. URL: <https://www.pygame.org/> (visited on 09/10/2026).
- [57] Patrick Rebling et al. “CycloCARLA: Design, Implementation, and Evaluation of a High-Fidelity Bicycle Simulator”. In: *Proceedings of the Driving Simulation Conference 2026 Europe XR*. Accepted for Publication. Driving Simulation Association, 2026.
- [58] Yannick Rauch et al. “Approach to a Holistic Modelling of Cycling Dynamics”. In: *SIMUL2023 - The Fifteenth International Conference on Advances in System*. SIMUL2023 - The Fifteenth International Conference on Advances in System. Nov. 13, 2023.
- [59] Fei Wu et al. “Don’t Block the Ground: Reducing Discomfort in Virtual Reality with an Asymmetric Field-of-View Restrictor”. In: *Proceedings of the 2021 ACM Symposium on Spatial User Interaction*. SUI ’21. New York, NY, USA: Association for Computing Machinery, Nov. 9, 2021, pp. 1–10. ISBN: 978-1-4503-9091-0. DOI: 10.1145/3485279.3485284. URL: <https://dl.acm.org/doi/10.1145/3485279.3485284> (visited on 09/10/2026).
- [60] Camillo Lugaresi et al. *MediaPipe: A Framework for Building Perception Pipelines*. Version 1. 2019. DOI: 10.48550/ARXIV.1906.08172. URL: <https://arxiv.org/abs/1906.08172> (visited on 09/10/2026).
- [61] Association for Standardization of Automation & Measuring Systems. *ASAM OpenSCENARIO XML*. Version 1.3.1. 2024. URL: <https://www.asam.net/standards/detail/openscenario/> (visited on 09/10/2026).