

Swim-and-Breach at Palm Scale: A Rudder-Steered Two-Propeller Underwater Robot Platform with Differential-Thrust Pitch Control

Daehyun Choi^{1,*†}, Ian Bergerson^{1,*}, Hengjia Zhu^{1,*}, Tianjun Lan¹, and Saad Bhamla^{1,†}

Abstract— We present a palm-scale (65 mm, 34 g) swim-and-breach robot platform. Two vertically stacked propellers provide both propulsion and differential-thrust pitch control under a proportional-integral-derivative (PID) loop, and a tail rudder adds yaw control. The hull, evaluated by flow simulation, reduces the drag five-fold relative to an equivalent cuboid, and the propellers are optimized using B-series modeling validated by dynamometer measurements. The current robot swims at 13.9 body lengths per second and turns at 209 deg per second, corresponding to the upper limits reported for underwater robots. In free swimming, the pitch loop turns the body to any commanded nose-up pitch angle, and, with the rudder stabilizing the exit, the current robot leaps 1.6 body lengths high and 3.7 long in a seamless cruise-leap-cruise sequence. The platform can be used to build small-scale robots that cross barriers and dry gaps between pools for inspection in streams, flooded structures, and industrial systems.

I. INTRODUCTION

To leave the water from a level swim, a fish pitches nose-up, accelerates toward the surface with a burst of thrust, and holds that pitch until it breaks through the free surface (Fig. 1(A)). Fishes across taxa leap for multiple purposes: outrunning predators below [1], clearing waterfalls in migration [2], shedding parasites [3], capturing prey above the surface [4], and escaping a sudden disturbance [5].

Underwater robots have matured as swimmers [6]. Soft bodies cruise with fishlike motion [7], high-frequency tail actuation approaches biological swimming performance [8], magnetic actuation has produced maneuverable designs [9], and wire-driven mechanisms offer direction control in compact packages [10]. The agility of these robots, however, is reported almost entirely as turning in the horizontal plane (perpendicular to gravity), whereas a water exit takes place in the vertical plane (parallel to gravity) and requires a hydrodynamic design built for burst thrust as well as fast and precise pitch and yaw control at the instant of exit.

To replicate the fish-inspired swim-and-breach maneuver, we developed a robot platform (Fig. 1(B)). We chose propellers as thrusters over a flapping tail because propellers are known to deliver at least an order of magnitude greater static thrust per unit weight [40], [41]. We vertically stacked the propellers for two reasons: (i) simple pitch control through the thrust difference between the two propellers, with a rudder mechanism correcting yaw deviations; and (ii) a low-drag design by positioning the motors along the same vertical

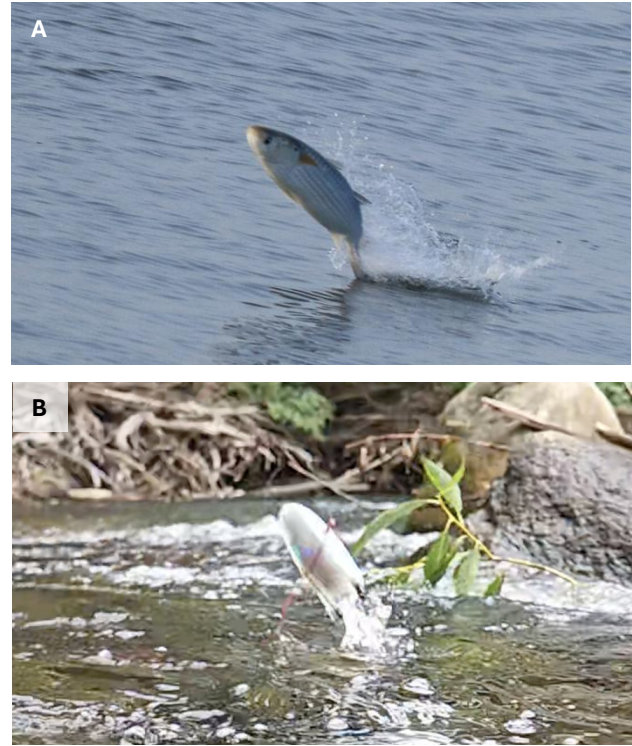


Fig. 1. Water exit of (A) a flathead grey mullet (*Mugil cephalus*; photo by Afsarnayakkan, Wikimedia Commons, CC BY-SA 4.0) and (B) the current robot in Boulder Creek, Colorado.

center plane so that the body can be kept laterally thin. Both in the laboratory and in a natural stream, we showed, through video tracking, that the current platform swam at 13.9 body lengths per second (BL/s), placing it among the fastest existing robotic systems [11]–[15], [20] in terms of both swimming speed and turning rate, and among the fastest even of the fish compared here [16]–[19], while its pitching rate is comparable to that of the sharks (Fig. 2(A)). The vertical leap, 2.8 BL, is the highest reported for a fish-shaped robot or jumping robot [20]–[26] and is comparable to those of the archerfish [4] and the guppy [30] (Fig. 2(B)). To our knowledge, the current platform is the most agile palm-scale robot to link free swimming with leaping, offering a potential means to extend the operational range of underwater robots beyond the submerged environment through aerial-underwater transitions [32], [33].

II. SYSTEM DESIGN OF THE ROBOT PLATFORM

A. Mechanical Design

1) *Hydrodynamics of the hull and rudder*: The current robot's body (Fig. 3) is a 3D-printed waterproof hull of body

*These authors contributed equally to this work.

†Corresponding authors.

¹The authors are with the BioFrontiers Institute, University of Colorado Boulder, Boulder, CO 80309, USA. {daehyun.choi, saad.bhamla}@colorado.edu

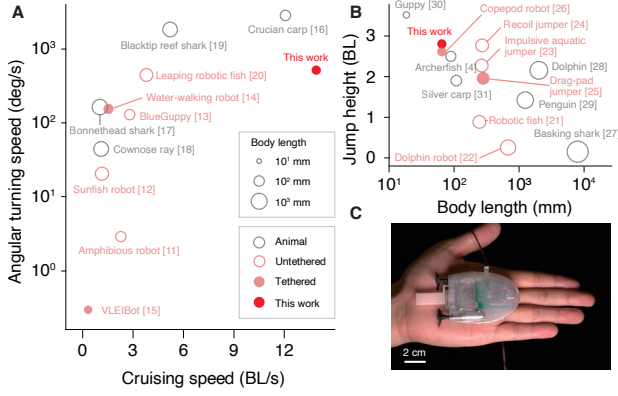


Fig. 2. Performance of the current robot against published robots and animals. (A) Reported angular turning rate (deg/s) against forward swimming speed normalized by body length (BL/s). (B) Jump height above the water surface against body length. In both panels, open and filled light red circles denote untethered and tethered or mechanically supported robots, open black circles denote animals, and the filled red circle denotes the current robot. Each label gives the name and the reference number, and the circle diameter scales with the logarithm of the body length. (C) The current robot on a palm.

length 65 mm (excluding the tail rudder and propellers) and width 15 mm. The current robot is neutrally buoyant at a total mass of 34 g, of which the two motors account for 10.0 g, the electronics (PCB, MOSFET driver boards, and the bulk capacitor) for 9.9 g, the printed body and covers for 5.6 g, the tail assembly with its gearmotor for 1.8 g, and the propellers for 0.6 g. The remaining 6 g is sealant and wiring.

The hull shape is a National Advisory Committee for Aeronautics (NACA) four-digit airfoil thickness form [34] truncated at the tail in all three views (Fig. 3) following the Kammbach principle, in which the tail ends abruptly just upstream of where the flow would separate [35], to keep both the drag and the body size small. In each view the thickness curve is cut at the fraction c of its chord and stretched over the outline, and the (maximum width, length, c) triples are (15 mm, 50 mm, 0.9), (50 mm, 65 mm, 0.5), and (15 mm, 65 mm, 0.5) for the front, side, and top views, respectively. A submerged body is passively stable in roll when its center of buoyancy (CoB) lies above its center of mass (CoM). In the current robot the inverted airfoil section of the front view places the displaced volume high, so the CoB lies 1.7 mm above and 0.7 mm forward of the CoM (Fig. 3(B)).

We compared the hydrodynamic drag of the current design with that of the equivalent cuboid (71 × 13 × 45 mm), a box with the same frontal, side, and top projected areas as the current design (Fig. 4(A)), using computational fluid dynamics (CFD) simulations that solve the incompressible unsteady RANS (URANS) equations with the $k-\omega$ SST model [36] in OpenFOAM. At a free-stream speed of 0.5 m/s the current design sheds a narrow vortex train confined to a cone behind the tail, whereas the cuboid sheds relatively large vortices from its leading edges onward (Fig. 4(A), iso-surfaces of the Q-criterion at $Q = 30 \text{ s}^{-2}$ colored by the local speed normalized by the free stream, u/u_0), which implies a larger pressure drag and more flow energy lost for the

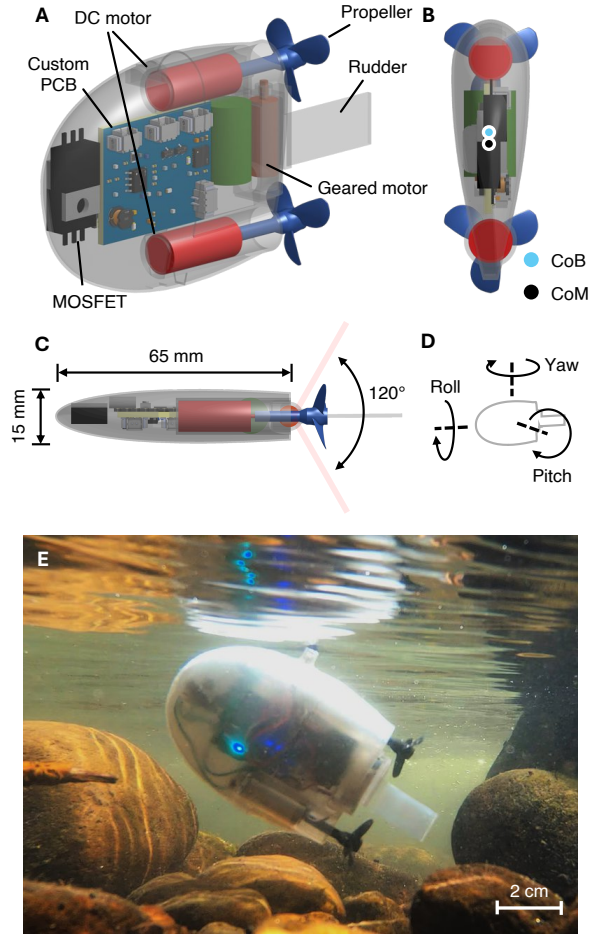


Fig. 3. Robot design in (A) oblique view with the sealed hull housing two coreless DC motors (one above the other in the center plane driving mirrored B-series propellers), the custom PCB, MOSFET drivers, and the geared rudder motor, (B) front view with the center of buoyancy (CoB, cyan) and center of mass (CoM, black) markers, and (C) top view (65 mm body length, 15 mm width) with the tail rudder sweeping ± 60 deg about the centerline. (D) Body axes with the pitch, yaw, and roll rotations. (E) The assembled prototype in a natural stream.

cuboid. At zero angle of attack (AoA) the current design has $C_d \approx 0.18$ against ≈ 0.9 for the cuboid (Fig. 4(B)), roughly a five-fold reduction, as the cuboid's flat front and sharp edges produce a large pressure difference between the front and separated wake (Fig. 4(C), top), while the current design keeps the flow attached over most of its length and recovers pressure toward the tail (Fig. 4(C), bottom). For angles of attack between -30 deg and 30 deg, which occur during pitch maneuvers, the current design's C_d stays at $\approx 0.2-0.35$, while the cuboid's stays at $\approx 0.9-1.3$ (Fig. 4(B)).

2) *Vertically stacked thruster pair and tail rudder:* Two 8520 coreless DC motors (DaFuRui, 8.5 mm × 20 mm, 3.7 V) are mounted vertically in the side-view center plane of the body (Fig. 3(A)–(C)). The thrust difference between the two motors produces a pitching torque with the vertical offset as the lever arm, while the thrust sum sets the net propulsive force. The two propellers are printed as mirror-image twins (Section II-A.3) so the pair can be mounted to contra-rotate and the net propeller reaction torque about the roll axis cancels when the two motors run at the same speed.

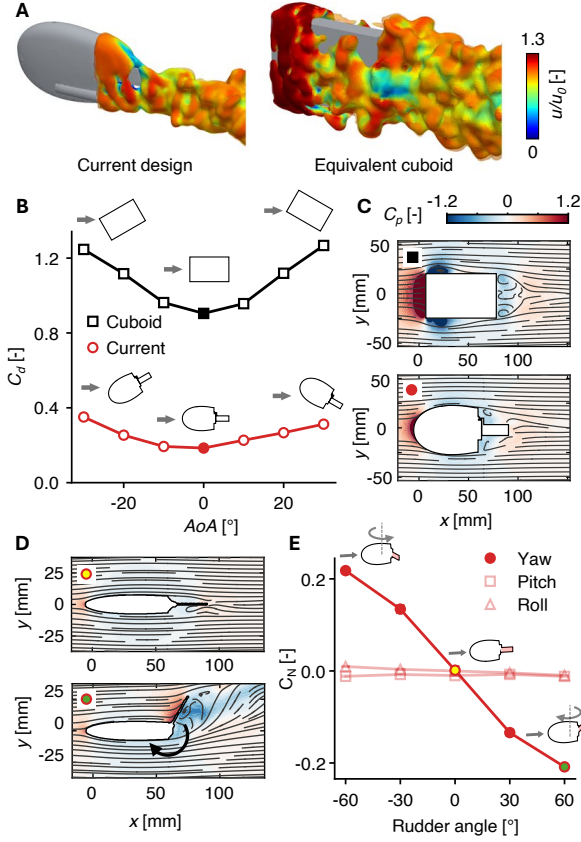


Fig. 4. Hydrodynamics of the hull and rudder using computational fluid dynamics. (A) Instantaneous wake structures behind the current design and behind the equivalent cuboid. (B) Drag coefficient $C_d = F_x / (q A_f)$ against angle of attack from -30 deg to 30 deg for the current design and the cuboid, with F_x the drag force, $q = \rho u_0^2 / 2$ the dynamic pressure at the free-stream speed $u_0 = 0.5$ m/s, and $A_f = 5.69$ cm 2 the frontal projected area shared by the current design and the cuboid. (C) Contours of the pressure coefficient $C_p = (p - p_\infty) / q$ and streamlines around the cuboid and around the current design. (D) Midplane flow with the rudder neutral and deflected. (E) Yaw, pitch, and roll moment coefficients $C_N = M / (q A_f L)$ against rudder angle from -60 deg to 60 deg, with M the moment about the CoM and L the overall length of the body with its rudder.

Yaw authority comes from a single flat tail rudder (25 mm long, 11 mm tall, 1 mm thick) mounted between the propeller pair. The rudder is driven by a 6 mm two-stage planetary gearmotor (Garosa, 26.45:1 reduction, ≈ 2.6 mN-m output torque) through an H-bridge. Rudder deflection creates a circulation that turns the body (Fig. 4(D)), with a yaw-moment coefficient that grows monotonically with angle over ± 60 deg while the pitch and roll moment coefficients stay negligible (Fig. 4(E)), so the rudder steers the body in the horizontal plane without disturbing the pitch PID control. In straight free swimming, the flow passively realigns the rudder without position sensing. When the body yaws off target, a PID controller uses the gyro-integrated angle to drive the gearmotor with signed PWM and steer the body back toward the target.

3) Propeller optimization: We optimized our propeller using the Wageningen B-series model, a standard marine propeller family [37]–[38], because its geometry follows directly from a few parameters and its thrust and torque

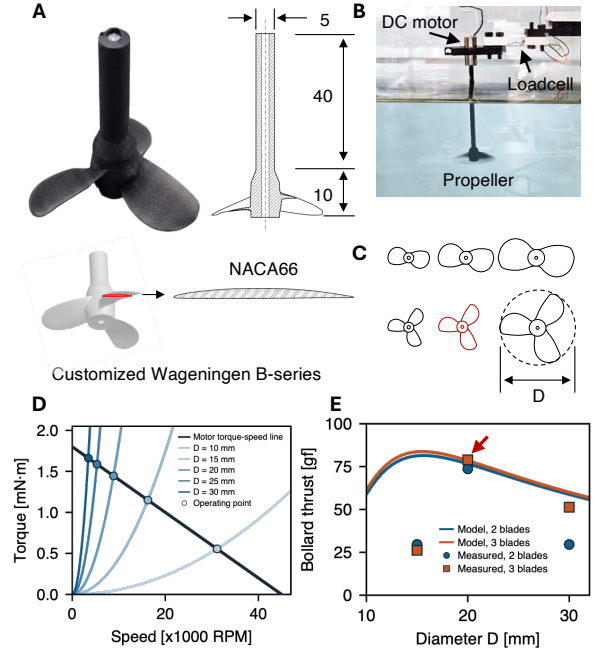


Fig. 5. Propeller optimization. (A) A printed three-blade customized Wageningen B-series propeller (modified NACA 66 blade sections, dimensions in mm). (B) Bollard-thrust dynamometer, with the motor attached to a load cell and the propeller submerged in a water tank. (C) Planforms of the printed variants, two- and three-blade at diameters D from 15 to 30 mm. The red outline is the selected three-blade 20 mm propeller, the one marked by the arrow in (E). (D) The motor's torque-speed line against the B-series torque load curves $Q = K_Q \rho n^2 D^5$ for $D = 10$ –30 mm, with the operating points circled. (E) Bollard thrust versus diameter D , predicted by the torque-matched model for two- and three-blade families (curves) and measured on the dynamometer (symbols). The arrow marks the selected three-blade 20 mm propeller (78.9 gf at 2.95 A).

are predictable. A B-series propeller is defined by four parameters such as the blade count Z , the diameter D , the pitch ratio P/D , and the expanded blade area ratio A_E/A_0 , while the others are fixed by the series, such as the chord, maximum thickness, and skew distributions along the radius (Fig. 5(A)). The open-water thrust and torque coefficients, $K_T = T / (\rho n^2 D^4)$ and $K_Q = Q / (\rho n^2 D^5)$ with T the thrust, Q the shaft torque, and ρ the water density, are published as regression polynomials in the advance ratio $J = V_a / (nD)$ (with V_a the advance speed, n the rotation rate, and D the propeller diameter) and the geometry.

At $J = 0$, corresponding to zero robot speed, K_T/K_Q increases as the pitch ratio (P/D) decreases. A smaller blade area ratio (A_E/A_0) also reduces both blade torque and mass. Thus, for the torque-limited coreless motor, we fixed both at their lower bounds, $P/D = 0.6$ and $A_E/A_0 = 0.40$, leaving blade count (Z) and diameter (D) as the two remaining parameters.

For a given diameter, the rotation rate, n , follows from matching the torque required by the propeller to the torque supplied by the motor (Fig. 5(D)). At rest the propeller requires $Q = K_Q \rho n^2 D^5$, a parabola in the rotation rate n with K_Q from the B-series at $J = 0$, while the motor supplies torque along a straight torque-speed line between the nominal 1.8 mN-m stall torque and 45 kRPM no-load

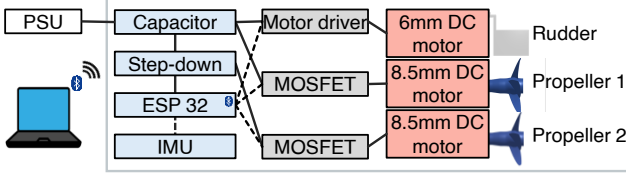


Fig. 6. Electronics. Supply power passes through a bulk capacitor at the tether terminal and a step-down converter to the ESP32 and IMU. MOSFET channels and an H-bridge motor driver actuate the two 8.5 mm thrusters and the 6 mm geared rudder motor, respectively. A host PC connects over BLE for parameterization and telemetry only.

speed of the 8520 class, and their intersection, the operating point, fixes n .

With the pair of n and D , the bollard thrust $T = K_T \rho n^2 D^4$ follows, plotted in Fig. 5(E) for two and three blades (solid curves in Fig. 5(E)) together with the dynamometer measurements (symbols in Fig. 5(E)). In the bollard dynamometer (Fig. 5(B)), a single 8520 motor with the propeller submerged is mounted on a 200 g load cell read by an amplifier (HX711), an inline sensor (INA260) records the current, and a relay switches a regulated 5.0 V supply for five pulses per propeller (5 s on, 20 s rest). We tested six printed propellers, two- and three-blade at $D = 15, 20$, and 30 mm (Fig. 5(C)), all at $P/D = 0.6$ and $A_E/A_0 = 0.40$. As a result, the three-blade 20 mm propeller is the optimum, with a peak sustained thrust of 78.9 gf at 2.95 A, followed by the two-blade 20 mm propeller at 73.7 gf. At $D = 15$ mm, the measured thrust is substantially lower than the model predicts, at 29.6 gf for two blades and 26.1 gf for three blades. This discrepancy arises because the B-series blade thickness scales with diameter and falls below the printer's 0.30 mm resolution limit at this small diameter. The printed blades are therefore thicker than specified by the series, so the B-series polynomials no longer accurately predict their performance. At $D = 30$ mm the thrust drops to 29.5 gf (two blades) and 51.3 gf (three blades), because a larger D steepens the torque parabola in Fig. 5(D) and moves the operating point toward stall (i.e., $n \rightarrow 0$). With both thrusters the static thrust-to-weight ratio is $2 \times 78.9/34 \approx 4.7$. Against the hull drag of Fig. 4(B) over a one-body-length run-up from rest, that thrust would bring the neutrally buoyant 34 g body to $v = 2.3$ m/s and a ballistic rise of $v^2/(2g) \approx 0.27$ m, about 4 BL, which overestimates the measured height of 2.8 BL (Fig. 2(B)) by neglecting added mass and the decrease in thrust at higher advance ratios ($J > 0$).

B. Electronics and Firmware

The custom board (32×25 mm, 3 mm thick, ≈ 5 g, Fig. 6) hosts an ESP32-C3 Super Mini module (AITRIP), an MPU-6050 IMU on I²C (accelerometer ± 2 g, gyro ± 250 deg/s, 42 Hz digital low-pass filter), IRLB8721 MOSFETs gating the thrusters, and a DRV8833 H-bridge for the rudder gearmotor. Power enters at 12–20 V over a 1 m, 30 AWG twisted-pair tether and is stepped down by an MP2307 synchronous buck to 5 V, from which the MCU module regulates 3.3 V for logic and the IMU. A 1000 μ F, 25 V electrolytic at the tether terminal buffers the thrusters' current

transients.

We connect a host PC to the robot's board over Bluetooth Low Energy (BLE) for parameterization and ≈ 70 Hz, 14-field telemetry (raw IMU, per-motor PWM, sequence phase, estimated and target pitch, controller output). Once we start a run, the entire sequence executes on the current platform without BLE communication while the board records an on-board log in RAM (raw IMU, motor and rudder PWM, angles and targets at about 25 Hz, up to about 120 s) and streams the log to the host PC over BLE when the run ends, so a dropped link during the run does not lead to any data loss.

C. Closed-Loop Pitch Control

Pitch is estimated on-device by a time-based complementary filter [39] fusing the gyro rate with the accelerometer gravity reference,

$$\hat{\theta}_k = \alpha \left(\hat{\theta}_{k-1} + \omega \Delta t \right) + (1 - \alpha) \theta_{\text{acc}}, \quad \alpha = \frac{\tau}{\tau + \Delta t}, \quad (1)$$

where $\hat{\theta}_k$ is the pitch estimate at step k , ω the gyro pitch rate, Δt the sample interval, θ_{acc} the accelerometer-derived pitch, and $\tau = 2$ s the filter time constant. The accelerometer term is rejected whenever the measured specific force deviates from 1 g by more than 0.15 g (thrust and vibration corrupt the gravity reference), leaving pure gyro integration for that step. The gyro bias is updated at a low adaptation rate and only while the robot is idle, so a commanded rotation is not absorbed into the bias estimate.

The controller is a PID on the pitch error e between the estimate $\hat{\theta}$ and the commanded pitch θ_{ref} ,

$$\begin{aligned} e &= \hat{\theta} - \theta_{\text{ref}}, & u &= K_p e + K_i \int e dt + K_d \dot{\theta}, & (2) \\ \delta &= \text{sat}_{[-\delta_{\text{max}}, \delta_{\text{max}}]}(u), & d_{\text{top}} &= \text{sat}_{[0, d_{\text{max}}]}(d_{\text{base}} + \delta), \\ & & d_{\text{bot}} &= \text{sat}_{[0, d_{\text{max}}]}(d_{\text{base}} - \delta), & (3) \end{aligned}$$

where $\text{sat}_{[a,b]}(x) = \min(\max(x, a), b)$ is the saturation function, u is the controller output, the trim δ (saturated at $\pm \delta_{\text{max}}$) tilts the thrust pair through the top- and bottom-motor duties d_{top} and d_{bot} , and the base duty d_{base} sets the net thrust.

We validated the PID control algorithm in a water tank, first in sinusoidal tracking and then in impulsive-disturbance rejection. The submerged robot was mounted at its CoM on the shaft of a pivot motor so that the robot could rotate only in pitch (Fig. 7(A)). From the host PC, we swept sinusoidal pitch commands over amplitudes of 10 deg, 20 deg, and 30 deg and frequencies of 0.2, 0.33, and 1 Hz (Fig. 7(B)). For each run, the amplitude A and phase φ were extracted by least-squares fitting $A \sin(2\pi f t + \varphi)$ at the commanded frequency f to the ≈ 70 Hz telemetry, with the first period discarded, and every metric was computed from the raw data. The gains were optimized in this setup to $K_p = 10$, $K_i = 0$, and $K_d = 0.5$ and held fixed throughout, with a per-motor ceiling $d_{\text{max}} = 24\%$ here and in free swimming (Section III) and 100% in the water exits (Section IV). The ratio of fitted to commanded amplitude stays at 0.88–0.96

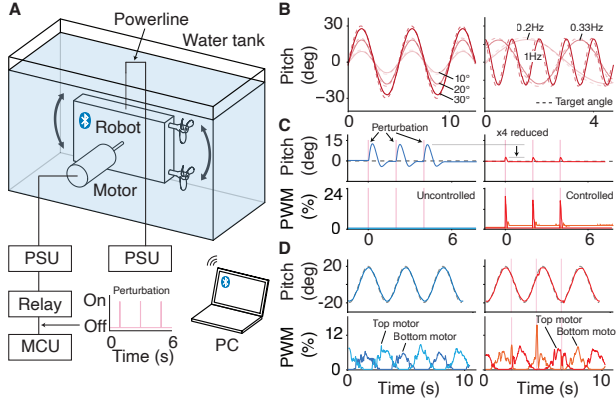


Fig. 7. Validation of the closed-loop pitch control in a water tank. (A) The water tank setup in which the robot, here with an earlier rectangular hull, is mounted to a frame free to pitch, is powered from a laboratory power supply through the tether, and reports telemetry over BLE to the host PC. A relay-driven motor on an independent supply serves as a free pivot when unpowered and delivers timed mechanical taps when the MCU (Arduino Uno) switches the relay (inset, three taps at 2 s spacing). (B) Sinusoidal tracking, estimated pitch $\hat{\theta}$ against the commanded θ_{ref} (dashed), across amplitudes 10–30 deg (left) and across frequencies 0.2–1 Hz (right). (C) Impulsive disturbance rejection with the pitch commanded to 0 deg, pitch and per-motor PWM traces, uncontrolled (left) and controlled (right), with the tap instants marked by vertical pink lines. (D) Taps delivered during sinusoidal tracking, pitch and per-motor PWM without (left) and with (right) perturbations.

across every condition (Fig. 7(B)), and even with $K_i = 0$ the pitch returns to the command after small perturbations. The root-mean-square tracking error (RMSE) stays within 11% of the commanded amplitude over amplitudes of 10–30 deg and frequencies of 0.2–0.33 Hz, and grows to 30% at 1 Hz, where the actuator begins to saturate, due to phase lag rather than amplitude error (Fig. 7(B)).

We applied impulsive disturbances through the pivot motor (Fig. 7(A)), powered from an independent supply through a relay that an MCU switched, so that the motor shaft tapped the body directly in timed 10 ms pulses, three times at 2 s intervals. With the controller off, the hull swings ± 12 deg and rings down slowly (Fig. 7(C), left). With the PID commanded to 0 deg, the excursions stay within ± 3 deg and recover within about 1 s of each tap (Fig. 7(C), right), a four-fold reduction of the swing. The tap instants detected automatically from gyro-rate spikes agree with the programmed tap schedule. In addition, taps delivered during sinusoidal tracking push the instantaneous error to 6–8 deg but are absorbed within about 0.3 s, leaving the overall RMSE indistinguishable from undisturbed runs (Fig. 7(D)).

III. UNDERWATER PITCH MANEUVERS

A. Sinusoidal Pitch Tracking

In free swimming, we commanded the robot to follow sinusoidal pitch at amplitudes of 10 deg and 20 deg and frequencies of 0.5, 0.67, and 1 Hz. The robot follows the commanded sinusoid across all conditions (Fig. 8), with RMSE (mean $\pm$ standard deviation over $n = 5$ trials per case) ranging from 1.47 ± 0.17 deg for the slowest command of 10 deg amplitude at 0.5 Hz to 4.15 ± 1.29 deg for the fastest command of 10 deg amplitude at 1 Hz. The forward

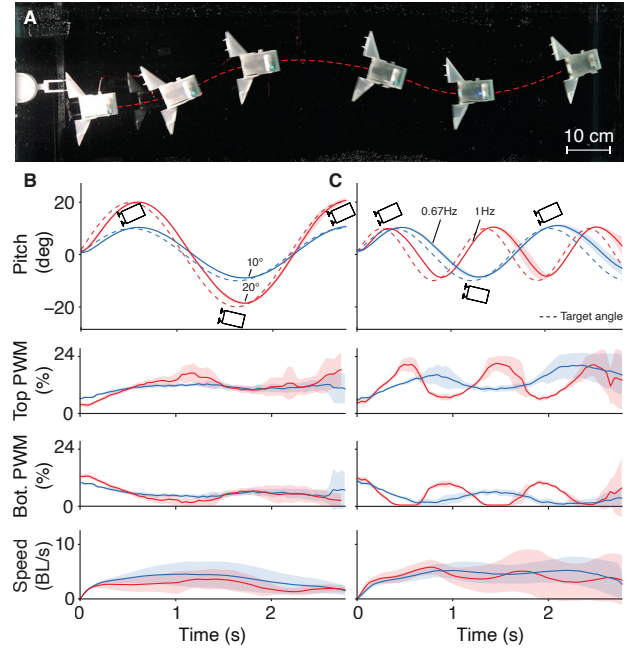


Fig. 8. Free-swimming sinusoidal pitch tracking. (A) Snapshot sequence of the $A = 10$ deg, 0.67 Hz swim. The dashed line traces the body center. (B) Amplitude sweep, 10 deg (blue) and 20 deg (red) at 0.5 Hz, and (C) frequency sweep, 0.67 Hz (blue) and 1 Hz (red) at 10 deg. In both, the four rows are the estimated pitch $\hat{\theta}$ (solid) against the command θ_{ref} (dashed), the top- and bottom-motor PWM duties, and the forward speed in BL/s, with shaded bands the standard deviation over $n = 5$ trials per case.

speed peaks at 4–6 BL/s at 24% PWM duty (Fig. 8(B) and (C)). This sinusoidal steering demonstrates pitch control from the thruster pair alone, with no dedicated dive planes or buoyancy controller. The runs used the earlier rectangular hull of Fig. 7(A). Because these runs test the two-motor pitch loop rather than the hull, the change to the current hull is expected to alter the drag and added mass but not the loop.

B. Pitch-Up

The pitch-up maneuver rotates the swimming body from level to a steep nose-up angle (Fig. 9(A)). While the robot swam straight, we stepped the target pitch to 0, 30, 60, or 90 deg nose-up for 1.5 s, and the on-board PID brought the robot to each commanded angle within 0.75 s (Fig. 9(C)) and the robot retained forward speed through the rotation (Fig. 9(B), $t > 0$). The robot can therefore reach any pitch angle from level to vertical in under a second, covering the range needed for a water exit.

IV. WATER EXIT PERFORMANCE

A. Exit Sequence

We tested the free-surface crossing and the rudder’s yaw authority during the crossing from a start inclined at 65 deg (Fig. 10). During the burst both thrusters run at the commanded duty while the pitch PID control of Section II-C holds the pitch at the initial angle of 65 deg. With the rudder yaw loop engaged, the body breaks through the surface at the launch angle (Fig. 10(A)), leaving the water at 0.78 m/s, and the CoM rises 1.3 BL above the surface (Fig. 10(B), red dashed line). With the yaw loop disengaged, the exit yaws

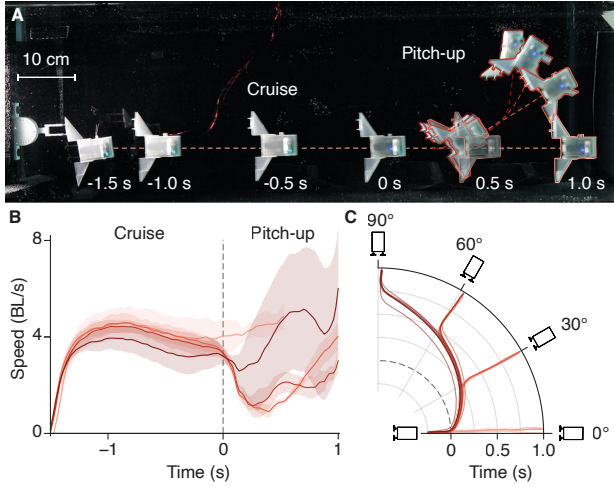


Fig. 9. Pitch-up maneuver. (A) Snapshot sequence of the straight approach ($t < 0$) and the pitch-up starting at $t = 0$, with overlaid trajectories fanning out to the four commanded target angles, 0, 30, 60, and 90 deg. (B) Forward speed through the cruise and the pitch-up for each target (mean over trials, shaded band the spread). (C) Pitch θ to each target in polar form, angle against time from the step (light traces individual trials, dark traces their mean), whose target labels also give the line colors in (A) and (B).

out of the vertical launch plane (see blue lines in Fig. 10(B) and Fig. 10(D)), and across trials the exit yaw angle reaches about 22 deg against about 3 deg with the loop engaged (Fig. 10(E)).

The pitch PID control holds the target angle by small, continual corrections (Fig. 10(C), left) that drive the two thrusters at unequal duties, leaving the reaction torques of the contra-rotating propellers unbalanced. When the lower thruster is the stronger, the uncanceled roll torque from the two motors can effectively be considered a lateral force at the lower propeller, which lies behind the CoM, and that force turns the body in yaw (Fig. 10(C), middle). The rudder, mounted between the propeller pair behind the CoM, supplies the opposing yaw moment with negligible pitch coupling (Fig. 10(C), right), so the exit stays in the launch plane even at exit speeds of $\mathcal{O}(10)$ BL/s and in a turbulent stream with background flow (Fig. 13).

B. Complete Leap

Cruise, pitch-up, and burst, followed by a leap and a re-entry, comprise a five-phase sequence run on-device (Fig. 11 and the schematic of Fig. 12(A)) whose phase boundaries are marked by the vertical lines in Fig. 12(C)–(E). In the leap phase both thrusters switch off and the body flies ballistically with the vertical acceleration in the lab frame at -1 g throughout (Fig. 12(E)), and cruise resumes after re-entry. In the tank the current robot cleared an obstacle in all three trials, rising 1.6 BL above the surface and landing 3.7 BL horizontally from the takeoff point (Fig. 11 and Fig. 12(B)). With the pitch loop engaged throughout, pitch follows the stepped nose-up target through the burst, continues past vertical in the air, and recovers after re-entry, while yaw holds near zero (Fig. 12(C) and (D)).

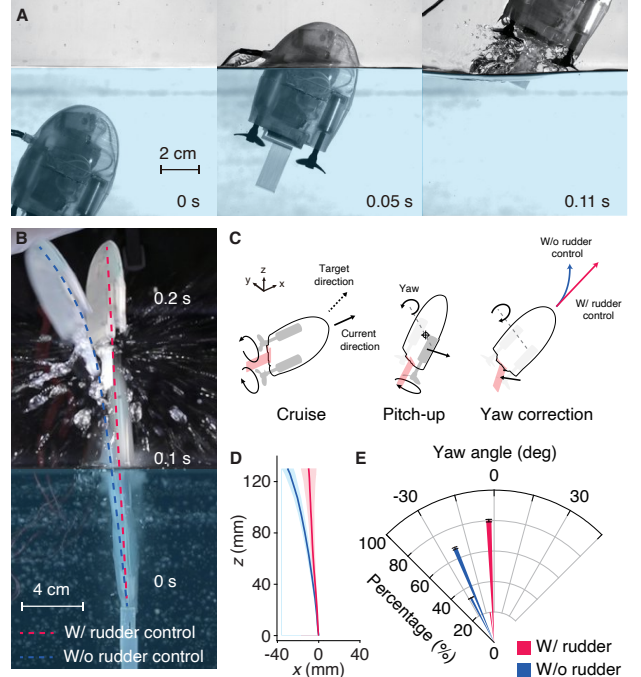


Fig. 10. Water-exit maneuver. (A) High-speed sequence of the breach in side view. (B) Composite exit trajectories with (red dashed line) and without (blue dashed line) rudder control. (C) Schematic of the exit sequence with the yaw torque of the thrust imbalance and the yaw correction by rudder control. (D) Exit trajectories in the vertical plane, z against x , with and without rudder control (mean line and shaded standard deviation, $n = 5$ trials per case). (E) Polar histogram of the exit yaw angle over the same trials, with and without rudder control.

C. Field Demonstration

We tested the water exit outdoors in Boulder Creek, Colorado (Fig. 13) to assess whether the rudder keeps the exit stable under turbulence and background flow. We launched the robot, powered through the tether from a portable battery, from a linear frame set underwater, in a slow current with turbulence. An exit with rudder control succeeded in the stream flow, reaching 2.8 BL above the surface (Fig. 13(A)), which supports the robustness of the current design to external flow, whereas an exit without rudder control left the water near vertical, yawed away from the exit plane at the apex, and struck the water surface far off along the yaw direction (Fig. 13(B)), as in Fig. 10(B).

V. CONCLUSIONS

We presented a palm-scale (65 mm, 34 g) swim-and-breach robot platform whose two vertically stacked propellers provide propulsion and differential-thrust pitch control, while a tail rudder adds yaw control. In URANS simulation, the Kamm-cut NACA hull reduces the drag five-fold against an equivalent cuboid, and rudder deflection yaws the body with negligible pitch and roll moments. A three-blade 20 mm propeller, selected among six candidates on the dynamometer, gives a static thrust-to-weight ratio of 4.7, and the current robot swims at 13.9 BL/s and turns at 209 deg/s, corresponding to the upper limits reported for underwater robots. The pitch loop tracked sinusoidal commands with amplitude ratios of 0.88–0.96, held pitch within ± 3 deg

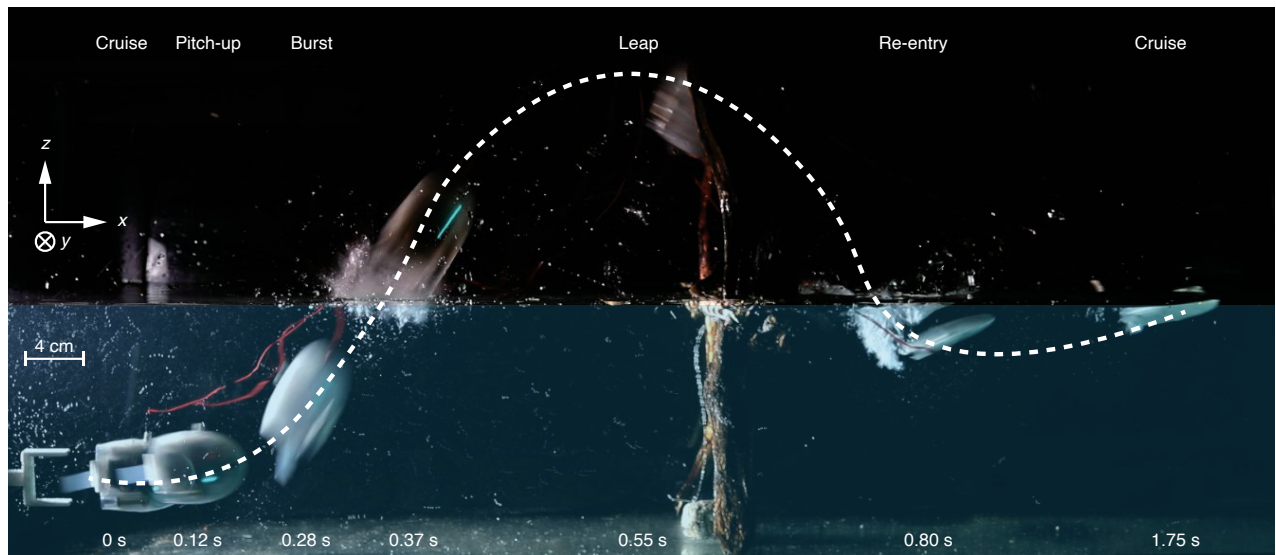


Fig. 11. Complete leap over an obstacle in the tank, consisting of cruise, pitch-up, burst through the surface, ballistic flight over the obstacle, re-entry, and return to cruise, with the leap rising 1.6 BL above the surface and spanning 3.7 BL.

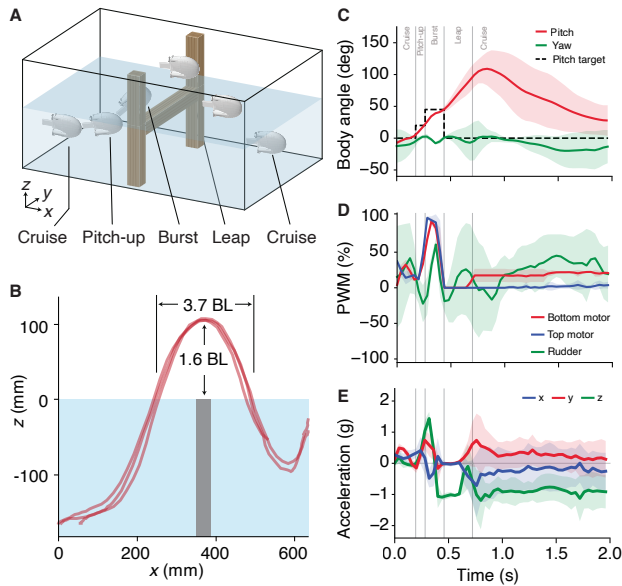


Fig. 12. Leap kinematics and control signals in the tank. (A) Schematic of the tank with the obstacle and the robot at the five phases: cruise, pitch-up, burst, leap with both thrusters off, and cruise again after re-entry. (B) Body-center trajectories of three trials in the vertical plane, z against x , the water shaded blue and the obstacle in gray, with the apex height and the leap length marked in BL. Time histories ($n = 5$ trials) of (C) pitch and yaw against the stepped pitch target, (D) thruster and rudder duty (both thrusters driven in the burst, motors off in the leap, low duty in cruise), and (E) three-axis acceleration in the lab frame, with z the vertical axis along gravity. Vertical lines mark the phase boundaries, and shaded bands span trials.

under impulsive disturbances, and reached nose-up angles up to 90 deg within 0.75 s. Rudder control stabilized the water exit, reducing its yaw seven-fold, from about 22 deg to 3 deg. The current robot demonstrated the complete cruise-leap-cruise sequence in the tank, leaping 1.6 BL high and 3.7 BL long. The rudder-controlled exit also reached 2.8 BL above the surface in a turbulent natural stream, supporting the robustness of the current design to external flow.

Future directions might include (i) untethered operation,

through a joint size–thrust–weight optimization with an onboard battery, a revised hull, and propeller optimization, (ii) a quantitative analysis of underwater maneuvering performance in the horizontal plane (perpendicular to gravity) using rudder control, and (iii) repeated hop cycles with controlled re-entry and attitude control in the air, where roll is unregulated, with systematic field trials in the habitats of the fish that motivated the design.

The current robot platform shows the possibility of underwater robots crossing the weirs, rock sills, pipe lips, and dry gaps between pools that currently stop them in streams, flooded structures, and industrial systems, while providing a modular platform for environmental sensing, inspection, and monitoring.

ACKNOWLEDGMENT

S. Bhamla acknowledges funding from Schmidt Sciences, LLC. D. Choi acknowledges funding from the National Research Foundation of Korea (RS-2022-NR070924, RS-2023-00248034). The authors thank Paulami Sarkar (Bhamla Lab) for assistance with the experiments.

AUTHOR CONTRIBUTIONS

Daehyun Choi: Conceptualization, Data curation, Formal analysis, Investigation, Methodology, Software, Validation, Writing – Original Draft, Writing – Review & Editing; Ian Bergerson: Conceptualization, Data curation, Formal analysis, Investigation, Methodology, Software, Validation, Visualization, Writing – Original Draft; Hengjia Zhu: Data curation, Formal analysis, Investigation, Validation, Visualization; Tianjun Lan: Data curation, Formal analysis, Investigation; Saad Bhamla: Conceptualization, Funding acquisition, Resources, Supervision, Writing – Review & Editing.

DATA AVAILABILITY

The data that support the findings of this study are available from the corresponding authors upon reasonable

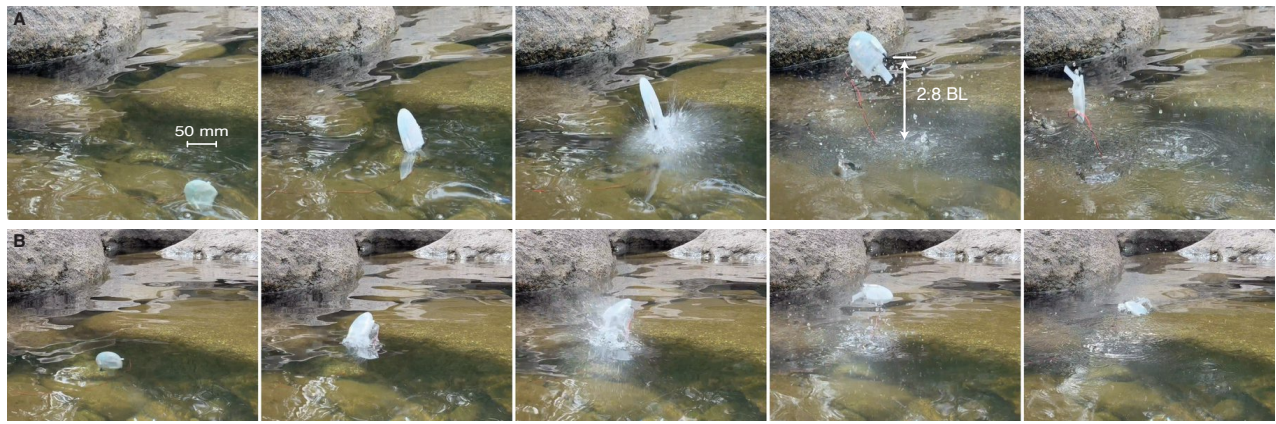


Fig. 13. Water exits in Boulder Creek, Colorado. (A) An exit with rudder control, reaching 2.8 BL above the surface, from the surface start through the burst to the apex and the descent. (B) An exit without rudder control, in which the body leaves the water near vertical, yaws away from the exit plane at the apex, and strikes the water surface far off along the yaw direction.

request.

REFERENCES

- [1] J. Davenport, "How and why do flying fish fly?" *Rev. Fish Biol. Fish.*, vol. 4, no. 2, pp. 184–214, 1994.
- [2] D. V. Lauritzen, F. S. Hertel, L. K. Jordan, and M. S. Gordon, "Salmon jumping: Behavior, kinematics and optimal conditions, with possible implications for fish passageway design," *Bioinspir. Biomim.*, vol. 5, no. 3, Art. no. 035006, 2010.
- [3] T. Dempster, S. Bui, K. Overton, and F. Oppedal, "Jumping to treat sea lice: Harnessing salmon behaviour to enable surface-based chemotherapeutic application," *Aquaculture*, vol. 512, Art. no. 734318, 2019.
- [4] A. M. Shih, L. Mendelson, and A. H. Techet, "Archer fish jumping prey capture: Kinematics and hydrodynamics," *J. Exp. Biol.*, vol. 220, no. 8, pp. 1411–1422, 2017.
- [5] B. J. Vetter, A. F. Casper, and A. F. Mensinger, "Characterization and management implications of silver carp (*Hypophthalmichthys molitrix*) jumping behavior in response to motorized watercraft," *Manag. Biol. Invasions*, vol. 8, no. 1, pp. 113–124, 2017.
- [6] R. Wang, S. Wang, Y. Wang, L. Cheng, and M. Tan, "Development and motion control of biomimetic underwater robots: A survey," *IEEE Trans. Syst., Man, Cybern.: Syst.*, vol. 52, no. 2, pp. 833–844, 2022.
- [7] R. K. Katzschmann, J. DelPreto, R. MacCurdy, and D. Rus, "Exploration of underwater life with an acoustically controlled soft robotic fish," *Sci. Robot.*, vol. 3, no. 16, Art. no. eaar3449, 2018.
- [8] J. Zhu, C. White, D. K. Wainwright, V. Di Santo, G. V. Lauder, and H. Bart-Smith, "Tuna robotics: A high-frequency experimental platform exploring the performance space of swimming fishes," *Sci. Robot.*, vol. 4, no. 34, Art. no. eaax4615, 2019.
- [9] X. Chen, J. Yu, Z. Wu, Y. Meng, and S. Kong, "Toward a maneuverable miniature robotic fish equipped with a novel magnetic actuator system," *IEEE Trans. Syst., Man, Cybern.: Syst.*, vol. 50, no. 7, pp. 2327–2337, 2020.
- [10] Y. Wang, C. Chen, Y. Chen, J. Li, Y. Motegi, K. Ohkuma, T. Maki, and M. Zhao, "Design, modeling and direction control of a wire-driven robotic fish based on a 2-DoF crank-slider mechanism," *arXiv preprint arXiv:2603.02851*, 2026.
- [11] D. Wang, Y. Liu, J. Deng, S. Zhang, J. Li, W. Wang, J. Liu, W. Chen, Q. Quan, G. Liu, H. Xie, and J. Zhao, "Miniature amphibious robot actuated by rigid-flexible hybrid vibration modules," *Adv. Sci.*, vol. 9, no. 29, Art. no. 2203054, 2022.
- [12] L. Huang, Z. Huang, Q. Liu, Z. Song, Y. Shen, and M. Huang, "Coordinated dual-fin actuation of bionic ocean sunfish robot for multi-modal locomotion," *Biomimetics*, vol. 10, no. 8, Art. no. 489, 2025.
- [13] H. Ko, V. Saro-Cortes, B. Mmari, D. Ni, A. Wissa, and R. Nagpal, "BlueGuppy: Tunable kinematics enables maneuverability in a minimalist fish-like robot," *Bioinspir. Biomim.*, vol. 20, no. 5, Art. no. 056006, 2025.
- [14] D. Kim, M. Gwon, B. Kim, V. M. Ortega-Jimenez, S. Han, D. Kang, M. S. Bhamla, and J.-S. Koh, "Design of a biologically inspired water-walking robot powered by artificial muscle," *Micromachines*, vol. 13, no. 4, Art. no. 627, 2022.
- [15] E. K. Blankenship, C. K. Trygstad, F. M. F. R. Gonçalves, and N. O. Pérez-Arancibia, "VLEIBot: A new 45-mg swimming micro-robot driven by a bioinspired anguilliform propulsor," in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2024, pp. 6014–6021.
- [16] P. Domenici, H. Turesson, J. Brodersen, and C. Brönmark, "Predator-induced morphology enhances escape locomotion in crucian carp," *Proc. R. Soc. B*, vol. 275, no. 1631, pp. 195–201, 2008.
- [17] S. L. Hoffmann and M. E. Porter, "Body and pectoral fin kinematics during routine yaw turning in bonnethead sharks (*Sphyrna tiburo*)," *Integr. Org. Biol.*, vol. 1, no. 1, Art. no. obz014, 2019.
- [18] J. M. Parson, F. E. Fish, and A. J. Nicastro, "Turning performance of batoids: Limitations of a rigid body," *J. Exp. Mar. Biol. Ecol.*, vol. 402, nos. 1–2, pp. 12–18, 2011.
- [19] J. E. Trujillo, I. Bouyoucos, W. J. Rayment, P. Domenici, S. Planes, J. L. Rummer, and B. J. M. Allan, "Escape response kinematics in two species of tropical shark: Short escape latencies and high turning performance," *J. Exp. Biol.*, vol. 225, no. 22, Art. no. jeb243973, 2022.
- [20] D. Chen, Z. Wu, Y. Meng, M. Tan, and J. Yu, "Development of a high-speed swimming robot with the capability of fish-like leaping," *IEEE/ASME Trans. Mechatron.*, vol. 27, no. 5, pp. 3579–3589, 2022.
- [21] D. Chen, Z. Wu, P. Zhang, M. Tan, and J. Yu, "Performance improvement of a high-speed swimming robot for fish-like leaping," *IEEE Robot. Autom. Lett.*, vol. 7, no. 2, pp. 1936–1943, 2022.
- [22] J. Yu, T. Wang, D. Chen, and Y. Meng, "Quantifying the leaping motion using a self-propelled bionic robotic dolphin platform," *Biomimetics*, vol. 8, no. 1, Art. no. 21, 2023.
- [23] J. Dong, L. Zhong, Q. Chen, R. Wu, X. Zheng, H. Zhu, S. Wang, and T. Zhang, "Design, analysis, and tests of an impulsive aquatic jumping mechanism inspired by frog limbs," *IEEE Robot. Autom. Lett.*, vol. 9, no. 7, pp. 6344–6351, 2024.
- [24] Y. Xia, X. Zhang, J. Yan, and J. Zhao, "A small water surface jumping robot utilizing efficient hydrodynamic resistance based on rapid recoil design," *IEEE Robot. Autom. Lett.*, vol. 10, no. 3, pp. 2758–2765, 2025.
- [25] M. Gwon, D. Kim, B. Kim, S. Han, D. Kang, and J.-S. Koh, "Scale dependence in hydrodynamic regime for jumping on water," *Nat. Commun.*, vol. 14, no. 1, Art. no. 1473, 2023.
- [26] B. Chang, J. Myeong, E. Viot, C. Clanet, H.-Y. Kim, and S. Jung, "Jumping dynamics of aquatic animals," *J. R. Soc. Interface*, vol. 16, no. 152, Art. no. 20190014, 2019.
- [27] E. M. Johnston, L. G. Halsey, N. L. Payne, A. A. Kock, G. Iosilevskii, B. Whelan, and J. D. R. Houghton, "Latent power of basking sharks revealed by exceptional breaching events," *Biol. Lett.*, vol. 14, no. 9, Art. no. 20180537, 2018.
- [28] H. Tanaka, G. Li, Y. Uchida, M. Nakamura, T. Ikeda, and H. Liu, "Measurement of time-varying kinematics of a dolphin in burst accelerating swimming," *PLoS ONE*, vol. 14, no. 1, Art. no. e0210860, 2019.

- [29] J. Davenport, R. N. Hughes, M. Shorten, and P. S. Larsen, "Drag reduction by air release promotes fast ascent in jumping emperor penguins—a novel hypothesis," *Mar. Ecol. Prog. Ser.*, vol. 430, pp. 171–182, 2011.
- [30] D. Soares and H. S. Bierman, "Aerial jumping in the Trinidadian guppy (*Poecilia reticulata*)," *PLoS ONE*, vol. 8, no. 4, Art. no. e61617, 2013.
- [31] X. T. Shi, Z. J. Jin, Y. Liu, X. Hu, J. J. Tan, Q. W. Chen, Y. P. Huang, D. F. Liu, Y. Wang, and X. L. Gu, "Can age-0 Silver Carp cross laboratory waterfalls by leaping?" *Limnologica*, vol. 69, pp. 67–71, 2018.
- [32] R. Zufferey, A. Ortega Ancel, A. Farinha, R. Siddall, S. F. Armanini, M. Nasr, R. V. Brahmam, G. Kennedy, and M. Kovac, "Consecutive aquatic jump-gliding with water-reactive fuel," *Sci. Robot.*, vol. 4, no. 34, Art. no. eaax7330, 2019.
- [33] R. Zufferey, S. L. Jeger, M. Hüsler, F. Ruiz, A. Lapsansky, A. Ijspeert, and D. Floreano, "Leaping out of the water: Aerial-aquatic locomotion with flapping wings," *Science*, vol. 393, no. 6807, pp. 207–211, 2026.
- [34] I. H. Abbott and A. E. von Doenhoff, *Theory of Wing Sections*. New York, NY, USA: Dover, 1959.
- [35] W.-H. Hucho and G. Sovran, "Aerodynamics of road vehicles," *Annu. Rev. Fluid Mech.*, vol. 25, no. 1, pp. 485–537, 1993.
- [36] F. R. Menter, "Two-equation eddy-viscosity turbulence models for engineering applications," *AIAA J.*, vol. 32, no. 8, pp. 1598–1605, 1994.
- [37] G. Kuiper, *The Wageningen Propeller Series*. Wageningen, The Netherlands: MARIN, 1992.
- [38] J. Carlton, *Marine Propellers and Propulsion*, 4th ed. Oxford, UK: Butterworth-Heinemann, 2019.
- [39] R. Mahony, T. Hamel, and J.-M. Pfimlin, "Nonlinear complementary filters on the special orthogonal group," *IEEE Trans. Autom. Control*, vol. 53, no. 5, pp. 1203–1218, 2008.
- [40] C. K. Trygstad and N. O. Pérez-Arancibia, "Force characterization of insect-scale aquatic propulsion based on fluid–structure interaction," in *Proc. IEEE Int. Conf. Adv. Robot. (ICAR)*, 2025, pp. 764–771.
- [41] F. Hartmann, M. Baskaran, G. Raynaud, M. Benbedda, K. Mulleners, and H. Shea, "Highly agile flat swimming robot," *Sci. Robot.*, vol. 10, no. 99, Art. no. eadr0721, 2025.