

GeoFF3D: Coordinate-Anchored Feed-Forward Reconstruction for Large-Scale UAV Mapping

Xiang Yang¹, Yongli Wang¹, Yunsheng Zhang^{1,2,*}, Jun Li³, Hao Chen³, Haifeng Li¹

¹School of Geosciences and Info-Physics, Central South University, Changsha, China

²Hunan Engineering Research Center of 3D Real Scene Construction and Application Technology, Changsha, China

³College of Electronic Science and Technology, National University of Defense Technology, Changsha, China

*Corresponding author. Email: zhangys@csu.edu.cn

Abstract

Existing feed-forward 3D reconstruction methods typically process a bounded number of images and recover cameras and geometry in local or internally normalized frames. Extending them to large-scale UAV mapping requires scalable multi-chunk processing and reliable aggregation, while full Sim(3) alignment can become unstable for near-collinear trajectories. We present GeoFF3D, which combines a coordinate-anchored model with a spatial large-scale reconstruction framework (SLRF). The model uses georeferenced camera translations and optional geometric priors to predict camera poses and dense point maps directly in a gravity-aligned Z-up metric frame. SLRF partitions images into spatially overlapping chunks, propagates shared-view priors, and aggregates local reconstructions hierarchically, while remaining applicable to different bounded-view models. Across nine aerial mapping blocks, GeoFF3D achieves the best average reconstruction quality, improving F@5 from 0.829 for Pi3X + SLRF to 0.877. On long UAVScenes sequences, it reaches 0.848, compared with 0.687 for Pi3X + SLRF and 0.451 for the strongest evaluated SLAM/streaming baseline. GeoFF3D reconstructs 2,000 images in approximately five minutes, demonstrating scalable and robust large-scale UAV reconstruction. The code is available at <https://github.com/yanxian-ll/GeoFF3D>.

1 Introduction

Unmanned aerial vehicle (UAV) oblique photogrammetry is widely used for large-scale 3D scene acquisition in urban modeling, terrain surveying, disaster assessment, and infrastructure inspection. Conventional photogrammetric systems recover camera poses and scene geometry through multi-stage geometric estimation and iterative optimization, providing reliable mapping products at the cost of substantial computation (Schönberger and Frahm 2016; Schönberger et al. 2016). Recent feed-forward reconstruction models instead directly predict camera parameters, depth maps, or dense point maps from multi-view images, offering a more efficient alternative (Wang et al. 2024; Leroy, Cabon, and Revaud 2024; Yang et al. 2025; Wang et al. 2025a,d). However, most existing models process only a bounded number of images and reconstruct them in reference-camera frames or internally normalized scene representations, whereas practical UAV surveys contain hundreds or thousands of views and require outputs in a unified georeferenced, gravity-aligned metric frame.

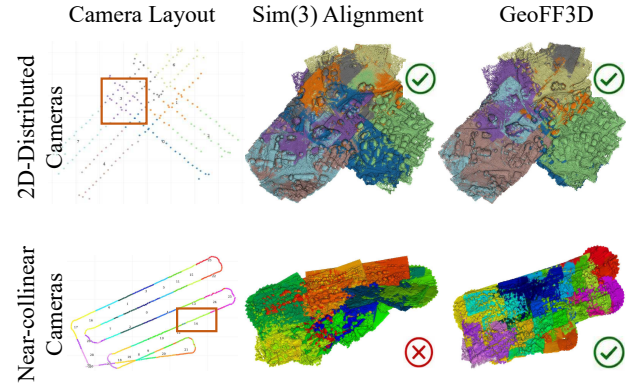


Figure 1: Effect of camera layout on post-hoc alignment. Full Sim(3) is well constrained for two-dimensionally distributed cameras but may tilt a near-collinear reconstruction, whereas GeoFF3D preserves the gravity-aligned Z-up orientation.

This gap introduces two coupled challenges. First, georeferencing a locally predicted reconstruction commonly requires estimating a full Sim(3) transformation between predicted camera centers and positioning priors. As illustrated in Fig. 1, this transformation is well constrained for two-dimensionally distributed cameras, but may become unstable for near-collinear UAV trajectories. In such cases, roll and pitch are weakly constrained, so the dense reconstruction may be incorrectly tilted even when the aligned camera centers appear accurate. Second, large image collections must be divided into overlapping chunks. Because each chunk is reconstructed independently, neighboring chunks may disagree in their coordinate frames and in the depths predicted for shared images, producing duplicated surfaces, vertical offsets, and visible seams. These difficulties are further amplified in multi-strip UAV surveys, where temporal proximity does not necessarily indicate spatial overlap.

Our key insight is to use georeferencing priors to define the prediction coordinate frame itself, rather than reconstructing in an internal frame and registering the result afterward. Based on this insight, we present GeoFF3D, which consists of a coordinate-anchored model and a spatial large-scale reconstruction framework (SLRF). The coordinate-anchored

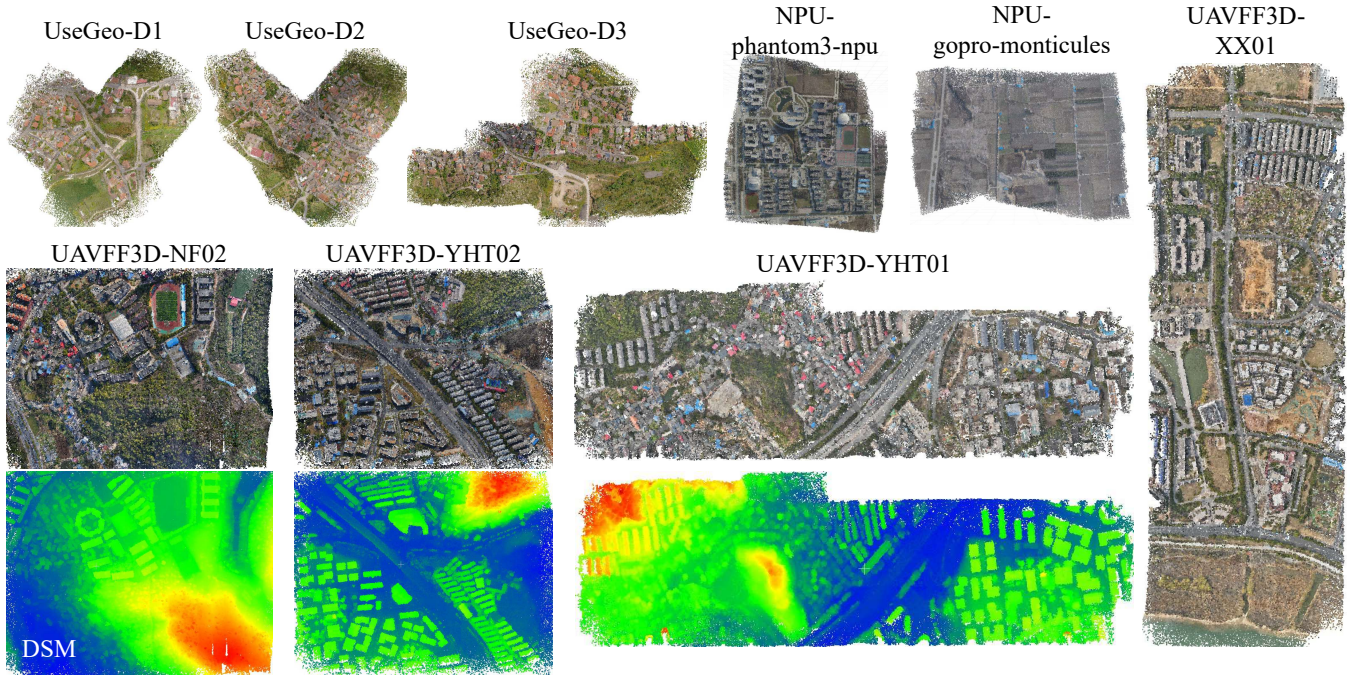


Figure 2: Qualitative reconstruction results of GeoFF3D across diverse aerial mapping scenes from UseGeo, NPU-DroneMap, and UAVFF3D-Real. The results cover multi-strip surveys with varying spatial extents, camera platforms, and scene structures.

model uses georeferenced translations and optional geometric priors to directly predict camera poses and dense point maps in a gravity-aligned Z-up metric frame. The translation anchors provide approximate metric scale and spatial placement, while the Z-up representation stabilizes the vertical direction. SLRF partitions images into spatially overlapping chunks, processes them from the scene center outward, propagates shared-view priors when supported, and hierarchically aggregates local reconstructions using gravity-preserving transformations. Together, these designs improve cross-chunk consistency. SLRF can wrap different bounded-view feed-forward predictors while enabling prior propagation only when supported.

We evaluate GeoFF3D on multi-strip aerial blocks and long UAV sequences. GeoFF3D achieves the best average performance across nine aerial blocks and a substantially larger margin on long UAVScenes sequences. These results show that coordinate-anchored prediction improves aggregation across general multi-strip surveys and is particularly beneficial for long, near-collinear trajectories, while SLRF scales to collections containing thousands of images. Our main contributions are:

1. We introduce a coordinate-anchored feed-forward model that uses approximate georeferenced camera translations and optional geometric priors to directly recover camera poses and dense geometry in a gravity-aligned Z-up metric frame, reducing reliance on unstable full Sim(3) post-hoc alignment.
2. We introduce SLRF, which combines footprint-guided spatial chunking, center-outward prior propagation, and

gravity-preserving hierarchical aggregation. It can be instantiated with different bounded-view predictors and scales to UAV collections containing hundreds to thousands of images.

2 Related Work

Feed-forward 3D reconstruction. Existing feed-forward methods typically recover cameras and geometry in reference-camera frames or internally normalized scene representations. Methods such as DUST3R, MAST3R, and VGGT anchor their outputs to a selected input camera (Wang et al. 2024; Leroy, Cabon, and Revaud 2024; Yang et al. 2025; Wang et al. 2025a, 2026). π^3 instead removes the designated reference view and predicts permutation-equivariant cameras and geometry, while retaining an internally normalized representation (Wang et al. 2025d; Wang and Agapito 2025; Zhang et al. 2025). Prior-conditioned methods such as Pow3R, MapAnything, and MAST3R-Fusion further incorporate camera or geometric observations to guide reconstruction or downstream optimization (Jang et al. 2025; Keetha et al. 2026; Lu et al. 2025; Khafizov et al. 2025; Liu et al. 2025b; Zhou et al. 2026). In contrast, GeoFF3D uses georeferenced camera translations to define the prediction frame itself, directly recovering cameras and dense geometry in a gravity-aligned metric frame.

Scalable feed-forward reconstruction. Recent methods extend feed-forward reconstruction to large image collections and streaming inputs using spatial memories, persistent states, causal attention, token compression, or test-time adaptation (Wang and Agapito 2025; Wang et al. 2025b;

Chen et al. 2025; Lan et al. 2025; Zhuo et al. 2026; Li et al. 2025c; Yuan et al. 2026; Su et al. 2026; Zou et al. 2026; Chen et al. 2026a,b; Jin et al. 2026; Zhang et al. 2026c; Xie et al. 2026; Shen et al. 2026). Other systems reconstruct overlapping clips or submaps and enforce global consistency through learned registration, loop closure, pose graphs, or geometric optimization (Liu et al. 2025a; Deng et al. 2026; Maggio, Lim, and Carbone 2025; Maggio and Carbone 2026; Murai, Dexheimer, and Davison 2025; Zhang et al. 2026b,a; Li et al. 2025a,b; Huang et al. 2025). These approaches are primarily designed for temporally ordered videos or sequentially neighboring submaps and commonly rely on registration or optimization to enforce global consistency. In contrast, SLRF partitions UAV images according to spatial coverage rather than acquisition order, enabling GeoFF3D to handle both multi-strip aerial blocks and long sequences without additional global optimization.

3 Method

3.1 Problem Formulation

Given a collection of N UAV images, where N may reach hundreds or thousands, a feed-forward model can process at most M views in one pass, with $N \gg M$. Approximate georeferenced camera translations provide the primary coordinate anchors, while camera rotations, intrinsics, and depth observations are optional. Our goal is to recover all camera poses and dense geometry in a shared georeferenced Z-up metric frame.

The complete reconstruction is formulated as

$$\left\{ \left(\hat{\mathbf{T}}_i^w, \hat{\mathbf{X}}_i^w \right) \right\}_{i=1}^N = \mathcal{A}_{\mathcal{T}} \left(\left\{ f_{\theta}(\mathcal{D}_{S_k}, \mathcal{Q}_k) \right\}_{k=1}^K \right),$$

$$\{S_k\}_{k=1}^K = \mathcal{P}_{\text{foot}}(\mathcal{D}), \quad |S_k| \leq M \ll N,$$

where $\mathcal{P}_{\text{foot}}$ partitions the image collection $\mathcal{D}$ into spatially overlapping chunks, f_{θ} predicts each chunk using its georeferencing inputs and propagated priors $\mathcal{Q}_k$, and $\mathcal{A}_{\mathcal{T}}$ aggregates the chunk predictions into globally consistent world-frame cameras $\hat{\mathbf{T}}_i^w$ and dense point maps $\hat{\mathbf{X}}_i^w$.

3.2 Coordinate-Anchored Feed-Forward Reconstruction

The first component of GeoFF3D is a coordinate-anchored feed-forward model for bounded-view reconstruction. Given a spatial chunk containing at most M views, the model fuses image features with available geometric priors and predicts cameras and dense geometry in the shared georeferenced Z-up world frame. Figure 3 summarizes this component.

Coordinate Frame The coordinate-anchored model predicts cameras and geometry in a local georeferenced Cartesian frame, whose Z-axis points opposite to gravity and whose X-Y plane is parallel to the local horizontal plane. Approximate camera translations are expressed in this frame and provide metric scale and spatial placement. For numerical stability, we compute a translation center $\mathbf{c}_T$ and scene scale s_T from the available translation anchors, and use them to normalize the camera translations and metric depth priors within each chunk. After inference, the predicted cameras

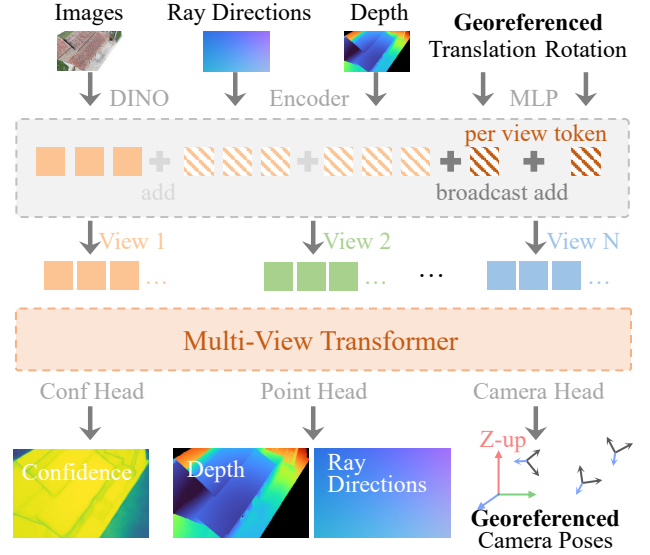


Figure 3: Coordinate-anchored feed-forward model.

and geometry are restored to the georeferenced metric frame using $\mathbf{c}_T$ and s_T . Consequently, independently processed chunks are predicted in a shared Z-up frame before aggregation.

Prior Encoding For view i , the image encoder produces visual patch tokens F_i^I . Ray directions and depth observations are encoded as patch-level features F_i^R and F_i^D , preserving their spatial correspondence with the image tokens. In contrast, normalized georeferenced translations and optional georeferenced rotations are encoded as view-level embeddings e_i^t and e_i^r , which are broadcast to all patch tokens of the corresponding view. The fused representation is

$$F_i = F_i^I + m_i^{\text{ray}} F_i^R + m_i^D F_i^D + m_i^t e_i^t + m_i^r e_i^r,$$

where the binary masks indicate the availability of each prior. During training, prior dropout randomly removes individual inputs, allowing the same model to handle complete, partial, or sparse geometric observations. The fused tokens are processed by alternating intra-view and inter-view attention before being passed to the prediction heads. Translation priors serve as coordinate-conditioning signals rather than being directly copied to the output.

Prediction The camera head predicts a complete camera-to-world transformation $\widehat{\mathbf{W}}_i^{c \rightarrow w} \in SE(3)$ for each view. In parallel, the dense head predicts an image-plane ray $\hat{\mathbf{r}}_i(u)$ and a positive Z-depth $\hat{d}_i(u)$ for each pixel u . Their product defines the camera-frame point, which is transformed and de-normalized into the world frame:

$$\hat{\mathbf{X}}_i^w(u) = s_T \pi_3 \left(\widehat{\mathbf{W}}_i^{c \rightarrow w} \begin{bmatrix} \hat{d}_i(u) \hat{\mathbf{r}}_i(u) \\ 1 \end{bmatrix} \right) + \mathbf{c}_T.$$

Here, $\pi_3(\cdot)$ extracts the three-dimensional coordinates from the homogeneous representation. A separate head predicts per-pixel confidence for suppressing unreliable geometry during fusion.

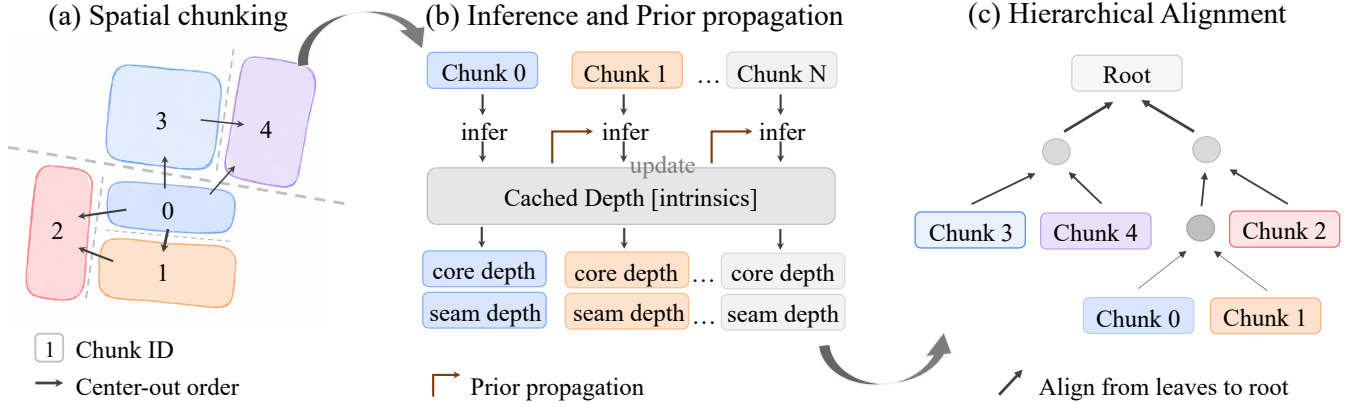


Figure 4: The spatial large-scale reconstruction framework (SLRF) of GeoFF3D. Images are first partitioned into overlapping core and seam views according to their estimated ground footprints. The resulting chunks are processed from the scene center outward, while cached depth and camera intrinsics from shared views are propagated to subsequent chunks. The local reconstructions are finally merged from leaves to root using gravity-preserving alignment.

Training We initialize the coordinate-anchored model of GeoFF3D from a pretrained Pi3X checkpoint and train it on UAVFF3D (Yang et al. 2026) and BlendedMVS (Yao et al. 2020). All scenes are converted to a common gravity-aligned Z-up coordinate system. The overall training objective is

$$\mathcal{L} = \lambda_{\text{local}} \mathcal{L}_{\text{local}} + \lambda_{\text{world}} \mathcal{L}_{\text{world}} + \lambda_{\text{pose}} \mathcal{L}_{\text{pose}} + \lambda_{\text{grav}} \mathcal{L}_{\text{grav}},$$

where we set $\lambda_{\text{local}} = 0.5$, $\lambda_{\text{world}} = 1.0$, $\lambda_{\text{pose}} = 0.2$, and $\lambda_{\text{grav}} = 1.0$. Following Pi3 (Wang et al. 2025d), $\mathcal{L}_{\text{local}}$ supervises camera-frame point maps, Z-depths, image-plane rays, and relative camera poses. The world-frame point and pose losses supervise dense geometry and absolute camera poses in the normalized georeferenced frame, enabling the model to learn the coordinate system defined by the translation anchors rather than only reconstructing an internally normalized scene. The gravity loss minimizes the cosine discrepancy between the predicted and ground-truth camera up directions. It primarily constrains roll and pitch, thereby further stabilizing camera orientation in the anchor-defined Z-up frame.

Training proceeds in two stages. We first train for 80 epochs with a base resolution of 224 pixels to establish coordinate-anchored Z-up prediction. We then fine-tune the model for 10 epochs at 518 pixels, while randomly dropping and perturbing the geometric priors to improve robustness to incomplete and noisy georeferencing inputs.

3.3 Spatial Large-Scale Reconstruction Framework

Large UAV collections exceed the single-pass view budget and must be processed as multiple local chunks. The second component of GeoFF3D is its spatial large-scale reconstruction framework (SLRF), which wraps the bounded-view coordinate-anchored model with footprint-guided chunking, center-outward processing, and hierarchical aggregation, as shown in Fig. 4.

Footprint-Guided Spatial Chunking We first estimate the ground footprint of each image from available georeferencing information, including GNSS positions and IMU orientations. Based on these footprints, we recursively partition the image collection into spatially compact leaf chunks rather than following acquisition order. We build an adaptive binary tree by splitting the root along the along-track axis and each subsequent node at the median along the axis of largest center spread, until every leaf contains at most $\lfloor 0.7M \rfloor$ core views. Each leaf k contains a core-view set $\mathcal{C}_k$ and additional seam views $\mathcal{O}_k$ selected from neighboring regions:

$$\mathcal{S}_k = \mathcal{C}_k \cup \mathcal{O}_k, \quad |\mathcal{C}_k| \leq \lfloor 0.7M \rfloor, \quad |\mathcal{S}_k| \leq M.$$

Each image belongs to one core set but may also appear as a seam view in adjacent chunks. Core-view geometry is retained for final fusion, while seam views provide overlap for depth propagation and cross-chunk alignment.

Center-Outward Inference and Prior Propagation We construct a spatial adjacency graph over the leaf chunks, select the chunk closest to the scene center, and process the chunks in breadth-first order from the center outward. We maintain a depth cache indexed by image identity. Before inferring each chunk, cached depths of its shared views are retrieved and supplied to the model as input depth priors. After inference, low-confidence regions are removed using a confidence quantile threshold of 0.25. The filtered depths are then used to update the cache, with core-view predictions preferred when duplicate estimates exist. The updated cache is used for subsequent chunks. When camera intrinsics are unavailable and all images are captured by the same camera, the average intrinsics predicted from the first chunk are used as input priors for all subsequent chunks. Reusing shared-view priors reduces depth discrepancies for the same images across neighboring chunks and improves cross-chunk geometric consistency.

Gravity-Aligned Hierarchical Aggregation Although all chunks are predicted in the common georeferenced Z-up

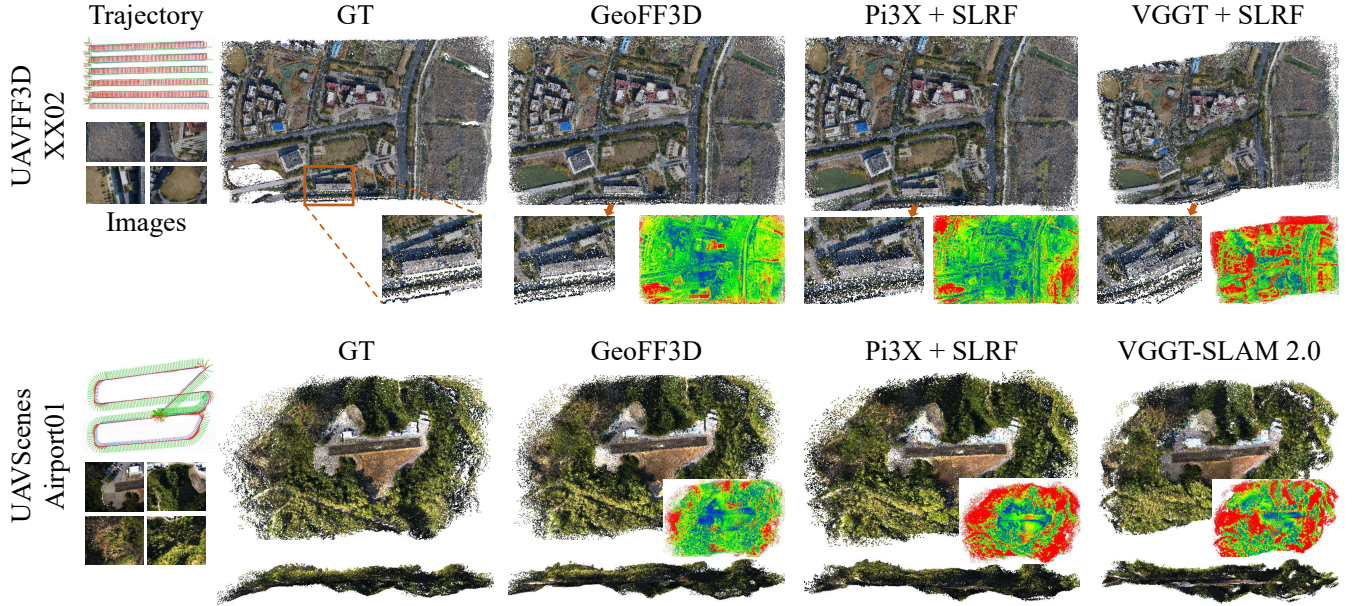


Figure 5: Qualitative comparison on UAVFF3D-Real XX-02 (top) and the elongated UAVScenes Airport01 sequence (bottom). Main panels show top views, while the auxiliary panels visualize local structure, point-to-ground-truth distance, and side profiles. The methods exhibit different boundary, duplication, and vertical-profile errors.

world frame, residual errors may remain because of noisy georeferencing and local prediction uncertainty. We first anchor each leaf chunk to its georeferenced translation priors using a gravity-aligned similarity transformation (GA-Sim)

$$\mathcal{T}_{\text{GA-Sim}}(\mathbf{x}) = s\mathbf{R}_z(\theta)\mathbf{x} + \mathbf{t},$$

which estimates scale, yaw, and three-dimensional translation while preserving roll and pitch. Sibling nodes are then refined using a gravity-aligned rigid transformation (GA-Rigid)

$$\mathcal{T}_{\text{GA-Rigid}}(\mathbf{x}) = \mathbf{R}_z(\Delta\theta)\mathbf{x} + \Delta\mathbf{t},$$

which estimates only residual yaw and translation from shared-view correspondences. The alignment proceeds bottom-up along the footprint tree until a single root reconstruction is obtained. The accumulated transformations are finally applied to all leaf chunks, and only confidence-filtered core-view geometry is fused into the final point cloud. These gravity-preserving transformations correct residual cross-chunk misalignment without disturbing the shared Z-up orientation.

4 Experiments

4.1 Experimental Setup

Datasets. We evaluate GeoFF3D on four UAV datasets with complementary roles. We use all three UseGeo (Nex et al. 2024) blocks, containing 224–327 images per scene, and six UAVFF3D-Real (Yang et al. 2026) blocks, containing 387–1,177 images per scene, for quantitative aerial-block evaluation. The six UAVFF3D-Real test scenes are geographically disjoint from the training set; no image, flight, or physical site is used for training or model selection. For

long-sequence evaluation, we select eight UAVScenes (Wang et al. 2025c) sequences with 1,317–2,589 original frames and uniformly sample them with a stride of 3 for all methods. We additionally use all 12 NPU-DroneMap (Bu et al. 2016) keyframe sequences, containing 285–648 images per scene, for qualitative evaluation because complete dense reference geometry is unavailable.

Baselines. For aerial blocks, we compare GeoFF3D with VGGT + SLRF and Pi3X + SLRF using UAVFF3D-fine-tuned checkpoints (Yang et al. 2026). VGGT receives no pose priors; translations are used only by SLRF for footprint construction and alignment. Pi3X and GeoFF3D receive the same perturbed translation and rotation priors. VGGT + SLRF and Pi3X + SLRF use full Sim(3) for leaf and inter-chunk alignment, whereas GeoFF3D uses GA-Sim and GA-Rigid. Predicted depth is propagated only when supported. For long sequences, we additionally compare with VGGT-SLAM (Sim(3)), VGGT-SLAM 2.0, VGGT-Long, TTT3R, and LingBot-Map (Maggio, Lim, and Carbone 2025; Maggio and Carbone 2026; Deng et al. 2026; Chen et al. 2026b,a).

Metrics. We report Accuracy, Completeness, F@1, and F@5 for datasets with reference geometry, where F@1 and F@5 denote the F-scores at 1 m and 5 m distance thresholds, respectively. All reported averages are computed over scenes. All methods receive the same camera-center-based global Sim(3) and point-cloud ICP for aligned geometry evaluation. This is separate from the per-chunk reconstruction protocols.

Implementation details. All methods process images with a maximum side length of 518 pixels. GeoFF3D, VGGT + SLRF, and Pi3X + SLRF use a chunk budget of 30 views. The remaining methods use their released checkpoints and

Dataset	Scene	VGGT + SLRF				Pi3X + SLRF				GeoFF3D			
		Acc.↓	Comp.↓	F@1↑	F@5↑	Acc.↓	Comp.↓	F@1↑	F@5↑	Acc.↓	Comp.↓	F@1↑	F@5↑
UAVFF3D	YHT01	4.86	<u>3.68</u>	0.084	0.688	<u>4.21</u>	3.87	<u>0.096</u>	<u>0.720</u>	3.00	2.44	0.154	0.880
	YHT02	5.36	5.19	0.086	0.658	2.94	2.89	0.128	0.860	<u>3.19</u>	<u>3.25</u>	<u>0.087</u>	<u>0.834</u>
	NF01	8.19	6.16	0.027	0.486	4.12	3.32	0.057	0.771	<u>4.15</u>	<u>3.34</u>	<u>0.054</u>	<u>0.766</u>
	NF02	<u>5.37</u>	5.05	0.069	0.651	6.55	6.93	<u>0.070</u>	0.588	5.19	<u>6.25</u>	0.076	<u>0.596</u>
	XX01	8.81	7.13	0.035	0.476	<u>3.92</u>	<u>3.40</u>	<u>0.113</u>	<u>0.793</u>	2.65	2.16	0.149	0.939
	XX02	2.70	<u>2.31</u>	0.220	0.896	2.02	1.90	0.270	0.951	<u>2.17</u>	<u>2.30</u>	<u>0.255</u>	<u>0.935</u>
UseGeo	D1	1.65	1.17	0.512	0.970	<u>1.29</u>	<u>1.11</u>	<u>0.575</u>	<u>0.984</u>	1.15	1.02	0.639	0.989
	D2	3.62	3.18	<u>0.329</u>	0.830	<u>3.02</u>	<u>2.79</u>	0.324	<u>0.850</u>	1.51	1.30	0.471	0.978
	D3	2.56	1.76	0.322	0.917	<u>2.00</u>	<u>1.41</u>	<u>0.440</u>	<u>0.945</u>	1.42	1.21	0.517	0.981
Overall	Average	4.79	3.96	0.187	0.730	<u>3.34</u>	<u>3.07</u>	<u>0.230</u>	<u>0.829</u>	2.72	2.59	0.267	0.877

Table 1: Quantitative comparison on aerial mapping blocks.

recommended inference configurations. We train GeoFF3D using two NVIDIA A100 GPUs with 40 GB of memory each and evaluate all methods using a single NVIDIA A100 GPU with 40 GB of memory. At test time, Pi3X + SLRF and GeoFF3D share pose priors generated by perturbing ground-truth translations and rotations. Gaussian noise is added to horizontal translation, vertical translation, and yaw with standard deviations of 0.5 m, 0.8 m, and 1.0° and limits of 2.0 m, 2.0 m, and 3.0°.

4.2 Large-Scale UAV Reconstruction

We evaluate GeoFF3D on multi-strip aerial mapping blocks and long UAV sequences. Table 1 reports the per-block results, Table 2 summarizes the average performance on UAVScenes, and Fig. 5 provides representative qualitative comparisons. Figure 2 further presents GeoFF3D reconstructions across aerial mapping scenes with different spatial extents and acquisition platforms.

Aerial mapping blocks. Across the nine UseGeo and UAVFF3D-Real blocks, GeoFF3D obtains the best average Accuracy, Completeness, F@1, and F@5, with 2.72 m, 2.59 m, 0.267, and 0.877, respectively. Compared with Pi3X + SLRF, it reduces Accuracy and Completeness by 18.7% and 15.8%, while improving F@1 and F@5 by 0.036 and 0.048. The gains at both thresholds indicate improvements in strict geometric accuracy and overall reconstruction quality. Although the best predictor varies across individual blocks, GeoFF3D provides the strongest average performance. Figure 5 illustrates the different boundary and vertical error patterns behind these metrics.

Long UAV sequences. The margin becomes larger on UAVScenes: compared with Pi3X + SLRF, GeoFF3D reduces Accuracy and Completeness from 6.05 m and 4.40 m to 4.14 m and 2.28 m, by 31.5% and 48.2%, respectively, while improving F@1 from 0.181 to 0.319 and F@5 from 0.687 to 0.848. The consistent gains at both thresholds show improvements in fine-scale accuracy and overall reconstruction quality. These sequences have elongated and near-collinear camera layouts, for which full Sim(3) weakly constrains roll

Method	Acc.↓	Comp.↓	F@1↑	F@5↑
VGGT-SLAM	21.87	32.03	0.060	0.323
VGGT-SLAM 2.0	10.36	36.15	0.108	0.411
VGGT-Long	9.49	47.97	0.110	0.408
TTT3R	10.48	79.50	0.061	0.239
LingBot-Map	7.75	44.02	0.114	0.451
VGGT + SLRF	8.00	5.21	0.125	0.608
Pi3X + SLRF	<u>6.05</u>	<u>4.40</u>	<u>0.181</u>	<u>0.687</u>
GeoFF3D	4.14	2.28	0.319	0.848

Table 2: Average comparison on UAVScenes.

and pitch. The quantitative gains and side profiles in Fig. 5 therefore support the benefit of establishing metric scale and gravity during prediction.

4.3 Ablations and Analysis

Our ablations examine the coordinate-anchored model, the SLRF pipeline, pose-prior robustness, chunk-size sensitivity, and efficiency and scalability.

Coordinate-anchored model. Table 3 evaluates 16-view samples from UseGeo and UAVFF3D-Real using ATE, Chamfer-L1 distance (CD), and gravity-direction error (GDE), defined as camera-center RMSE, symmetric point-cloud distance, and mean camera-up angular error, respectively. Removing the world-frame losses causes the largest degradation, showing that they establish the coordinate system defined by the translation anchors. Gravity supervision consistently reduces GDE, showing that it further stabilizes the Z-up orientation. For the full model, Sim(3) lowers ATE but increases CD and GDE relative to GA-Sim, revealing a trade-off between fitting camera centers and preserving gravity-aligned geometry.

SLRF pipeline. The following full-pipeline analyses report averages over UseGeo D1, UAVFF3D-Real NF01, and UAVScenes Town01. We report CD, ATE, 3D seam error

Variant	Align.	UseGeo			UAVFF3D-Real		
		ATE↓	CD↓	GDE↓	ATE↓	CD↓	GDE↓
(a) Pi3X	Sim(3)	1.18	1.67	1.11	4.37	8.95	2.40
(b) w/o world	GA-Sim	3.13	3.37	4.04	22.18	22.95	12.87
(c) w/o gravity	GA-Sim	2.02	1.35	1.03	5.85	8.91	<u>1.55</u>
(d) Full	GA-Sim	1.82	<u>1.62</u>	<u>0.95</u>	5.26	9.37	1.16
(e) Full	Sim(3)	<u>1.38</u>	<u>2.13</u>	<u>2.02</u>	<u>4.61</u>	15.14	2.71
(f) Full	None	5.34	5.27	0.93	11.36	10.12	1.16

Table 3: Coordinate-anchored model ablation. “w/o world” removes $\mathcal{L}_{\text{world}}$ and $\mathcal{L}_{\text{pose}}$, while “w/o gravity” removes $\mathcal{L}_{\text{grav}}$.

(S_{3D}), and vertical seam error (S_z). S_{3D} is the mean Euclidean discrepancy between corresponding points reconstructed from shared views in neighboring chunks, while S_z is their mean absolute difference along the vertical axis. Replacing the temporal-sequential pipeline (a) with the footprint-hierarchical pipeline (b) substantially improves global accuracy. Variant (c) achieves the lowest CD, while (d) provides the strongest seam consistency. The full model obtains the lowest ATE with competitive CD and seam errors.

Variant	T	H	G	P	CD↓	ATE↓	S_{3D} ↓	S_z ↓
(a)	✓				34.85	57.24	1.71	0.95
(b)		✓			7.55	8.27	1.38	0.86
(c)			✓		4.23	6.52	1.60	1.04
(d)		✓		✓	5.55	<u>6.27</u>	1.03	0.57
Full		✓	✓	✓	<u>4.50</u>	5.52	<u>1.29</u>	0.79

Table 4: SLRF pipeline ablation. T and H denote the temporal-sequential and footprint-hierarchical pipelines, respectively; G replaces Sim(3) with GA-Sim and GA-Rigid, and P adds prior propagation.

Pose-prior robustness. Table 5 evaluates doubled pose noise and the removal of rotation priors. GeoFF3D remains relatively stable under doubled noise, whereas using translation priors alone causes substantially larger degradation in both global accuracy and seam consistency.

Setting	CD↓	ATE↓	S_{3D} ↓	S_z ↓
Default noise	4.50	5.52	1.29	0.79
2× pose noise	5.12	6.34	1.73	1.21
Translation only	6.56	10.67	2.48	1.76

Table 5: Robustness to pose-prior.

Chunk-size sensitivity. Table 6 evaluates chunk budgets of 20, 30, and 40 views. The 20-view setting is fastest and uses the least memory, while $M = 30$ achieves the best CD and ATE with moderate resource use. Increasing the budget to 40 views raises peak memory and degrades both global metrics. We therefore use $M = 30$ to balance reconstruction quality and efficiency.

M	CD↓	ATE↓	Avg. Time (s)↓	Peak Mem. (GiB)↓
20	4.56	6.47	70.59	11.82
30	4.50	5.52	86.44	12.59
40	5.15	6.05	77.86	16.50

Table 6: Chunk-size sensitivity. CD, ATE, and time are averaged over the three scenes; peak memory is their maximum.

Efficiency and scalability. Figure 6 evaluates the complete system as the image count increases. Runtime grows nearly linearly, with model inference accounting for most of the cost. GeoFF3D reconstructs 2,000 images in about five minutes using roughly 16 GiB of GPU memory.

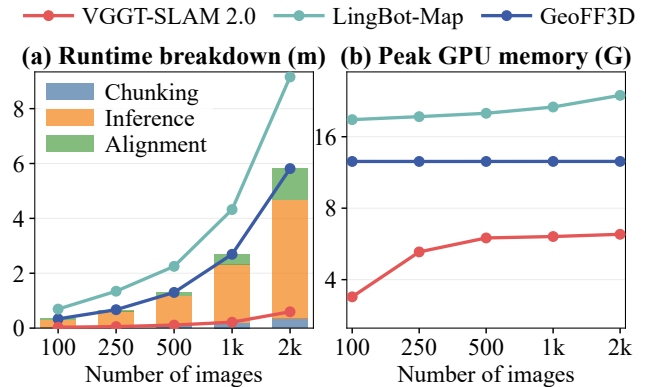


Figure 6: Runtime breakdown and peak GPU memory versus image count on UAVScenes Town01.

5 Conclusions

We presented GeoFF3D, which directly reconstructs cameras and dense geometry in a georeferenced, gravity-aligned Z-up metric frame. Experiments show that GeoFF3D achieves the best average performance on aerial mapping blocks and a larger advantage on long, near-collinear sequences, while outperforming representative SLAM and streaming systems. The results show that coordinate anchoring benefits general multi-strip aggregation and that metric scale and gravity are especially important for elongated trajectories. Future work will explore online reconstruction, global optimization, and improved robustness to sparse or noisy georeferencing priors.

References

- Bu, S.; Zhao, Y.; Wan, G.; and Liu, Z. 2016. Map2DFusion: Real-Time Incremental UAV Image Mosaicing Based on Monocular SLAM. In *2016 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 4564–4571.
- Chen, L.-Z.; Gao, J.; Chen, Y.; Cheng, K. L.; Sun, Y.; Hu, L.; Xue, N.; Zhu, X.; Shen, Y.; Yao, Y.; and Xu, Y. 2026a. Geometric Context Transformer for Streaming 3D Reconstruction. *arXiv preprint arXiv:2604.14141*.
- Chen, X.; Chen, Y.; Xiu, Y.; Geiger, A.; and Chen, A. 2026b.

- TTT3R: 3D Reconstruction as Test-Time Training. In *International Conference on Learning Representations (ICLR)*.
- Chen, Z.; Qin, M.; Yuan, T.; Liu, Z.; and Zhao, H. 2025. LONG3R: Long Sequence Streaming 3D Reconstruction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 5273–5284.
- Deng, K.; Ti, Z.; Xu, J.; Yang, J.; and Xie, J. 2026. VGGT-Long: Chunk it, Loop it, Align it – Pushing VGGT’s Limits on Kilometer-scale Long RGB Sequences. In *IEEE International Conference on Robotics and Automation (ICRA)*.
- Huang, J.; Zhou, Q.; Rabeti, H.; Korovko, A.; Ling, H.; Ren, X.; Shen, T.; Gao, J.; Slepichev, D.; Lin, C.-H.; Ren, J.; Xie, K.; Biswas, J.; Leal-Taixé, L.; and Fidler, S. 2025. ViPE: Video Pose Engine for 3D Geometric Perception. *arXiv preprint arXiv:2508.10934*.
- Jang, W.; Weinzaepfel, P.; Leroy, V.; Agapito, L.; and Revaud, J. 2025. Pow3R: Empowering Unconstrained 3D Reconstruction with Camera and Scene Priors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 1071–1081.
- Jin, H.; Wu, R.; Zhang, T.; Gao, R.; Barron, J. T.; Snavely, N.; and Hołyński, A. 2026. ZipMap: Linear-Time Stateful 3D Reconstruction via Test-Time Training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21748–21759.
- Keetha, N.; Müller, N.; Schönberger, J.; Porzi, L.; Zhang, Y.; Fischer, T.; Knapitsch, A.; Zauss, D.; Weber, E.; Antunes, N.; Luiten, J.; Lopez-Antequera, M.; Rota Bulò, S.; Richardt, C.; Ramanan, D.; Scherer, S.; and Kotschieder, P. 2026. MapAnything: Universal Feed-Forward Metric 3D Reconstruction. In *International Conference on 3D Vision (3DV)*, 499–509.
- Khafizov, R.; Komarichev, A.; Rakhimov, R.; Wonka, P.; and Burnaev, E. 2025. G-CUT3R: Guided 3D Reconstruction with Camera and Depth Prior Integration. *arXiv preprint arXiv:2508.11379*.
- Lan, Y.; Luo, Y.; Hong, F.; Zhou, S.; Chen, H.; Lyu, Z.; Yang, S.; Dai, B.; Loy, C. C.; and Pan, X. 2025. SStream3R: Scalable Sequential 3D Reconstruction with Causal Transformer. *arXiv preprint arXiv:2508.10893*.
- Leroy, V.; Cabon, Y.; and Revaud, J. 2024. Grounding Image Matching in 3D with MAST3R. In *European Conference on Computer Vision (ECCV)*, 71–91.
- Li, K.; Niemeyer, M.; Wang, S.; Gasperini, S.; Navab, N.; and Tombari, F. 2025a. SING3R-SLAM: Submap-based Indoor Monocular Gaussian SLAM with 3D Reconstruction Priors. *arXiv preprint arXiv:2511.17207*.
- Li, Z.; Tucker, R.; Cole, F.; Wang, Q.; Jin, L.; Ye, V.; Kanazawa, A.; Holynski, A.; and Snavely, N. 2025b. MegaSaM: Accurate, Fast, and Robust Structure and Motion from Casual Dynamic Videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 10486–10496.
- Li, Z.; Zhou, J.; Wang, Y.; Guo, H.; Chang, W.; Zhou, Y.; Zhu, H.; Chen, J.; Shen, C.; and He, T. 2025c. WinT3R: Window-Based Streaming Reconstruction with Camera Token Pool. *arXiv preprint arXiv:2509.05296*.
- Liu, Y.; Dong, S.; Wang, S.; Yin, Y.; Yang, Y.; Fan, Q.; and Chen, B. 2025a. SLAM3R: Real-Time Dense Scene Reconstruction from Monocular RGB Videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 16651–16662.
- Liu, Y.; Min, Z.; Wang, Z.; Wu, J.; Wang, T.; Yuan, Y.; Luo, Y.; and Guo, C. 2025b. WorldMirror: Universal 3D World Reconstruction with Any-Prior Prompting. *arXiv preprint arXiv:2510.10726*.
- Lu, Y.; Zhang, J.; Fang, T.; Nahmias, J.-D.; Tsin, Y.; Quan, L.; Cao, X.; Yao, Y.; and Li, S. 2025. Matrix3D: Large Photogrammetry Model All-in-One. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 11250–11263.
- Maggio, D.; and Carlone, L. 2026. VGGT-SLAM 2.0: Real-time Dense Feed-forward Scene Reconstruction. *arXiv preprint arXiv:2601.19887*.
- Maggio, D.; Lim, H.; and Carlone, L. 2025. VGGT-SLAM: Dense RGB SLAM Optimized on the SL(4) Manifold. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Murai, R.; Dexheimer, E.; and Davison, A. J. 2025. MAST3R-SLAM: Real-Time Dense SLAM with 3D Reconstruction Priors. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 16695–16705.
- Nex, F.; Stathopoulou, E. K.; Remondino, F.; Yang, M. Y.; Madhuanand, L.; Yogender, Y.; Alsadik, B.; Weinmann, M.; Jutzi, B.; and Qin, R. 2024. UseGeo—A UAV-Based Multi-Sensor Dataset for Geospatial Research. *ISPRS Open Journal of Photogrammetry and Remote Sensing*, 13: 100070.
- Schönberger, J. L.; and Frahm, J.-M. 2016. Structure-from-Motion Revisited. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 4104–4113.
- Schönberger, J. L.; Zheng, E.; Pollefeys, M.; and Frahm, J.-M. 2016. Pixelwise View Selection for Unstructured Multi-View Stereo. In *European Conference on Computer Vision (ECCV)*, 501–518.
- Shen, Y.; Zhang, Z.; Qu, Y.; Zheng, X.; Ji, J.; Zhang, S.; and Cao, L. 2026. FastVGGT: Fast Visual Geometry Transformer. In *International Conference on Learning Representations (ICLR)*.
- Su, Z.; Ye, W.; Feng, H.; Fan, K.; Zhang, J.; Yu, D.; Liu, Z.; and Wong, N. 2026. XStreamVGGT: Extremely Memory-Efficient Streaming Vision Geometry Grounded Transformer With KV Cache Compression. *arXiv preprint arXiv:2601.01204*.
- Wang, H.; and Agapito, L. 2025. 3D Reconstruction with Spatial Memory. In *International Conference on 3D Vision (3DV)*, 78–89.
- Wang, J.; Chen, M.; Karaev, N.; Vedaldi, A.; Rupperecht, C.; and Novotny, D. 2025a. VGGT: Visual Geometry Grounded Transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 5294–5306.

- Wang, J.; Chen, M.; Zhang, S.; Karaev, N.; Schönberger, J.; Labatut, P.; Bojanowski, P.; Novotny, D.; Vedaldi, A.; and Ruppert, C. 2026. VGGT- Ω . In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21486–21499.
- Wang, Q.; Zhang, Y.; Holynski, A.; Efros, A. A.; and Kanazawa, A. 2025b. Continuous 3D Perception Model with Persistent State. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 10510–10522.
- Wang, S.; Leroy, V.; Cabon, Y.; Chidlovskii, B.; and Revaud, J. 2024. DUST3R: Geometric 3D Vision Made Easy. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 20697–20709.
- Wang, S.; Li, S.; Zhang, Y.; Yu, S.; Yuan, S.; She, R.; Guo, Q.; Zheng, J.; Howe, O. K.; Chandra, L.; Srijevan, S.; Sivasdas, A.; Aggarwal, T.; Liu, H.; Zhang, H.; Chen, C.; Jiang, J.; Xie, L.; and Tay, W. P. 2025c. UAVScenes: A Multi-Modal Dataset for UAVs. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 28946–28958.
- Wang, Y.; Zhou, J.; Zhu, H.; Chang, W.; Zhou, Y.; Li, Z.; Chen, J.; Pang, J.; Shen, C.; and He, T. 2025d. π^3 : Permutation-Equivariant Visual Geometry Learning. *arXiv preprint arXiv:2507.13347*.
- Xie, T.; Yang, P.; Jin, Y.; Cai, Y.; Yin, W.; Ren, W.; Zhang, Q.; Hua, W.; Peng, S.; Guo, X.; and Zhou, X. 2026. Scal3R: Scalable Test-Time Training for Large-Scale 3D Reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21760–21771.
- Yang, J.; Sax, A.; Liang, K. J.; Henaff, M.; Tang, H.; Cao, A.; Chai, J.; Meier, F.; and Feiszli, M. 2025. Fast3R: Towards 3D Reconstruction of 1000+ Images in One Forward Pass. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21924–21935.
- Yang, X.; Wang, Y.; Li, H.; and Zhang, Y. 2026. UAVFF3D: A Geometry-Aware Benchmark for Feed-Forward UAV 3D Reconstruction. *arXiv preprint arXiv:2605.17942*.
- Yao, Y.; Luo, Z.; Li, S.; Zhang, J.; Ren, Y.; Zhou, L.; Fang, T.; and Quan, L. 2020. BlendedMVS: A Large-Scale Dataset for Generalized Multi-View Stereo Networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 1790–1799.
- Yuan, S.; Yang, Y.; Yang, X.; Zhang, X.; Zhao, Z.; Zhang, L.; and Zhang, Z. 2026. InfiniteVGGT: Visual Geometry Grounded Transformer for Endless Streams. *arXiv preprint arXiv:2601.02281*.
- Zhang, F.; Zhang, T.; Khosoussi, K.; Zhang, Z.; Huang, Z.; and Luo, Y. 2026a. TALO: Pushing 3D Vision Foundation Models Towards Globally Consistent Online Reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21870–21879.
- Zhang, G.; Qian, S.; Wang, X.; and Cremers, D. 2026b. ViSTA-SLAM: Visual SLAM with Symmetric Two-view Association. In *International Conference on 3D Vision (3DV)*, 396–406.
- Zhang, J.; Herrmann, C.; Hur, J.; Sun, C.; Yang, M.-H.; Cole, F.; Darrell, T.; and Sun, D. 2026c. LoGeR: Long-Context Geometric Reconstruction with Hybrid Memory. *arXiv preprint arXiv:2603.03269*.
- Zhang, S.; Wang, J.; Xu, Y.; Xue, N.; Ruppert, C.; Zhou, X.; Shen, Y.; and Wetzstein, G. 2025. FLARE: Feed-forward Geometry, Appearance and Camera Estimation from Uncalibrated Sparse Views. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 21936–21947.
- Zhou, Y.; Li, X.; Li, S.; Yan, Z.; Xia, C.; and Feng, S. 2026. MAST3R-Fusion: Integrating Feed-Forward Visual Model with IMU, GNSS for High-Functionality SLAM. *ISPRS Journal of Photogrammetry and Remote Sensing*, 239: 698–712.
- Zhuo, D.; Zheng, W.; Guo, J.; Wu, Y.; Zhou, J.; and Lu, J. 2026. Streaming 4D Visual Geometry Transformer. In *International Conference on Learning Representations (ICLR)*.
- Zou, Z.; Jia, X.; Wu, Z.; and Jiang, Y.-G. 2026. Attention Itself Could Retrieve. RetrieveVGGT: Training-Free Long Context Streaming 3D Reconstruction via Query-Key Similarity Retrieval. *arXiv preprint arXiv:2605.09644*.

A Per-Sequence Quantitative Results

The main paper reports averages over UAVScenes. Here we expose the sequence-level variation hidden by those averages, separating directed distance errors from thresholded F-scores.

A.1 UAVScenes

Tables 7 and 8 use the main-paper configuration of each method: VGGT-SLAM is evaluated with Sim(3) alignment, all SLRF methods use 30-view chunks, and Pi3X + SLRF and GeoFF3D receive the same noisy pose priors.

(a) Accuracy (m) ↓								
Method	Town01	Town02	Valley01	Valley02	Airport01	Airport02	Island01	Island02
VGGT-SLAM (Sim(3))	29.991	27.393	30.978	28.674	6.828	9.136	29.864	12.119
VGGT-SLAM 2.0	5.789	22.608	6.696	19.519	3.400	6.413	5.616	12.848
VGGT-Long	4.083	7.320	17.774	19.611	2.715	5.680	9.825	8.874
TTT3R	21.071	10.449	13.199	7.409	5.854	9.598	8.374	7.851
LingBot-Map	5.069	3.619	11.056	16.154	4.949	5.476	7.806	7.859
VGGT + SLRF	9.542	10.555	10.908	11.162	3.287	6.110	6.294	6.148
Pi3X + SLRF	11.221	6.249	9.645	7.543	2.883	3.177	3.939	3.712
GeoFF3D	2.112	1.966	12.712	8.646	1.710	1.579	2.303	2.092

(b) Completeness (m) ↓								
Method	Town01	Town02	Valley01	Valley02	Airport01	Airport02	Island01	Island02
VGGT-SLAM (Sim(3))	70.925	96.866	30.536	23.604	4.949	4.204	19.626	5.528
VGGT-SLAM 2.0	90.787	18.684	148.922	8.863	3.232	3.094	5.397	10.260
VGGT-Long	188.463	113.174	14.829	49.660	3.308	4.072	5.565	4.721
TTT3R	59.267	53.307	125.724	124.355	31.376	24.836	102.990	114.123
LingBot-Map	36.116	109.232	133.475	59.554	4.876	4.402	2.128	2.387
VGGT + SLRF	8.525	10.886	6.078	7.311	2.154	2.435	2.411	1.872
Pi3X + SLRF	8.510	6.627	6.977	4.902	2.281	2.330	1.971	1.625
GeoFF3D	1.746	1.580	4.432	4.660	1.527	1.252	1.663	1.398

Table 7: Per-sequence Accuracy and Completeness on UAVScenes. Both metrics are measured in meters. Best results are shown in bold.

(a) $F@1 \uparrow$								
Method	Town01	Town02	Valley01	Valley02	Airport01	Airport02	Island01	Island02
VGGT-SLAM (Sim(3))	0.019	0.021	0.041	0.033	0.106	0.105	0.040	0.116
VGGT-SLAM 2.0	0.001	0.032	0.003	0.061	0.270	0.177	0.193	0.123
VGGT-Long	0.008	0.023	0.030	0.045	0.306	0.211	0.126	0.130
TTT3R	0.023	0.052	0.037	0.075	0.135	0.104	0.035	0.024
LingBot-Map	0.094	0.048	0.034	0.051	0.165	0.182	0.154	0.182
VGGT + SLRF	0.062	0.105	0.056	0.067	0.204	0.186	0.154	0.170
Pi3X + SLRF	0.065	0.095	0.083	0.105	0.257	0.305	0.228	0.313
GeoFF3D	0.284	0.297	0.055	0.078	0.412	0.465	0.453	0.510

(b) $F@5 \uparrow$								
Method	Town01	Town02	Valley01	Valley02	Airport01	Airport02	Island01	Island02
VGGT-SLAM (Sim(3))	0.149	0.142	0.247	0.240	0.555	0.541	0.220	0.488
VGGT-SLAM 2.0	0.019	0.241	0.025	0.390	0.806	0.681	0.677	0.452
VGGT-Long	0.034	0.096	0.260	0.263	0.823	0.711	0.539	0.537
TTT3R	0.202	0.372	0.125	0.192	0.431	0.446	0.085	0.057
LingBot-Map	0.490	0.134	0.109	0.275	0.679	0.682	0.608	0.635
VGGT + SLRF	0.450	0.596	0.448	0.456	0.850	0.705	0.682	0.677
Pi3X + SLRF	0.446	0.586	0.489	0.560	0.867	0.848	0.835	0.862
GeoFF3D	0.937	0.966	0.492	0.578	0.960	0.976	0.925	0.950

Table 8: Per-sequence F-scores on UAVScenes at 1 m and 5 m thresholds. Best results are shown in bold.

B Qualitative Results

The qualitative comparisons complement the aggregate metrics by exposing coverage, boundary continuity, vertical orientation, and cross-dataset generalization. We organize the examples by aerial blocks, long trajectories, and NPU-DroneMap sequences.

B.1 Aerial Mapping Blocks

Figures 7 and 8 use matched cameras within each row so that coverage, boundary completeness, local deformation, and missing regions can be compared directly. The trajectory column also makes the acquisition geometry explicit, which is essential when interpreting difficult near-collinear or sparsely overlapping blocks.

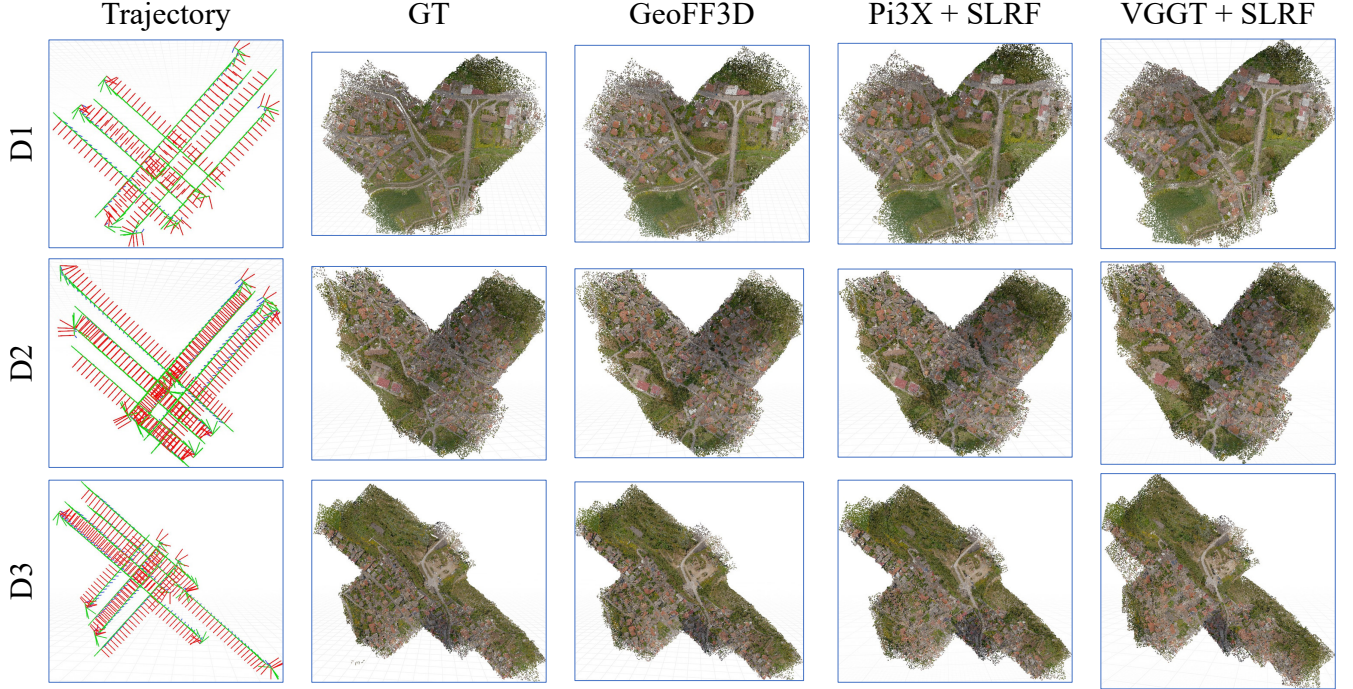


Figure 7: Matched-view qualitative comparison on all three UseGeo blocks. Rows correspond to D1–D3; columns show the camera trajectory, ground truth, GeoFF3D, Pi3X + SLRF, and VGGT + SLRF. All reconstructions in a row use the same rendering camera and bounds.

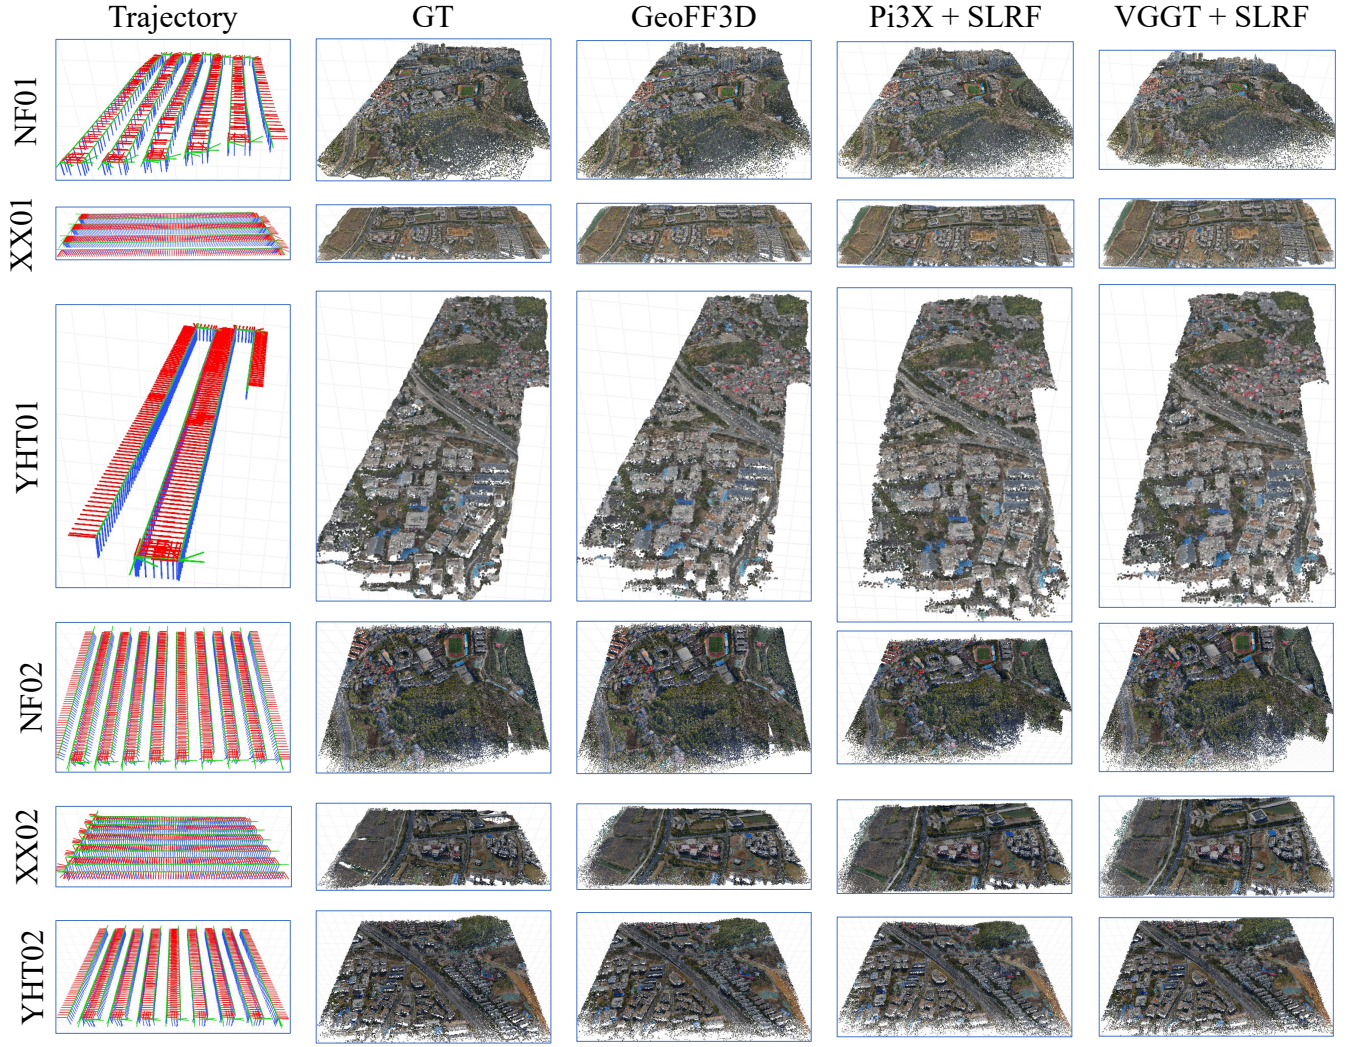


Figure 8: Matched-view qualitative comparison on five UAVFF3D-Real blocks. Rows show NF01, XX01, YHT01, NF02, and XX02; columns show the trajectory, ground truth, GeoFF3D, Pi3X + SLRF, and VGGT + SLRF. The same view and spatial bounds are used within each row.

B.2 Long UAV Sequences

Near-collinear long trajectories are particularly sensitive to post-hoc roll and pitch estimation. The qualitative comparison therefore reports both a top view and a vertical side profile. A method may fit the horizontal camera layout while producing an incorrect vertical orientation or excessive scene thickness. GeoFF3D retains a Z-up profile because gravity is constrained during prediction and preserved during hierarchical aggregation.

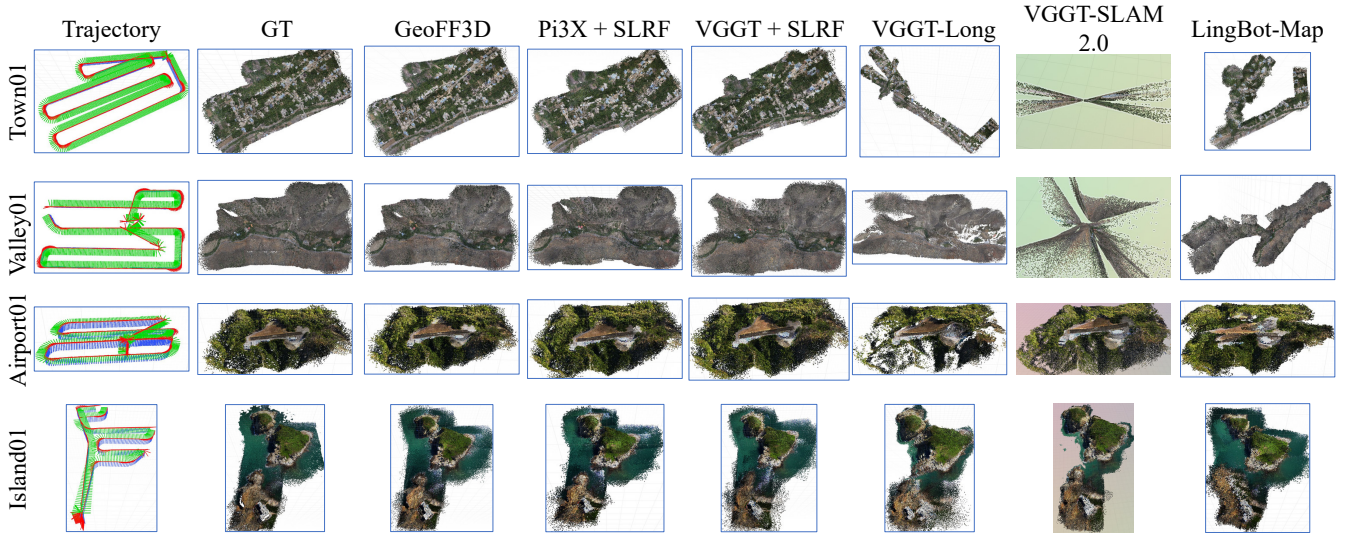


Figure 9: Matched-view comparison on representative UAVScenes trajectories. Rows show Town01, Valley01, Airport01, and Island01; columns show the trajectory, ground truth, GeoFF3D, three chunked/streaming baselines, and LingBot-Map. The shared views expose fragmentation and global orientation errors that are obscured by aggregate metrics.

B.3 NPU-DroneMap Generalization

NPU-DroneMap contains real keyframe sequences spanning urban, industrial, road, and agricultural environments. Although complete dense reference point clouds are unavailable, these sequences test whether the coordinate-anchored model and spatial pipeline generalize beyond the quantitative benchmark datasets.

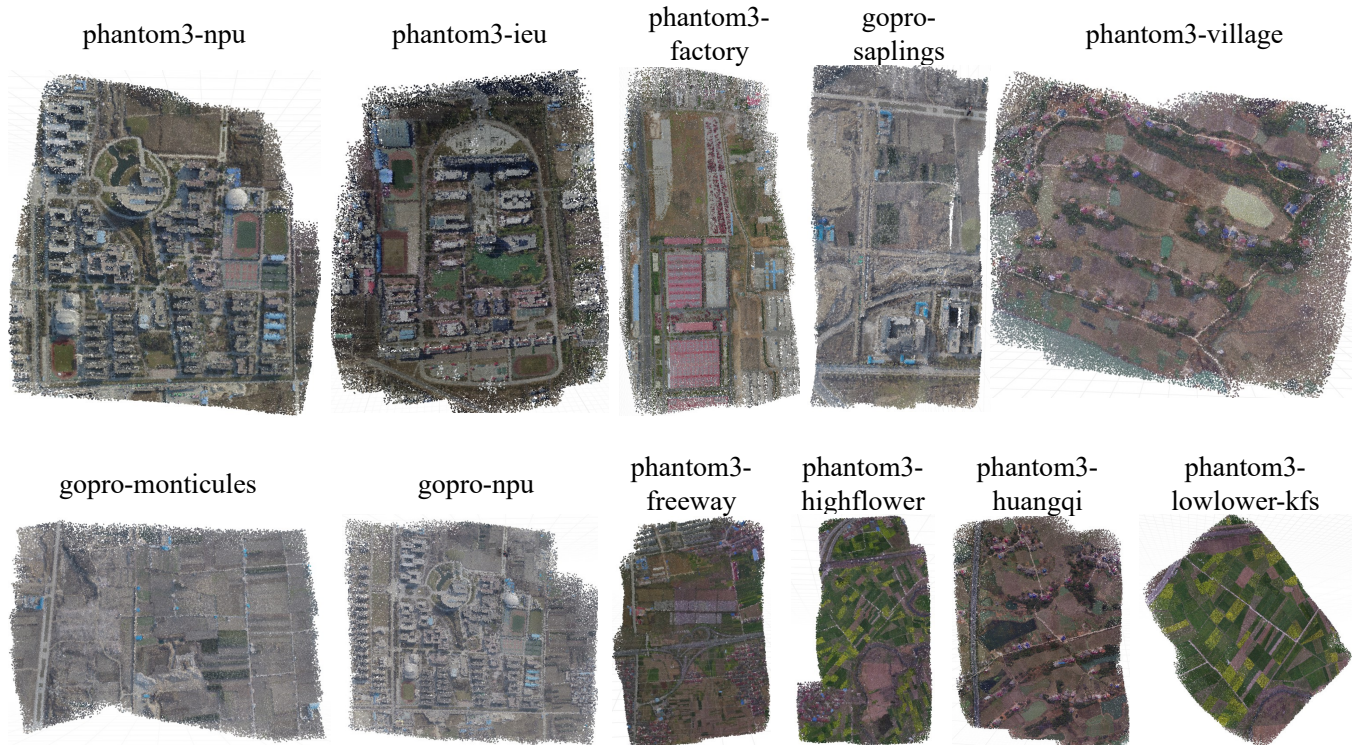


Figure 10: Cross-dataset generalization on 11 representative NPU-DroneMap keyframe sequences (from the 12-sequence dataset), covering campus, factory, road, industrial, village, and agricultural scenes. All reconstructions use a common point-rendering convention; no dense reference geometry is available for quantitative scoring.