

RoboRacer Arena: Scaling High-Fidelity Autonomous Racing in Isaac Sim

Mihaela-Larisa Clement^{1,2}, Agnes Poks¹, Ezio Bartocci¹

Abstract—RoboRacer offers a standardized platform for research using 1:10-scale autonomous vehicles, but the variety of available tracks hinders the process of acquiring policies. Although existing occupancy-grid simulators allow for the quick addition of new maps, they fail to include physical contact, while 3D simulators require each circuit to be implemented as a separate asset, thus limiting their scalability. In order to overcome this issue, we have developed RoboRacer Arena, a system that creates 3D racing environments directly from occupancy maps. Our method starts by using a flood fill algorithm to extract the drivable corridors and to identify the track boundaries, which are then used to establish the barriers. A distance field is calculated to define the collision boundaries. The track surfaces, textures, collision properties, and materials are assembled into a USD stage, which allows for the automated and reproducible generation of the environment in Isaac Sim. The input maps can be obtained from SLAM sessions, from rescaled Formula 1 circuits, or from natural-language descriptions. When the input is based on natural language, we use Gemma 4 31B to generate a track specification without specifying any coordinates or geometry. To guarantee consistency and reproducibility, we apply geometric screening, procedural generation, and raster-level validation. The simulation environments are initialized in a time range of 1.18 to 2.48 seconds, with the initialization time increasing linearly as the raster size increases. In 30 matched trials involving 10 tracks and 3 seeds, 21 maps were generated and all passed validation. RoboRacer Arena currently contains 130 tracks and supports the generation of tracks from natural language. In benchmark tests, the system attains 8,707 vehicle-steps per second when using 256 parallel rigid-body vehicles, excluding the time taken for rendering and policy execution.

I. INTRODUCTION

RoboRacer, formerly F1TENTH, combines inexpensive, standardised 1:10 vehicles with dynamics that expose tyre interaction, steering limits, sensing, and control latency [1], [2]. This allows for repeatable physical experiments in classical and learning-based control [3]. Learning-based experiments, however, also require training environments that differ from the deployment track: diversity materially affects generalisation to held-out environments [4], [5].

Current RoboRacer simulators separate environment supply from physical richness. F1TENTH Gym [1] loads arbitrary occupancy maps efficiently but omits three-dimensional contact, suspension, and rendering. The AutoDRIVE Simulator currently used by the RoboRacer Sim Racing League [6], [7], [8] provides those capabilities but requires each track to be hand-modelled and imported as a simulator-specific 3D asset. Users can therefore vary maps cheaply or simulate richer vehicle interaction. Combining both still requires per-track 3D asset construction.

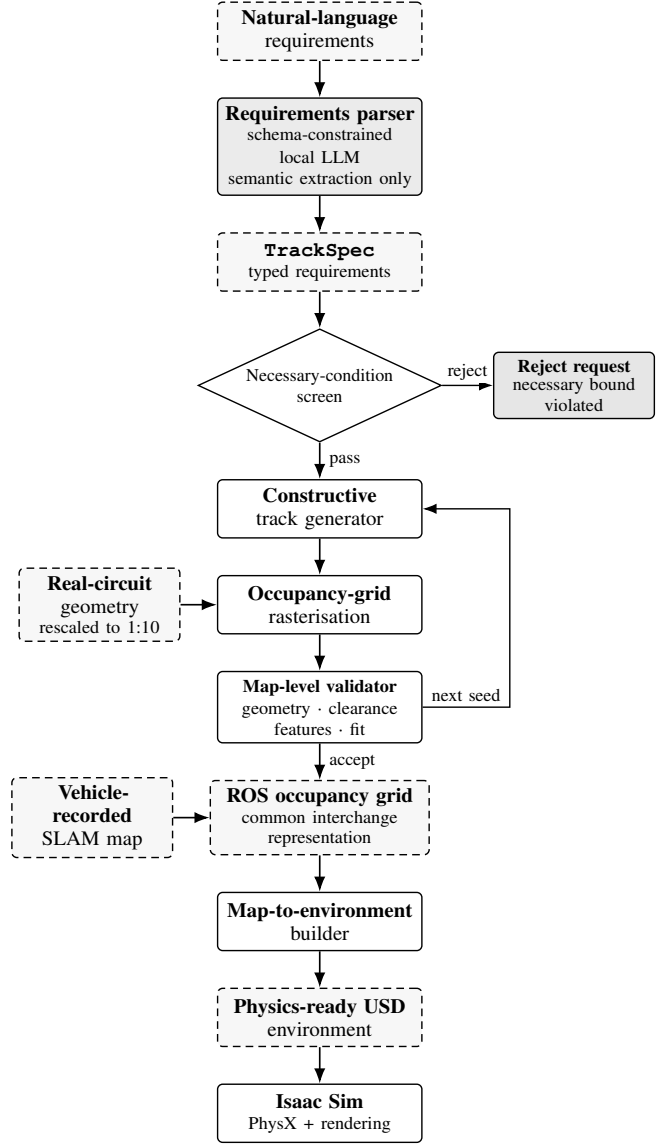


Fig. 1: Architecture of RoboRacer Arena. Vehicle-recorded SLAM maps and natural-language requirements are converted to a common ROS occupancy grid. For language-driven generation, the LLM extracts requirements, while the necessary-condition screen, geometry construction, and map-level validation remain deterministic. The occupancy grid is then converted into a physics-ready Isaac Sim environment.

¹TU Wien, Vienna, Austria.

²AIT Austrian Institute of Technology, Vienna, Austria.

RoboRacer Arena builds three-dimensional racing environments directly from occupancy maps. As Figure 1 shows,

vehicle-recorded SLAM maps, Formula 1 circuits at 1:10 vehicle scale, and tracks generated from natural-language requirements share one ROS occupancy-grid representation. A programmatic builder converts any supported grid into textured, collision-ready USD geometry. The natural-language pipeline separates responsibilities: a local model extracts a typed `TrackSpec`, a necessary-condition screen rejects requests that cannot fit, a deterministic constructor proposes geometry, and a validator remeasures the raster before acceptance.

The platform also instantiates a configurable model of the standard Traxxas-based RoboRacer chassis. We distinguish its fixed geometry and mass properties, configurable deployment settings, and measured operating envelope from 62.4 min of physical driving.

The contributions of this work are:

- 1) **An automated map-to-environment builder** that converts ROS occupancy grids into collision-ready, textured USD environments for Isaac Sim in 1.18 s to 2.48 s across an 82-fold raster-size range (Sec. III-C).
- 2) **A requirements-to-track pipeline** whose language extraction, necessary-condition screening, deterministic construction, and raster-level validation are independently testable (Sec. IV).
- 3) **An integrated RoboRacer simulation and track library** comprising a parameterised 1:10 vehicle, 130 simulation-ready tracks, and parallel-physics measurements up to 2048 vehicles (Secs. III-B and V-C).

The intended release includes the builder and 130 simulation-ready tracks with source and licence provenance. We recorded 51 distinct SLAM maps at several RoboRacer competitions and racing or testing sessions. Another 23 are unmodified ROS maps redistributed with permission from the GPL-3.0 F1TENTH racetracks collection [9]. Our rasterisation pipeline adds 44 OpenStreetMap-derived circuits at 1:10 scale, comprising 25 from the TUM racetrack database and 19 from a public Formula 1 GeoJSON collection [10], [11]. The remaining 12 tracks are generated from requirements. The Formula 1 circuit sources retain the Open Database Licence.

II. RELATED WORK

Racing simulators. TORCS [12], CARLA [13], Gran Turismo [14], and Learn-to-Race [15] target full- or game-scale vehicles. DeepRacer [16] uses a different small-scale platform. Within RoboRacer, F1TENTH Gym loads occupancy maps into a planar simulator [1], whereas AutoDRIVE supplies three-dimensional dynamics and rendering for tracks built as simulator-specific 3D assets [6], [7]. Isaac Gym and Isaac Lab provide large-scale GPU simulation [17], [18]. Recent work has also demonstrated small-scale wheeled-robot learning in Isaac Lab and 1:10 vehicle models in Isaac Sim [19]. RoboRacer Arena adds the track-construction layer. Physics-engine choice can change learned behaviour [20]. Existing tools thus separate simulation scale, physical richness, and inexpensive track supply.

Learning-based control for RoboRacer. Lidar-based deep reinforcement learning [21], residual policies over Pure Pursuit [22], [23], physical transfer [24], and latent-imagination methods [25] all evaluate generalisation beyond a single training configuration. Their policy architectures differ, but each result depends on which tracks the simulator can supply. RoboRacer Arena supplies that experimental input while leaving controller design unchanged.

Environment construction from maps. Occupancy grids are a standard spatial representation in mobile robotics [26]. Prior systems convert such maps into Gazebo or urban simulation environments [27], [28]. Isaac Sim provides the inverse operation by extracting a grid from an existing world [29]. Our input is likewise a grid, but the output must include racing-specific floor and barrier meshes, collision properties, and material bindings. Starting from an existing grid, our contribution is the repeatable construction of a racing environment.

Procedural and language-driven generation. Procedural race-track generation predates learning-based simulators [30], [31] and supports domain randomisation in autonomous racing [32] and reinforcement-learning benchmarks [4]. Language-conditioned robotics systems instead generate tasks or scenes from semantic requests [33], [34]. The language model populates the fixed specification. Deterministic stages then construct and validate the geometry.

III. SYSTEM DESIGN: A COMMON MAP INTERFACE




A. Occupancy Maps as a Common Interface

Let q denote a natural-language request and S its typed, 12-field specification: name, lap length L , corridor width w , hall dimensions (B_x, B_y) , direction, three feature counts (hairpins, chicanes, and sweepers), optional feature order, minimum radius, and longest straight. A track is a closed planar corridor with an arc-length-parameterised centreline $C : [0, L) \rightarrow \mathbb{R}^2$, where $\|C'(s)\|_2 = 1$. Rasterisation yields a ROS occupancy map $M : \Omega_\Delta \rightarrow \{0, 205, 254\}$ on grid domain Ω_Δ with resolution Δ . Recorded SLAM maps, tracks constructed from S , and rasterised Formula 1 circuits at 1:10 vehicle scale all enter the simulator through this representation.

There can be three results of a natural language request. A *rejection* proves that S violates a necessary geometric bound. A *generation failure* means that the bounded constructor found no candidate, without proving infeasibility. An *acceptance* means that the finished map M satisfies every raster-level test. We call the corresponding stages the *screen*, *constructor*, and *validator*.

B. Vehicle Model and ROS 2 Interface

Each vehicle-track instance is created programmatically in Isaac Sim through physics configuration, environment loading, vehicle and sensor instantiation, and ROS 2 bridge startup [35]. Vehicle dynamics use GPU PhysX with the TGS solver. Our GPU measurements use one NVIDIA RTX PRO 6000 Blackwell Max-Q GPU with 96 GB of VRAM. Map building is single-threaded on an AMD EPYC 9654 and peaks at 0.78 GB memory.

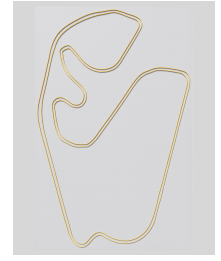

(a) SLAM map from the 27th RoboRacer Autonomous Racing Competition. (b) Automatic Isaac Sim reconstruction. (c) Requirement-generated track. (d) Interlagos at 1:10 vehicle scale.

Fig. 2: Three inputs, one environment representation. (a) A recorded competition map. (b) Its collision-ready reconstruction, built in 1.18s. (c) A map for “three hairpins and one chicane within a 20×15 m hall.” (d) A Formula 1 circuit at 1:10 vehicle scale. Every input produces the occupancy grid consumed by the same builder.

TABLE I: Vehicle parameters. Static values define the chassis. Deployment values are settings or statistics from the ICRA 2026 competition recordings.

	Parameter	Value
Static	Wheelbase / track width	0.3275 m / 0.265 m
	Mass / yaw inertia	4.885 kg / 0.089 kg m ²
	CoM to front / rear axle	0.1753 m / 0.1522 m
	Wheel radius / CoM height	0.0525 m / 0.063 m
	Maximum steering angle	0.524 rad
	Lidar beams / field of view	1081 / 270°
Deployment	Tyre-surface friction μ	≈ 0.83
	Scan / odometry rate	39.9 Hz / 50.0 Hz
	Drive command rate	20.0 Hz
	Speed, median / p99 / max (m s ⁻¹)	3.42 / 6.39 / 6.66
	Yaw rate, median / p99 (rad s ⁻¹)	1.20 / 5.46
	Recorded driving	62.4 min

The vehicle model uses the standard Traxxas-based 1:10 RoboRacer chassis. Table I separates static hardware parameters from deployment-dependent settings and observed driving statistics. We configure tyre friction for each deployment, while measured speed and yaw rate describe the recorded operating envelope.

The observations come from four runs at the 27th RoboRacer Autonomous Racing Competition (ICRA 2026): 62.4 min, 149 362 lidar scans, and 187 043 odometry messages. Speed lies predominantly between 1.5 m s^{-1} to 5 m s^{-1} and reaches 6.66 m s^{-1} . Pooled lateral-error RMS is 0.650 m over 53 388 samples. The configurable deployment uses an effective tyre-surface friction coefficient of $\mu \approx 0.83$, estimated from a lateral pull test as the measured lateral force divided by the vehicle weight.

Sensing and control. GPU ray casting models the physical lidar’s 270° field of view and chassis alignment. Controllers may downsample its beams, as in prior RoboRacer learning pipelines [21], [22], while retaining the sensor model. The ROS 2 bridge publishes odometry, transforms, and simulation time and accepts the Ackermann commands used by the physical vehicle. Configurable sensor and command rates preserve this interface across simulation and hardware.

C. From Occupancy Grid to USD

The builder first isolates the drivable corridor from the occupancy grid. Filled maps already identify free track cells. For thin-line maps, flood filling removes the exterior and infield before boundary extraction.

Visual and collision geometry follow separate representations. Smoothed corridor borders are swept into tubes with the 33 cm default diameter of RoboRacer air ducts, and evenly spaced rings reproduce their appearance. A level set of the free-space distance field instead defines the collision boundaries, which are extruded into invisible wall meshes. Configurable floor and barrier materials, compliance, texture, colour, and geometry are bound in the resulting metre-scale USD stage.

IV. TRACK CONSTRUCTION: SPECIFICATIONS AND FORMULA 1 CIRCUITS

A recorded map reproduces an existing layout. New environments can instead be constructed from controlled requirements or scaled Formula 1 circuit geometry. For requirements, four checkable stages convert request q into occupancy grid M : parsing, screening, construction, and validation.

A. Specification Extraction and Admissibility

Specification extraction. Gemma 4 31B runs locally through Ollama at temperature zero, with output constrained to the fixed 12-field schema for S (Sec. III-A). The parser normalises dimensions to metres, applies documented indoor defaults only to unstated fields, and leaves feature order empty unless q specifies it. Conversion to the typed specification rejects malformed output. The model supplies semantics, not coordinates, topology, or a centreline.

Admissibility screen. A constant-time arc-length screen is applied before construction, while final acceptance belongs to the separate raster-level validator. Let r_{req} be the requested minimum radius, and let t_w , d_c , and m_h denote wall thickness, inter-corridor clearance, and hall margin. The constructor’s minimum radius r_{min} , centreline pitch p , and lap-capacity

bound $L_{\max}$ are

$$\begin{aligned} r_{\min} &= \begin{cases} r_{\text{req}}, & r_{\text{req}} > 0, \\ \max(0.9 \text{ m}, 0.75w), & \text{otherwise,} \end{cases} \\ p &= w + 2t_w + d_c, \\ L_{\max} &= \frac{(B_x - 2m_h)(B_y - 2m_h)}{p}. \end{aligned} \quad (1)$$

For the set $\mathcal{F}(S)$ of requested named features, $\ell_i^{\min}$ is feature i 's minimum arc length under the constructor's geometric bands. The screen reserves 28 % of the lap for straights and permits named features to consume at most 70 % of the remainder. It passes S only if

$$2\pi r_{\min} \leq L \leq L_{\max}, \quad \sum_{i \in \mathcal{F}(S)} \ell_i^{\min} \leq 0.70(1 - 0.28)L. \quad (2)$$

For a 200 m lap in a 20×15 m hall, the default $p = 2.15$ m gives $L_{\max} \approx 123.7$ m, so the screen rejects immediately. Equations (1)–(2) provide a sound necessary condition. A passing request still leaves turn closure and collision-free lattice placement to the constructor. Five hairpins in a 45 m lap, for example, clear the length budget by 0.77 m but produce no matching candidate.

B. Lattice Construction and Raster Validation

The lattice constructor grows a connected square-lattice cell set while forbidding holes and diagonal contacts. Its outer boundary yields one closed centreline C . Lattice spacing follows p and $r_{\min}$. Rounding forms ordinary corners, while a requested sweeper replaces one 90° corner by two larger-radius 45° turns. Each loop is resampled, scaled uniformly to L , and tested in its original and 90° -rotated orientations for hall fit, self-clearance, and curvature-based feature counts. It is deterministic given a seed. Evaluation uses three seeds to average over candidate orderings.

For cell centre $\mathbf{x} \in \Omega_\Delta$, define $d(\mathbf{x}, C) = \min_{s \in [0, L]} \|\mathbf{x} - C(s)\|_2$. Rasterisation at resolution Δ is

$$M(\mathbf{x}) = \begin{cases} 254, & d(\mathbf{x}, C) \leq w/2 - \Delta/2, \\ 0, & w/2 - \Delta/2 < d(\mathbf{x}, C) \leq w/2 + t_w, \\ 205, & \text{otherwise.} \end{cases} \quad (3)$$

The values follow the ROS map-server grayscale convention: 0 (black) marks occupied walls, 205 (grey) marks unknown background, and 254 (white) marks free track. This encoding lets generated and recorded SLAM maps use the same loader. The half-cell correction compensates for raster width measurement, and the resulting occupancy map and metadata match the recorded-map interface.

The validator measures M , not analytic curve C . Acceptance requires one connected corridor and one infield, lap length and width within 3 % and 5 % of S , minimum radius within raster tolerance, exact feature counts, and valid self-clearance, hall fit, feature order, and longest straight. Failure of any test discards the candidate. Algorithm 1 summarises the bounded 800-candidate lattice control flow. SCREEN implements Eqs. (1)–(2), and RASTERISE implements Eq. (3).

Algorithm 1 Natural-language requirements to validated occupancy map.

Require: Natural-language request q
Ensure: Validated map M , rejection, or generation failure

```

1:  $S \leftarrow \text{PARSE}(q)$ 
2: if not SCREEN( $S$ ) then
3:   return rejection
4: end if
5: for  $k = 1, \dots, 800$  do  $\triangleright k$ : deterministic candidate index
6:    $C \leftarrow \text{CONSTRUCT}(S, k)$ 
7:   if  $C = \emptyset$  then
8:     continue
9:   end if
10:   $M \leftarrow \text{RASTERISE}(C, S)$ 
11:  if VALIDATE( $M, S$ ) then
12:    return  $M$ 
13:  end if
14: end for
15: return generation failure

```

C. Formula 1 Circuits at 1:10 Vehicle Scale

We convert 44 OpenStreetMap-derived circuit geometries: 25 use the TUM database's centreline and measured left/right widths, whereas 19 use Formula 1 circuit centrelines from a public GeoJSON collection, with constant widths recorded in the dataset metadata [10], [11]. Uniform reduction to one tenth of full-scale dimensions brings the circuits to the scale of the 1:10 RoboRacer vehicles while preserving their proportions. A periodic cubic spline then smooths and resamples each closed loop. When non-local sections would merge after rasterisation, local width is reduced according to their separation but never below 60 % of nominal width. At grade-separated crossings, we retain the centreline because the planar grid collapses height.

V. EVALUATION: BUILD COST, VALIDITY, AND SCALE

A. Map Building and Circuit-Library Accuracy

Table II spans an 82-fold range in raster size, from the ICRA 2026 competition map to 1:10 Formula 1 circuits, while single-threaded build time changes only 2.1-fold. Every evaluated map becomes a physics-ready USD stage in 1.18 s to 2.48 s.

TABLE II: ROS occupancy grid to physics-ready USD. Time is single-core wall clock.

Map	Raster (MP)	Time (s)	USD (MB)
27th RoboRacer			
Autonomous Racing			
Competition	0.13	1.18	7.8
Norising	2.56	1.49	21.6
Interlagos	3.02	1.68	40.5
Monaco	3.04	1.60	31.3
Zandvoort	3.48	1.75	40.6
Silverstone	7.40	2.16	55.4
Suzuka	8.43	2.20	54.4
Spa-Francorchamps	10.77	2.48	65.9

All 44 maps contain one connected free corridor and use the same occupancy encoding as requirement-generated maps. At 1:10 scale, lap length spans 229.36 m to 699.84 m and

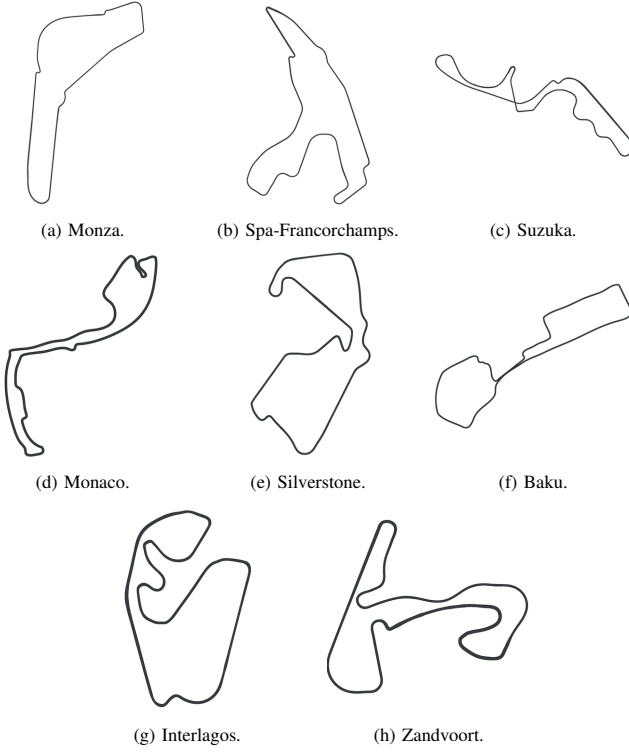


Fig. 3: Eight of 44 Formula 1 circuits at 1:10 vehicle scale. Each uses the occupancy-grid interface consumed by the builder in Sec. III-C.

mean corridor width spans 0.919 m to 1.588 m. Generating the library takes 43.72 s.

Width correction affects four circuits and at most 8 % of any loop. Relative to the scaled input geometry, centreline-length error averages 0.253 % and peaks at 0.924 %. These errors quantify rasterisation and resampling relative to the scaled input. The reference is the source geometry rather than a surveyed circuit. Suzuka is distributed with its centreline because its grade separation is lost in the planar map.

B. Requirements-Pipeline Evaluation

Parser selection. A candidate model must recover every stated requirement and preserve defaults for every unstated one. The first screen uses 12 requests spanning number words, unit conversions, feature order, and omitted fields. Four of six local models parse all 12 exactly and advance to a 17-request invention audit repeated three times (51 resident-model calls per model).

Three models avoid invented constraints on all 51 audit calls (Table III). Mistral 7B is fastest and smallest but invents a value in 6 calls. For “a 38 m lap for a small 15 by 12 hall,” it inserts an unstated 9 m minimum radius, causing the geometric screen to reject the altered request. Explicitly prohibiting copied numbers worsens its score from 45/51 to 39/51. Nullable fields yield 36/51 and omit 42 of 165 stated values.

Among the three models with 51/51 audit passes, GPT-OSS 120B has the lowest latency but uses 65.4 GB of VRAM. We

select Gemma 4 31B: it ties the best accuracy and restraint, is smaller and faster than Qwen 3.6 35B, and requires less than one third of GPT-OSS 120B’s VRAM.

TABLE III: Local parser evaluation. Parse is exact output on 12 requests. Audit pass means no invented constraint across 51 calls. Latency is seconds per resident-model call. Models failing Parse are not advanced (dashes).

Model	Parse	Audit pass	Latency	VRAM (GB)
gemma4:31b	12/12	51/51	9.3	19.0
qwen3.6:35b	12/12	51/51	12.5	23.9
gpt-oss:120b	12/12	51/51	3.7	65.4
mistral:7b	12/12	45/51	0.8	4.4
Nemotron-C2	9/12	—	—	24
GLM-4.7-F	0/12	—	—	19

Constructor comparison. We compare constructors independently of the parser by replacing the CONSTRUCT stage in Algorithm 1 with three methods. The lattice constructor is described in Sec. IV. The DE constructor [36] optimises a centreline curvature profile $\kappa(s)$ and feature turn and radius variables within shared bounds (link turns lie in $[-137^\circ, 137^\circ]$). It integrates the profile, projects it globally to enforce 2π total turn and position closure, and minimises the sum of penalties for lap length, corridor width, minimum radius, self-clearance, hall fit, and squared feature-count error. The Table IV run also includes the older soft realism-prior term.

The random-sampling control draws the same parameter vector uniformly within those bounds and integrates it once, without optimisation or closure projection. It serves as a performance floor.

Each method receives the same 10 specifications and three seeds (30 matched trials). Internal evaluations follow each method’s stopping rule. Within a trial, lattice samples until a candidate passes its checks or reaches the 800-draw cap, DE runs to its convergence criterion, and random sampling draws once. “Built” means that the constructor emitted a rasterised occupancy map. “Valid” means that map passed the external raster validator. Runtime covers construction, map writing, and validation.

Lattice builds 21 maps, all valid. DE builds 27, of which 15 are valid. Random sampling builds 30, of which 11 are valid (Table IV). Lattice therefore builds fewer maps than either baseline, but produces the most valid trials and the only entirely valid built set. This comparison observes raw constructor outputs upstream of the final validator. The complete pipeline never returns an invalid output.

TABLE IV: Constructor comparison on 10 specifications and three seeds. Every built map is judged by the same external raster validator.

Constructor	Valid trials	Valid/built	s/trial
Lattice	21/30	21/21	3.7
DE optimiser	15/30	15/27	5.1
Random sampling	11/30	11/30	11.2

End-to-end pipeline. A separate eight-request test evaluates the complete pipeline and accepts six maps. The 200 m-in-20 × 15 m request is rejected by the screen. The five-hairpin, 45 m request passes the screen but ends in generation failure. Both requests terminate before map return, distinguishing a proven rejection from a bounded-search failure.

C. Track Supply and Simulation Throughput

Table V separates track supply from simulation throughput. F1TENTH Gym and RoboRacer Arena are measured on the same workstation. AutoDRIVE track and training values come from its published documentation and accompanying materials. Track supply is directly comparable. Throughput retains each system’s documented workload.

TABLE V: Environment supply and simulation capabilities. AutoDRIVE values are reported. F1TENTH Gym and RoboRacer Arena are measured here. The text defines each throughput workload.

	F1TENTH Gym	AutoDRIVE Simulator	RoboRacer Arena
Released / supplied tracks	pre-scanned maps	6	130
Recorded occupancy map	yes	no	yes
Natural-language requirements	no	no	yes
Automated map → 3D	n/a	no	1.2 s to 2.5 s
3D contact	no	yes	yes
Rendering	no	yes	yes
Gym interface	yes	no	yes
Throughput (step/s)	4942	62.5	8707 [†]

[†]Aggregate over 256 parallel rigid-body vehicle instances.

F1TENTH Gym advances one planar vehicle without rendering or three-dimensional contact at 4942 steps per second (approximately 49 times real time). AutoDRIVE’s 62.5 agent-steps per second is derived from a 1 000 000-step training run lasting 4h26min and therefore includes rendering and policy updates.

The RoboRacer Arena benchmark isolates contact physics from rendering and policy execution. One rigid-body vehicle advances at 28.1 steps per second. With 256 vehicles, each reaches 34.0, for 8707 vehicle-steps per second in aggregate. Aggregate throughput then falls to 8368 at 1024 vehicles and 6818 at 2048. These measurements characterise backend scaling with rigid-body proxies. Full-articulation learning throughputs remains a separate workload.

Track creation provides the clearest practical distinction between the simulators. AutoDRIVE requires a 3D circuit asset to be modelled and imported. RoboRacer Arena instead accepts a recorded map, rasterises Formula 1 circuit geometry at 1:10 vehicle scale, or constructs a map from requirements. These workflows avoid per-track 3D modelling and asset import and populate the 130-track release.

VI. SCOPE AND LIMITATIONS

The occupancy grid supplies track shape and collision geometry, but not a complete visual reconstruction of the venue. Generic materials are sufficient for lidar and contact-based experiments, whereas ongoing work uses three-dimensional Gaussian splatting when camera appearance matters while retaining explicit geometry for collision. Because the present map representation is planar and assumes a constant surface

and width, elevation, surface transitions, and continuously varying width remain extensions, and grade-separated crossings collapse to planar overlaps.

The throughput values in Sec. V-C describe different rendering, policy, vehicle, and parallelism workloads and are not a matched learning benchmark. The language results remain bounded to 12 parser requests, 51 invention-audit calls per advanced model, and eight end-to-end requests.

VII. CONCLUSION

RoboRacer Arena builds three-dimensional racing environments from recorded maps, circuit geometry, and track specifications through a common occupancy-grid interface that produces collision-ready USD stages in 1.18 s to 2.48 s. The 130-track release combines a configurable vehicle model with 44 Formula 1 circuits at 1:10 vehicle scale, which average 0.253 % centreline-length error, while the lattice constructor produces a valid map in 21/30 trials and all 21 built maps pass validation. Independent language extraction, screening, construction, and raster validation make success and refusal inspectable. Ongoing work extends the platform with three-dimensional Gaussian-splat reconstructions for vision-based experiments and uses matched reinforcement-learning and MPC experiments to compare learning and closed-loop behaviour across the simulators and the physical vehicle.

ACKNOWLEDGMENT

This research was funded in whole or in part by the Austrian Science Fund (FWF) 10.55776/DOC1345324.

REFERENCES

- [1] M. O’Kelly, H. Zheng, D. Karthik, and R. Mangharam, “F1TENTH: An open-source evaluation environment for continuous control and reinforcement learning,” in *Proceedings of the NeurIPS 2019 Competition and Demonstration Track*, ser. Proceedings of Machine Learning Research, H. J. Escalante and R. Hadsell, Eds., vol. 123. PMLR, 2020, pp. 77–89. [Online]. Available: <https://proceedings.mlr.press/v123/o-kelly20a.html>
- [2] J. Betz, H. Zheng, A. Liniger, U. Rosolia, P. Karle, M. Behl, V. Krovi, and R. Mangharam, “Autonomous vehicles on the edge: A survey on autonomous vehicle racing,” *IEEE Open Journal of Intelligent Transportation Systems*, vol. 3, pp. 458–488, 2022. [Online]. Available: <https://doi.org/10.1109/OJITS.2022.3181510>
- [3] I. Charles, H. Maghsoumi, and Y. Fallah, “Advancing autonomous racing: A comprehensive survey of the RoboRacer (F1TENTH) platform,” 2025. [Online]. Available: <https://arxiv.org/abs/2506.15899>
- [4] K. Cobbe, C. Hesse, J. Hilton, and J. Schulman, “Leveraging procedural generation to benchmark reinforcement learning,” in *Proceedings of the 37th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, H. Daumé III and A. Singh, Eds., vol. 119. PMLR, 2020, pp. 2048–2056. [Online]. Available: <https://proceedings.mlr.press/v119/cobbe20a.html>
- [5] R. Kirk, A. Zhang, E. Grefenstette, and T. Rocktäschel, “A survey of zero-shot generalisation in deep reinforcement learning,” *Journal of Artificial Intelligence Research*, vol. 76, pp. 201–264, 2023. [Online]. Available: <https://doi.org/10.1613/jair.1.14174>
- [6] T. V. Samak, C. V. Samak, and M. Xie, “AutoDRIVE simulator: A simulator for scaled autonomous vehicle research and education,” in *Proceedings of the 2nd International Conference on Control, Robotics and Intelligent System*, ser. CCRIS ’21. Association for Computing Machinery, 2021, pp. 1–5. [Online]. Available: <https://doi.org/10.1145/3483845.3483846>

- [7] T. V. Samak, C. V. Samak, S. Kandhasamy, V. Krovi, and M. Xie, "AutoDRIVE: A comprehensive, flexible and integrated digital twin ecosystem for autonomous driving research and education," *Robotics*, vol. 12, no. 3, p. 77, 2023. [Online]. Available: <https://doi.org/10.3390/robotics12030077>
- [8] T. V. Samak, C. V. Samak, and V. N. Krovi, "F1TENTH sim racing league: An open-source competition framework for promoting reproducibility and benchmarking in autonomous driving," Workshop on Reproducibility and Benchmarking in Robotic Research, IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), 2024, author-uploaded workshop manuscript; ResearchGate identifier 10.13140/RG.2.2.32033.52323. [Online]. Available: https://www.researchgate.net/publication/390629916_F1TENTH_Sim_Racing_League_An_Open-Source_Competition_Framework_for_Promoting_Reproducibility_and_Benchmarking_in_Autonomous_Driving
- [9] F1TENTH Community, "f1tenth_racetracks: Maps from more than 20 real race tracks downscaled 1:10 for the F1TENTH gym and simulator," GitHub repository, 2021. [Online]. Available: https://github.com/f1tenth/f1tenth_racetracks
- [10] A. Heilmeyer and TUM Institute of Automotive Technology (TUMFTM), "racetrack-database: Center lines, track widths and race lines for more than 20 race tracks," GitHub repository, 2019. [Online]. Available: <https://github.com/TUMFTM/racetrack-database>
- [11] T. Bacinger, "f1-circuits: Formula 1 circuit GeoJSON files," GitHub repository, 2019. [Online]. Available: <https://github.com/bacinger/f1-circuits>
- [12] B. Wymann, É. Espié, C. Guionneau, C. Dimitrakakis, R. Coulom, and A. Sumner, "TORCS: The open racing car simulator," Computer software, version 1.3.5, 2013. [Online]. Available: <https://sourceforge.net/projects/torcs/files/all-in-one/1.3.5/>
- [13] A. Dosovitskiy, G. Ros, F. Codevilla, A. Lopez, and V. Koltun, "CARLA: An open urban driving simulator," in *Proceedings of the 1st Annual Conference on Robot Learning*, ser. Proceedings of Machine Learning Research, S. Levine, V. Vanhoucke, and K. Goldberg, Eds., vol. 78. PMLR, 2017, pp. 1–16. [Online]. Available: <https://proceedings.mlr.press/v78/dosovitskiy17a.html>
- [14] P. R. Wurman, S. Barrett, K. Kawamoto, J. MacGlashan, K. Subramanian, T. J. Walsh, R. Capobianco, A. Devlic, F. Eckert, F. Fuchs, L. Gilpin, P. Khandelwal, V. Kompella, H. Lin, P. MacAlpine, D. Oller, T. Seno, C. Sherstan, M. D. Thomure, H. Aghabozorgi, L. Barrett, R. Douglas, S. Ganju, B. Chen, A. Koul, M. Spranger, and H. Kitano, "Outracing champion gran turismo drivers with deep reinforcement learning," *Nature*, vol. 602, no. 7896, pp. 223–228, 2022. [Online]. Available: <https://doi.org/10.1038/s41586-021-04357-7>
- [15] J. Herman, F. Francis, S. Ganju, B. Chen, A. Koul, A. Gupta, A. Skabelkin, I. Zhukov, M. Kumskey, and E. Nyberg, "Learn-to-race: A multimodal control environment for autonomous racing," in *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2021, pp. 9773–9782. [Online]. Available: https://openaccess.thecvf.com/content/ICCV2021/html/Herman_Learn-To-Race_A_Multimodal_Control_Environment_for_Autonomous_Racing_ICCV_2021_paper.html
- [16] B. Balaji, S. Mallia, S. Genc, S. Gupta, L. Dirac, V. Khare, G. Roy, T. Sun, Y. Tao, B. Townsend, E. Calleja, S. Muralidhara, and D. Karuppasamy, "DeepRacer: Autonomous racing platform for experimentation with sim2real reinforcement learning," in *2020 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2020, pp. 2746–2754. [Online]. Available: <https://doi.org/10.1109/ICRA40945.2020.9197465>
- [17] V. Makoviychuk, L. Wawrzyniak, Y. Guo, M. Lu, K. Storey, M. Macklin, D. Hoeller, N. Rudin, A. Allshire, A. Handa, and G. State, "Isaac Gym: High performance gpu-based physics simulation for robot learning," in *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, J. Vanschoren and S.-K. Yeung, Eds., vol. 1. Curran Associates, Inc., 2021. [Online]. Available: <https://arxiv.org/abs/2108.10470>
- [18] M. Mittal, P. Roth, J. Tigue, A. Richard, O. Zhang, P. Du, A. Serrano-Muñoz, X. Yao, R. Zurbrugg, N. Rudin et al., "Isaac Lab: A gpu-accelerated simulation framework for multi-modal robot learning," 2025. [Online]. Available: <https://arxiv.org/abs/2511.04831>
- [19] T. Han, P. Shah, S. Rajagopal, Y. Bao, S. Jung, S. Talia, G. Guo, B. Xu, B. Mehta, E. Romig, R. Scalise, and B. Boots, "Wheeled lab: Modern sim2real for low-cost, open-source wheeled robotics," in *Proceedings of the 9th Conference on Robot Learning*, ser. Proceedings of Machine Learning Research, J. Lim, S. Song, and H.-W. Park, Eds., vol. 305. PMLR, 2025, pp. 906–923. [Online]. Available: <https://proceedings.mlr.press/v305/han25a.html>
- [20] J. Collins, S. Chand, A. Vanderkop, and D. Howard, "A review of physics simulators for robotic applications," *IEEE Access*, vol. 9, pp. 51 416–51 431, 2021. [Online]. Available: <https://doi.org/10.1109/ACCESS.2021.3068769>
- [21] B. D. Evans, H. A. Engelbrecht, and H. W. Jordaan, "High-speed autonomous racing using trajectory-aided deep reinforcement learning," *IEEE Robotics and Automation Letters*, vol. 8, no. 9, pp. 5353–5359, 2023. [Online]. Available: <https://doi.org/10.1109/IRV55152.2023.10186744>
- [22] R. Trumpp, D. Hoornaert, and M. Caccamo, "Residual policy learning for vehicle control of autonomous racing cars," in *2023 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, 2023, pp. 1–6. [Online]. Available: <https://doi.org/10.1109/IV55152.2023.10186744>
- [23] R. Trumpp, D. Hoornaert, M. Theile, and M. Caccamo, "Efficient real-world autonomous racing via attenuated residual policy optimization," 2026. [Online]. Available: <https://arxiv.org/abs/2603.12960>
- [24] E. Ghignone, N. Baumann, C. Hu, J. Wang, L. Xie, A. Carron, and M. Magno, "RLPP: A residual method for zero-shot real-world autonomous racing on scaled platforms," 2025. [Online]. Available: <https://arxiv.org/abs/2501.17311>
- [25] A. Brunnbauer, L. Berducci, A. Brandstätter, M. Lechner, R. M. Hasani, D. Rus, and R. Grosu, "Latent imagination facilitates zero-shot transfer in autonomous racing," in *2022 International Conference on Robotics and Automation (ICRA)*. IEEE, 2022, pp. 7513–7520. [Online]. Available: <https://doi.org/10.1109/ICRA46639.2022.9811650>
- [26] A. Elfes, "Using occupancy grids for mobile robot perception and navigation," *Computer*, vol. 22, no. 6, pp. 46–57, Jun. 1989. [Online]. Available: <https://doi.org/10.1109/2.30720>
- [27] S. Curtis, "map2gazebo: Create gazebo worlds from 2d occupancy grid maps," Open-source ROS package and GitHub repository, 2020. [Online]. Available: <https://github.com/shilohc/map2gazebo>
- [28] A. Mondal, P. Tigas, and Y. Gal, "Real2sim: Automatic generation of open street map towns for autonomous driving benchmarks," in *Machine Learning for Autonomous Driving Workshop at NeurIPS*, 2020. [Online]. Available: <https://ml4ad.github.io/files/papers2020/Real2sim%3A%20Automatic%20Generation%20of%20Open%20Street%20Map%20Towns%20For%20Autonomous%20Driving%20Benchmarks.pdf>
- [29] NVIDIA Corporation, "Mapping: Occupancy map generator," NVIDIA Isaac Sim 6.0.1 Documentation, 2026. [Online]. Available: https://docs.isaacsim.omniverse.nvidia.com/6.0.1/digital_twin/ext.isaacsim.asset.generator.occupancy_map.html
- [30] J. Togelius, G. N. Yannakakis, K. O. Stanley, and C. Browne, "Search-based procedural content generation: A taxonomy and survey," *IEEE Transactions on Computational Intelligence and AI in Games*, vol. 3, no. 3, pp. 172–186, 2011. [Online]. Available: <https://doi.org/10.1109/TCAIG.2011.2148116>
- [31] D. Loiacono, L. Cardamone, and P. L. Lanzi, "Automatic track generation for high-end racing games using evolutionary computation," *IEEE Transactions on Computational Intelligence and AI in Games*, vol. 3, no. 3, pp. 245–259, 2011. [Online]. Available: <https://doi.org/10.1109/TCAIG.2011.2163692>
- [32] F. Behrens, "Procedural race track generation for domain randomization," Hochschule Kempten, Fakultät Informatik, Technical Reports in Computing Science CS-01-2020, 2020. [Online]. Available: <https://opus4.kobv.de/opus4-hs-kempten/frontdoor/index/docId/1661>
- [33] L. Wang, Y. Ling, Z. Yuan, M. Shridhar, C. Bao, Y. Qin, B. Wang, H. Xu, and X. Wang, "GenSim: Generating robotic simulation tasks via large language models," in *International Conference on Learning Representations*, B. Kim, Y. Yue, S. Chaudhuri, K. Fragkiadaki, M. Khan, and Y. Sun, Eds., vol. 2024, 2024, pp. 4890–4924. [Online]. Available: https://proceedings.iclr.cc/paper_files/paper/2024/hash/143ea4a156ef64f32d4d905206cf32e1-Abstract-Conference.html
- [34] Y. Yang, F.-Y. Sun, L. Weihs, E. VanderBilt, A. Herrasti, W. Han, J. Wu, N. Haber, R. Krishna, L. Liu, C. Callison-Burch, M. Yatskar, A. Kembhavi, and C. Clark, "Holodeck: Language guided generation of 3d embodied ai environments," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 16 227–16 237. [Online]. Available: https://openaccess.thecvf.com/content/CVPR2024/html/Yang_Holodeck_Language_Guided_Generation_of_3D_Embodied_AI_Environments.CVPR.2024_paper.html
- [35] NVIDIA Corporation, "NVIDIA Isaac Sim," Computer software, version 6.0.1, Jun. 2026, source repository licensed under Apache-2.0;

required components and assets have additional license terms. [Online]. Available: <https://docs.isaacsim.omniverse.nvidia.com/6.0.1/>

[36] R. Storn and K. Price, "Differential evolution—a simple and efficient

heuristic for global optimization over continuous spaces," *Journal of Global Optimization*, vol. 11, no. 4, pp. 341–359, Dec. 1997. [Online]. Available: <https://doi.org/10.1023/A:1008202821328>