

ArmnetBench v0.1: Parallel Real-World Evaluation of Manipulation Policies on a Low-Cost Arm Farm

Praveen Selvaraj Lorenzo Uttini Ville Kuosmanen

Armnet
`armnet.dev`

Abstract

Real-world evaluation is a bottleneck in developing generalist robot manipulation policies. Each rollout requires physical hardware and an operator to set up, reset, and score it. We introduce **ArmnetBench v0.1**, a benchmark run on a fleet of low-cost SO-101 cells under light on-site supervision. v0.1 validates this arm farm end to end and compares 7 policies across 12 tasks with both single-arm and bimanual configurations. Each policy is trained or fine-tuned on 50 demonstrations per task; the benchmark contains 2,518 policy rollouts and 600 reference demonstrations. All 3,118 episodes carry a three-way label (successful, suboptimal, or failure). Policy rollouts are human-scored, while demonstrations are successful by construction. Beyond evaluation, its quality-labelled trajectories support downstream learning, from reward and predictive world models to policies trained on mixed-quality data. The leaderboard is an initial comparison under this shared budget. We release the 3,118 core episodes in LeRobot v3.0 and RoboMeter formats.

1 Introduction

Real-world evaluation increasingly gates progress in generalist robot manipulation. Assessing competence requires physical hardware, varied trials, and an operator to arrange, reset, and score each rollout. The resulting cost limits many studies to a few dozen trials on one robot in one lab, making improvements hard to distinguish from noise and results hard to compare. Unreported choices such as camera placement, lighting, object initialisation, checkpoint selection, and task-specific tuning can further inflate headline success rates and hinder independent reproduction (Atreya et al., 2025).

Simulation makes evaluation cheap and reproducible but inherits a sim-to-real gap. Physical benchmarks avoid that gap, but often trade cost for fewer tasks or trials, a single embodiment, or coarse binary scoring. ArmnetBench instead reduces the per-trial cost with parallel low-cost cells. Each adds three cameras, a Raspberry Pi, and a networked power plug to the largely 3D-printable SO-101 (Cadène et al., 2024). The farm runs policy rollouts in isolated containers under one protocol. This supports broad coverage across tasks, policies as well as single-arm and bimanual configurations, with every scored rollout released as data.

v0.1 validates this evaluation substrate and establishes a baseline for iteration. Its leaderboard compares policies trained or fine-tuned on the same 50 demonstrations per task; it does not estimate each method’s capability ceiling.

Contributions.

- **The Armnet arm farm:** a managed fleet of low-cost single-arm and bimanual SO-101 cells that evaluates policies in parallel under light on-site supervision (Section 3).
- **ArmnetBench v0.1:** a 12-task suite and shared-budget evaluation protocol for comparing 7 policies across single-arm and bimanual settings, with three-way operator scoring (Sections 4 and 5).

Table 1: ArmnetBench versus representative real-world manipulation benchmarks. Entries are qualitative characterisations of each work’s dominant design choice. *Labelled eval corpus* means a released set of policy *rollouts*, each tagged with a success/failure (or graded) outcome, as distinct from teleoperated training demonstrations.

Benchmark	Setup	Scoring	Human in loop	Labelled eval corpus
REPLAB (Yang et al., 2019)	Blueprint cell	Learned binary	✗	✗
SceneReplica (Khargonkar et al., 2024)	Blueprint scenes	Binary	✓	✗
FurnitureBench (Heo et al., 2025)	Blueprint cell	Binary + phases	✓	✗
FMB (Luo et al., 2025)	Blueprint cell	Binary	✓	✗
AutoEval (Zhou et al., 2025)	Autonomous cell	Learned binary	✗	✗
RoboArena (Atreya et al., 2025)	Federated labs	Preference	✓	✗
RoboDojo (Chen et al., 2026)	Sim + remote real	Binary + score	✓	✗
VLA-REPLICA (Huang et al., 2026)	Blueprint cell	Binary	✓	✗
ArmnetBench (ours)	Managed fleet	Graded 3-way	✓	✓

- **A released labelled corpus:** 3,718 labelled episodes in total, comprising 3,118 core benchmark episodes in LeRobot v3.0 and RoboMeter formats plus 600 additional rollouts. We also release the exact policy checkpoint evaluated for every benchmark task–policy pair (Section 4.4).

2 Related Work

Simulation and task-suite benchmarks. Simulated suites make manipulation evaluation cheap and parallel. Meta-World (Yu et al., 2020) covers multi-task and meta-RL manipulation, LIBERO (Liu et al., 2023) targets lifelong-learning transfer, and SIMPLER (Li et al., 2024) seeks rankings that align with real robots. Contact, deformables, and visual realism still transfer imperfectly, motivating evaluation on physical robots.

Reproducible real-world benchmarks. Physical benchmarks standardise hardware or scenes. REPLAB (Yang et al., 2019) provides a reproducible low-cost cell, SceneReplica (Khargonkar et al., 2024) replicable scenes, FurnitureBench (Heo et al., 2025) long-horizon assembly, FMB (Luo et al., 2025) functional manipulation, and VLA-REPLICA (Huang et al., 2026) a replicable SO-101 cell for cross-lab VLA evaluation. These are primarily blueprints for independently rebuilt setups.

Auto-evaluation and distributed evaluation. AutoEval (Zhou et al., 2025) automates reset and success detection on one robot. RoboArena (Atreya et al., 2025) pools heterogeneous labs and uses preference scoring because absolute rates do not compare across sites. RoboDojo (Chen et al., 2026) combines simulation with a standardised remote service on bimanual platforms.

Low-cost arms and datasets. ALOHA (Zhao et al., 2023) showed that low-cost hardware can support fine-grained bimanual manipulation. Large-scale datasets such as DROID (Khazatsky et al., 2024) collect diverse real-world interactions, while Open X-Embodiment (Open X-Embodiment Collaboration, 2024) aggregates data across robot embodiments. LeRobot (Cadène et al., 2024) provides open hardware, software, and dataset tooling around low-cost arms including the SO-100/SO-101.

Together, these lines of work address simulation, reproducible hardware, automated or distributed evaluation, and scalable data collection. ArmnetBench combines a managed low-cost fleet with same-cell policy comparison and a released, graded evaluation corpus (Table 1). Whether

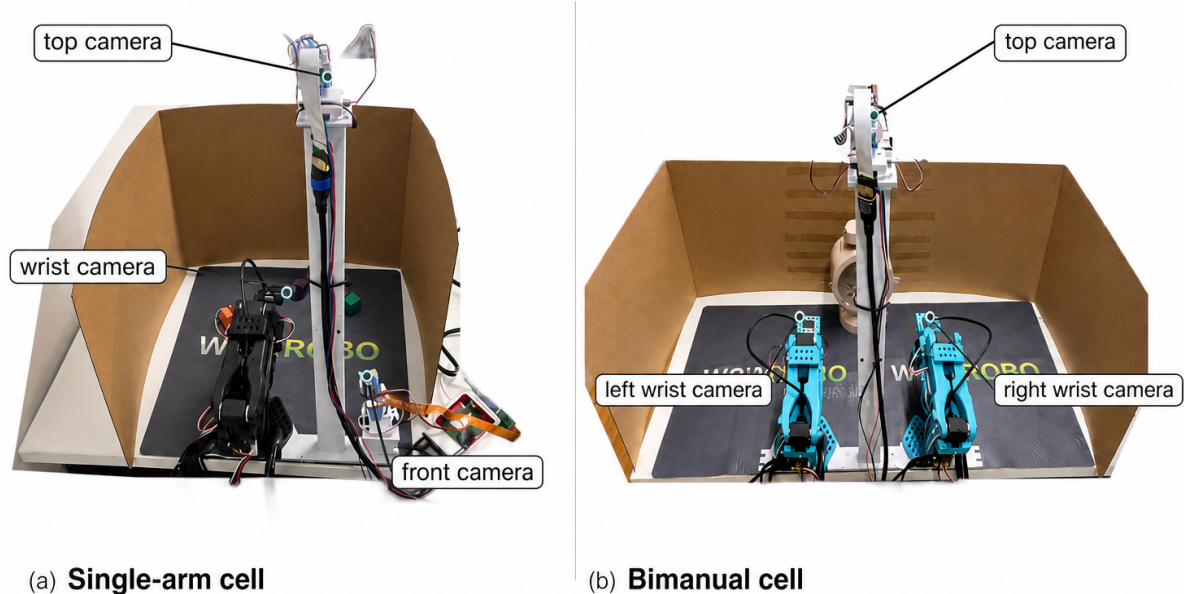


Figure 1: Single-arm (left) and bimanual (right) ArmnetBench cells. Each cell uses a bounded cardboard workspace and three cameras. The single-arm cell uses `top`, `front`, and `wrist` views; the bimanual cell uses `top`, `left_wrist`, and `right_wrist` views.

absolute rates agree across nominally identical cells remains untested.

3 The Armnet Arm Farm

We collect ArmnetBench v0.1 on the *Armnet* arm farm: a managed fleet of low-cost single-arm and bimanual SO-101 cells. In v0.1, one co-located workstation builds and runs policy containers, performs inference and real-time control, and drives the arms over the local network. A cloud backend schedules jobs and streams logs and video for operator monitoring.

3.1 Cells

Each *cell* contains one or two SO-101 5-DoF follower arms, 3 cameras, and a Raspberry Pi 5 edge device in a fixed workspace (Figure 1). The edge device connects the Feitech serial bus and cameras to the workstation. Observations are camera views, five arm-joint positions and one gripper position per arm; actions are target arm-joint and gripper positions. A networked Shelly plug supports remote power scheduling and recovery. The nominal cell setup is fixed within each task and object positions are randomised between rollouts.

Enclosure and workspace. A3 cardboard sheets (297×420 mm) bound the workspace and provide a plain backdrop: three sheets for single-arm cells and four for the wider bimanual cell. One enclosure used cut-down cardboard, so exact geometry and background differ mildly.

Cameras. Each cell carries three cameras. Single-arm cells use `front`, `top`, and `wrist` views; bimanual cells use `top`, `left_wrist`, and `right_wrist`. The context cameras (`front/top`) are Raspberry Pi Camera Module 3 units (IMX708) on Arducam pan/tilt mounts. TheRobotStudio’s 3D-printed overhead-camera mount is modified so its original webcam interface accepts the Arducam pan/tilt unit. Supplementary side brackets attach to this mount and provide clamping points

Table 2: Approximate per-cell bill of materials (indicative US retail, mid-2026). Arm, camera, and enclosure quantities differ between the configurations.

Component	Price (USD)	Qty single-arm	Qty bimanual
SO-101 follower arm	150	1	2
Table clamp	8	2	2
Context camera	52	2	1
Wrist camera	19	1	2
Raspberry Pi 5	45	1	1
Shelly smart plug	22	1	1
A3 cardboard sheet	1	3	4
Total (USD)		359	477

for the arm bases, fixing top-camera-to-arm geometry and bimanual arm spacing. Pan/tilt values are stored in the per-cell configuration and held fixed during evaluation. Innomaker U20CAM 1080p USB wrist cameras mount on the end-effectors. The **top** and **front** cameras sit at approximately 46.9 cm and 6.3 cm, respectively. All views use a 16:9 aspect ratio chosen to retain the most scene detail, recording at 20 fps. Context cameras (**top/front**) use 1024×576 and wrist cameras use 1280×720 .

Lighting. v0.1 uses ambient office light with cells away from windows and all room lights on. Illumination is not calibrated or matched across cells.

Cost. Table 2 gives indicative mid-2026 US retail prices. The follower price amortises the \$259 SO-ARM101 kit, including printed parts and 12 servos, across its leader/follower pair.

3.2 Running an evaluation

A user submits a policy image, embodiment, and task. The workstation builds the image and runs it locally in an isolated container, keeping policy dependencies separate from cell software. The running policy streams commands to the edge Pi connected to a matching arm. Logs and video stream to the control panel (Figure 2), where operators monitor the fleet, reset the scene, and score each rollout. Opening a cell’s detail view shows recent history and live-streaming logs from its cell and edge processes. Cells execute autonomously between resets.

3.3 v0.1 deployment

We collected v0.1 on 3 cells co-located in a single room: two single-arm SO-101 cells (**cell-1**, **cell-3**) and one bimanual cell (**cell-8**). We partitioned tasks across cells so that all seven policies for a task ran on the *same* cell, holding the nominal setup constant within that task. The cloud backend could drive geographically distributed cells, but v0.1 did not exercise this.

Per-cell hardware cost appears in Table 2. Table 3 summarises deployment scale and operator workload. Operators passively monitored all active cells throughout each rollout but were actively involved only for scene resets and scoring. The active-time figure is a retrospective estimate rather than a measurement collected during v0.1.

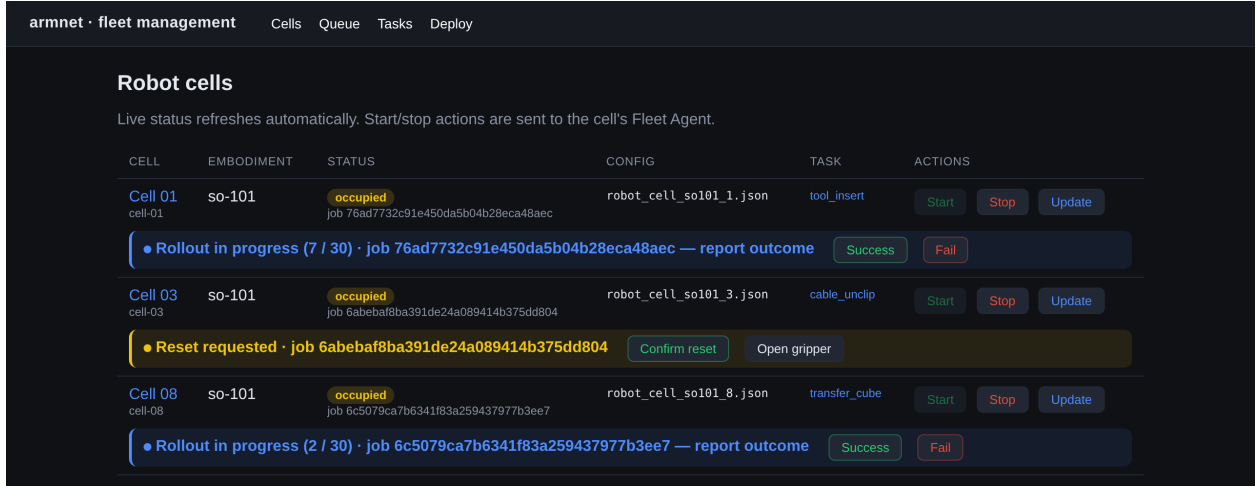


Figure 2: The fleet-management control panel used for parallel evaluation. Two cells are mid-rollout, with progress and scoring controls, while the third is waiting for the operator to confirm a scene reset. Each row also shows occupancy, the active job, configuration, task, and cell lifecycle controls.

Table 3: Armnet arm farm deployment statistics for the v0.1 run.

Metric	v0.1
Cells (single-arm / bimanual)	2 / 1
Benchmark rollouts collected (total / per cell)	2,520 / 840
Benchmark rollouts removed (manual reset errors)	2
Cells supervised concurrently per operator	3
Active operator time per rollout (reset + score)	~10 s

4 The ArmnetBench Benchmark

ArmnetBench v0.1 turns the arm-farm infrastructure into a shared test bed for comparing manipulation policies under a common data budget.

4.1 Tasks

ArmnetBench v0.1 comprises 12 tabletop manipulation tasks, 8 single-arm and 4 bimanual (Table 4, Figure 3). The suite spans stacking, insertion, deformable objects, pick-and-place, and articulated objects. Every task has 50 human-teleoperated reference demonstrations used to train or fine-tune each policy.

4.2 Policies

We evaluate two specialist imitation policies, ACT (Zhao et al., 2023) and Diffusion Policy (Chi et al., 2023), and five vision-language-action models: SmolVLA (Shukor et al., 2025), π_0 (Black et al., 2024), $\pi_{0.5}$ (Black et al., 2025), GR00T N1.7 (NVIDIA et al., 2025), and MolmoAct 2 (Fang et al., 2026). Each is trained or fine-tuned per task on the same 50 demonstrations. We release every evaluated task-policy checkpoint.

SINGLE-ARM



BIMANUAL



Figure 3: The 12 ArmnetBench v0.1 tasks, shown from the top camera at the start of a human-teleoperated reference demonstration. The upper two rows show the eight single-arm tasks; the bottom row shows the four bimanual tasks.

4.3 Evaluation protocol and labels

Each task-policy pair targets 30 rollouts. One π_0 and one $\pi_{0.5}$ episode were removed due to incorrect manual resets, leaving those pairs with 29. Before each rollout, an operator resets the scene and randomises object placement within a task-specific range. Initial states are sampled independently rather than matched across policies. v0.1 did not enforce standardised per-task wall-clock limits, so rollout termination depended on operator judgement. The on-site operator then scores the rollout through the control panel with a *three-way quality label*:

- **successful** — the task goal was achieved cleanly
- **suboptimal** — the goal was achieved, but with a poor-quality finish
- **failure** — the goal was not achieved

The graded scheme can represent partial competence, but operators used **suboptimal** conservatively: 89 of 2,518 policy rollouts (3.5%) carry it, so v0.1 is nearly binary. The 50 teleoperated demonstrations per task are **successful** by construction and serve as training data and a human reference. Successful and suboptimal rollouts are trimmed at completion to remove trailing idle frames; corrupted or unlabelled source episodes are excluded.

In total, v0.1 contains **3,118 labelled episodes**: 600 human-teleoperated reference episodes (12×50) and 2,518 policy rollouts ($7 \times 12 \times 30$, minus 2 dropped). Labels comprise 1,290 **successful**, 1,739 **failure**, and 89 **suboptimal** episodes. Every episode has 3 synchronised camera views at 20 fps.

These 3,118 episodes define the *core benchmark* and all reported results. The RoboMeter release additionally contains 600 labelled policy rollouts from extra runs outside the core benchmark. They are released as data but excluded from the leaderboard and core label totals.

Table 4: ArmnetBench v0.1 tasks. Each task has 50 human-teleoperated reference demonstrations used to train/fine-tune all 7 policies.

Embodiment	Task	Instruction
Single-arm	block_stack	Stack the colourful blocks on top of each other
	cable_clip	Push the DisplayPort cable into the cable holder on the white block
	cable_unclip	Remove the power cable from the cable holder
	eye_drops_to_basket	Put the eye drops into the basket
	eye_drops_to_shelf	Put the eye drops on the shelf
	ring_insert	Insert the colourful ring into the central wooden peg
	tool_insert	Insert the missing tool into the empty slot on the toolbox
Bimanual	tool_removal	Remove the small middle tool from the toolbox
	fold_tea_towel	Fold the brown tea towel
	insert_candle	Insert the candle inside the lantern and close the door
	open_lamp_door	Hold the lamp still with the left arm and open the door with the right gripper
	transfer_cube	Transfer the cube between the arms and drop it into the white basket

4.4 Data formats and downstream uses

We release the core benchmark in two formats. **LeRobot v3.0** stores synchronised state, action, and packed AV1 video, with sparse terminal reward and done fields (`next.reward`, `next.done`) and episode metadata (`success`, `success_class`, `policy_type`, `policy_repo_id`). The **RoboMeter** export stores one video per camera, the `quality_label`, and an embedding of the task instruction; including the auxiliary rollouts, it contains 3,718 episodes (~ 26 hours). The two formats preserve the operator-assigned outcomes for downstream analysis. The quality labels support reward modelling and quality-conditioned policy training on mixed-quality trajectories. The synchronised observations, actions, and videos can also be used to train or fine-tune action-conditioned world models and video-generation modules within robot policies.

5 Results

All policies share the 50-demonstration training budget. We report *strict success rate* over n scored rollouts and the more lenient *success+suboptimal* rate, which also counts poor-quality completion.

$\pi_{0.5}$ leads both embodiments (45.4% single-arm, 52.1% bimanual), with an overall strict success rate of 47.6%. The middle reshuffles on bimanual tasks – Diffusion Policy rises to second (35.8%), while ACT falls to 2.5%. Relative standings are therefore embodiment-dependent and should not be extrapolated from single-arm results. Table 6 reports strict success for every (task, policy) pair. No policy succeeds on the contact-rich `cable_clip`, whereas the best task-policy pairs reach 60–86%.

Table 5: ArmnetBench v0.1 overall leaderboard, pooled across all 12 tasks. Strict success counts only **successful** rollouts; the last column also credits **suboptimal** completions. n is the number of scored rollouts.

Policy	n	Success (%)	Succ.+Subopt. (%)
$\pi_{0.5}$	359	47.6	51.5
π_0	359	35.1	40.4
GR00T N1.7	360	29.4	33.1
Diffusion	360	26.7	29.7
ACT	360	19.2	21.1
MolmoAct 2	360	18.9	21.7
SmolVLA	360	15.0	19.2

Table 6: Per-task strict success rate (%); entries generally aggregate 30 rollouts, with two at 29 after data cleaning. Best per row in **bold**. Single-arm tasks above the rule, bimanual below.

Task	ACT	Diffusion Policy	SmolVLA	π_0	$\pi_{0.5}$	GR00T N1.7	MolmoAct 2
block_stack	0	0	7	33	43	27	7
ring_insert	50	23	33	17	47	60	13
tool_insert	20	23	7	40	53	17	3
tool_removal	27	63	3	10	13	30	0
cable_clip	0	0	0	0	0	0	0
cable_unclip	60	7	37	47	70	33	23
eye_drops_to_basket	63	43	23	70	67	67	63
eye_drops_to_shelf	0	17	10	76	70	43	47
fold_tea_towel	10	50	17	50	70	13	20
insert_candle	0	7	7	27	30	3	3
open_lamp_door	0	73	30	7	23	13	33
transfer_cube	0	13	7	47	86	47	13

6 Discussion and Limitations

Reproducibility. v0.1 has three levels. (i) *Execution reproducibility* is strong: released container images and task-policy checkpoints reproduce the policy stack. (ii) *Within-cell scene consistency* is moderate: rigid mounts and recorded pan/tilt settings fix camera-to-arm geometry, but ambient lighting varies. (iii) *Cross-cell physical reproducibility* remains unanswered because each task ran on one cell.

Policy caveats. Absolute rates depend on our training, fine-tuning, and integration recipes and should be read with the per-task breakdown in Section 5.

Uncontrolled factors.

- **Manual reset errors.** Two episodes were excluded during data cleaning after incorrect scene resets, one from a π_0 pair and one from a $\pi_{0.5}$ pair, leaving those pairs with 29 rollouts.
- **Unmeasured initial-state variation.** Operators randomised object placement within task-specific ranges but did not record positions. This prevents analysis of spatial success patterns. Unknown training distributions may also preclude strict in- versus out-of-distribution classification.

- **Unstandardised rollout duration.** v0.1 did not enforce fixed per-task wall-clock limits. Operator-dependent stopping decisions could affect failure rates and reduce comparability across task-policy pairs.
- **Object deterioration.** Some task objects wore down over the evaluation, including the eye-drops carton and cable-task velcro, potentially changing task difficulty.
- **Physical cell changes.** On `cell-3` the `front` camera was misaligned for every policy except MolmoAct 2, although the full scene remained visible from `top`. The bimanual `right_wrist` view was slightly blurry for every policy except MolmoAct 2. Either issue could depress affected success rates.

7 Future Work

The primary future objective is reducing operator time per rollout. Automated scene reset would remove the main manual step and make initial states repeatable; initial-position logging would verify each reset, and a reward-model labeller would reduce manual scoring. Together, these changes should let one operator supervise more cells. Secondary goals are a broader task suite, per-cell lightboxes, camera-framing checks, and a shared task-policy slice across cells to measure cross-cell reproducibility.

8 Conclusion

ArmnetBench demonstrates real-world policy evaluation on low-cost parallel SO-101 cells under light on-site supervision. v0.1 validates the system end to end and produces a graded rollout corpus. Its quality-labelled trajectories also support training and fine-tuning a range of downstream robot learning models. Its leaderboard compares evaluated implementations under one training budget. We release the core benchmark in LeRobot v3.0 and RoboMeter formats, together with every benchmark task-policy checkpoint, on the HuggingFace Hub.¹

References

- Pranav Atreya, Karl Pertsch, Tony Lee, Moo Jin Kim, Arhan Jain, Artur Kuramshin, Clemens Eppner, Cyrus Neary, Edward Hu, Fabio Ramos, et al. Roboarena: Distributed real-world evaluation of generalist robot policies. In *Conference on Robot Learning (CoRL)*, 2025. arXiv:2506.18123.
- Kevin Black, Noah Brown, Danny Driess, et al. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024.
- Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Robert Equi, Chelsea Finn, Niccolo Fusai, Manuel Y. Galliker, et al. $\pi_{0.5}$: A vision-language-action model with open-world generalization. In *Proceedings of the 9th Conference on Robot Learning*, volume 305 of *Proceedings of Machine Learning Research*, pages 17–40, 2025.
- Remi Cadène, Simon Alibert, Alexander Soare, Quentin Gallouedec, Adil Zouitine, and Thomas Wolf. Lerobot: State-of-the-art machine learning for real-world robotics in pytorch. <https://github.com/huggingface/lerobot>, 2024.

¹<https://huggingface.co/collections/armnet/armnetbench-v01>

- Tianxing Chen, Yue Chen, Zixuan Li, Junyuan Tang, Kailun Su, Weijie Wan, Baijun Chen, Haoran Lu, et al. Robodojo: A unified sim-and-real benchmark for comprehensive evaluation of generalist robot manipulation policies. *arXiv preprint arXiv:2607.04434*, 2026.
- Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. In *Robotics: Science and Systems (RSS)*, 2023.
- Haoquan Fang, Jiafei Duan, Donovan Clay, Sam Wang, Shuo Liu, Weikai Huang, Xiang Fan, Wei-Chuan Tsai, Shirui Chen, Yi Ru Wang, Shanli Xing, Jaemin Cho, Jae Sung Park, Ainaz Eftekhari, Peter Sushko, Karen Farley, Angad Wadhwa, Cole Harrison, Winson Han, Ying-Chun Lee, Eli VanderBilt, Rose Hendrix, Suveen Ellawela, Lucas Ngoo, Joyce Chai, Zhongzheng Ren, Ali Farhadi, Dieter Fox, and Ranjay Krishna. Molmoact2: Action reasoning models for real-world deployment. *arXiv preprint arXiv:2605.02881*, 2026.
- Minho Heo, Youngwoon Lee, Doohyun Lee, and Joseph J. Lim. Furniturebench: Reproducible real-world benchmark for long-horizon complex manipulation. *The International Journal of Robotics Research*, 2025.
- Alex S. Huang, Jiahui Zhang, Shiqing Tang, and Yu Xiang. Vla-replica: A low-cost, reproducible benchmark for real-world evaluation of vision-language-action models. *arXiv preprint arXiv:2605.20774*, 2026.
- Ninad Khargonkar, Sai Haneesh Allu, Yangxiao Lu, B. Prabhakaran, and Yu Xiang. Scenereplica: Benchmarking real-world robot manipulation by creating replicable scenes. In *IEEE International Conference on Robotics and Automation (ICRA)*, 2024.
- Alexander Khazatsky, Karl Pertsch, Suraj Nair, et al. Droid: A large-scale in-the-wild robot manipulation dataset. In *Robotics: Science and Systems (RSS)*, 2024.
- Xuanlin Li, Kyle Hsu, Jiayuan Gu, et al. Evaluating real-world robot manipulation policies in simulation. *arXiv preprint arXiv:2405.05941*, 2024.
- Bo Liu, Yifeng Zhu, Chongkai Gao, et al. Libero: Benchmarking knowledge transfer for lifelong robot learning. *arXiv preprint arXiv:2306.03310*, 2023.
- Jianlan Luo, Charles Xu, Fangchen Liu, et al. Fmb: A functional manipulation benchmark for generalizable robotic learning. *The International Journal of Robotics Research*, 2025.
- NVIDIA, Johan Bjorck, Fernando Castañeda, Nikita Cherniadev, Xingye Da, Runyu Ding, Linxi Fan, Yu Fang, Dieter Fox, et al. Gr00t n1: An open foundation model for generalist humanoid robots. *arXiv preprint arXiv:2503.14734*, 2025.
- Open X-Embodiment Collaboration. Open x-embodiment: Robotic learning datasets and rt-x models. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 6892–6903, 2024. doi: 10.1109/ICRA57147.2024.10611477.
- Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, Adil Zouitine, Michel Aractingi, Caroline Pascal, Martino Russi, Andres Marafioti, Simon Alibert, Matthieu Cord, Thomas Wolf, and Remi Cadène. Smolvla: A vision-language-action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025.

- Brian Yang, Jesse Zhang, Vitchyr Pong, Sergey Levine, and Dinesh Jayaraman. Replab: A reproducible low-cost arm benchmark platform for robotic learning. *arXiv preprint arXiv:1905.07447*, 2019.
- Tianhe Yu, Deirdre Quillen, Zhanpeng He, et al. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on Robot Learning (CoRL)*, 2020.
- Tony Z. Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. In *Robotics: Science and Systems (RSS)*, 2023.
- Zhiyuan Zhou, Pranav Atreya, You Liang Tan, Karl Pertsch, and Sergey Levine. Autoeval: Autonomous evaluation of generalist robot manipulation policies in the real world. In *Conference on Robot Learning (CoRL)*, 2025. arXiv:2503.24278.