

TacWAM: Anchor-Guided World Action Model with Mechanics-Aware Tactile Prediction

Lei Jin^{*1}, Yiding Ma^{*1}, Xin Zhang², Chen Gao¹, Wei Wu^{1,2}, Yong Li^{1†}

¹Tsinghua University

²Manifold AI

liyong07@tsinghua.edu.cn

Abstract

World Action Models (WAMs) combine future-state prediction with robot action generation, but existing approaches largely rely on visual futures. Visual prediction captures scene structure and object motion, yet provides limited supervision for force, deformation, shear, and slip during contact-rich manipulation. This creates two design requirements: tactile futures should carry meaningful physical information, and they should not become privileged cues for action generation. We present **TacWAM**, a mechanics-aware tactile WAM that addresses this challenge in three steps. First, a Spatially Aligned Fusion (SAF) Tactile Encoder maps tactile appearance, dense force fields, and deformation flow into a shared latent prediction space, with bilateral force and torque reconstruction preserving global contact information. Second, a tactile history encoder provides temporal context so future tactile prediction reflects how force and deformation change beyond the current tactile observation. Third, Anchor-Guided Tri-Modal (AGT) Attention separates current visual and tactile anchors, future prediction tokens, and action tokens, allowing future tactile states to supervise training without being directly read by the action branch. We evaluate TacWAM on four real-world contact-rich manipulation tasks covering fragile grasping, sustained surface contact, and dynamic in-hand manipulation. TacWAM achieves an average success rate of 75.0%, exceeding the strongest evaluated baseline by 37.5 percentage points. Staged ablations show consistent degradation when tactile history is removed and access to future prediction targets is relaxed. These results indicate that future tactile supervision can improve contact-aware action learning when combined with informative tactile representations and deployment-consistent information constraints.

1 Introduction

World models enable robots to learn predictive representations of how the environment evolves, and recent World Action Models (WAMs) combine such predictive learning with action generation for robot control (Hafner et al. 2021; Han and Yilmaz 2026; Liu et al. 2026; Cai et al. 2026). However, most WAMs still model the future primarily through visual state transitions. Visual prediction captures scene layout, object appearance, and visible motion, but physical manipulation also depends on local mechanics that are only indirectly

expressed in images. For contact-rich tasks, learning how the scene looks is therefore not sufficient; the model should also capture how tactile signals such as force and deformation change during interaction.

Tactile sensing provides direct evidence about this interaction process. Visually similar states can correspond to substantially different tactile conditions. For example, *a stable-looking grasp may be close to slip, an apparently aligned insertion may already be mechanically constrained, and a brittle object may look unchanged while force becomes unsafe*. These distinctions are reflected in force buildup, deformation, shear, pressure asymmetry, and incipient slip (Lepora 2026; Ai et al. 2024; Zhao et al. 2024; Cao et al. 2026). Touch is therefore useful not only for detecting contact, but also for supervising force- and deformation-related changes that visual futures alone cannot fully capture.

Prior visuo-tactile methods have used touch for observation fusion, representation learning, policy refinement, and future tactile prediction (Heng et al. 2025; Zhang et al. 2025; Bi et al. 2025; Zang et al. 2026; Wu et al. 2026). These works show that touch can improve manipulation and that future tactile prediction can be useful. Building on this direction, we focus on a complementary requirement for tactile WAMs: future tactile states should provide physically informative supervision while action generation remains restricted to information available at deployment. This lets tactile futures enrich world-model training without serving as direct action inputs.

Following this principle, we introduce **TacWAM**, a tactile-augmented World Action Model that uses tactile prediction to strengthen WAM training without exposing future tactile targets to the action branch. TacWAM realizes this idea through four connected design choices. First, it maps heterogeneous gripper-side tactile observations into a shared tactile representation using a **Spatially Aligned Fusion Tactile Encoder (SAF Tactile Encoder)**, which fuses tactile appearance, dense force fields, and deformation flow, while reconstructing bilateral resultant force and torque as global wrench supervision. Second, a tactile history context summarizes recent interaction changes before the current action chunk. Third, future tactile states provide an additional predictive target for force- and deformation-aware training, serving as supervision for contact representations that visual prediction alone does not capture rather than as direct action inputs.

^{*}These authors contributed equally.

[†]Corresponding author.

Finally, **Anchor-Guided Tri-Modal Attention (AGT Attention)** organizes visual, tactile, and action streams around the current visual frame and current observed tactile state: future visual and tactile tokens serve as prediction targets, while action tokens can access only deployment-available anchors and action tokens. Together, these designs allow TacWAM to learn richer contact-related predictive representations during training while maintaining deployment-consistent action generation.

Our contributions can be summarized as follows:

- We introduce TacWAM, which extends visual WAM training with recent tactile history and future tactile prediction, enabling the model to learn from changes in touch beyond the current tactile observation.
- We develop a Spatially Aligned Fusion Tactile Encoder that maps tactile appearance, force, and deformation into a shared latent representation while preserving local contact patterns and global force/torque information.
- We propose Anchor-Guided Tri-Modal Attention, which prevents the action branch from accessing future visual or tactile targets during training, ensuring that action generation uses only information available at deployment.
- We evaluate TacWAM on four real-world contact-rich manipulation tasks. TacWAM consistently outperforms representative vision-only and visuo-tactile baselines, while staged ablations support the importance of tactile history and restricted future-target visibility in the complete framework.

2 Related Work

2.1 World Action Models

World models learn predictive representations of environment dynamics to support planning and policy learning (Hafner et al. 2021). World Action Models (WAMs) extend this idea by combining future-state prediction with robot action generation. Recent WAMs jointly learn actions and future visual observations or latent visual states, using visual prediction to improve the representations learned for control (Han and Yilmaz 2026; Liu et al. 2026; Cai et al. 2026). Such prediction captures scene structure, object motion, and other visible state changes. However, visually similar states can involve different contact conditions, such as stable contact, increasing force, or incipient slip. Visual futures therefore provide limited supervision for force, deformation, and other local contact changes. TacWAM extends the predictive learning of WAMs by introducing future tactile states as additional training targets.

2.2 Visuo-Tactile and Predictive Tactile Learning

Tactile sensing provides direct observations of contact states that are difficult to infer from images. Prior work has learned visuo-tactile representations for dexterous manipulation and tactile-informed control of articulated objects (Lee et al. 2019; Heng et al. 2025; Zhao et al. 2024). Tactile information has also been incorporated into vision-language-action policies through multimodal features, tactile feedback pathways, and contact-aware policy adaptation (Zhang et al. 2025;

Huang et al. 2025; Bi et al. 2025). Reactive tactile policies further use high-frequency feedback to correct actions during contact-rich manipulation (Calandra et al. 2018; Xue et al. 2025). These methods demonstrate that current tactile observations improve contact perception and action control. Vision-based tactile sensors further show that local contact geometry, shear, and force-related information can be recovered from deformable sensing surfaces (Yuan, Dong, and Adelson 2017; Ma et al. 2019), motivating tactile representations that preserve more than binary contact state.

A closely related line of work uses tactile prediction as a learning signal. TacForeSight predicts short-horizon tactile dynamics from tactile observations and wrist force/torque signals, and uses the predicted states as anticipatory contact information (Zang et al. 2026). DreamTacVLA predicts future tactile signals to improve contact-aware action learning, while $\mathcal{N}_0$ -VTLA introduces a predictive tactile pathway into a large-scale vision-tactile-language-action model (Ye et al. 2025; NeoteAI Team and Fudan TEAI Team 2026). In a related direction, τ uses future visual observations to supervise the learning of a spatiotemporal tactile representation (Cheng et al. 2026). Other methods develop tactile or visuo-tactile world models for future-state prediction, rollout generation, policy learning, and closed-loop control (Higuera et al. 2026; Huang et al. 2026; Zheng et al. 2026; Zhou et al. 2026; Wu et al. 2026; Tian et al. 2026). Together, these studies show that both current tactile conditioning and predictive tactile learning can benefit contact-rich manipulation.

TacWAM builds on this broader visuo-tactile learning direction rather than treating tactile prediction itself as the primary novelty. It focuses on how tactile futures are represented and how they are used inside WAM training: the SAF Encoder and tactile history support prediction of force and deformation changes, while AGT Attention keeps future sensory targets from becoming direct inputs to action generation.

3 Method

3.1 Problem Formulation

TacWAM extends a visual World Action Model with predictive tactile state modeling. At time t , the robot observes

$$o_t = (o_t^v, o_t^{\text{tac}}, q_t, l), \quad (1)$$

where o_t^v is the visual observation, o_t^{tac} is the tactile observation, q_t is proprioception, and l denotes the task or language condition. Raw tactile readings are first mapped into a learned tactile representation,

$$z_t^{\text{tac}} = E_{\text{SAF}}(o_t^{\text{tac}}). \quad (2)$$

Note that we do not assume that z_t^{tac} is the full physical state. It is a tactile-observable representation of force- and deformation-related signals, used as the prediction space for future tactile modeling.

At the beginning of an action chunk t_0 , TacWAM predicts visual futures, future tactile states, and an action sequence from stream-specific information. Here $c_{t_0}^{\text{tac}}$ denotes a compact tactile history context summarized from recent tactile

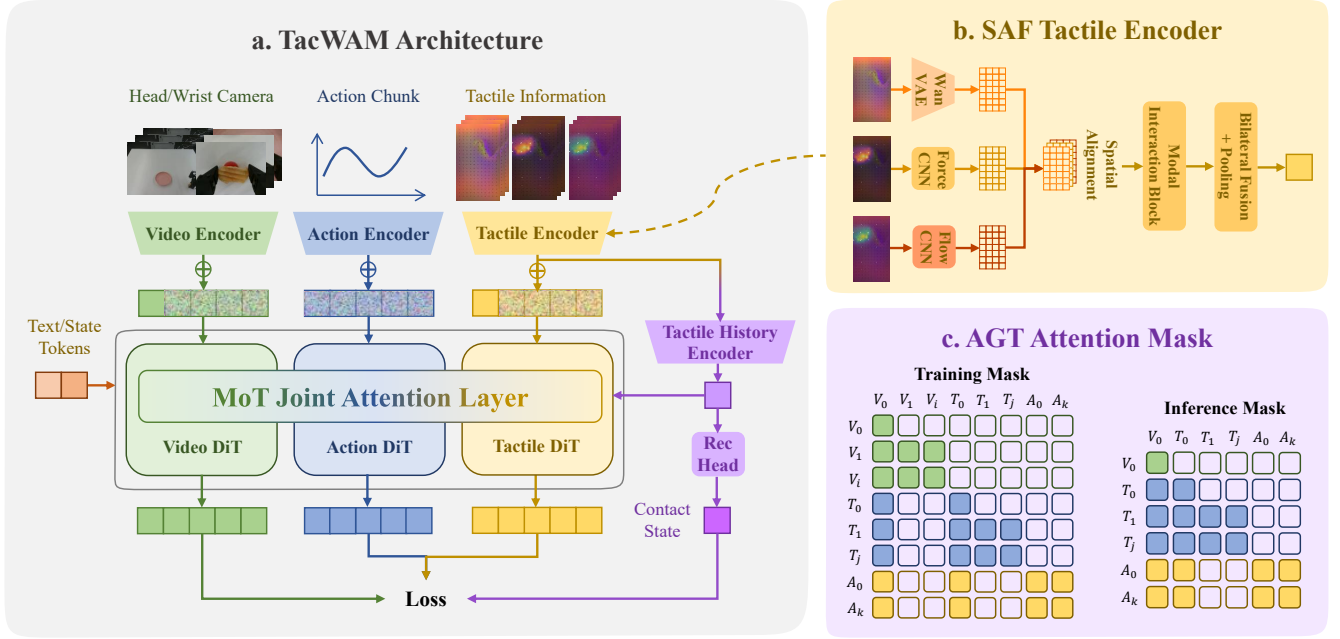


Figure 1: Overview of TacWAM. (a) TacWAM jointly predicts visual futures, future tactile states, and action chunks from deployment-available context. (b) The Spatially Aligned Fusion (SAF) Tactile Encoder constructs the tactile latent prediction space from tactile appearance, dense force fields, and mesh deformation flow, with global wrench supervision. (c) Anchor-Guided Tri-Modal (AGT) Attention separates observable anchors, future prediction targets, and action tokens.

latents; its construction is detailed in the Tactile History-Modulated Prediction subsection.

$$\begin{aligned}\hat{\mathbf{v}}_{t_0+1:t_0+H} &= F_V(o_{t_0}^v, q_{t_0}, l), \\ \hat{\mathbf{z}}_{t_0+1:t_0+H}^{\text{tac}} &= F_T(o_{t_0}^v, z_{t_0}^{\text{tac}}, c_{t_0}^{\text{tac}}, q_{t_0}, l), \\ \hat{\mathbf{a}}_{t_0:t_0+H-1} &= F_A(o_{t_0}^v, z_{t_0}^{\text{tac}}, q_{t_0}, l).\end{aligned}\quad (3)$$

These equations summarize the intended conditioning rather than separate networks; noised prediction tokens and the flow-matching timestep are omitted for clarity. Following the underlying WAM, each action token is represented as the target robot state for the next transition, $a_t := q_{t+1}^{\text{target}}$, rather than as a low-level instantaneous command.

3.2 TacWAM Overview

Figure 1(a) provides an overview of the overall architecture. TacWAM is built around a single tri-modal WAM generator with visual, tactile, and action streams. On top of this generator, TacWAM introduces three tactile-specific designs. First, the SAF Tactile Encoder maps synchronized tactile appearance, force, and deformation-flow signals into a shared tactile latent space, which defines the future tactile prediction target. Second, the tactile history encoder summarizes recent tactile changes before the current chunk and conditions the tactile prediction branch on contact-phase context. Third, AGT Attention specifies the information topology among visual, tactile, and action streams, preventing future sensory prediction targets from being directly accessed by action tokens.

The three streams are jointly implemented in a Mixture-of-Transformers backbone, where visual, tactile, and action

streams are processed by modality-specific experts and communicate through masked mixed self-attention. AGT governs this mixed self-attention among visual, tactile, and action tokens; task language and current proprioception are supplied separately as deployment-available context through expert cross-attention. Under the finalized AGT mask, future tactile prediction is a parallel predictive objective rather than an action-conditioned consequence model: the action stream uses deployment-available visual and tactile anchors, task/proprioceptive context, and action-token interactions, while future tactile states provide predictive supervision for force and deformation changes during training.

3.3 Spatially Aligned Fusion (SAF) Tactile Encoder

TacWAM defines a tactile latent prediction space using E_{SAF} and a tactile reconstructor R_{tac} , as illustrated in Figure 1(b). Each tactile observation contains synchronized signals from the two gripper-side tactile sensors:

$$o_t^{\text{tac}} = (I_t^{\text{rect}}, F_t, M_t^{\text{flow}}), \quad (4)$$

where I_t^{rect} is the rectified tactile image, F_t is the dense local force field, and M_t^{flow} is the mesh deformation flow. These three inputs are spatially registered on the tactile sensor surface and are fused into a step-level tactile representation:

$$z_t^{\text{tac}} = E_{\text{SAF}}(I_t^{\text{rect}}, F_t, M_t^{\text{flow}}). \quad (5)$$

For each sensor side, tactile appearance, force, and deformation-flow features are encoded with corresponding

Table 1: AGT visibility. Rows denote query streams and entries list permitted key/value streams.

Query stream	Permitted key/value streams
Visual	V_0 and $V_{1:H}$ under the video first-frame-causal mask
Tactile future	V_0 , T_0 , and $T_{1:H}$ under a tactile first-frame-causal mask
Action	V_0 , T_0 , and action tokens

branches, and the two sides are fused bilaterally. The encoder is single-frame so that both observed tactile states and predicted per-step tactile states share the same latent space. To preserve force- and deformation-related structure, R_{tac} reconstructs dense force fields, mesh deformation flow, and a bilateral resultant wrench from z_t^{tac} . The resultant wrench contains a 3D force and a 3D torque for each gripper-side tactile sensor:

$$R_{\text{tac}}(z_t^{\text{tac}}) = (\hat{F}_t, \hat{r}_t^{\text{wrench}}, \hat{M}_t^{\text{flow}}). \quad (6)$$

The resultant wrench is therefore treated as global mechanics supervision rather than a fourth spatial input. TacWAM predicts future z^{tac} states instead of directly generating heterogeneous tactile sensor streams. The reconstruction objectives encourage the latent state to preserve local force, deformation, and bilateral wrench information.

3.4 Anchor-Guided Tri-Modal (AGT) Attention

TacWAM uses AGT to specify which information each stream may read during mixed self-attention, as shown in Figure 1(c). At chunk start t_0 , the current tactile state is used as a clean anchor,

$$T_0 = z_{t_0}^{\text{tac}}, \quad (7)$$

and the supervised future tactile sequence is

$$\mathbf{T}_{1:H} = [z_{t_0+1}^{\text{tac}}, \dots, z_{t_0+H}^{\text{tac}}]. \quad (8)$$

The WAM generator arranges tokens as

$$[V_0, V_{1:H} \mid T_0, T_{1:H} \mid A], \quad (9)$$

where V_0 is the current visual anchor, $V_{1:H}$ denotes future visual prediction tokens, T_0 is the clean, i.e., unnoised, tactile anchor, $T_{1:H}$ denotes future tactile prediction tokens, and A denotes action tokens. Future visual and tactile tokens are noised prediction variables during flow matching, while their clean counterparts provide supervision. We use the notation “query reads key/value” to describe visibility. Table 1 summarizes the AGT rules.

The central constraint is that action tokens cannot read future visual or tactile prediction tokens. Moreover, video tokens cannot read $T_{1:H}$, and future tactile tokens do not read action tokens. Future visual and tactile states can therefore serve as prediction targets during training, while action generation remains conditioned only on deployment-available information. AGT is thus an information-isolation mechanism for predictive co-training, not a claim of action-conditioned tactile dynamics.

3.5 Tactile History-Modulated Prediction

Single-frame touch is often ambiguous: the same force magnitude can correspond to stable contact, growing pressure, slip recovery, or impending object damage depending on the recent interaction trajectory. TacWAM therefore summarizes recent tactile history before the current chunk:

$$c_{t_0}^{\text{tac}} = E_{\text{hist}}(z_{t_0-T_{\text{hist}}+1:t_0}^{\text{tac}}). \quad (10)$$

The output $c_{t_0}^{\text{tac}}$ is a compact chunk-level tactile context. It is not inserted as additional memory tokens. Instead, it modulates the tactile expert through adaptive normalization, helping future tactile prediction disambiguate the current interaction phase and tactile evolution trend. The history context is not a direct privileged input to the action stream.

The history window and the tactile generation sequence share the current state: the former uses it as the endpoint of recent tactile evolution, while the latter uses it as the clean initial anchor T_0 for future prediction. During flow-matching training, future tactile tokens are noised while T_0 remains clean. The tactile expert predicts $\hat{z}_{t_0+1:t_0+H}^{\text{tac}}$ from the current visual anchor, the clean tactile anchor, tactile history context, and its own tactile prediction sequence. It does not attend to action tokens under the finalized AGT mask.

This design changes the role of tactile prediction. TacWAM does not attach tactile forecasting as an isolated post-hoc head. Instead, future tactile states are integrated into the multimodal generative objective, encouraging the jointly trained WAM to encode contact-relevant tactile evolution beyond visual supervision alone.

3.6 Training and Inference

Training first learns the tactile latent prediction space by optimizing E_{SAF} and R_{tac} . The tactile reconstruction loss combines force-field, bilateral resultant wrench, and mesh-flow reconstruction. After this tactile representation pretraining, the tactile encoder and decoder are frozen.

$$\mathcal{L}_{\text{SAF}} = \lambda_F \mathcal{L}_F + \lambda_R \mathcal{L}_{\text{wrench}} + \lambda_M \mathcal{L}_{\text{flow}}. \quad (11)$$

TacWAM is then trained with the frozen tactile representation model. The frozen tactile encoder provides z^{tac} for tactile history and future tactile targets. The WAM generator is trained to jointly predict visual futures, action chunks, and tactile futures with scheduler-weighted flow-matching objectives. Tactile latent prediction is supervised on $\mathbf{T}_{1:H}$, and the frozen but differentiable R_{tac} decodes predicted tactile states to force fields, bilateral resultant wrench, and mesh flow as a semantic consistency regularizer. The decoder parameters remain fixed, while gradients through the decoder supervise the predicted tactile latents. The tactile history encoder is trained jointly with the WAM generator. Here, $\mathcal{L}_{\text{contact}}$ is a lightweight contact-event auxiliary loss applied to the tactile history encoder. Its labels are derived from the binary contact sequence in the tactile history window, including contact onset, release, and stable-contact states.

$$\mathcal{L}_{\text{TacWAM}} = \lambda_v \mathcal{L}_{\text{video}} + \lambda_a \mathcal{L}_{\text{action}} + \lambda_z \mathcal{L}_{\text{tac-latent}} + \lambda_{\text{sem}} \mathcal{L}_{\text{tac-decoded}} + \lambda_c \mathcal{L}_{\text{contact}}. \quad (12)$$

During deployment, the model runs at chunk level and outputs the action sequence from current visual/tactile anchors

and task/proprioceptive context. After executing one action chunk, the robot receives new observations and infers the next chunk, yielding a closed-loop receding-horizon execution process. Future tactile predictions can also be decoded through R_{tac} for analyzing force and deformation evolution, but they are not used as online correction signals in this paper. The main experiments evaluate whether learning these predictive tactile states improves tactile forecasting and action generation under the AGT information constraints.

4 Experiments

We evaluate TacWAM through the following research questions:

- RQ1: How does TacWAM compare with vision-only and visuo-tactile baselines on contact-rich manipulation?
- RQ2: Does tactile history improve future force prediction and phase-dependent contact manipulation within TacWAM?
- RQ3: How do AGT information constraints affect deployment performance compared with relaxed attention masks?

4.1 Experimental Setup

We evaluate TacWAM on a real-world manipulation platform with synchronized visual, tactile, proprioceptive, and action streams.

Platform. The robot platform uses an Agilex Piper manipulator equipped with two Xense G1-WS tactile sensors mounted on the gripper sides. Visual observations are captured from an overhead camera and a wrist-mounted camera, providing complementary scene-level and hand-centric views. The robot state and action are both represented by joint positions, and each action token corresponds to a target joint-position state for the next control step. All sensing and control streams are synchronized at 30 Hz.

Data. The dataset contains demonstrations collected on the real platform, with synchronized visual observations, joint-position states and actions, and tactile streams from the two gripper-side sensors. For each task, we collect 300 episodes, and each episode contains about 500 frames on average. Each tactile frame contains the three spatially aligned inputs used by SAF: rectified tactile appearance, dense force fields, and mesh deformation flow. All sensor streams are temporally aligned at the frame level.

Tasks. We evaluate on four real-world contact-rich manipulation tasks, which cover fragile grasping, small-object contact localization, sustained contact, and dynamic in-hand manipulation, as shown in Figure 2:

- **Potato-chip grasping:** grasp a thin, fragile chip and place it onto a target plate, requiring precise force regulation to avoid slip or breakage.
- **Cherry grasping:** grasp an object of variable size, where tactile feedback is needed to confirm stable contact.
- **Whiteboard wiping:** maintain sustained surface contact while moving along the board, stressing pressure control, shear, and contact continuity.

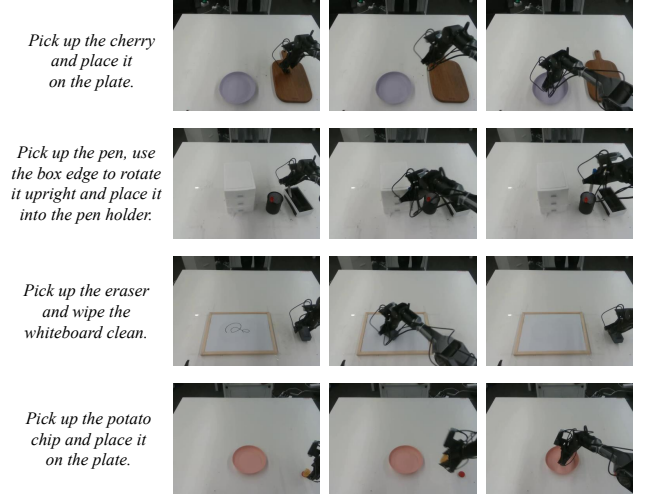


Figure 2: Real-world evaluation tasks. The figure shows the text prompts and overhead-camera observations for the four contact-rich manipulation tasks used in our experiments.

- **Two-pen twirling:** manipulate two pens through dynamic bilateral contact changes, requiring the model to represent evolving force distribution and rotation dynamics.

A trial is counted as successful if the task goal is completed without violating the task-specific physical constraint: the chip must be placed without breaking or dropping, the cherry must be stably grasped and placed, the whiteboard must be wiped with sustained contact, and the pens must complete the required twirling motion without falling.

Baselines. We compare TacWAM with four representative baselines covering vision-only VLA, vision-only WAM, tactile policy learning, and tactile WAM modeling. All methods are trained and evaluated on the same task data and use the same joint-position action representation when applicable. Vision-only baselines use the overhead and wrist camera views together with proprioception and task conditioning, while tactile baselines additionally receive the synchronized tactile observations.

- $\pi_{0.5}$ is a vision-language-action baseline built on the open-world generalization VLA model from Physical Intelligence (Physical Intelligence et al. 2025). It represents the class of end-to-end visual VLA policies that map visual observations and task instructions directly to robot actions, without explicit visual or tactile future prediction.
- **Fast-WAM** is a vision-only World Action Model baseline (Yuan et al. 2026). It retains visual predictive co-training during training but removes explicit future generation at inference, providing a visual-predictive WAM comparison for evaluating TacWAM.
- **RDP** is a visual-tactile policy baseline based on Reactive Diffusion Policy (Xue et al. 2025). It uses tactile feedback for contact-rich manipulation through a slow-fast policy structure, but it is not a tactile world-action model that predicts future tactile states as WAM training targets.

Table 2: Main real-world manipulation results. Entries are task success rates over 20 real-world trials.

Method	Chip	Cherry	Wiping	Twirling	Avg.
$\pi_{0.5}$	10.0%	60.0%	35.0%	20.0%	31.3%
Fast-WAM	15.0%	40.0%	20.0%	5.0%	20.0%
RDP	50.0%	45.0%	0.0%	35.0%	32.5%
VT-WAM	45.0%	45.0%	30.0%	30.0%	37.5%
TacWAM	90.0%	70.0%	75.0%	65.0%	75.0%

- **VT-WAM** is a visual-tactile WAM baseline that jointly models visual futures, tactile futures, and actions for contact-rich manipulation (Tian et al. 2026). Since no official implementation is publicly available, we reimplement VT-WAM following the paper design and train it under the same data and action-space setting.

Evaluation protocol. All methods are trained on the same demonstrations for the same number of epochs under their respective input settings. We evaluate each trained model under the same task definitions, success criteria, and sequence of real-world test conditions, with object poses and initial robot configurations varied within predefined ranges. For each method and task, we run 20 trials and report the success rate as the percentage of successful executions.

4.2 Main Results

To answer RQ1, the main evaluation measures whether TacWAM improves closed-loop manipulation success over the four baseline families. Table 2 reports per-task and average success rates. The main comparison focuses on task-level execution performance; diagnostic analyses of tactile prediction quality and architectural components are presented in the next subsection.

Quantitative analysis. TacWAM outperforms all baselines on every task. Compared with the strongest baseline for each task, TacWAM improves success rates by 40.0 points on potato-chip grasping, 10.0 points on cherry grasping, 40.0 points on whiteboard wiping, and 30.0 points on two-pen twirling. On average, TacWAM achieves a success rate of 75.0%, exceeding the best-performing baseline (VT-WAM, 37.5%) by 37.5 percentage points. The gains are especially pronounced on whiteboard wiping and two-pen twirling, the two tasks that most strongly require sustained contact and dynamic bilateral contact reasoning, where purely visual or reactive tactile baselines struggle most.

The overall trend matches our expectation: visual-only baselines are competitive when contact is visually simple, while tactile baselines improve on tasks requiring force regulation, sustained contact, or bilateral contact reasoning. TacWAM further improves over both reactive tactile policies and existing tactile WAMs, supporting the value of mechanics-aware tactile predictive training in the complete framework.

Qualitative analysis. The incorporation of tactile sensing and predictive tactile training mainly addresses two problems. First, precise grasping of irregular small objects: on potato-chip and cherry grasping, where the objects are frag-

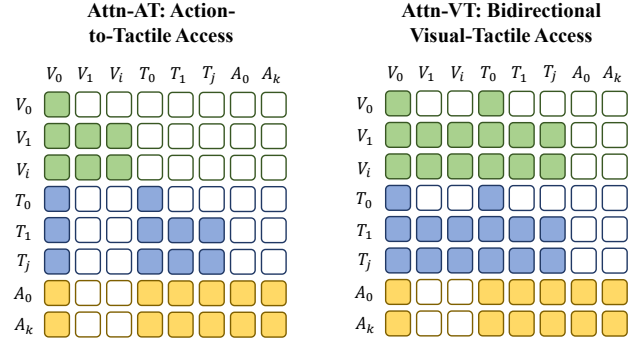


Figure 3: Attention-mask variants used in the joint-training ablations. Attn-AT allows action tokens to read the full tactile prediction sequence $T_{0:H}$. Attn-VT includes Attn-AT and further enables bidirectional interaction between visual future tokens and tactile future tokens.

ile or of variable size, vision-only baselines frequently miss the object entirely or over-squeeze it; in contrast, tactile feedback provides direct evidence of contact and force, leading to substantially higher success than vision-only policies. Second, under visual occlusion the robot cannot reliably determine whether contact is established or whether the pens are actually rotating. Vision-only models often produce motions that appear visually plausible but are physically ineffective, for example when the wiper glides over the whiteboard without maintaining contact. Tactile observations provide information that is unavailable from vision, allowing TacWAM to maintain sustained contact and handle dynamic bilateral interaction more reliably. The force-rollout analysis below further shows that the predicted resultant force magnitude follows the ground-truth trend over complete contact-rich episodes.

4.3 Ablation Results

To answer RQ2 and RQ3, we use three joint-training ablations to analyze the roles of tactile history and AGT visibility. These ablations form a nested sequence that progressively removes history and relaxes cross-stream restrictions, while keeping the same task data, action representation, and tactile future prediction objective. This staged design tests whether performance degrades consistently as the proposed temporal context and information constraints are weakened. Figure 3 illustrates the two relaxed attention masks used after removing tactile history. Table 3 reports success rates on two representative contact-rich tasks.

Without tactile history. This ablation removes the tactile history pathway to test whether E_{hist} and the resulting history context are useful for contact-rich manipulation. The history encoder is not used, the tactile history context is replaced by zeros, and the auxiliary contact-event loss $\mathcal{L}_{\text{contact}}$ is disabled. All other joint-training objectives remain unchanged, including future tactile prediction, decoded tactile targets, visual prediction, and action prediction. Removing tactile history reduces the average success rate from 82.5% to 55.0% (−27.5 points), with a particularly large drop on

Table 3: Ablation results on selected contact-rich tasks. Entries are task success rates over 20 real-world trials.

Variant	Chip	Wiping	Avg.
TacWAM	90.0%	75.0%	82.5%
w/o History	50.0%	60.0%	55.0%
w/o History + Attn-AT	30.0%	45.0%	37.5%
w/o History + Attn-VT	10.0%	5.0%	7.5%

chip grasping (90.0% $\rightarrow$ 50.0%), where the force buildup preceding stable grasping is difficult to infer reliably from the current tactile anchor alone. This result suggests that temporal tactile context provides information beyond the current tactile anchor and is an important part of TacWAM.

Without tactile history + Attn-AT. This ablation starts from the history-free variant and relaxes only the action-stream tactile visibility. Instead of allowing action tokens to read only the clean tactile anchor T_0 , action tokens can read the full tactile prediction sequence $T_{0:H}$ together with V_0 and other action tokens. The video mask, tactile first-frame-causal mask, and tactile access to the visual anchor are otherwise unchanged. Performance drops further to 37.5% on average. Rather than helping, exposing action tokens to future tactile prediction tokens creates an unreliable shortcut: during training, action tokens can exploit target-derived future prediction variables, whereas deployment relies on generated counterparts under the inference process. This train-test mismatch degrades deployment behavior, suggesting that the restriction $A \leftarrow T_0$ is important for TacWAM.

Without tactile history + Attn-VT. This ablation further relaxes the information structure by enabling direct bidirectional interaction between visual prediction tokens and tactile future tokens, while preserving the clean-anchor semantics. Specifically, the current visual anchor can read the tactile anchor, future visual tokens can read tactile prediction tokens, the tactile anchor can read the current visual anchor, and future tactile tokens can read visual prediction tokens. The tactile stream still keeps its first-frame-causal internal structure. This variant nearly collapses, reaching only 7.5% on average (-30.0 points from Attn-AT) and 5.0% on whiteboard wiping. Fully bidirectional video-tactile future exchange appears to destabilize multimodal co-training and severely degrades action generation. This result supports AGT’s stricter separation for deployment-consistent learning.

Overall, the three ablations form a consistent trend: performance decreases as tactile history is removed and the attention structure is progressively relaxed. These staged results provide consistent evidence that tactile history and restricted future-token visibility are important to the complete TacWAM design.

Future tactile state prediction. For RQ2, we further evaluate whether tactile history improves predicted force evolution over complete episodes. For whiteboard wiping and two-pen twirling, we decode predicted tactile states to reconstruct the bilateral resultant wrench and compute the resultant force magnitude. Figure 4 compares the resulting curves from TacWAM and the history-free variant against ground truth.

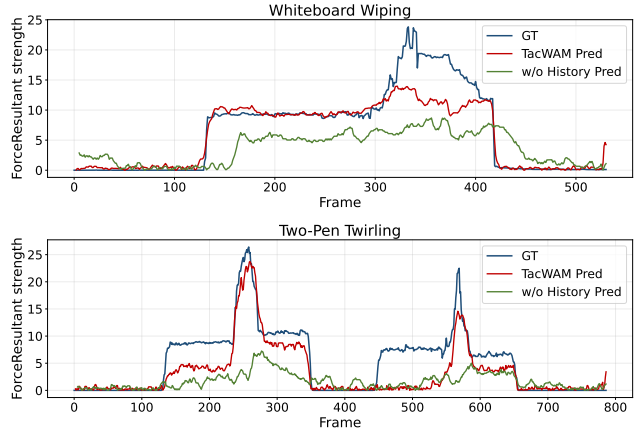


Figure 4: Representative episode-level tactile prediction roll-outs on whiteboard wiping and two-pen twirling. We reconstruct the bilateral resultant wrench from predicted tactile states, compute the resultant force magnitude, and compare TacWAM and w/o History predictions with ground truth over complete episodes.

TacWAM tracks both the magnitude and temporal trend of the ground-truth force more closely than w/o History, illustrating that tactile history can improve future tactile prediction rather than only improving downstream action success.

The difference is especially clear on whiteboard wiping, where the w/o History prediction lags behind the ground-truth force changes. This temporal delay suggests that, without recent tactile context, the model needs additional incoming tactile evidence before updating its estimate of the current contact phase. By contrast, tactile history provides recent interaction evolution before the current chunk, allowing TacWAM to infer the current contact state more promptly and predict force changes with less delay. This analysis explains why removing history substantially reduces manipulation success in the ablation results.

5 Conclusion

We presented TacWAM, a tactile-augmented World Action Model that extends visual WAMs with predictive tactile states for contact-rich manipulation. The SAF Encoder constructs a mechanics-aware tactile representation from spatially aligned tactile appearance, dense force fields, and deformation flow with global wrench supervision; tactile history summarizes recent force and deformation changes; and AGT Attention enables tri-modal co-training with explicit future-target isolation. On four contact-rich manipulation tasks, TacWAM outperforms vision-only VLA/WAM and visuo-tactile baselines on every task, improving the average success rate by 37.5 percentage points over the strongest baseline. Staged ablations show consistent degradation when tactile history is removed and attention restrictions are progressively relaxed, supporting the importance of tactile history and controlled information flow. These results suggest that predictive tactile states are a useful training signal for contact-rich world action modeling.

References

- Ai, B.; Tian, S.; Shi, H.; Wang, Y.; Tan, C.; Li, Y.; and Wu, J. 2024. RoboPack: Learning Tactile-Informed Dynamics Models for Dense Packing. arXiv:2407.01418.
- Bi, J.; Ma, K. Y.; Hao, C.; Shou, M. Z.; and Soh, H. 2025. VLA-Touch: Enhancing Vision-Language-Action Models with Dual-Level Tactile Feedback. arXiv:2507.17294.
- Cai, J.; Ling, L.; Chu, S.; Liu, Z.; Kang, J.; Liang, Z.; Xu, W.; Mao, Y.; Zhang, W.; Yang, X.; Ying, R.; Zheng, R.; and Mu, Y. 2026. AHA-WAM: Asynchronous Horizon-Adaptive World-Action Modeling with Observation-Guided Context Routing. arXiv:2606.09811.
- Calandra, R.; Owens, A.; Jayaraman, D.; Lin, J.; Yuan, W.; Malik, J.; Adelson, E. H.; and Levine, S. 2018. More Than a Feeling: Learning to Grasp and Regrasp Using Vision and Touch. *IEEE Robotics and Automation Letters*, 3(4): 3300–3307.
- Cao, Z.; Tian, D.; Guan, R.; Mu, Y.; Sun, X.; Liang, S.; Liu, D.; Huang, T.; Yue, Y.; Ding, H.; Fang, B.; Zhou, A.; Han, Q.-L.; and Xiong, H. 2026. Tactile-Based Multimodal Fusion in Embodied Intelligence: A Survey of Vision, Language, and Contact-Driven Paradigms. arXiv:2605.17336.
- Cheng, N.; Xu, J.; Li, W.; Chen, Y.; Gao, J.; Wang, Y.; Peng, K.; and Han, W. 2026. τ : Learning Touch-Augmented Vision-Language-Action Models from Future Visual Supervision. arXiv:2607.24485.
- Hafner, D.; Lillicrap, T.; Norouzi, M.; and Ba, J. 2021. Mastering Atari with Discrete World Models. In *International Conference on Learning Representations*.
- Han, Y.; and Yilmaz, A. 2026. Enhancing Policy Learning with World-Action Model. arXiv:2603.28955.
- Heng, L.; Geng, H.; Zhang, K.; Abbeel, P.; and Malik, J. 2025. ViTacFormer: Learning Cross-Modal Representation for Visuo-Tactile Dexterous Manipulation. arXiv:2506.15953.
- Higuera, C.; Arnaud, S.; Boots, B.; Mukadam, M.; Hogan, F. R.; and Meier, F. 2026. Visuo-Tactile World Models. arXiv:2602.06001.
- Huang, J.; Wang, S.; Lin, F.; Hu, Y.; Wen, C.; and Gao, Y. 2025. Tactile-VLA: Unlocking Vision-Language-Action Model’s Physical Knowledge for Tactile Generalization. arXiv:2507.09160.
- Huang, Y.; Sang, S.; Lu, H.; Ni, S.; Wu, S.; Guo, Z.; Shi, Y.; and Wang, J. 2026. ViTacWorld: Scaling Visuo-Tactile World Models for Contact-Rich Robot Manipulation. arXiv:2607.22530.
- Lee, M. A.; Zhu, Y.; Zachares, P.; Tan, M.; Srinivasan, K.; Savarese, S.; Fei-Fei, L.; Garg, A.; and Bohg, J. 2019. Making Sense of Vision and Touch: Learning Multimodal Representations for Contact-Rich Tasks. arXiv:1907.13098.
- Lepora, N. F. 2026. Tactile Robotics: Past and Future. *The International Journal of Robotics Research*.
- Liu, Y.; Sun, P.; Li, S.; Xie, Y.; Zhang, L.; Chao, X.; Dong, S.; Chen, F.; Zhang, X.-P.; and Ding, W. 2026. OA-WAM: Object-Addressable World Action Model for Robust Robot Manipulation. arXiv:2605.06481.
- Ma, D.; Donlon, E.; Dong, S.; and Rodriguez, A. 2019. Dense Tactile Force Estimation Using GelSlim and Inverse FEM. In *2019 International Conference on Robotics and Automation (ICRA)*, 5418–5424.
- NeoteAI Team; and Fudan TEAI Team. 2026. $\mathcal{N}_0$ -VTLA: Scaling Vision-Tactile-Language-Action Model with Latent Tactile Tokens. arXiv:2607.23782.
- Physical Intelligence; Black, K.; Brown, N.; Darpinian, J.; Dhabalia, K.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Galliker, M. Y.; Ghosh, D.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; LeBlanc, D.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Ren, A. Z.; Shi, L. X.; Smith, L.; Springenberg, J. T.; Stachowicz, K.; Tanner, J.; Vuong, Q.; Walke, H.; Walling, A.; Wang, H.; Yu, L.; and Zhilinsky, U. 2025. $\pi_{0.5}$: A Vision-Language-Action Model with Open-World Generalization. arXiv:2504.16054.
- Tian, S.; Zheng, Y.; Zheng, Y.; Gu, S.; Zang, Y.; Qin, Y.; Li, W.; Li, H.; Ding, W.; and Zhao, D. 2026. VT-WAM: Visual-Tactile World Action Model for Contact-Rich Manipulation. arXiv:2607.02503.
- Wu, S.; You, L.; Zhu, J.; Liu, Y.; Zhang, C.; Liu, J.; Wang, W.; Li, Q.; Li, J.; and Zhao, H. 2026. Tactile-WAM: Touch-Aware World Action Model with Tactile Asymmetric Attention. arXiv:2606.26663.
- Xue, H.; Ren, J.; Chen, W.; Zhang, G.; Fang, Y.; Gu, G.; Xu, H.; and Lu, C. 2025. Reactive Diffusion Policy: Slow-Fast Visual-Tactile Policy Learning for Contact-Rich Manipulation. arXiv:2503.02881.
- Ye, G.; Zhang, Z.; Zhao, X.; Wu, S.; Lu, H.; Lu, S.; and Liu, H. 2025. Learning to Feel the Future: DreamTacVLA for Contact-Rich Manipulation. arXiv:2512.23864.
- Yuan, T.; Dong, Z.; Liu, Y.; and Zhao, H. 2026. Fast-WAM: Do World Action Models Need Test-time Future Imagination? arXiv:2603.16666.
- Yuan, W.; Dong, S.; and Adelson, E. H. 2017. GelSight: High-Resolution Robot Tactile Sensors for Estimating Geometry and Force. *Sensors*, 17(12): 2762.
- Zang, Y.; Zheng, Y.; Nie, X.; Zheng, Y.; Tian, S.; Gu, S.; Gao, C.; Wang, Z.; Yan, S.; and Ding, W. 2026. TacForeSight: Force-Guided Tactile World Model for Contact-Rich Manipulation. arXiv:2606.11184.
- Zhang, C.; Hao, P.; Cao, X.; Hao, X.; Cui, S.; and Wang, S. 2025. VTLa: Vision-Tactile-Language-Action Model with Preference Learning for Insertion Manipulation. arXiv:2505.09577.
- Zhao, Z.; Li, Y.; Li, W.; Qi, Z.; Ruan, L.; Zhu, Y.; and Althoefer, K. 2024. Tac-Man: Tactile-Informed Prior-Free Manipulation of Articulated Objects. arXiv:2403.01694.
- Zheng, Y.; Gu, S.; Li, W.; Zheng, Y.; Zang, Y.; Tian, S.; Li, X.; Hao, C.; Gao, C.; Liu, S.; Li, H.; Chen, Y.; Yan, S.; and Ding, W. 2026. OmniVTA: Visuo-Tactile World Modeling for Contact-Rich Robotic Manipulation. arXiv:2603.19201.
- Zhou, J.; Hong, F.; Li, Y.; Zhao, Y.; Cen, Y.; Liu, Z.; Huang, J.; Chen, Z.; Zhang, R.; Zhu, W.; Song, X.; and Yang, S. 2026. TouchWorld: A Predictive and Reactive Tactile Foundation Model for Dexterous Manipulation. arXiv:2607.07287.