

Vision-Language Model Reasoning for Contextual Semantic Mapping in Intralogistics

Marvin Rüdert^{1,2}
marvin.ruedt@kit.edu

Hao Pang^{1,2}
hao.pang@kit.edu

Constantin Enke¹
constantin.enke@kit.edu

Zäzilia Seibold¹
zaezilia.seibold@kit.edu

Kai Furmans¹
kai.furmans@kit.edu

Abstract—Autonomous mobile robots operating in intralogistics environments rely on geometric maps for localization and navigation, but lack semantic understanding of objects and their contextual properties. We present a contextual semantic mapping pipeline that combines SLAM-based geometric mapping, SAM-based instance segmentation, instance clustering, and VLM multi-view reasoning to produce a contextual semantic map representation encoding geometric structure, object class, and object movability. By aggregating observations across multiple viewpoints and querying a VLM in a zero-shot, open-vocabulary setting, the pipeline infers contextual object properties—here demonstrated through movability—without requiring task-specific training or predefined object categories. We evaluate three VLMs under two prompting strategies and conduct a component-wise analysis of the pipeline. The proposed pipeline achieves 98.93% mIoU for semantic classification and 89.17% mAcc for object movability estimation. Component analysis identifies VLM reasoning as the primary bottleneck for contextual understanding and instance clustering as the main limitation for panoptic performance. The resulting semantic map supports context-aware filtering and robust navigation in dynamic intralogistics environments.

Index Terms—Semantic mapping, autonomous mobile robots, vision-language models, instance segmentation, open-vocabulary reasoning, intralogistics

I. INTRODUCTION

Autonomous mobile robots (AMRs) are increasingly deployed in indoor environments such as intralogistics systems, where they navigate freely using geometric maps generated by simultaneous localization and mapping (SLAM) [1]. These maps encode the spatial structure of the environment and support localization and path planning, but lack semantic information about objects and infrastructure, limiting higher-level task execution and reasoning [2]–[4].

This limitation is particularly critical in intralogistics systems, which are dynamic and heterogeneous, containing objects such as shelves, pallets, and vehicles whose states change over time. Current systems often struggle to adapt to such changes and may require frequent remapping [5]. Semantic maps must therefore go beyond object categories and capture contextual properties relevant to robot operation, such as movability, functional state, or spatial relationships.

Classical semantic mapping approaches integrate semantic perception into SLAM pipelines [4], [6], [7], but rely on closed-vocabulary models limited to predefined categories. Recent work explores open-vocabulary mapping using vision-language models (VLMs) [8], [9], enabling more flexible object recognition. However, these methods primarily focus on object identification and lack contextual reasoning about object properties [10], [11]. Approaches integrating foundation models such as contrastive language-image pre-training (CLIP) [12] and the segment anything model (SAM) [13] further improve open-vocabulary perception and class-agnostic segmentation, yet most operate on single images and do not reason across multiple viewpoints or infer higher-level semantic attributes.

To address these gaps, we propose a semantic mapping pipeline that integrates geometric mapping, instance segmentation, instance clustering, and VLM-based contextual reasoning, as illustrated in Fig. 1. RGB images provide visual observations for instance segmentation and serve as input for semantic and contextual inference, while 2D laser scans are used to construct a geometric map via SLAM and to localize and aggregate object instances across multiple frames. A VLM then performs open-vocabulary classification and infers contextual properties—in this work, object movability—enabling the distinction between static infrastructure and potentially dynamic objects. The result is a contextual semantic map representation encoding geometric structure, semantic class, and movability. The main contributions of this work are:

- A modular semantic mapping pipeline integrating SLAM, SAM-based instance segmentation, and VLM-based reasoning for intralogistics environments.
- A multi-view reasoning approach enabling robust open-vocabulary object classification and inference of contextual properties such as object movability.
- A contextual semantic map representation that augments geometric maps with semantic class and object movability.
- A systematic evaluation of individual pipeline components and their contribution to semantic mapping performance.

II. RELATED WORK

A. Semantic Mapping in Robotics

Semantic mapping enhances geometric representations by incorporating information at the object and context levels,

This research was funded by the InvestBW Innovation Program of the Ministry of Economic Affairs, Labor and Tourism of Baden-Württemberg, Germany.

¹Institute for Material Handling and Logistics, Karlsruhe Institute of Technology, Karlsruhe, Germany.

²These authors contributed equally.

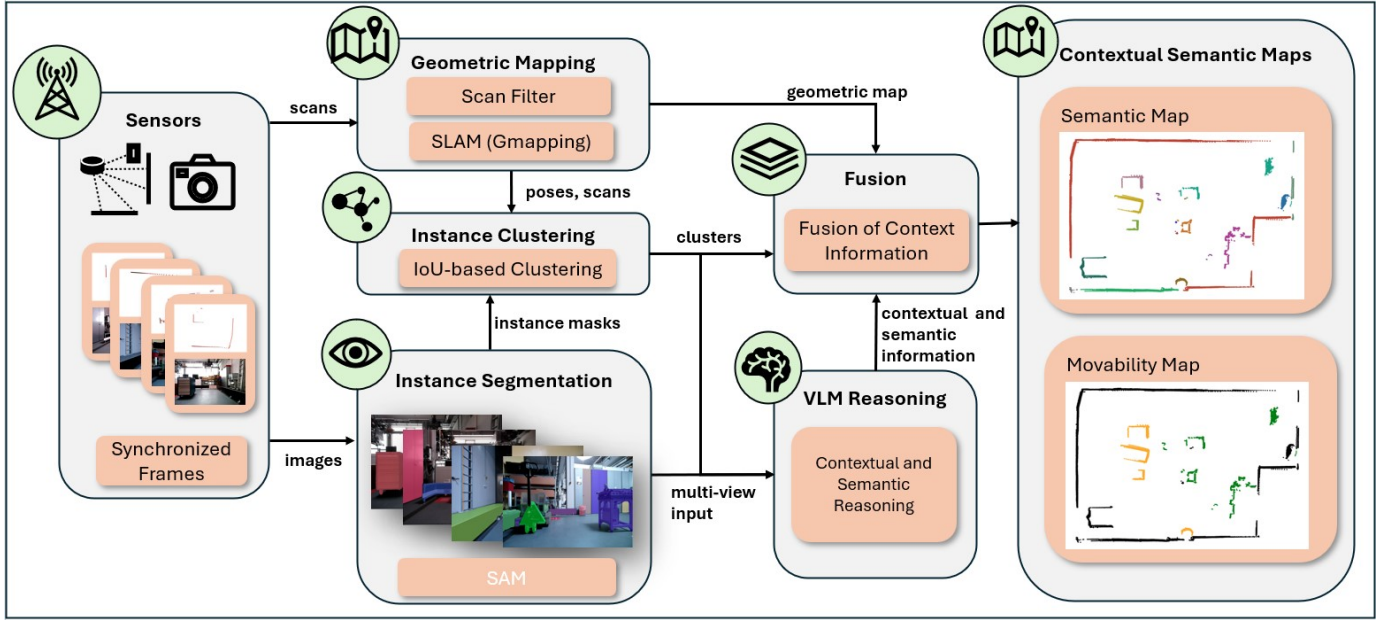


Fig. 1: Contextual Semantic Mapping Pipeline

thereby enabling robots to reason beyond purely spatial structures [14]. Initial approaches couple SLAM with recognition of defined object classes to assign semantic labels to spatial maps using RGB-D and LiDAR data [4], [6], [7]. For example, [4] fuse RGB-D and LiDAR data within a SLAM pipeline and project YOLO-based detections into the map for semantic filtering. Similarly, [6] construct persistent object-level maps, while [7] improve robustness through temporal consistency. While effective, these methods rely on closed-vocabulary models and are therefore limited to predefined object categories.

Several works extend semantic mapping toward multi-level map representations. Hierarchical and object-centric approaches organize environments into multiple abstraction levels [3], while scene graph representations encode relationships between entities [2]. However, these methods primarily focus on structural organization rather than semantic reasoning about object properties and context. In dynamic environments, [15] combine segmentation and motion cues to identify and remove moving objects during SLAM, improving localization accuracy but relying on observed motion.

More recent work explores open-vocabulary semantic mapping. VLMs [9] fuse CLIP-based visual-language embeddings with 3D reconstructions, enabling flexible semantic queries at runtime. Related approaches incorporate CLIP features into SLAM pipelines for open-vocabulary object localization and multi-view fusion [8], [16]. While these methods improve flexibility, they primarily focus on object identification and retrieval, and dense feature representations can introduce object ambiguities [9].

Overall, existing approaches provide either closed-set semantic maps or open-vocabulary representations without deeper contextual understanding. In contrast, we incorporate vision-language-based reasoning into the mapping process to

infer object properties and enable context-aware map filtering.

B. Foundation Models for Visual Perception

Recent advances in foundation models have significantly expanded visual perception capabilities by providing complementary mechanisms for segmentation, open-vocabulary recognition, and language grounding. SAM [13] enables high-quality, class-agnostic segmentation by generating object masks from image prompts, with extensions supporting concept-level grounding through language [17]. In contrast, VLMs such as CLIP [12] learn a joint embedding space for images and text, enabling open-vocabulary classification. Grounding DINO [18] further extends these capabilities by performing language-guided object detection through cross-modal attention.

These models are often combined into integrated pipelines. Grounded-SAM [19] first generates bounding boxes from text prompts using Grounding DINO and then refines them into pixel-level masks with SAM, enabling automatic object annotation. While effective, such approaches depend on accurate tagging models, which can be unreliable in cluttered environments. In contrast to prompt-based approaches, we adopt a bottom-up paradigm to eliminate dependence on manual prompts and enhance segmentation quality. We first generate fine-grained masks automatically with SAM and then aggregate them into persistent object-level instances through clustering in the geometric map.

Language-guided perception pipelines further incorporate higher-level reasoning into detection. [20] generate structured scene descriptions using VLMs to guide open-vocabulary detection and segmentation, while [21] use a VLM in combination with Grounding DINO and SAM for extracting open-vocabulary 3D object representations. However, these ap-

proaches rely on single-view reasoning or predefined targets in structured environments, which limits robustness in industrial settings.

Despite these advances, most methods remain image-centric and focus on object identity rather than contextual reasoning and scene understanding. [22] incorporate temporal information to improve segmentation quality, but likewise without accounting for context. In contrast, we use segmentation as an intermediate representation, aggregate object observations across multiple views, and enable subsequent semantic reasoning within a spatial map.

C. Language-Based Semantic Reasoning

Vision-language models enable reasoning beyond object recognition, including the inference of attributes, relationships, and contextual properties [12], [23]. Recent work extends these capabilities to spatial reasoning by incorporating depth and region-level representations [24].

In robotics, language models have been applied to perception, mapping, and planning. For example, [25] incorporate language priors into SLAM, while [26] use language-based reasoning for navigation. Structured representations such as scene graphs enable relational reasoning [27], [28], and systems such as osmAG-LLM [29] performs reasoning over semantic maps to generate navigation goals verified through perception.

Generative approaches further demonstrate the potential of language models for scene understanding. MetaScenes [30] combine SAM-based segmentation with VLMs to generate detailed object descriptions, including attributes such as material and physical properties. However, these approaches focus on scene interpretation or reconstruction and do not integrate semantic reasoning into navigation-relevant mapping.

A key challenge in applying language models is robustness. Prior work shows that performance depends on prompting strategies and can suffer from hallucinations [31], [32]. Moreover, most systems apply language models either at the image level or as post-processing on pre-built representations, often relying on sparse or single-view observations. In contrast, we integrate language-based reasoning directly into the mapping pipeline, using aggregated multi-view observations to infer object properties and enrich the semantic map representation.

III. PROBLEM FORMULATION

AMRs operating in indoor environments rely on geometric maps—typically 2D static occupancy grid maps—generated by SLAM algorithms. These maps represent the spatial structure of the environment and can be used for localization and path planning, but do not contain information about the semantic identity or contextual properties of objects present in the scene. The goal of this work is to generate semantic maps of intralogistics environments that augment geometric structure with context-aware object understanding, including properties such as object movability. Such maps enable higher-level operations and natural language queries, for example “*transport the pallet from the transfer station to the shelf*”, which require semantic

object understanding and spatial grounding in the environment, while identifying dynamic objects in the environment can improve the robustness of the localization.

A. Sensor Observations

We employ a standard sensor configuration in industrial mobile robotics: two 2D laser scanners providing 360° range measurements and a forward-facing RGB camera that captures visual information. During exploration of the environment, the robot collects a sequence of synchronized sensor observations

$$O = \{(I_i, S_i)\}_{i=1}^T \quad (1)$$

where I_i and S_i denote the RGB image and 2D laser scan in the robot coordinate frame at time step i , referred to as a *frame*, and T is the total number of frames.

B. Geometric Map Representation

The geometric map is represented as a 2D point cloud, which serves as a flexible intermediate form convertible to occupancy grid maps or cost maps. The geometric map is a collection of 2-dimensional points:

$$GM = \{p_i\}_{i=1}^n \quad (2)$$

where $p_i \in \mathbb{R}^2$ denotes the position (x, y) of point i in the map coordinate frame, and n is the total number of points.

C. Contextual Semantic Map Representation

The contextual semantic map representation extends GM by attaching per-point semantic and contextual attributes. The resulting representation of the environment is a collection of 6-dimensional points:

$$SM = \{(p_i, cls_i, ins_i, m_i)\}_{i=1}^n \quad (3)$$

where cls_i is the semantic object class, ins_i is the instance identifier, and $m_i \in \{immovable, movable, mobile\}$ is the movability property of the corresponding object. We define three movability categories: *immovable* for fixed infrastructure, *movable* for objects that are transportable but lack intrinsic mobility, and *mobile* for objects that are self-moving or mounted on a mobile carrier.

D. Contextual Semantic Mapping Task

Given the observation sequence O , the objective is to estimate SM —a geometrically grounded, semantically enriched representation of the environment. For each point p_i , the pipeline assigns cls_i , ins_i , and m_i by combining SAM-based instance segmentation, instance clustering, and VLM-based contextual and semantic reasoning.

IV. CONTEXTUAL SEMANTIC MAPPING PIPELINE

We propose a multimodal mapping framework that integrates geometric mapping, instance-level perception, and VLM-based multi-view reasoning to generate a contextual semantic map representation of intralogistics environments. As illustrated in Fig. 1, the system consists of five main modules: geometric mapping, instance segmentation, instance clustering, VLM-based reasoning, and map fusion.

The system takes as input synchronized measurements from an RGB camera and two 2D laser scanners. Temporal synchronization establishes a point-to-pixel correspondence that associates geometric observations from the laser scanners with visual information extracted from camera images, enabling joint spatial-semantic processing throughout the pipeline.

A. Geometric Mapping

The laser scans are first processed in a geometric mapping module. We apply a scan filtering step to remove overlapping projected points caused by the spatial offset between the camera and laser scanner. Specifically, when scan points are reprojected into the camera coordinate frame, sensor placement differences can cause multiple points to overlap in the image plane; these ambiguities are filtered prior to downstream processing. After preprocessing, filtered scans are used for 2D geometric mapping using SLAM. In this work, we employ GMapping to estimate robot poses and build the geometric map GM of the environment.

B. Instance Segmentation

We apply the automatic mask generation pipeline of SAM [13] to each RGB image independently, producing fine-grained, class-agnostic segmentation masks. The established point-to-pixel correspondence is used to project segmented instances into the geometric map coordinate frame, associating each mask with a spatial footprint in GM .

C. Instance Clustering

To associate observations of the same physical object across frames, we introduce an instance clustering module operating in the geometric map space. Projected instances are clustered based on pairwise intersection-over-union (IoU): instances with $IoU > 0.3$ are grouped as observations of the same object. The resulting clusters serve two purposes—they provide persistent object-level representations for map fusion, and aggregate multi-view observations passed to the VLM reasoning module.

D. VLM-Based Reasoning

Aggregated multi-view observations of each object cluster are passed to a VLM, which infers object class and movability in a zero-shot, open-vocabulary setting. The reasoning module is described in detail in Section V.

E. Map Fusion

The fusion module integrates three information sources: (i) the geometric map GM produced by SLAM, (ii) clustered object instances from segmentation and clustering, and (iii) semantic and contextual attributes inferred by the VLM, to produce the final semantic map SM as defined in Section III. Each object instance is represented by its spatial footprint, semantic class, and movability, yielding a contextual semantic map representation that supports both geometric localization and context-aware reasoning.

V. VISION-LANGUAGE MODEL REASONING

To obtain semantic understanding of the environment, we employ a VLM in a zero-shot, open-vocabulary setting to infer object classes and movability—the primary contextual property for distinguishing static infrastructure from potentially dynamic objects in intralogistics environments.

A. Visual Input Representation

Each object instance is represented by a composite image comprising (i) a full-scene view in which the target object is highlighted using a green segmentation mask to provide spatial context, and (ii) a cropped close-up of the object that preserves fine-grained visual details (Fig. 2). The close-up views are generated directly from the segmentation masks with a small amount of padding around the object. To improve robustness to occlusions and partial visibility, multiple views of the same object instance are provided jointly, allowing the VLM to integrate complementary observations across viewpoints and resolve ambiguities that may arise from individual frames.



Fig. 2: Composite VLM input image showing a charging station with a textual label. Left: full-scene view with green segmentation mask highlight. Right: cropped object view.

B. Prompt Design and Reasoning Strategy

Inference is guided by a structured prompt defining the task, a movability ontology, and a JSON output format. We compare two prompting strategies: direct JSON prompting, which returns a structured output directly, and CoT-augmented JSON prompting, which precedes the JSON output with an explicit chain-of-thought (CoT) reasoning process covering visual feature extraction, multi-view aggregation, and reasoning. The effect of CoT augmentation on classification performance is evaluated in Section VI-C. The prompt follows a fixed structure; an abbreviated version is shown below.

Prompt Template (Abbreviated)

Role: Expert AI for visual perception in intralogistics

Task: Classify the highlighted object and infer its movability

Input: Composite images (full-scene + cropped close-up) of the same object instance

Process (optional):

- 1) **Perception:** Extract visual features (shape, ground contact, carriers, context)
- 2) **Multi-view aggregation:** Combine observations and resolve ambiguities
- 3) **Reasoning:** Infer object class and movability

Movability ontology:

- 1) **Immovable:** Fixed infrastructure (e.g., wall, shelf, barrier, charging station)
- 2) **Movable:** Transportable, no intrinsic mobility (e.g., pallet, box, container)
- 3) **Mobile:** Self-moving, on wheels, or on mobile carrier (e.g., human, AMR, pallet on forklift)

Output: JSON, optionally preceded by CoT reasoning

Contextual reasoning plays a key role: for example, a pallet is classified as *movable* when standing on the floor, but as *mobile* when placed on a pallet jack or forklift (Fig. 3). Distinctions like these require reasoning about object relationships, rather than appearance alone.



Fig. 3: Composite VLM input showing a pallet on a pallet jack. Left: full-scene view with green segmentation mask highlight. Right: cropped object view.

C. Structured Output and Map Integration

The VLM returns a structured JSON containing the inferred object class, object movability, and a short explanation for traceability, ensuring consistent downstream processing:

JSON Output for Fig. 3

```
{
  "object_class": "pallet on pallet jack",
  "movability": "mobile",
  "short_explanation": "The pallet is
  currently being transported by a mobile
  pallet jack, making it mobile in this
  context."
}
```

If no reliable prediction is possible, a fallback (object_class: unknown, movability: unknown) is returned.

The predicted attributes cls_i and m_i are assigned to the corresponding object instance and propagated to all map points p_i belonging to that instance, yielding the semantic map SM as defined in Section III.

D. Design Choices

The following design choices were evaluated to obtain a robust configuration for VLM-based semantic reasoning.

Input representation. Explored formats included full-scene images with bounding-box or segmentation mask overlays, cropped-only views, and composite representations. The composite format—combining a full-scene segmentation mask with a cropped object view—yielded the most reliable results. It provides both spatial context and fine-grained object detail, and proved essential for directing model attention toward the highlighted object rather than visually dominant elements.

Prompt design. Evaluated variants included short and detailed instructions, prompts with and without output examples, and prompts with and without explicit reasoning steps. Best results were obtained with structured prompts containing an explicit movability ontology. Output examples were omitted to avoid anchoring bias toward specific object classes. The effect of CoT-reasoning is analyzed in Section VI-C.

Contextual text. For process-specific infrastructure such as charging and transfer stations, textual labels were placed on objects in the scene. The VLM reliably leverages such in-scene text even under low resolution and motion blur.

VI. EXPERIMENTAL RESULTS AND EVALUATION

A. Experimental Setup

Experiments are conducted in a controlled intralogistics environment comprising 18 object instances from 13 semantic classes, where instances refer to physical objects and classes to their semantic categories. Data is recorded using the sensor configuration described in Section IV and subsampled via motion thresholds (30 cm translation or 15° rotation), yielding 74 frames.¹ Each object is observed from multiple viewpoints; all available views are provided jointly as composite images in a single query.

In Section VI-C, we first conduct a VLM study in which the pipeline is kept fixed and only the semantic inference stage is varied. We analyze the effect of (i) VLM choice and (ii) prompting strategy—direct JSON prompting vs. CoT-augmented JSON prompting—on open-vocabulary classification and movability inference accuracy. Three VLMs are evaluated: *Gemini 3.1 Flash Lite* (released March 2026), a lightweight model optimized for efficiency; *GPT-5.1* (released November 2025), a high-capacity general-purpose model; and *GPT-o3* (released April 2025), a reasoning-optimized model designed for structured multi-step inference. This selection covers the trade-off between inference efficiency, model capacity, and reasoning ability.

¹The dataset, including RGB images, laser scans, instance annotations, and the VLM prompts, is publicly available: <https://doi.org/10.35097/qx7b62vnbercxzj9>.

To identify system bottlenecks and quantify individual component contributions, we further conduct a component analysis in Section VI-D using ground-truth substitution, with the VLM configuration fixed to the best-performing combination from the VLM study. Ground-truth annotations were manually generated for the final map as well as for each intermediate module. For the instance segmentation module, ground-truth instance masks were obtained by manually providing positive and negative point prompts to SAM. For the instance clustering module, objects were manually annotated with bounding boxes, and segmented instances belonging to the same object were explicitly associated. Semantic and movability labels were added to the objects to obtain the ground-truth for the VLM-reasoning module and the contextual semantic maps.

B. Evaluation Metrics

Semantic segmentation is evaluated using mean intersection over union (mIoU). For each semantic class c present in the ground truth, IoU is computed as

$$\text{IoU}_c = \frac{\text{TP}_c}{\text{TP}_c + \text{FP}_c + \text{FN}_c}, \quad (4)$$

where TP_c , FP_c , and FN_c denote the number of points correctly classified, falsely assigned to class c , and missed for class c , respectively. The mIoU is averaged over all classes present in the ground truth.

We evaluate **movability classification** as balanced per-class accuracy over the three movability classes: immovable, movable, and mobile. For each movability class present in the ground truth, we compute the fraction of valid points of that class whose predicted movability matches the ground-truth. The final score (mAcc) is the average of these per-class accuracies. This gives equal weight to each movability class and avoids domination by classes containing many more points.

Since our mapping pipeline is also able to understand the environment in a panoptic manner (a combination of instance segmentation and semantic segmentation), we further evaluate the **panoptic segmentation** performance using Panoptic Quality (PQ) [33]. Panoptic Quality is defined as

$$\text{PQ} = \frac{\sum_{(p,g) \in \text{TP}} \text{IoU}(p,g)}{|TP| + \frac{1}{2}|FP| + \frac{1}{2}|FN|}. \quad (5)$$

Here, a predicted segment p and a ground-truth segment g are considered a true positive (TP) if their $\text{IoU}(p,g) > 0.5$. PQ is computed per class and then averaged over all classes to obtain the final score.

C. Vision-Language Model Study

Table I reports the semantic classification (mIoU) and movability accuracy (mAcc) for the three VLMs under two prompting strategies. All models are evaluated zero-shot, without fine-tuning or in-context examples, via their respective APIs. Typical queries comprise ~ 700 prompt tokens and ~ 600 image tokens per view, yielding a ~ 75 -token JSON response; CoT-JSON prompting adds ~ 300 reasoning tokens. Per-object

TABLE I: Semantic classification (mIoU) and movability accuracy (mAcc) in % for different VLM models and prompting strategies. Deviations exceeding 2% relative to the direct JSON prompting baseline are highlighted (red: degradation, green: improvement).

Model $\rightarrow$ Prompt $\downarrow$	Gemini 3.1 FL		GPT-5.1		GPT-o3	
	mIoU	mAcc	mIoU	mAcc	mIoU	mAcc
Direct JSON	98.93	89.17	74.38	96.28	88.67	93.38
CoT JSON	89.43	92.56	68.13	96.42	92.89	89.11

inference takes approximately 5–10 s depending on view count and model.

VLM comparison. Gemini 3.1 Flash Lite achieves the highest semantic classification accuracy with direct prompting (98.93% mIoU), while GPT-5.1 lags substantially (74.38%), suggesting weaker open-vocabulary visual grounding. GPT-5.1, however, achieves the highest movability accuracy (96.28%), indicating stronger contextual reasoning despite weaker visual classification. GPT-o3 occupies a middle ground on both metrics (88.67% mIoU, 93.38% mAcc), offering a balanced performance across both tasks. Overall, Gemini 3.1 Flash Lite provides the best trade-off between semantic classification and movability accuracy.

Prompting strategy. The effect of CoT reasoning is model-dependent. For Gemini 3.1 Flash Lite, CoT degrades mIoU by 9.50% while improving mAcc by 3.39%, suggesting that explicit reasoning steps introduce classification uncertainty without proportional benefit for this model. GPT-5.1 shows a similar pattern, with mIoU decreasing by 6.25% under CoT. In contrast, GPT-o3 benefits from CoT reasoning, gaining 4.22% in mIoU, consistent with its design as a reasoning-optimized model. Overall, direct JSON prompting achieves higher semantic classification accuracy across all models, while movability accuracy remains largely unaffected by the prompting strategy.

D. Component Analysis

Based on the results of Section VI-C, Gemini 3.1 Flash Lite with direct JSON prompting achieves the best overall semantic classification performance and is therefore used for all subsequent experiments. The full pipeline serves as the baseline. To investigate the benefit of multi-view reasoning, we additionally evaluate a single-view variant in which the VLM receives only one composite image per object instance. To identify system bottlenecks, oracle experiments are conducted in which each module is individually replaced with ground-truth inputs. Results are reported in Table II.

The full pipeline achieves 98.93% mIoU for the semantic segmentation, 89.17% mAcc for the movability estimation, and 89.78% PQ for the panoptic segmentation, demonstrating robust scene understanding ability in cluttered intralogistics environments. Qualitative mapping results are shown in Fig. 4, together with the corresponding manually annotated ground-truth for comparison.

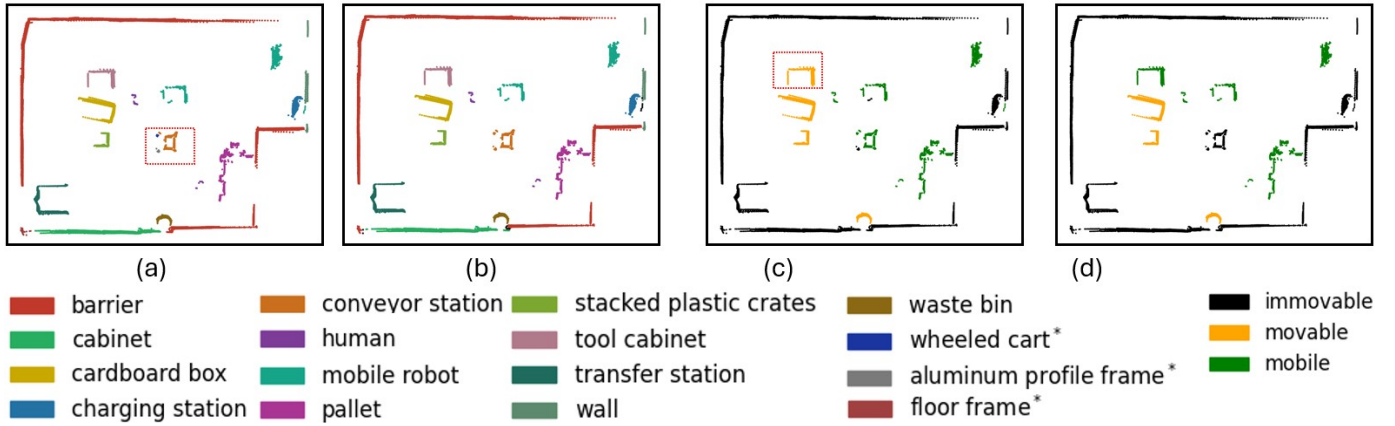


Fig. 4: Visualization of the semantic and movability maps from the experiment. (a) Predicted semantic map; (b) ground-truth semantic map; (c) predicted movability map; and (d) ground-truth movability map. Major incorrect estimations in both predicted maps are highlighted with red bounding boxes. Semantic labels marked with * denote categories absent from the ground truth but appearing in the estimated map.

TABLE II: Component analysis with oracle substitution. ✓ and × indicate enabled and disabled modules, respectively. ★ denotes oracle substitution with ground truth. Changes exceeding 2% relative to the baseline (first row) are highlighted (red: degradation, green: improvement).

SAM	multi-view	VLM	fusion	mIoU	mAcc	PQ
✓	✓	✓	✓	98.93	89.17	89.78
✓	×	✓	✓	65.90	94.90	52.83
★	✓	✓	✓	91.74	96.85	88.59
✓	★	✓	✓	99.81	88.15	89.08
✓	✓	★	✓	99.48	99.82	90.08
✓	✓	✓	★	98.96	89.22	98.92
★	★	★	★	99.91	100	99.91

Disabling the multi-view input leads to a slight increase of 5.73% in the movability mAcc, but causes a substantial drop (over 30%) in all other metrics, indicating that multi-view input is necessary for maintaining consistent semantic reasoning, while multiple independent reasoning can improve contextual understanding.

Replacing individual components with ground truth provides further insights. Using ground-truth segmentation results in an improvement of 7.68% in mAcc but a degradation of 7.49% in semantic mapping performance (mIoU). This observation appears counterintuitive, as one might expect perfect segmentation masks to improve downstream recognition. One possible explanation is that current VLMs may not rely on masks as strict pixel-level grounding signals. Using the ground-truth clustering to aggregate multi-views of one object together does not lead to noticeable improvements, suggesting that clustering is not a bottleneck for the multi-view reasoning. In contrast, substituting the VLM with ground-truth (VLM GT) improves mAcc for over 10%, indicating that reasoning remains a limiting factor. Improvements at the panoptic level are mainly observed when replacing the fusion stage, suggesting that instance association is the primary bottleneck for

panoptic-level mapping.

Finally, when all components are replaced with ground truth, the pipeline approaches optimal performance. The remaining gap from perfect mIoU is mainly attributed to errors introduced during the fusion of point clouds and image observations. This verifies the design of the proposed semantic mapping pipeline.

VII. CONCLUSION

We presented a semantic mapping pipeline for intralogistics environments that integrates SLAM-based geometric mapping, SAM-based instance segmentation, instance clustering, and VLM-based contextual reasoning. By aggregating object observations across multiple viewpoints and reasoning over them in a zero-shot, open-vocabulary setting, the pipeline produces a contextual semantic map representation encoding geometric structure, semantic class, and object movability—enabling the distinction between static infrastructure and potentially dynamic objects without requiring task-specific training or predefined object categories.

Experimental results demonstrate that Gemini 3.1 Flash Lite with direct JSON prompting achieves the highest semantic classification accuracy (98.93% mIoU), while component analysis confirms that multi-view reasoning is essential for consistent spatial and semantic grouping. VLM-based reasoning is identified as the primary bottleneck for movability estimation, and instance association as the main limitation for panoptic performance.

The current system operates offline on pre-recorded data and is evaluated in a single controlled environment. Future work will focus on online semantic map updating to handle dynamic object states, extension to 3D environments using 3D LiDAR sensors, and evaluation across diverse intralogistics scenarios. Incorporating additional contextual properties beyond movability—such as functional state or spatial

relationships—represents a further direction toward richer, task-aware semantic representations.

REFERENCES

- [1] C. Cadena, L. Carlone, H. Carrillo, Y. Latif, D. Scaramuzza, J. Neira, I. Reid, and J. J. Leonard, “Past, Present, and Future of Simultaneous Localization and Mapping: Toward the Robust-Perception Age,” *IEEE Transactions on Robotics*, vol. 32, no. 6, pp. 1309–1332, 2016.
- [2] I. Armeni, Z.-Y. He, A. Zamir, J. Gwak, J. Malik, M. Fischer, and S. Savarese, “3D scene graph: A structure for unified semantics, 3D space, and camera,” in *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, Seoul, South Korea, 2019, pp. 5663–5672.
- [3] J. Zhou, A. Elksnis, Z. Fu, B. Chen, and C. Yang, “MultiMap3D: A multi-level semantic perceptual map construction based on SLAM and point cloud detection,” in *2023 28th International Conference on Automation and Computing (ICAC)*. Birmingham, United Kingdom: IEEE, 2023, pp. 1–6.
- [4] R. Alqobali, R. Alnasser, A. Rashidi, M. Alshmrani, and T. Alhmiedat, “A real-time semantic map production system for indoor robot navigation,” *Sensors*, vol. 24, no. 20, p. 6691, 2024.
- [5] T. Lackner, J. Hermann, C. Kuhn, and D. Palm, “Review of autonomous mobile robots in intralogistics: state-of-the-art, limitations and research gaps,” *Procedia CIRP*, vol. 130, pp. 930–935, 2024.
- [6] R. Martins, D. Bersan, M. F. M. Campos, and E. R. Nascimento, “Extending maps with semantic and contextual object information for robot navigation: A learning-based framework using visual and depth cues,” *Journal of Intelligent & Robotic Systems*, vol. 99, pp. 555–569, 2020.
- [7] X. Song, Z. Zhijiang, X. Liang, and Z. Huaidong, “Monocular camera and laser based semantic mapping system with temporal-spatial data association for indoor mobile robots,” *Multimedia Tools and Applications*, vol. 82, no. 22, pp. 34 459–34 484, 2023.
- [8] B. Chen, F. Xia, B. Ichter, K. Rao, K. Gopalakrishnan, M. S. Ryoo, A. Stone, and D. Kappler, “Open-vocabulary queryable scene representations for real world planning,” in *2023 IEEE International Conference on Robotics and Automation (ICRA)*, London, United Kingdom, 2023, pp. 11 509–11 522.
- [9] C. Huang, O. Mees, A. Zeng, and W. Burgard, “Visual language maps for robot navigation,” in *2023 IEEE International Conference on Robotics and Automation (ICRA)*. London, United Kingdom: IEEE, 2023, pp. 10 608–10 615.
- [10] P. G. Pawar and V. Devendran, “Scene understanding: A survey to see the world at a single glance,” in *2019 2nd International Conference on Intelligent Communication and Computational Techniques (ICCT)*. Jaipur, India: IEEE, 2019, pp. 182–186.
- [11] C. K. I. Williams, “Structured generative models for scene understanding,” *International Journal of Computer Vision*, vol. 133, no. 5, pp. 2845–2867, 2025.
- [12] A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, G. Krueger, and I. Sutskever, “Learning transferable visual models from natural language supervision,” *Proceedings of the 38th International Conference on Machine Learning*, vol. 139, pp. 8748–8763, 2021.
- [13] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo, P. Dollár, and R. Girshick, “Segment anything,” 2023, arXiv preprint arXiv:2304.02643.
- [14] S. Raychaudhuri and A. X. Chang, “Semantic mapping in indoor embodied AI: A survey on advances, challenges, and future directions,” 2025, arXiv preprint arXiv:2501.05750.
- [15] C. Zheng, P. Zhang, and Y. Li, “Semantic SLAM system for mobile robots based on large visual model in complex environments,” *Scientific Reports*, vol. 15, no. 1, p. 8450, 2025.
- [16] T. B. Martins, M. R. Oswald, and J. Civera, “Open-vocabulary online semantic mapping for SLAM,” *IEEE Robotics and Automation Letters*, vol. 10, no. 11, pp. 11 745–11 752, 2025.
- [17] N. Carion, L. Gustafson, Y.-T. Hu, S. Debnath, R. Hu, D. Suris, C. Ryali, K. V. Alwala, H. Khedr, A. Huang, J. Lei, T. Ma, A. Kalla, M. Marks, J. Greer, M. Wang, P. Sun, R. Rädle, E. Mavroudi, K. Xu, T.-H. Wu, Y. Zhou, L. Momeni, R. Hazra, S. Ding, S. Vaze, F. Porcher, F. Li, S. Li, A. Kamath, H. Kei, P. Dollár, N. Ravi, K. Saenko, P. Zhang, and C. Feichtenhofer, “SAM 3: Segment anything with concepts,” 2025, arXiv preprint arXiv:2511.16719.
- [18] S. Liu, Z. Zeng, T. Ren, F. Li, H. Zhang, J. Yang, Q. Jiang, C. Li, J. Yang, H. Su, J. Zhu, and L. Zhang, “Grounding DINO: Marrying DINO with grounded pre-training for open-set object detection,” in *Computer Vision – ECCV 2024*, A. Leonardis, E. Ricci, S. Roth, O. Russakovsky, T. Sattler, and G. Varol, Eds. Cham: Springer Nature Switzerland, 2025, vol. 15105, pp. 38–55, series Title: Lecture Notes in Computer Science.
- [19] T. Ren, S. Liu, A. Zeng, J. Lin, K. Li, H. Cao, J. Chen, X. Huang, Y. Chen, F. Yan, Z. Zeng, H. Zhang, F. Li, J. Yang, H. Li, Q. Jiang, and L. Zhang, “Grounded SAM: assembling open-world models for diverse visual tasks,” 2024, arXiv preprint arXiv:2401.14159.
- [20] B. Pätzold, J. Nogga, and S. Behnke, “Leveraging vision-language models for open-vocabulary instance segmentation and tracking,” *IEEE Robotics and Automation Letters*, vol. 10, no. 11, pp. 11 578 – 11 585, 2025.
- [21] Y. Shi, D. Wen, G. Chen, E. Welte, S. Liu, K. Peng, R. Stiefelhagen, and R. Rayyes, “VISO-Grasp: Vision-language informed spatial object-centric 6-DoF active view planning and grasping in clutter and invisibility,” in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. Hangzhou, China: IEEE, 2025, pp. 14 931–14 938.
- [22] T. Zemskova, M. Kichik, D. Yudin, A. Staroverov, and A. Panov, “SegmATron: Embodied adaptive semantic segmentation for indoor environment,” *Neurocomputing*, vol. 638, p. 130169, 2025.
- [23] W. Wang, Z. Chen, X. Chen, J. Wu, X. Zhu, G. Zeng, P. Luo, T. Lu, J. Zhou, Y. Qiao, and J. Dai, “VisionLLM: Large language model is also an open-ended decoder for vision-centric tasks,” in *Advances in Neural Information Processing Systems*, A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, Eds., vol. 36. Curran Associates, Inc., 2023, pp. 61 501–61 513.
- [24] A.-C. Cheng, H. Yin, Y. Fu, Q. Guo, R. Yang, J. Kautz, X. Wang, and S. Liu, “SpatialRGPT: Grounded spatial reasoning in vision-language models,” *38th Conference on Neural Information Processing Systems*, pp. 135 062 – 135 093, 2024.
- [25] Y. Jiao, Y. Qiu, and H. I. Christensen, “Real-time indoor object SLAM with LLM-enhanced priors,” 2025, arXiv preprint arXiv:2509.21602.
- [26] J. Shi, S. Yagi, S. Yamamori, and J. Morimoto, “LLM-guided zero-shot visual object navigation with building semantic map,” in *2025 IEEE/SICE International Symposium on System Integration (SII)*, Munich, Germany, 2025, pp. 1274–1279.
- [27] A. G. Puigianer, A. Zacharia, and K. Alexis, “Relationship-aware hierarchical 3D scene graph for task reasoning,” 2026, arXiv preprint arXiv:2602.02456.
- [28] Q. Xie, Z. Liang, F. Li, and L. Zeng, “DSM: Constructing a diverse semantic map for 3D visual grounding,” *IEEE Robotics and Automation Letters*, vol. 11, no. 5, pp. 6344–6351, 2026.
- [29] F. Xie, S. Schwertfeger, and H. Blum, “osmAG-LLM: Zero-shot open-vocabulary object navigation via semantic maps and large language models reasoning,” *IEEE Robotics and Automation Letters*, vol. 11, no. 3, pp. 2426–2433, 2026.
- [30] H. Yu, B. Jia, Y. Chen, Y. Yang, P. Li, R. Su, J. Li, Q. Li, W. Liang, S.-C. Zhu, T. Liu, and S. Huang, “MetaScenes: Towards automated replica creation for real-world 3D scans,” 2025, arXiv preprint arXiv:2505.02388.
- [31] J. Moncada-Ramirez, J.-L. Matez-Bandera, J. Gonzalez-Jimenez, and J.-R. Ruiz-Sarmiento, “Agentic workflows for improving large language model reasoning in robotic object-centered planning,” *Robotics*, vol. 14, no. 3, p. 24, 2025.
- [32] A. Mohanty, V. B. Parthasarathy, and A. Shahid, “The future of MLLM prompting is adaptive: a comprehensive experimental evaluation of prompt engineering methods for robust multimodal performance,” *Transactions on Machine Learning Research*, 2025.
- [33] A. Kirillov, K. He, R. Girshick, C. Rother, and P. Dollár, “Panoptic segmentation,” in *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. Long Beach, CA, USA: IEEE, 2019, pp. 9396–9405.