

BayesContact: Uncertain Pose Estimation via Visuo-Tactile Proposals and Simulation-based Inference

Aditya Kamireddypalli¹, Matías Mattamala¹, João Moura¹, Russell Buchanan²,
Sethu Vijayakumar¹, Subramanian Ramamoorthy¹

Abstract—Contact-rich manipulation requires pose estimates that are often more accurate than what depth-only sensing provides. Existing methods, relying on vision and contact, employ costly offline training procedures that need to be retrained for new environments and geometries. We propose *BayesContact*, a Simulation-Based Inference framework for visuo-tactile pose estimation in peg-in-hole insertion. *BayesContact* maintains a particle belief over object pose and fuses depth observations with force/torque-derived contact evidence. We employ simulation based forward models to approximate these observation likelihoods. For each pose hypothesis, a renderer predicts depth measurements and a physics simulator predicts contact outcomes under guarded probing actions; both are scored against real observations to update the belief. The resulting multimodal belief also enables information-gain-based probing for active disambiguation. Across simulated geometries and real-robot experiments, *BayesContact* improves pose observability and insertion success over vision-only inference by 30%.

I. INTRODUCTION

For robots to automate manipulation tasks, they must be capable of reliable physical interaction with objects. Everyday industrial skills such as key insertion, cable connection, fastening, and assembly are contact-rich: the robot must make, maintain, and break contact while respecting tight geometric constraints. In these settings, small estimation errors in relative pose or local geometry can lead to missed contacts, jamming, excessive forces, or task failure. Reliable, contact-rich manipulation depends not only on control, but also on accurate estimation of the task-relevant scene state.

A central difficulty in these tasks is partial observability. In peg-in-hole insertion, the robot must reason about the pose of the hole, but this state is only indirectly observed through vision, proprioception, and contact. Depth sensing provides useful global information, but suffers from sensor noise, occlusions, restricted viewpoints, and ambiguities due to part geometry. The most task-relevant surfaces may be hidden inside the hole or only revealed through physical interaction; for example, plugging in a USB-A device. As a result, visually plausible pose hypotheses may not be physically feasible.

Prior work addresses this challenge by training learning-based methods from simulation via Reinforcement Learning and using Sim2Real techniques to transfer to real robot settings, or demonstrations via Imitation Learning [1], [2], [3]. Although effective, these methods require new demonstrations and retraining to achieve insertions in new objects and scenes. Alternatively, Kim and Rodriguez [4] show that decoupling state and dynamics uncertainty by explicitly estimating pose improves sample efficiency of the learned

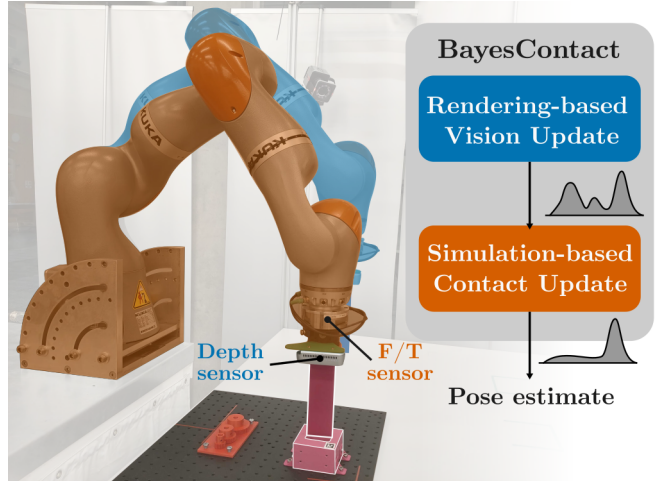


Fig. 1: BayesContact: We propose a Simulation-based Inference approach to infer uncertain pose using rendering-based depth and physics-based contact likelihoods, which enable online estimation of pose from depth and contact sensing. *BayesContact* improves pose observability and insertion success over vision-only approaches by 30%.

policy and Sim2Real transfer. Motivated by this work, we propose to go one step further and achieve pose estimation for insertion using the same simulation tools used for policy learning but without offline training.

Our key insight is that force–torque (F/T) sensing becomes spatially informative when interpreted through geometry and simulation. A raw wrench does not directly reveal a contact point or object pose. However, conditioned on the robot state, the probing action, and a hypothesized object pose, a physics simulation can predict what contact evidence should be observed. Comparing simulated and measured contact therefore defines a likelihood over possible poses. In this way, contact is not merely a feedback signal for control, but a source of Bayesian evidence about the hidden scene state.

To this effect, we present *BayesContact*, an online visuo-contact pose estimation framework leveraging Simulation-Based Inference (SBI). Inspired by existing works in robotics [5], [6], [7], we apply this framework to a contact-rich manipulation problem. *BayesContact* maintains a particle belief over the pose of a known target object. For each pose hypothesis, a graphics simulator predicts visual observations and a physics simulator predicts contact observations. These simulated observations are compared against real depth and F/T measurements to construct approximate likelihoods, which are fused through sequential Bayesian inference. We implement this framework using probabilistic programming,

allowing rendering-based and physics-based likelihoods to be composed modularly while supporting multimodal beliefs.

Furthermore, BayesContact also leverages the current belief to choose the next action for probing, turning contact into an active sensing mechanism.

The specific contributions of this work are:

- 1) We introduce a Bayesian Simulation-Based Inference framework [8] for online pose estimation with visual and tactile sensing in contact-rich insertion tasks.
- 2) We propose rendering-based depth and simulation-based contact likelihoods for flexible estimation.
- 3) We demonstrate, through simulation and real robot experiments, that fusing depth vision and F/T contact improves pose observability across multiple insertion geometries.

II. RELATED WORK

A. Multi sensor fusion for Contact-rich Manipulation

Sensor fusion methods integrate diverse information sources into a shared state representation that is suitable for task execution. In contact-rich manipulation, the sources include cameras, F/T sensing, and robot proprioception.

Visual sensing provides rich task-relevant global information within the context contact-rich manipulation. However, due to a limited field of view, vision-only approaches are often hindered by partial observability of the task space. To combat this, some approaches use multiple cameras within the workspace to estimate task-relevant state [9] [10]. This is an effective strategy for most contact-rich tasks involving collision free motions. However, for tasks that involve forceful interactions, multi-camera configurations may not exhaustively cover the task space for enhanced coverage, making contact information vital [11].

Prior works use learned contact process models within a Bayesian Inference framework for effectively fusing contact and vision information to estimate task-relevant state. Kloss et al. [12] propose differentiable versions of classical filtering methods that learn non-linear process models for contact. They demonstrate an improved state estimate for a planar-pushing task, over an end-to-end LSTM based learned method. Lee et al. [13] learn joint sensor observation models for contact and vision using neural networks. Using a Bayesian Inference framework was shown to improve the estimation of task-relevant state while keeping the interpretability, over end-to-end learned methods.

While these methods are effective for planar pushing tasks, forceful interaction require contact models that relate interacting object configurations with interaction forces. In this work we build upon the Bayesian Inference framework used by prior methods but we integrate sensor likelihoods provided by simulators, particularly graphics and physics engine, which provide additional modeling flexibility.

B. Object Pose Estimation Using Contact

Prior works attempt to estimate pose of an object using only contact sensing. Suresh et al. [14] jointly estimate pose and geometry of an object in a planar pushing task using a

probabilistic representation and Factor Graph optimization. They use limit surface models to capture interaction dynamics with the assumption of known contact location on the robot. These provide effective contact model approximations that are suitable for the planar pushing task with the assumption of known contact location. However, forceful interaction tasks like peg-in-hole insertion require approximations that track contact location, which are available via simulation when conditioned on geometry.

Lee et al. [15] propose differentiable contact features to be able to use contact models for forceful interaction tasks. They demonstrate a bi-level optimization with the inner optimization solving for contact forces and the outer optimization solving for object configuration. Our method follows a similar approach with the exception of using sampling-based inference for object configuration proposals and a simulator for the contact model evaluation. This is further demonstrated on a real-world peg insertion task.

Tactile sensing is a common paradigm to estimate and correct for pose differences. Kim and Rodriguez [4] use tactile sensing modalities and learn a contact line estimator for a peg-in-hole task. This builds upon a factor graph-based optimization to estimate contact line from tactile sensing. Suresh et al. [16] learn a tactile sensor model to fuse tactile imagery with visual depth image to jointly estimate pose and reconstruct geometry.

Though effective, these approaches make assumptions of known extrinsic contact locations. In this work we infer contact locations and fuse the resulting evidence to estimate the hidden hole pose.

C. Sampling-based Inference and Contact

The general Approximate Inference frameworks proposed for the pose estimation tasks involve fusing information via factor graphs. When integrating various sensing modalities, factor graph-based optimization require a differentiable forward model to be specified. Due to the inherent discontinuous and non-linear nature of contact, often task specific contact approximations make them amenable to state inference [14] [4] [15].

An alternate approach is to use a simulator to specify these forward models. Simulation-based Inference provides an alternative Approximate Inference that allow inverting complex forward models [8]. Prior works in robotics have used graphics engines to specify forward models for 3D scene perception [6]. This involves sampling in the parameter space and evaluating simulation-based likelihoods with observed data to infer unobserved parameters. Often sampling-based approximate inference methods such as Markov Chain Monte Carlo (MCMC) and Sequential Monte Carlo (SMC) methods are used to approximate particle-based approximate distributions of the latent parameter. Jatavallabhula et al. [7] uses simulation-based inference methods to estimate the parameters of the object articulation model through interaction.

In this work, we extend this formulation with geometry-conditioned force likelihoods and depth-based image likeli-

hoods, enabling contact-aware scene understanding for estimating the hole pose in a peg-insertion task.

III. BACKGROUND

A. Simulation-Based Bayesian Inference

We formulate pose estimation as Bayesian inference over an unknown object pose $\mathbf{x}$. Given an observation $\mathbf{o}$, Bayesian inference updates a prior belief into a posterior,

$$p(\mathbf{x} | \mathbf{o}) = \frac{p(\mathbf{o} | \mathbf{x})p(\mathbf{x})}{\int p(\mathbf{o} | \mathbf{x}')p(\mathbf{x}') d\mathbf{x}'} \quad (1)$$

For sequential observations, this update can be written recursively as

$$b_k(\mathbf{x}) = p(\mathbf{x} | \mathbf{o}_{1:k}, \mathbf{a}_{1:k}) \propto p(\mathbf{o}_k | \mathbf{x}, \mathbf{a}_k) b_{k-1}(\mathbf{x}), \quad (2)$$

where $b_k(\mathbf{x})$ is the belief after the k -th measurement, $\mathbf{o}_k$ is the observation, and $\mathbf{a}_k$ is the action used to acquire it.

In contact-rich manipulation, the likelihood $p(\mathbf{o}_k | \mathbf{x}, \mathbf{a}_k)$ is difficult to specify analytically. Visual observations depend on rendering, visibility, occlusion, and sensor noise, while contact observations depend on geometry, robot motion, and contact physics. We therefore treat pose estimation as a Simulation-Based Inference problem. For each pose hypothesis $\mathbf{x}$, a renderer or physics simulator predicts an observation, and a surrogate likelihood scores the agreement between the simulated and measured observations. We implement this generative model using probabilistic programming.

B. Sequential Monte Carlo

Since the posterior over object pose can be multimodal due to occlusion, symmetry, visual ambiguity, and ambiguous contact explanations, we represent the belief using a weighted set of particles,

$$b_k(\mathbf{x}) \approx \sum_{i=1}^N w_k^{(i)} \delta(\mathbf{x} - \mathbf{x}_k^{(i)}), \quad (3)$$

where $\mathbf{x}_k^{(i)}$ is the i -th pose hypothesis and $w_k^{(i)}$ is its normalized weight.

Sequential Monte Carlo (SMC) updates this belief by proposing pose hypotheses, evaluating their simulation-based likelihoods, normalizing particle weights, and resampling when required. This representation is well suited to BayesContact because each particle can be independently rendered or simulated to evaluate its consistency with visual and contact measurements.

IV. METHOD

A. Overview

BayesContact estimates the pose of a known *hole* object in a peg-in-hole task. The state is $\mathbf{x} \in \mathcal{X} \subset SE(3)$, where the pose is parameterized as $\mathbf{x} = (x_x, x_y, \theta)$. Here, x_x and x_y are planar translations, and θ is the yaw angle about the vertical axis. The full object transform is obtained by embedding this planar pose into $SE(3)$ with fixed height, roll, and pitch. The pose is estimated using a particle belief,

which is updated from depth and F/T measurements. The approach is summarized in Fig. 2

For inference, each particle is used to determine depth observations from a graphics renderer, and contact observations under probing actions from a physics simulator. These simulated observations are compared with the measured depth and F/T data using likelihoods. These determine the front-end of the estimator. The likelihoods are then used to update the belief (via the particles) using SMC inference, which corresponds to the back-end of BayesContact [17].

Inference proceeds in two stages. First, depth observations initialize a vision posterior using SMC with Metropolis–Hastings refinement. Second, the contact phase warm-starts with the vision posterior and updates the belief using contact-rich probing. During this phase, each probing step may provide both F/T-derived contact evidence and associated depth observations, which are fused through a joint simulation-based likelihood.

B. Problem Formulation

Measurements are indexed by k . The first γ measurements correspond to the visual perception phase. The remaining measurements correspond to contact-rich interaction:

$$\mathbf{o}_k = \begin{cases} \mathbf{o}_k^d, & k \leq \gamma, \\ (\mathbf{o}_k^f, \mathbf{o}_k^d), & k > \gamma. \end{cases} \quad (4)$$

Here, $\mathbf{o}_k^d$ denotes a depth observation, and $\mathbf{o}_k^f$ denotes F/T-derived contact evidence. In the contact phase, the observation may contain both the contact evidence from the guarded probe and additional depth information collected during or after the probe. Given action $\mathbf{a}_k$, the inference objective is to estimate

$$b_k(\mathbf{x}) = p(\mathbf{x} | \mathbf{o}_{1:k}, \mathbf{a}_{1:k}). \quad (5)$$

The object pose $\mathbf{x}$ is static across measurements, while the belief b_k is updated sequentially as new visual and contact observations are acquired. The upcoming sections discuss the main components of the belief update, namely the observation likelihoods and the SMC inference machinery.

C. Observation Likelihoods

BayesContact compares observed and simulated measurements using modality-specific likelihoods. These likelihoods are not intended to be exact analytic sensor models. Instead, they act as simulation-based scoring functions: a pose hypothesis receives a high score when its simulated visual or contact evidence is consistent with the measured data. All $\mathcal{L}$ terms below denote log likelihoods.

Depth Likelihood: For a visual measurement, the observed depth image $\mathbf{o}_k^d$ is compared with a rendered depth image $\tilde{\mathbf{o}}_k^d = \mathcal{R}(\mathbf{x})$, where $\mathcal{R}$ is a function that renders the scene in the world frame with a known camera pose. The depth likelihood for the current measurement is

$$\mathcal{L}_{\text{depth}}(\mathbf{o}_k^d | \mathbf{x}) = \frac{1}{HW} \sum_{u,v} \ell_{u,v}(\mathbf{o}_k^d | \mathbf{x}), \quad (6)$$

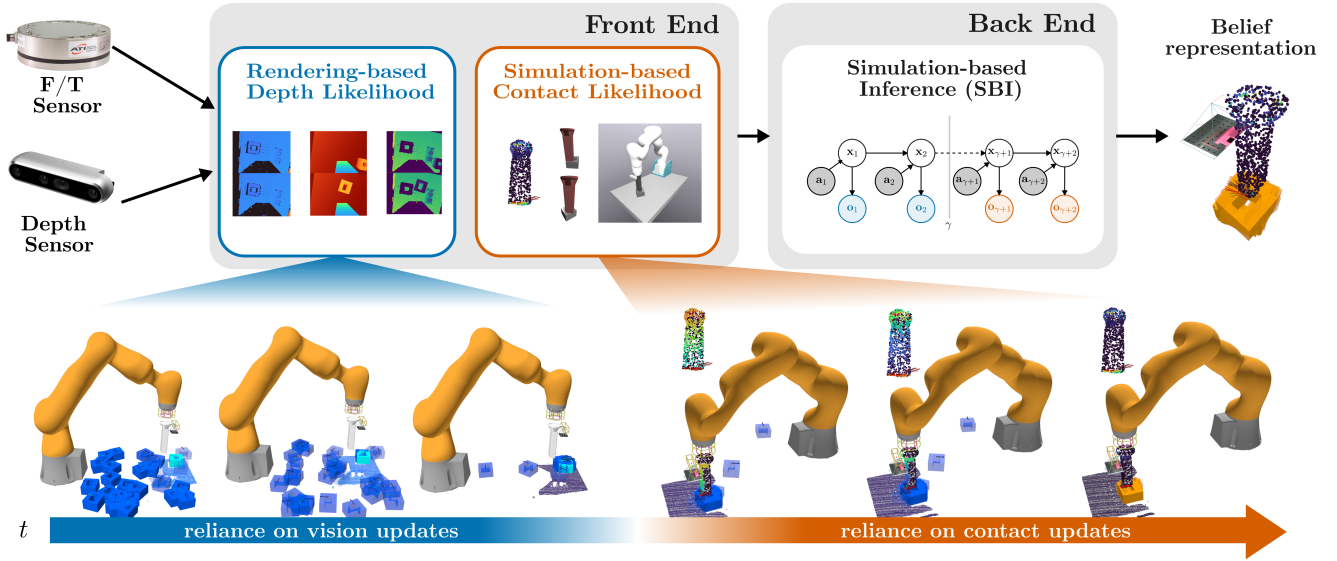


Fig. 2: System overview. BayesContact performs pose estimation using simulation-based forward models with a graphics renderer for depth observations and a physics simulator for contact observations. These likelihoods serve as the frontend to a Sequential Monte Carlo inference backend. Together, these allow the robot to estimate belief over pose of a hole in a peg-insertion setup.

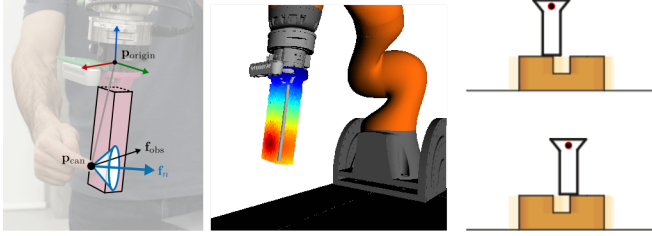


Fig. 3: Geometry-conditioned Contact Likelihood. Force-Torque data consists of rich local information about the direction of the hole when conditioned on geometry.

where H, W are the image dimensions. $\ell_{u,v}$ denotes a pixel-wise score computed over each pixel (u, v) using a Laplace inlier model mixed with a constant outlier model:

$$\ell_{u,v}(\mathbf{o}_k^d | \mathbf{x}) = \log \left[(1 - p_{\text{out}}) \text{Lap}(\mathbf{o}_{k,u,v}^d; \tilde{\mathbf{o}}_{k,u,v}^d(x), b) + p_{\text{out}} \exp(c_{\text{out}}) \right], \quad (7)$$

where

$$\text{Lap}(\mathbf{y}; \mu, b) = \frac{1}{2b} \exp\left(-\frac{|\mathbf{y} - \mu|}{b}\right).$$

Here b is the scale parameter, p_{out} is the outlier probability, and c_{out} is the constant outlier log-probability.

This likelihood assigns high score to pose hypotheses whose rendered depth image aligns with the observed depth image. The outlier mixture prevents a small number of mismatched pixels, missing depth returns, or rendering artefacts from dominating the score.

Geometry-Conditioned Contact Likelihood: The contact likelihood compares the observed and simulated contact

evidence using a Chamfer-distance score:

$$\mathcal{L}_{\text{contact}}(\mathbf{o}_k^f | \mathbf{x}, \mathbf{a}_k) = - \sum_{p_i \in \tilde{\mathbf{o}}_k^f(x, \mathbf{a}_k)} \min_{q_j \in \mathbf{o}_k^f} \|p_i - q_j\|^2. \quad (8)$$

For contact measurements, the F/T signal is first converted into contact evidence on the peg surface. Candidate contact points $\{p_j\}_{j=1}^P$ are sampled from the peg mesh, with corresponding surface normals $\{\hat{n}_j\}_{j=1}^P$. We assume that the transform from the F/T sensor frame to the peg frame is known to express the F/T sensor origin relative to the peg. For each candidate point, we use the transform to compute the moment arm $\mathbf{r}_j = \mathbf{p}_{\text{can}} - \mathbf{p}_{\text{origin}}$, with the measured force $\mathbf{f}$ and torque $\boldsymbol{\tau}$ expressed in a common frame (Fig. 3).

For a true point contact, we compute the wrench consistency residual

$$\rho_j = \|\boldsymbol{\tau} - (\mathbf{r}_j \times \mathbf{f})\|_2. \quad (9)$$

Candidate points that violate simple physical constraints, such as tensile contact or friction-cone consistency, are down-weighted. The residual is converted into a score,

$$s_j = \exp(-\rho_j), \quad (10)$$

and the highest-scoring candidates define the observed contact evidence $\mathbf{o}_k^f$.

To obtain the simulated contact measurement, from a pose hypothesis $\mathbf{x}$ and probe action $\mathbf{a}_k$, the physics simulator $\mathcal{S}$ predicts the simulated contact evidence

$$\tilde{\mathbf{o}}_k^f(\mathbf{x}, \mathbf{a}_k) = \mathcal{S}(\mathbf{x}, \mathbf{a}_k). \quad (11)$$

This likelihood is the main mechanism by which contact improves observability.

Joint Contact-Phase Likelihood: During the visual phase, particle weights are updated using only the depth likelihood.

During the contact phase, where $(k > \gamma)$, and $\mathbf{o}_k = (\mathbf{o}_k^f, \mathbf{o}_k^d)$, we employ a joint log-likelihood given by,

$$\mathcal{L}_{\text{joint}}(\mathbf{o}_k^f, \mathbf{o}_k^d, \tau_k^{\text{cam}} | \mathbf{x}, \mathbf{a}_k) = \mathcal{L}_{\text{contact}}(\mathbf{o}_k^f | \mathbf{x}, \mathbf{a}_k) + \mathcal{L}_{\text{depth}}(\mathbf{o}_k^d | \mathbf{x}) + \mathcal{L}_{\text{traj}}(\tau_k^{\text{cam}} | \mathbf{x}, \mathbf{a}_k). \quad (12)$$

Where τ_k^{cam} denotes the observed camera trajectory associated with action $\mathbf{a}_k$. The main contact-driven update comes from $\mathcal{L}_{\text{contact}}$, which scores whether the simulated contact geometry agrees with the F/T-localized contact evidence.

The trajectory term $\mathcal{L}_{\text{traj}}$ penalizes mismatch between observed and simulated camera poses using translational and geodesic rotational error. The likelihood is defined as

$$\mathcal{L}_{\text{traj}}(\tau_k^{\text{cam}} | \mathbf{x}, \mathbf{a}_k) = - \sum_{i=1}^{K_{\text{traj}}} \left[\frac{d_t(\mathbf{t}_{k,i}^{\text{obs}}, \mathbf{t}_{k,i}^{\text{sim}})^2}{2\sigma_t^2} + \frac{d_R(\mathbf{R}_{k,i}^{\text{obs}}, \mathbf{R}_{k,i}^{\text{sim}})^2}{2\sigma_R^2} \right], \quad (13)$$

where $\mathbf{t}_{*,i}^{\text{sim,obs}}$, $\mathbf{R}_{*,i}^{\text{sim,obs}}$ are simulated and observed translations and orientations of the camera at step i in the probe trajectory. The translational and rotational trajectory distances are

$$d_t(\mathbf{t}, \hat{\mathbf{t}}) = \|\mathbf{t} - \hat{\mathbf{t}}\|_2, d_R(\mathbf{R}, \hat{\mathbf{R}}) = \cos^{-1} \left(\frac{\text{tr}(\mathbf{R}\hat{\mathbf{R}}^T) - 1}{2} \right). \quad (14)$$

D. Sequential Monte Carlo Inference

BayesContact performs inference in two stages: a vision initialization phase followed by sequential contact updates.

Vision Phase: The vision phase uses Sampling-Importance-Resampling (SIR) [18] with Metropolis-Hastings (MH) rejuvenation to construct an initial posterior from depth observations. At measurement step k , particles (indexed by j) are proposed from the explore-exploit proposal

$$\pi_k(\mathbf{x}) = \alpha \mathcal{U}(\mathcal{X}) + (1 - \alpha) \sum_j w_{k-1}^{(j)} \mathcal{K}(\mathbf{x} | \mathbf{x}_{k-1}^{(j)}). \quad (15)$$

Here, $\mathcal{U}(\mathcal{X})$ is a uniform distribution over the bounded pose-search space, and $\mathcal{K}(\mathbf{x} | \mathbf{x}_{k-1}^{(j)})$ is a Gaussian perturbation kernel centered at particle $\mathbf{x}_{k-1}^{(j)}$. The coefficient α is the exploration probability: with probability α , a particle is drawn from $\mathcal{U}(\mathcal{X})$; otherwise, a previous particle is sampled according to $w_{k-1}^{(j)}$ and perturbed by $\mathcal{K}$. For the initial belief b_0 , $\alpha = 1$, giving a global uniform proposal over the specified support. Later, $0 < \alpha < 1$ balances global exploration and posterior-local exploitation.

Each proposed particle is rendered and scored using the depth log-likelihood. The log importance weight is

$$\log \tilde{w}_k^{(i)} = \mathcal{L}_{\text{depth}}(\mathbf{o}_k^d | \mathbf{x}_k^{(i)}) + \log p_0(\mathbf{x}_k^{(i)}) - \log \pi_k(\mathbf{x}_k^{(i)}). \quad (16)$$

The correction $\log p_0(\mathbf{x}) - \log \pi_k(\mathbf{x})$ accounts for sampling from the proposal rather than the prior. For a uniform prior over $\mathcal{X}$, the prior term is constant within the support.

After the SIR update, particles are refined using random-walk Metropolis-Hastings. The proposal perturbs planar translation and yaw,

$$\mathbf{x}' = (x_x + \epsilon_x, x_y + \epsilon_y, \theta + \epsilon_\theta), \quad (17)$$

where $\epsilon_x, \epsilon_y, \epsilon_\theta$ are zero-mean Gaussian perturbations. With a symmetric proposal and uniform prior, the acceptance probability is

$$A(\mathbf{x} \rightarrow \mathbf{x}') = \min(1, \exp[\mathcal{L}_{\text{depth}}(\mathbf{o}_k^d | \mathbf{x}') - \mathcal{L}_{\text{depth}}(\mathbf{o}_k^d | \mathbf{x})]). \quad (18)$$

The resulting vision posterior initializes the contact phase.

Contact Phase: For contact measurements $k > \gamma$, an action $\mathbf{a}_k$ is selected and executed, producing $\mathbf{o}_k = (\mathbf{o}_k^f, \mathbf{o}_k^d)$, where $\mathbf{o}_k^f$ is F/T-derived contact evidence and $\mathbf{o}_k^d$ is the available depth information. Particles are again proposed using Eq. (15), typically with α close to zero to emphasize exploitation of the current posterior.

For each proposed particle, the physics simulator produces $\tilde{\mathbf{o}}_k^f(\mathbf{x}_k^{(i)}, \mathbf{a}_k)$, and the renderer produces $\tilde{\mathbf{o}}_k^d(\mathbf{x}_k^{(i)})$ when depth is available. The contact-phase SIR log weight is

$$\log \tilde{w}_k^{(i)} = \mathcal{L}_{\text{joint}}(\mathbf{o}_k^f, \mathbf{o}_k^d, \tau_k^{\text{cam}} | \mathbf{x}_k^{(i)}, \mathbf{a}_k) + \log p_0(\mathbf{x}_k^{(i)}) - \log \pi_k(\mathbf{x}_k^{(i)}). \quad (19)$$

As before, the correction term accounts for proposal sampling. When no explicit proposal-density correction is used, particles are weighted directly by the joint log-likelihood.

At each SIR update, unnormalized weights are normalized and particles are propagated using systematic resampling. Unlike the vision phase, no MH rejuvenation is applied during contact updates because each likelihood evaluation requires physics simulation.

E. Action Space and Guarded Probing

To gather contact measurements, the robot executes contact actions $\mathbf{a}_k$, which specify guarded probing motions used to acquire information about the hole pose. In the contact phase, actions are parameterized as planar and yaw offsets,

$$\mathbf{a}_k = (\Delta x_k, \Delta y_k, \Delta \theta_k), \quad (20)$$

where Δx_k and Δy_k define the planar probing location and $\Delta \theta_k$ defines the yaw offset of the peg about the vertical axis.

From the commanded offset, the robot executes a guarded vertical dip along the negative z -axis. The motion is terminated when either a predefined F/T threshold is exceeded or a maximum displacement is reached. Actions are executed using a Cartesian impedance controller that tracks an action-dependent reference trajectory. The F/T measurements acquired during the guarded motion are converted into contact evidence and used in the corresponding Bayesian update.

Algorithm 1 Myopic Approximate Information Gain for Next-Best Probe

Require: Current belief $b_k = \{(x_k^i, w_k^i)\}_{i=1}^K$ truncated and normalized at top- K , candidate action set $\mathcal{A}_{\text{dip}}$, simulator $\mathcal{S}$, renderer $\mathcal{R}$

Ensure: Selected probing action a^*

```
1: Compute prior entropy  $H_0 = -\sum_{i=1}^K w_k^i \log w_k^i$ 
2: for all  $a \in \mathcal{A}_{\text{dip}}$  do
3:   Initialise  $\bar{H}(a) \leftarrow 0$ 
4:   for  $i = 1$  to  $K$  do ▷ Expected Entropy Loop
5:     Simulate contact evidence  $\tilde{o}_i^f \leftarrow \mathcal{S}(x_k^i, a)$ 
6:     Simulate depth evidence  $\tilde{o}_i^d \leftarrow \mathcal{R}(x_k^i, a)$ 
7:     for  $j = 1$  to  $K$  do ▷ Predict Entropy
8:        $\hat{w}_{k+1}^{(j)} \leftarrow$  Weight update Eq. (19)
9:     end for
10:     $H_{k+1}^i \leftarrow -\sum_{j=1}^K \hat{w}_{k+1}^{(j)} \log \hat{w}_{k+1}^{(j)}$ 
11:     $\bar{H}(a) \leftarrow \bar{H}(a) + w_k^i H_{k+1}^i$ 
12:  end for
13:   $\text{IG}(a) \leftarrow H_0 - \bar{H}(a)$ 
14: end for
15: Select  $a^* = \arg \max_{a \in \mathcal{A}_{\text{dip}}} \text{IG}(a)$ 
16: return  $a^*$ 
```

F. Active Sensing for Next-Best Probe

Because contact observations are local, their informativeness depends on where the robot probes. We can further use the belief representation provided by BayesContact to select the next probing action from a finite candidate set $\mathcal{A}_{\text{dip}} \subset \mathbb{R}^2 \times SO(2)$, where each action specifies a planar probing offset and yaw offset.

The action selection procedure is shown in Alg. 1. The algorithm approximates a one-step information-gain objective using the current particle belief. An expected posterior entropy is computed given the current belief. The action that maximizes the information gain between current belief and predicted posterior is chosen as detailed in Algorithm 1.

V. EXPERIMENTS

To validate *BayesContact*, we evaluate three questions:

- Q1** Does F/T-induced contact-location information improve pose observability?
- Q2** Does a particle-based simulation-inference belief better preserve and resolve geometric ambiguity than parametric alternatives?
- Q3** Does this belief enable active sensing?

A. Metrics

We evaluate pose accuracy using ADD-S, position error, and orientation error. ADD-S [9] measures geometric alignment while accounting for object symmetries:

$$\text{ADD-S} = \frac{1}{N} \sum_{\mathbf{x}_i \in \mathcal{M}} \min_{\mathbf{x}_j \in \mathcal{M}} \|\mathbf{R}\mathbf{x}_i + \mathbf{t} - (\mathbf{R}^*\mathbf{x}_j + \mathbf{t}^*)\|. \quad (21)$$

Where $\mathcal{M} = \{\mathbf{x}_i\}_{i=1}^N$ denote points sampled from the object model, and $(\mathbf{R}, \mathbf{t})$ and $(\mathbf{R}^*, \mathbf{t}^*)$ are the estimated and ground-truth poses. The translational error is defined as the Euclidean error $e_{\text{pos}} = d_t(\mathbf{t}, \mathbf{t}^*)$, while the rotational error is given by the geodesic distance $e_{\text{rot}} = d_R(\mathbf{R}, \mathbf{R}^*)$ (Eq. (14)).

B. Protocol

We evaluate *BayesContact* (**BC**) in simulation and on a physical robot across five peg-in-hole geometries with varying ambiguity (Fig. 6). In all trials, the arm is initialized such that the hole lies within the wrist-camera field of view and is not self-occluded by the robot.

Inference proceeds in two phases. During the vision phase, the robot remains stationary and updates a pose belief from visual measurements. Contact phase proceeds with probing strategies as described in the active sensing section below. Probing terminates when the measurement budget or stopping criterion is reached, after which the weighted particle mean is used for insertion.

For each geometry, we evaluate 20 randomized object poses in simulation and 10 in real world. Inference is performed with 5 random seeds. We report ADD-S, position error, and orientation error over measurement index to quantify convergence and observability.

Simulation experiments and simulation-based likelihood evaluations are performed in Drake [19]. The inference pipeline is implemented in GenJAX. The real-world setup uses a 7-DoF KUKA iiwa14 equipped with an ATI force/torque sensor. Probing actions are executed with a task-space Cartesian impedance controller using fixed stiffness and damping gains. Vertical probes are guarded motions along the negative z -axis and terminate when a prescribed force/torque threshold is reached.

Pose Estimation with vision: We perform experiments in simulation and the real robot. We report two vision-only variants: **BCv-SMC**, which performs sequential Monte Carlo inference with MH rejuvenation moves, and **BCv-PF**, a particle-filter variant without MH moves. These isolate the quality of the visual posterior before contact information is introduced. We compare against RANSAC+ICP [20], [21] (**ICP**), a geometric registration baseline, and Foundation-Pose [9] (**FP**), a deep learning-based 6D pose estimator.

Pose Estimation with contact: During the contact phase, inference is initialized from the vision posterior and the robot selects probing actions using one of three policies. **MAP** probing executes the action associated with the highest-weighted particle. Thompson Sampling samples a particle according to the current particle weights and probes according to that hypothesis. Information-gain maximization (**IG**) selects the action expected to maximally reduce posterior uncertainty, as defined in Algorithm 1. After each guarded probe, the resulting contact observation is incorporated into the belief. We additionally compare against a Manifold Unscented Kalman Filter (**Man-UKF**) [22], [23], a parametric belief-space baseline that fuses vision and contact measurements on the pose manifold.

VI. RESULTS

Contact-Location Observations Improve Pose Observability: Our experiments in simulation demonstrate that incorporating F/T-induced contact-location information consistently improves pose observability over vision-only infer-

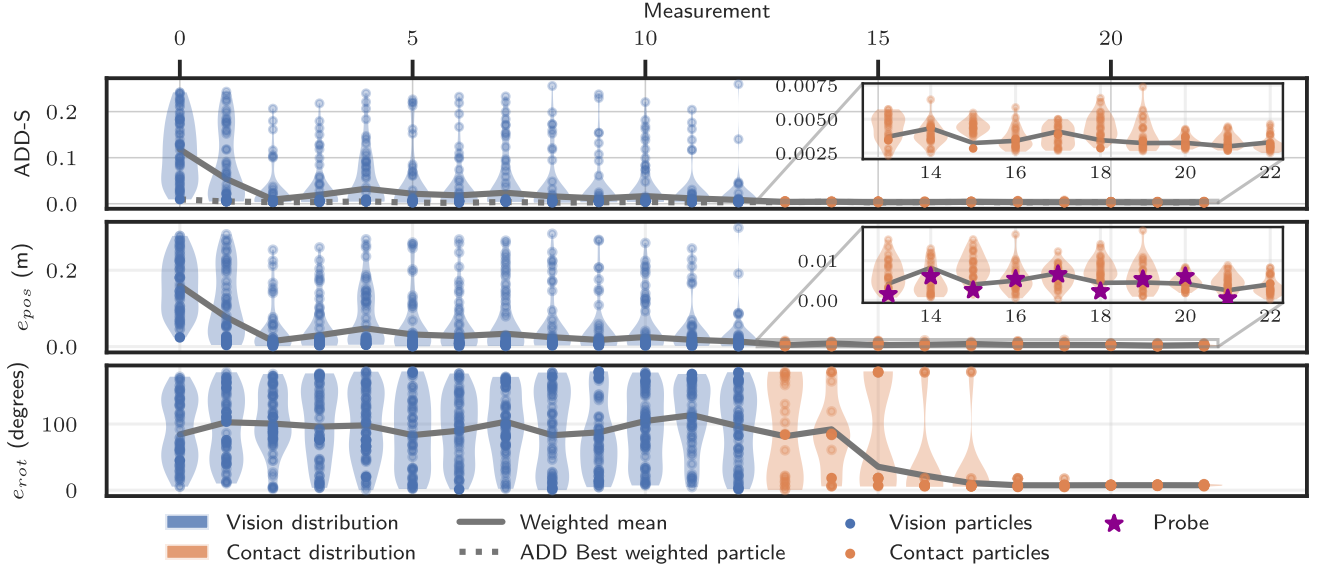


Fig. 4: Pose convergence. We illustrate the pose estimate convergence through vision and contact measurements for an example scenario using the ELLIPSE-TEETH geometry. *Top row:* Convergence of the ADD-S metric across time. *Middle row:* Position error. *Bottom row:* Orientation error. The particle orientation errors show a weight clustering around $\{0^\circ, 90^\circ, 180^\circ\}$ coming in from the vision posterior, a consequence of geometric ambiguity. Contact observations then help disambiguate between these modes.

TABLE I: Summary Pose Estimation Results in Simulation. We report converged ADD-S (mm), position error(mm), and orientation error (degrees), reported as mean ($\pm$ std), for both for Vision-only and Vision + Contact Approaches.

	Method	Rectangle			Ellipse			Rectangle-teeth			Ellipse-teeth			Arch		
		ADD-S ↓	Pos ↓	Ori ↓	ADD-S ↓	Pos ↓	Ori ↓	ADD-S ↓	Pos ↓	Ori ↓	ADD-S ↓	Pos ↓	Ori ↓	ADD-S ↓	Pos ↓	Ori ↓
Vision + Contact	BC-IG	3.92 ±1.41	1.34 ±0.31	34.8 ±28.5	3.74 ±1.36	1.38 ±0.27	38.1 ±31.2	3.86 ±1.22	1.21 ±0.24	24.6 ±18.9	3.91 ±1.30	1.36 ±0.29	27.8 ±20.4	4.12 ±1.47	1.52 ±0.33	31.7 ±24.6
	BC-MAP	4.05 ±1.52	1.42 ±0.34	39.6 ±31.7	3.89 ±1.44	1.36 ±0.30	42.5 ±34.1	4.02 ±1.28	1.48 ±0.31	34.9 ±25.8	4.04 ±1.37	1.62 ±0.36	37.6 ±27.2	4.20 ±1.51	1.58 ±0.35	34.8 ±26.1
	Man-UKF[23]	5.46 ±2.08	1.91 ±0.45	71.2 ±49.6	5.18 ±2.01	1.74 ±0.39	76.8 ±52.4	5.32 ±1.86	1.89 ±0.43	92.5 ±47.8	5.51 ±1.94	2.08 ±0.52	87.9 ±50.2	5.87 ±2.15	2.22 ±0.58	81.4 ±46.7
		BCv-SMC	5.28 ±2.27	2.51 ±0.46	76.4 ±55.7	5.11 ±2.39	2.05 ±0.19	80.4 ±58.1	6.18 ±2.29	2.07 ±0.16	106.6 ±55.1	6.81 ±4.89	3.91 ±5.16	83.9 ±54.8	7.08 ±1.40	2.14 ±0.26
Vision-only	BCv-PF	6.17 ±2.31	2.66 ±0.47	94.7 ±60.5	5.62 ±2.65	2.24 ±0.36	87.6 ±62.2	6.37 ±1.18	2.39 ±0.26	98.8 ±26.1	6.21 ±0.60	2.46 ±0.36	92.5 ±13.7	13.26 ±7.18	12.02 ±8.10	72.4 ±18.2
	ICP [21]	46.15 ±23.47	14.90 ±23.61	77.8 ±63.7	40.87 ±20.22	13.96 ±20.27	91.3 ±65.9	53.53 ±11.64	18.80 ±12.06	118.1 ±51.1	55.31 ±17.88	14.79 ±17.87	82.1 ±59.6	45.66 ±16.91	15.10 ±17.46	93.3 ±51.1
	FP [9]	10.85 ±6.76	9.31 ±7.93	102.3 ±81.9	10.69 ±4.79	7.69 ±6.96	142.9 ±57.6	8.17 ±3.67	5.32 ±4.07	100.7 ±75.7	11.08 ±6.41	9.60 ±9.01	110.6 ±79.3	9.70 ±5.10	6.59 ±5.71	107.4 ±76.0

TABLE II: Real-robot results. We report converged ADD-S error and insertion success rate for Rectangle and Rectangle-teeth.

Method	Rectangle		Rectangle-teeth	
	ADD-S (mm) $\downarrow$	Success $\uparrow$	ADD-S (mm) $\downarrow$	Success $\uparrow$
BCv-SMC	6.12		6.58	
	± 2.44	3/10	± 2.71	3/10
BC-IG	4.04		4.21	
	± 1.94	5/10	± 1.56	6/10

ence. As shown in Table I, BC-IG reduces average converged ADD-S, position error, and orientation error over BCv-SMC by 35.8%, 46.3%, and 67.1%, respectively, across all simulated geometries. The gains are largest for visually ambiguous geometries: on Rectangle-teeth, BC-IG reduces ADD-S, position error, and orientation error by 37.5%, 41.5%, and 76.9%, respectively; on Ellipse-teeth, the corresponding reductions are 42.6%, 65.2%, and 66.9%. Fig. 4 illustrates this effect: the vision posterior reduces translational uncertainty but retains multiple orientation modes, while contact

observations downweight hypotheses inconsistent with the measured contact evidence. Real-robot results in Table II show the same trend, with BC-IG reducing ADD-S by 34.0% on Rectangle and 36.0% on Rectangle-teeth over BCv-SMC, while improving insertion success by 20% and 30%, respectively.

Particle Beliefs Preserve and Resolve Geometric Ambiguity: The particle-based belief representation is important for preserving ambiguity until contact provides disambiguating evidence. Table I shows that BC-IG outperforms Man-UKF across all geometries, reducing average ADD-S, position error, and orientation error by 28.5%, 30.8%, and 61.7%, respectively. The largest improvements are again in orientation, where a unimodal parametric belief struggles to represent separated pose modes. On Rectangle-teeth, BC-IG reduces orientation error over Man-UKF by 73.4%; on Ellipse-teeth, it reduces orientation error by 68.4%. These results indicate that BayesContact benefits not only from contact sensing, but also from maintaining a multimodal particle belief that

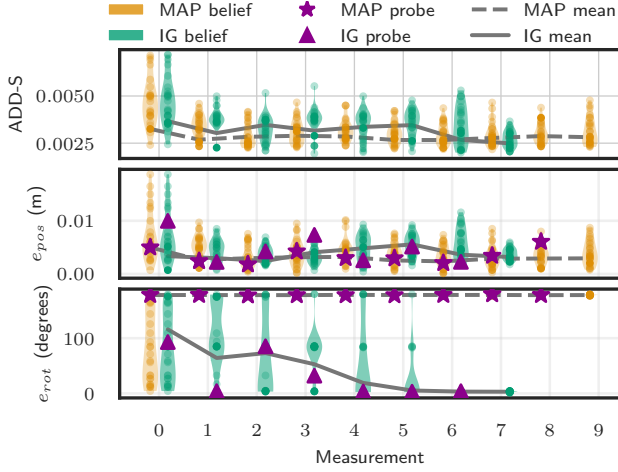


Fig. 5: Active sensing. Comparison of IG and the MAP probing strategies. Both strategies are initialized from the same prior vision belief for a single scenario. While they show similar convergence rates on overall ADD-S and position error, IG handles multimodality in orientation better than MAP.

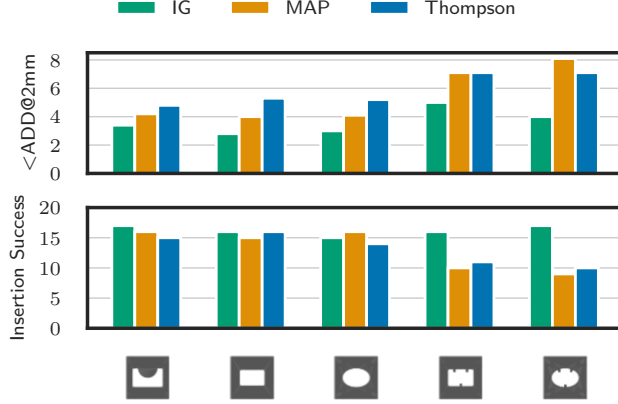


Fig. 6: Probing efficiency and Insertion Success. Top row: Number of contact measurements taken to reach a belief (weighted mean of particles) within an ADD of 2 mm, averaged across 20 simulated scenarios each. Bottom row: Total number of successful insertions out of 20 simulation attempts. Both cases are arranged by the geometry type displayed below: Arch, Rectangle, Ellipse, Rectangle-teeth, and Ellipse-teeth.

can be reweighted as new contact evidence arrives.

Particle Contact Beliefs Enable Information-Gain Active Sensing: Combining contact observations with a particle belief enables active probing. Fig. 5 shows that both MAP and IG probing improve pose accuracy from the same vision posterior, but IG better targets orientation ambiguity by selecting actions that reduce expected posterior entropy rather than committing to the current maximum-weight hypothesis. Fig. 6 suggests that IG reaches the ADD-S threshold with fewer probes and achieves higher insertion success than MAP and Thompson sampling in several geometries. Thus, the current results support contact-driven improvement most strongly, while showing that information-gain probing is a promising mechanism for using the particle belief to actively

resolve residual ambiguity.

VII. CONCLUSION

In this work we proposed *BayesContact*, a Simulation-Based Inference framework that incorporates geometry-conditioned F/T likelihoods and depth likelihoods with SMC inference to estimate the belief over pose of a hole in a peg-insertion setting. Through simulation and real robot experiments we demonstrate that F/T based contact improves pose observability over depth-only estimates. We further demonstrate how the resulting belief representation can be used for Information Gain-based active sensing.

REFERENCES

- [1] M. Noseworthy et al., “FORGE: Force-Guided Exploration for Robust Contact-Rich Manipulation Under Uncertainty,” *IEEE Robot. Autom. Lett.*, vol. 10, no. 5, pp. 4436–4443, 2025.
- [2] J. Luo, C. Xu, J. Wu, and S. Levine, “Precise and dexterous robotic manipulation via human-in-the-loop reinforcement learning,” *Sci. Robot.*, vol. 10, no. 105, eads5033, 2025.
- [3] B. Tang et al., “IndustReal: Transferring Contact-Rich Assembly Tasks from Simulation to Reality,” in *Robot.: Sci. Syst.*, 2023.
- [4] S. Kim and A. Rodriguez, “Active Extrinsic Contact Sensing: Application to General Peg-in-Hole Insertion,” in *IEEE Int. Conf. Robot. Autom. (ICRA)*, 2022, pp. 10 241–10 247.
- [5] F. Ramos, R. Possas, and D. Fox, “BayesSim: Adaptive Domain Randomization Via Probabilistic Inference for Robotics Simulators,” in *Robot.: Sci. Syst.*, 2019.
- [6] N. Goehoskar et al., “3DP3: 3D Scene Perception via Probabilistic Programming,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 34, 2021, pp. 9600–9612.
- [7] K. M. Jatavallabhula, M. Macklin, D. Fox, A. Garg, and F. Ramos, “Bayesian Object Models for Robotic Interaction with Differentiable Probabilistic Programming,” in *Conf. on Robot Learning (CoRL)*, 2023, pp. 1563–1574.
- [8] K. Cranmer, J. Brehmer, and G. Louppe, “The frontier of simulation-based inference,” *Proc. of the National Academy of Sciences*, vol. 117, no. 48, pp. 30 055–30 062, 2020.
- [9] B. Wen, W. Yang, J. Kautz, and S. Birchfield, “FoundationPose: Unified 6D Pose Estimation and Tracking of Novel Objects,” in *IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2024, pp. 17 868–17 879.
- [10] J. Lin, L. Liu, D. Lu, and K. Jia, “SAM-6D: Segment Anything Model Meets Zero-Shot 6D Object Pose Estimation,” in *IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2024, pp. 27 906–27 916.
- [11] P. K. Murali, B. Porr, and M. Kaboli, “Shared visuo-tactile interactive perception for robust object pose estimation,” *Int. J. Robot. Res.*, vol. 44, no. 7, pp. 1186–1216, 2025.
- [12] A. Kloss, G. Martius, and J. Bohg, “How to train your differentiable filter,” *Auton. Robots*, vol. 45, no. 4, pp. 561–578, 2021.
- [13] M. A. Lee et al., “Making Sense of Vision and Touch: Self-Supervised Learning of Multimodal Representations for Contact-Rich Tasks,” in *IEEE Int. Conf. Robot. Autom. (ICRA)*, 2019, pp. 8943–8950.
- [14] S. Suresh, M. Bauza, K.-T. Yu, J. G. Mangelson, A. Rodriguez, and M. Kaess, “Tactile SLAM: Real-time inference of shape and pose from planar pushing,” in *IEEE Int. Conf. Robot. Autom. (ICRA)*, 2021, pp. 11 322–11 328.
- [15] J. Lee, M. Lee, and D. Lee, “Uncertain Pose Estimation during Contact Tasks using Differentiable Contact Features,” in *Robotics: Science and Systems (RSS)*, 2023.
- [16] S. Suresh et al., “NeuralFeels with neural fields: Visuotactile perception for in-hand manipulation,” *Sci. Robot.*, vol. 9, no. 96, ead10628, 2024.
- [17] L. Carlone, A. Kim, T. Barfoot, D. Cremers, and F. Dellaert, Eds., *SLAM Handbook. From Localization and Mapping to Spatial Intelligence*. Cambridge University Press, 2025.
- [18] A. Doucet and A. M. Johansen, “A tutorial on particle filtering and smoothing : fifteen years later,” in *The Oxford handbook of nonlinear filtering*, ser. Oxford handbooks in mathematics, D. Crisan and B. Rozovskii, Eds., Oxford ; N.Y.: Oxford University Press, 2011, pp. 656–705.

- [19] R. Tedrake and t. D. D. Team, *Drake: Model-based design and verification for robotics*, 2019.
- [20] M. A. Fischler and R. C. Bolles, "Random sample consensus: a paradigm for model fitting with applications to image analysis and automated cartography," *Commun. ACM*, vol. 24, no. 6, pp. 381–395, 1981.
- [21] P. Besl and N. D. McKay, "A method for registration of 3-D shapes," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 14, no. 2, pp. 239–256, 1992.
- [22] S. Julier and J. Uhlmann, "Unscented filtering and nonlinear estimation," *Proc. of the IEEE*, vol. 92, no. 3, pp. 401–422, 2004.
- [23] P. K. Murali and M. Kaboli, "ArtReg: Visuo-Tactile based Pose Tracking and Manipulation of Unseen Articulated Objects," *CoRR*, vol. abs/2511.06378, 2025. arXiv: 2511.06378.