
SIREN-Bench: Behavior-Driven Generation and Evaluation of Emergency-Vehicle Interactions

Yicheng Zhu

Rochester Institute of Technology

Tianmu Zhao

CVS Health

Haoxin Leng

City University of Hong Kong

Fan Zuo

New York University

Tao Li

City University of Hong Kong

Zilin Bian *

Rochester Institute of Technology
zilin.bian@rit.edu

Abstract

Emergency vehicles (EMVs) can reorganize surrounding traffic as civilian vehicles brake, change lanes, or form rescue corridors in response to their passage. Evaluating these safety-critical interactions requires behavior-level control over both EMV privileges and civilian responses, together with consistent sensing and ground truth. Existing datasets and simulation benchmarks do not directly provide this combination. We present **SIREN**, a behavior-driven SUMO–CARLA co-simulation platform for generating EMV–civilian interactions. SIREN couples SUMO’s network-level traffic evolution and behavior logic with CARLA’s continuous vehicle control and synchronized onboard sensing; depending on the active behavior, the interaction is controlled by SUMO, CARLA, or jointly. We instantiate the platform as **SIREN-Bench-v1**, comprising seven parameterized interaction templates across emergency levels L1–L3 and three behavior families, with synchronized sensor observations and simulator-native annotations. We demonstrate the benchmark through three representative tasks: 3D object detection, trajectory prediction, and vision-language risk understanding. Evaluations of nine trajectory predictors, four LiDAR-based detectors, and five vision-language models reveal behavior-dependent failure modes. Traffic-clearance interactions are hardest for detection, privileged intersection traversal is hardest for prediction, and no learned predictor outperforms the constant-velocity reference on average. Vision-language models perform substantially better on normal traffic than on near-miss and collision events. These results demonstrate the value of behavior-centered benchmarking and establish SIREN as an extensible data-generation and evaluation platform for autonomous-driving and transportation safety research.

Keywords— Emergency vehicles, SUMO–CARLA co-simulation, Benchmark datasets

1 Introduction

Emergency vehicles (EMVs) do not merely add a rare vehicle type to ordinary traffic, instead, their passage can reorganize the behavior of the surrounding traffic. While responding to an emergency, an ambulance, fire truck, or police vehicle may cross a red signal, proceed through a stop-controlled intersection, pass between queued lanes, or temporarily occupy nonstandard road space. Civilian vehicles must react by braking, changing lanes, pulling toward lane boundaries, or entering otherwise restricted space to yield. These responses can extend beyond the vehicles directly blocking the EMV, altering lane occupancy, vehicle spacing, and right-of-way interactions across the local traffic scene [1, 2]. An EMV encounter is therefore a coupled and asymmetric multi-vehicle interaction: one privileged agent operates under altered mobility rules, while multiple civilian

*Corresponding author.

agents adapt to its presence. The safety-critical phenomenon is the resulting traffic-wide behavioral change, leading to increasing mobility risks.

These induced behavioral changes create a broader evaluation problem for autonomous-driving and transportation safety research. Models and control strategies are commonly developed under nominal assumptions about lane use, vehicle interaction, and right-of-way, whereas an EMV encounter can alter all three simultaneously. Its effects may therefore extend across perception, motion forecasting, interaction modeling, and safety assessment. Determining how such systems respond requires more than collecting isolated appearances of emergency vehicles. It requires reproducible interaction data in which EMV privileges, civilian responses, and traffic conditions can be configured while the simulated environment, sensing, and ground truth remain consistent.

Existing resources provide only parts of this capability. Naturalistic datasets such as nuScenes and the Waymo Open Dataset [3, 4], including recent long-tail extensions [5, 6], provide realistic observations but only for encounters that happened to be recorded; they offer no direct control over EMV behavior or civilian response. Transportation simulators such as SUMO and VISSIM support studies of EMV routing, signal priority, and response time [7, 8], but are aimed chiefly at operational analysis rather than multimodal AI evaluation. CARLA-based benchmarks provide configurable sensing and interactive simulation [9, 10], yet are typically organized around a finite suite of scenario definitions with actor behavior specified inside each scenario. What remains missing is behavior-level control of EMV–civilian interactions, through which EMV privileges and civilian response policies can be configured while synchronized sensor observations and simulator-native ground truth are collected for downstream evaluation.

We address this gap with **SIREN**, a behavior-driven SUMO–CARLA co-simulation platform for generating EMV interactions. SIREN couples SUMO’s network-level traffic evolution and behavior logic with CARLA’s continuous vehicle control and synchronized onboard sensing. Depending on the active behavior, the EMV–civilian interaction is controlled by SUMO, CARLA, or jointly through synchronized state exchange and control transfer. Neither simulator alone provides this complete behavior-to-data loop: SUMO enables coordinated traffic responses, while CARLA realizes them as continuous motion and produces the sensor-rich observations needed for benchmark construction. Together, they generate behavior-conditioned trajectories with simulator-native actor states, 3D geometry, traffic-control states, and interaction events.

To facilitate behavior-driven data generation and evaluation, we instantiate SIREN as **SIREN-Bench-v1**. We configure seven parameterized EMV interaction templates spanning emergency levels L1–L3, from privileged EMV motion without induced civilian yielding to lane-clearing and rescue-corridor responses. The templates cover three behavior families: traffic clearance, privileged traversal of traffic controls, and nonstandard road-space use. The platform supports variation within each template. For 3D object detection and trajectory prediction, v1 uses one recorded base episode per template, so all methods within those tasks operate on the same seven episodes. Risk understanding is evaluated separately on 105 front-camera videos, with 15 videos per template. As representative uses of this benchmark, we select three downstream tasks (Figure 1): **3D object detection**, **trajectory prediction**, and **vision-language risk understanding**, which respectively probe perception, motion forecasting, and scene-level risk inference under EMV-induced behavior. SIREN can also be extended to other tasks, such as behavior modeling, planning and control, traffic-flow analysis, and safety assessment.

Experiments with nine trajectory predictors, four LiDAR-based 3D detectors, and five vision-language models reveal different failure patterns across tasks. Detection is weakest in traffic-clearance episodes, where yielding creates dense and off-center vehicle configurations. Prediction is weakest during privileged intersection traversal, especially at stop-controlled intersections, and no learned predictor outperforms the constant-velocity reference on average. Vision-language models exhibit strong class-dependent biases: no evaluated model obtains non-zero F1 for all three risk classes, and the highest-accuracy model fails to identify any Near-Miss or Collision cases. Thus, unconventional EMV motion alone does not determine difficulty; the behavior it induces in surrounding traffic matters, and it affects perception, prediction, and semantic understanding differently.

Our contributions are threefold:

- **Behavior-centered benchmarking.** We introduce a benchmarking perspective in which EMV privileges and induced civilian responses are the primary factors for data generation and evaluation, rather than treating each scenario as an isolated test case.
- **Hybrid SUMO–CARLA co-simulation.** We develop SIREN, which uses synchronized SUMO–CARLA control to generate behavior-level EMV–civilian interactions together with onboard sensor observations and simulator-native annotations.
- **SIREN-Bench-v1 and representative evaluations.** We configure seven interaction templates spanning emergency levels L1–L3 and evaluate 3D object detection, trajectory prediction, and vision-language risk understanding, showing that different behaviors challenge different tasks.

The remainder of the paper reviews related work, presents the SIREN behavior model and co-simulation pipeline, describes the construction of SIREN-Bench-v1, and evaluates the three downstream tasks before concluding with the limitations of the current release.

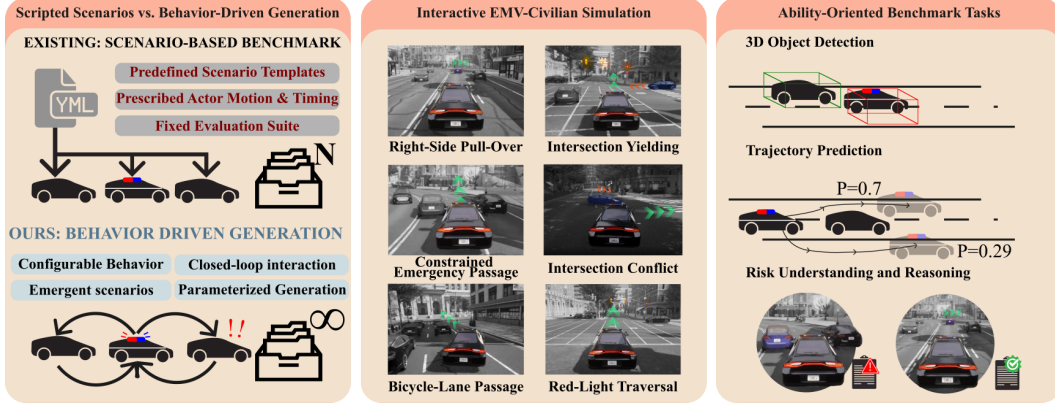


Figure 1: Overview of SIREN and SIREN-Bench. (1) Existing scenario-based benchmarks typically evaluate a fixed set of predefined scenarios with prescribed actor motion and timing. SIREN instead specifies EMV and civilian behavior policies and generates scenario realizations through closed-loop interaction. (2) Representative EMV–civilian interactions generated by the SIREN SUMO–CARLA co-simulation. Reading in row order, the panels illustrate the rescue-corridor pull-over and lane-clearing responses of the clearance family (S1–S2), privileged traversal of controlled intersections (S3–S6), and use of nonstandard road space (S7); template identifiers are defined in Table 2. (3) SIREN-Bench evaluates three complementary AI capabilities: 3D object detection, trajectory prediction under EMV-induced interaction, and scene-level risk understanding from onboard visual observations.

2 Related Work

2.1 Emergency-Vehicle Traffic Simulation and Control

SUMO provides the microscopic substrate for modeling vehicles, signals, demand, and simulator coupling [7], and within this tradition Bieker-Walz et al. model EMV special rights including blue-light activation, traffic-rule exceptions, and surrounding traffic that forms an emergency lane [11]. Most such work treats emergency mobility as a transportation operations problem: reducing response time, improving routing, or adjusting signals so an EMV can move through congested traffic. The closest precedent for EMV-civilian interaction is Cortes and Stefoni, who model civilian lane changes, sidewalk mounting, intersection approach, and traffic-light handling through a Paramics API calibrated on Santiago fire-truck video and GPS [12]. Other work targets optimization or control, such as EMVLight for decentralized multi-agent RL over coupled EMV routing and signal preemption [13], tactical decision-making via rule-based avoidance plus a speed-adaptive DQN [14], and adaptive motion control via online policy meta-learning [15]. These works show EMV behavior and civilian response can be modeled, but their objective remains traffic operation rather than benchmark generation for autonomous driving.

2.2 Autonomous-Driving Benchmarks and Simulators

CARLA provides an open urban-driving simulator for configurable sensors and benchmark tasks [9], while OpenCDA is the most direct co-simulation precedent, integrating CARLA and SUMO for cooperative-driving automation with a scenario manager [16]. Alongside this separate line of simulators, large datasets and scenario-generation surveys establish the need for scalable evaluation data and rare-event test cases [3, 4, 17], and recent closed-loop benchmarks improve realism in different ways: nuPlan on real-world data [18], Bench2Drive on end-to-end driving abilities in CARLA [10], Waymax on accelerated data-driven multi-agent simulation [19], and NAVSIM trading reactivity for scale [20]. The strongest recent attempt at long-tail event data is HiDrive, which explicitly includes emergency-vehicle yielding and red-light emergency-yielding scenarios [21]. Even there, routes and scenario categories are pre-specified within a finite curated suite, with no EMV behavior model to generate emergent interactions. Existing benchmarks thus include EMV response as scenario content, but not as the mechanism for generating new benchmark instances.

3 The SIREN Platform

Configuration in SIREN begins at the behavior layer, which sets the privileged EMV policy and the civilian response for a given emergency level and traffic condition. A closed-loop SUMO–CARLA co-simulation then

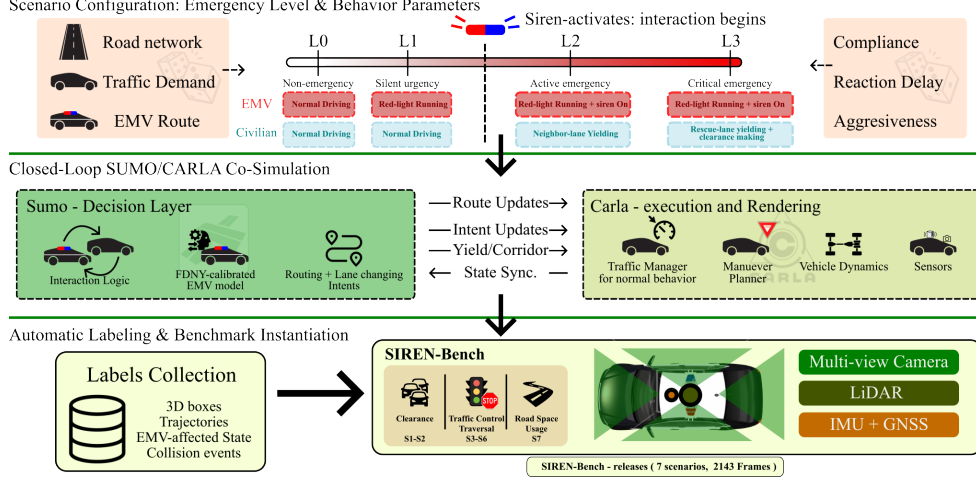


Figure 2: Overview of the SIREN behavior-driven generation pipeline. Rather than prescribing complete scenarios, SIREN configures EMV and civilian behaviors whose closed-loop interaction is resolved through SUMO–CARLA co-simulation. Simulator-native states and sensor observations are then used to construct SIREN-Bench for downstream evaluation. The emergency-level axis (L0–L3) is defined in Table 1; SIREN-Bench-v1 releases the L1–L3 settings as seven templates, with a risk-understanding set of 105 videos (15 per template and 190 frames per video; 19,950 frames in total).

resolves these behaviors into multi-agent traffic interactions while generating synchronized onboard observations, and the resulting simulator states are converted into task-specific annotations and benchmark episodes. Figure 2 summarizes the three stages. Because behaviors are specified before trajectories, individual scenarios emerge from the interaction between the EMV policy, civilian responses, and the surrounding traffic state. Figure 3 shows representative views of the platform, the EMV assets it supports, and four of the interactions it generates, illustrating how privileged EMV behavior combines with traffic-dependent civilian responses to produce diverse outcomes rather than replaying fixed trajectories.

3.1 Behavior-Driven Interaction Model

The calibrated microscopic EMV behavior model of Zuo et al. [22], obtained with a hybrid evolutionary-algorithm and reinforcement-learning (EA–RL) procedure, supplies the longitudinal and gap-acceptance parameters of a privileged EMV inside SUMO. SIREN builds on it. That model does not specify how civilians respond, however, and it has no sensing or rendering component. Our additions are the level-dependent civilian response policies described below, the event-based SUMO–CARLA control-transfer scheme of the next section, and the conversion of the resulting rollouts into annotated benchmark episodes.

Four emergency levels (Table 1) form the configuration axis of Figure 2. L0 is a non-emergency control setting in which the EMV holds no privilege and civilians follow nominal traffic rules; it exists so that the same road network, demand, and route can be replayed without an emergency, and is not instantiated in SIREN-Bench-v1. Levels L1–L3 share the same privileged EMV policy, including traffic-control traversal and SUMO-derived lateral maneuvers, and differ in the emergency cue and the response induced in surrounding traffic. At L1, the siren is inactive and civilians remain under nominal traffic control, allowing privileged EMV motion without induced yielding. L2 activates *lane-clearing yield*, in which affected vehicles perform a feasible lane change to vacate the EMV path. L3 activates *rescue-corridor yield*, where vehicles move toward their lane boundaries and hold the resulting clearance position until the EMV passes.

Once activated, an assigned response persists as an actor state until the EMV has passed; it is not a one-step command. A requested maneuver that is temporarily infeasible is deferred and reconsidered at subsequent simulation steps. Response delay, incomplete lane clearing, and corridor formation can therefore arise from the evolving traffic state instead of from prescribed actor trajectories.

3.2 Hybrid SUMO–CARLA Co-Simulation

SIREN uses a moving, fixed-radius interaction region centered on the EMV. Traffic outside this circle evolves primarily in SUMO; actors entering it join the CARLA-focused synchronization and control set. At every synchronous step SUMO supplies the EMV’s next-link sequence, left/right/sublane lane-change states, and

Table 1: Level-Dependent Control in SIREN

Level	Siren	EMV route mode	Civilian response	Templates
L0	off	Nominal; no privilege	Nominal traffic control	—
L1	off	Next-link; intent override	Nominal traffic control	S3–S6
L2	on	As L1	Feasible yield lane change	S2
L3	on	Next-link/intent; copied SUMO route; gap escape	Pull over, then braking hold	S1, S7

Note: L0 is a non-emergency control setting and is not instantiated in SIREN-Bench-v1. Levels L1–L3 share the same EMV privilege policy (stop- and red-signal traversal and nonstandard road-space use on shoulder lanes), so they vary only the emergency cue and the induced civilian response. An intent override is a temporary CARLA lane-change path derived from SUMO’s lateral request.

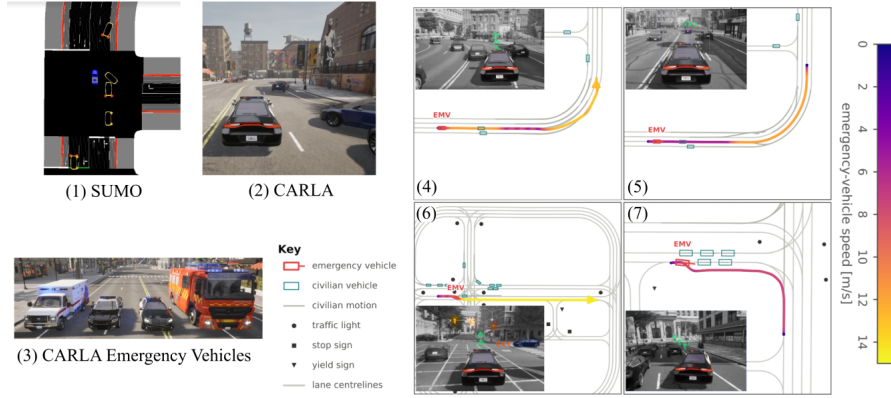


Figure 3: Illustrations of SIREN. (1) SUMO view of the synchronized traffic state. (2) CARLA rendering of the corresponding scene. (3) Supported EMV assets. (4) EMV passes between queued vehicles (template S1). (5) Civilian lane clearing for EMV passage (S2). (6) Privileged EMV traversal at a controlled intersection (S3–S6). (7) EMV use of nonstandard road space while turning (S7). Trajectory color indicates EMV speed.

per-vehicle `rescueLane` status, plus, at L3, rescue-corridor waypoints and the leader information used to detect a blocked EMV. CARLA converts the selected path into continuous throttle, brake, and steering through a shared waypoint navigator whose waypoint source, target speed, and collision handling change with the active mode. All lateral states are monitored, but only valid requests are executed; infeasible ones are deferred and reconsidered.

Under L1–L2 the EMV follows its next-link route, taking a temporary local path when SUMO requests a feasible lane change, and L1 civilians remain under CARLA Traffic Manager. At L2 a yield-active civilian is handed to a collision-aware lane-change navigator, retaining its original path so nominal control can resume after release. At L3 civilians use a pull-over navigator and then hold position, while the EMV follows a copied SUMO corridor path; this mode suppresses new intent-driven lane changes to prevent conflicting route sources. Should leader and speed evidence show the EMV still blocked, a higher-priority *gap-escape* planner builds a local recovery path and temporarily limits collision avoidance to permit controlled passage. Control ownership thus shifts with the level. The code-level arbitration, waypoint controller, and gap-recovery search are detailed in Section A.1.3. The event-based scheme keeps global traffic consistency in SUMO while letting CARLA realize short-horizon, interaction-specific motion without prescribing complete trajectories. Each synchronized rollout records actor poses, kinematics, controller states, signal phases, and calibrated onboard observations for all SIREN-Bench tasks.

Table 2: Seven Parameterized Interaction Templates in SIREN-Bench-v1

ID	Behavior family	Instantiated interaction	N_{veh}
S1	Clearance	EMV passes between two queues of vehicles.	30
S2	Clearance	Vehicles merge out of the EMV lane to create a clear passage.	20
S3	Traffic control	EMV traverses a red signal with same-direction traffic in the intersection.	20
S4	Traffic control	EMV traverses a red signal with crossing traffic in the intersection.	20
S5	Traffic control	EMV traverses a stop sign with same-direction traffic in the intersection.	20
S6	Traffic control	EMV traverses a stop sign with crossing traffic in the intersection.	30
S7	Road-space use	EMV occupies the lane shoulder while executing a right turn.	20

Note: Templates are organized by the EMV behavior they instantiate. N_{veh} is the configured background-traffic count.

3.3 Benchmark Construction

Each of the seven templates in SIREN-Bench-v1 defines a target interaction and road configuration, while the multi-agent trajectories are resolved through the closed-loop behavior model instead of being prescribed. The templates are parameterized and span three behavior families: traffic clearance, traffic-control traversal, and nonstandard road-space use (Table 2). Scenario-specific parameters (EMV and background speeds, traffic volume, response distance, maneuver timing) can be varied to produce different realizations of the same interaction. In v1, detection and trajectory prediction use one recorded base episode per template, whereas risk understanding uses a separate set of 15 front-camera videos per template. All evaluated methods within a task receive the same task-specific data.

All base episodes are generated on the CARLA Town10HD_Opt map, last 25–45 s, and are logged at 10 Hz, giving 250–450 actor-state frames per episode. The risk-understanding set comprises 105 front-camera videos—15 for each of the seven templates—with 190 frames per video and 19,950 video frames in total. Sensing uses a fixed EMV-mounted suite: a 64-beam LiDAR at 1.93 m with 120 m range, 1.3×10^6 points/s, 20 Hz rotation and a $+5^\circ / -25^\circ$ vertical field of view; four 800×600 RGB cameras at 100° field of view (front, rear, left/right rear-facing); and co-located GNSS and IMU. This LiDAR is denser than the 32-beam sensor used in nuScenes, one reason the pretrained detectors below should not be compared against their published nuScenes scores.

Object-level annotations for the downstream tasks come directly from the synchronized sensor observations and simulator states recorded for each episode, which include actor trajectories, kinematics, traffic-signal states, and camera calibration. Because CARLA exposes no vehicle sub-category for the detection labels, every vehicle, including the EMV, is exported as a single Car class; the benchmark therefore measures how the EMV interaction perturbs vehicle detection as a whole, and does not yet report a separate EMV-class AP. The seven base episodes support the trajectory-prediction and perception evaluations, while risk understanding uses the separate 105-video set described above.

4 Experiments

4.1 Experimental Setup

We generate the seven interaction templates of Table 2 on a compute cluster, allocating each simulation job four CPU cores, 32 GB of memory, and one 32-GB NVIDIA Tesla V100S GPU. CARLA 0.9.16 runs in synchronous mode with a fixed simulation step of 0.05 s (20 Hz) and renders camera observations at 800×600 pixels, while SUMO maintains the traffic and interaction states described in the co-simulation section above; actor states are logged at 10 Hz. Unless otherwise stated, all learned models use their released pretrained checkpoints without fine-tuning on SIREN-Bench. Further implementation details appear in Sections A.1.1–A.2.2.

4.1.1 Trajectory prediction

Seven learned predictors are compared: CSP [23], STDAN [24], BAT [25], EMP-M and EMP-D [26], DeMo [27], and DeMo with RealMotion [28]; constant velocity (CV) and the Intelligent Driver Model (IDM) are non-learned references.

Table 3: Trajectory Prediction on SIREN-Bench

Model	Clearance		Traffic-control traversal				Road-space	
	S1	S2	S3	S4	S5	S6	S7	Mean
CV	1.63/4.30	1.17/3.11	0.96/2.40	0.68/1.65	1.95/5.03	2.86/7.56	0.85/2.08	1.44/3.73
IDM	2.23/5.14	1.58/3.75	1.18/2.69	1.04/2.18	2.68/6.49	3.29/8.34	1.06/2.55	1.86/4.45
CSP	2.63/6.12	3.57/7.79	2.92/6.65	2.54/5.83	3.25/7.10	4.63/9.69	1.82/4.02	3.05/6.74
STDAN	3.99/8.12	6.02/12.13	4.20/9.14	3.11/6.81	4.58/9.94	7.87/15.41	2.38/5.93	4.59/9.64
BAT	9.14/17.35	9.55/16.14	8.17/15.75	6.06/10.52	4.80/7.85	8.40/13.16	3.42/5.06	7.08/12.26
EMP-M	1.79/4.73	1.55/4.38	2.71/8.24	1.88/5.92	3.47/9.44	3.24/8.86	2.05/6.50	2.38/6.87
EMP-D	1.67/4.44	1.32/3.57	2.41/7.39	1.39/4.60	2.13/6.21	3.50/9.68	1.63/5.83	2.01/5.96
DeMo	1.65/4.47	1.58/4.60	2.26/7.00	1.26/4.08	2.72/7.80	3.57/9.96	1.05/4.03	2.01/5.99
DeMo+RealMotion	1.62/4.29	1.43/4.22	2.35/6.95	1.64/4.83	2.41/7.03	2.50/6.85	1.23/3.77	1.88/5.42

Note: Each entry reports ADE/FDE (m) over a 5-s prediction horizon; lower is better.

Table 4: 3D Object Detection on SIREN-Bench

Model	Clearance		Traffic-control traversal				Road-space	
	S1	S2	S3	S4	S5	S6	S7	Mean
PointPillars	.398/.407	.434/.436	.583/.525	.589/.549	.451/.456	.530/.540	.569/.528	.508/.492
SECOND	.420/.420	.388/.438	.631/.563	.633/.574	.461/.480	.523/.540	.590/.556	.521/.510
VoxelNeXt	.438/.393	.413/.434	.641/.571	.616/.558	.468/.454	.568/.540	.578/.543	.532/.499
TransFusion-L	.424/.411	.423/.456	.648/.566	.618/.565	.491/.481	.562/.555	.610/.571	.539/.515

Note: Each entry reports mAP/NDS for the Car class using nuScenes-pretrained checkpoints; higher is better.

All methods are scored on a common grid: a 5-s future at 0.2 s (25 steps), one sample per (vehicle, frame) pair with a fully observed window, stride one frame. *Every* qualifying vehicle is scored, including the EMV; v1 reports no per-agent-category breakdown. Observation windows differ by family, since each released checkpoint fixes them: CSP, STDAN, BAT and the non-learned references take a 3-s history at 0.2 s (NGSIM convention), whereas EMP-M, EMP-D and DeMo take a 5-s history at 0.1 s and natively emit a 6-s future, which we resample onto the common grid. History length is thus a confound between families, and within-family comparisons are the more reliable ones. Stride-one sampling leaves the samples strongly overlapping. The templates yield 7,062 scored samples (914/1,371/825/1,247/605/340/1,760 for S1–S7) drawn from far fewer distinct behaviors, so they are not independent for significance testing. We report ADE and FDE here; minADE₆, minFDE₆, and 5-s RMSE are in the supplementary material.

4.1.2 3D object detection

We evaluate four representative LiDAR-based detectors pretrained on nuScenes: PointPillars [29], SECOND [30], VoxelNeXt [31], and TransFusion-L [32]. Scoring follows the official nuScenes protocol [3]: matches are resolved by bird’s-eye-view center distance rather than 3D IoU, mAP averages AP over the {0.5, 1, 2, 4} m thresholds, and NDS combines mAP with the true-positive error terms. All vehicles carry a single Car label, as noted above, so mAP here measures vehicle detection in the presence of the EMV interaction rather than EMV recognition specifically. The detailed true-positive error breakdown is deferred to the supplement.

4.1.3 Risk understanding

Inspired by *SeeUnsafe* [33], we use its preprocessing and prompting components unchanged, including segmentation and visual grounding as visual prompts together with the accompanying text prompt. We apply this pipeline to the SIREN-Bench videos and reference labels. Vision-language risk understanding evaluates whether a VLM can infer the scene-level risk category from an EMV–civilian interaction. Although this inference requires interpreting the agents and their interactions, the present benchmark evaluates the resulting classification rather than the model’s intermediate reasoning process. We evaluate five vision-language models: BlaiFa-InternVL3.5-8B [34], Gemma3-12B [35], LLaVA-Llama3-8B [36], MiniCPM-V-4.5-8B [37], and Qwen3.5-9B [38]. Each of the 105 MP4 videos produces two intermediate predictions over the classes Normal, Near-Miss, and Collision. Following *SeeUnsafe*, the more severe of the two predictions is selected with a max-severity rule (Normal < Near-Miss < Collision), yielding one final video-level prediction per video. Reference labels are derived from the recorded interactions and collision events. We report overall classification accuracy together with per-class precision and F1.

4.2 Main Benchmark Evaluation

4.2.1 Trajectory prediction

Averaged over the seven templates, the best learned predictor in Table 3 reaches 1.88 m ADE, against 1.44 m for constant velocity and 1.86 m for IDM. Although a learned model slightly outperforms the constant-velocity reference on S1 and S6 individually, neither non-learned reference is surpassed on the seven-template mean. The released checkpoints therefore do not transfer favorably to SIREN-Bench under the present evaluation setup. This comparison does not isolate a single cause: the gaps may reflect the EMV-induced interactions, source-domain shift, fixed differences in observation history, or model-specific input and adaptation choices. Among the learned methods, the Argoverse-trained models (EMP and DeMo) achieve lower mean ADE than the NGSIM-trained models (CSP, STDAN, and BAT).

The clearance scenarios S1–S2 introduce coordinated lateral responses as surrounding vehicles create space for the EMV, and they produce large errors for several predictors. More recent methods stay closer to the non-learned references, indicating that sustained lane-clearing motion can be captured when sufficient interaction context is available. Prediction performance, in short, depends strongly on the type of EMV interaction.

S6, where the EMV traverses a stop-controlled intersection with crossing traffic, is the highest-error scenario for seven of the nine evaluated methods. Averaged over the learned predictors, ADE reaches 4.82 m in S6, compared with 1.94 m in S7. For the stronger predictors, S5–S6 (stop-controlled) also tend to be more difficult than the corresponding red-light cases S3–S4. Traffic-control traversal thus poses a challenge of its own: surrounding vehicles continue to negotiate the intersection while responding to the EMV’s privileged motion, producing future trajectories that depart from ordinary right-of-way interactions. S7, by contrast, changes the road space occupied by the EMV but induces less coordinated response and is comparatively easy to predict. The primary difficulty for prediction therefore comes from the *interaction induced by the EMV*, not from unconventional EMV motion alone. Two caveats apply. S6 contributes the fewest scored samples (340), so its position as hardest rests on less evidence than the other columns. The learned predictors also come from different source domains (CSP, STDAN and BAT from NGSIM highway car-following, EMP and DeMo from Argoverse 2 urban driving), so the gap between families reflects a training-domain shift as well as the EMV interaction. Our claims rest on the ranking across templates, which is unaffected, since every model sees the same seven.

4.2.2 3D object detection

Mean mAP across the four detectors is about 0.42 in S1 and 0.41 in S2, against 0.63 and 0.61 in the red-light templates S3–S4. The observed pattern in Table 4 differs from the prediction results: detection scores are consistently lowest in the clearance templates. S1 sends the EMV through the corridor between two queues, and S2 moves several vehicles laterally while clearing a lane; both contain dense, off-center configurations that depart from lane-organized traffic and increase geometric overlap among nearby actors. The lower scores are consistent with these geometric conditions being challenging for zero-shot detection.

The traffic-control templates exhibit higher mAP. S3–S4 retain conventional vehicle placement and give the highest values in the benchmark, and S7 provides a similar contrast: although the EMV leaves the travel lane for the shoulder, mean mAP stays at 0.59, well above S1–S2. The stop-sign templates S5–S6 fall between these extremes at 0.45–0.57; their queued approaches may contribute some of the dense geometry also present in S1–S2. Ordering templates by mean mAP gives clearance (0.42) < stop-sign traversal (0.51) < shoulder use (0.59) < red-light traversal (0.62). In this release, lower mAP therefore coincides with episodes in which surrounding traffic is more strongly reorganized. Because detection uses one base episode per template, this comparison cannot separate the effect of behavior from episode-specific geometry, density, or vehicle placement; randomized realizations are needed to isolate those factors. NDS follows the same observed trend, and the true-positive breakdown is in the supplementary material. Absolute values should not be read against published nuScenes numbers: the checkpoints run zero-shot on a denser 64-beam sensor and a different city layout, and we make no claim about the size of that shift.

4.2.3 Risk understanding

Table 5 shows that overall accuracy does not reliably measure three-class risk identification. Qwen3.5-9B obtains the highest accuracy (70.48%) and Normal-class F1 (82.68%), but has zero precision and F1 for both Near-Miss and Collision. Its apparent advantage therefore comes from favoring the dominant Normal class rather than from discriminating among the three risk levels. LLaVA-Llama3-8B exhibits the opposite pattern: its 22.86% accuracy and 37.21% Near-Miss F1 are paired with zero Normal and Collision scores, indicating a strong bias toward the Near-Miss class.

Performance on the safety-critical classes remains weak across all five models. BlaiFa-InternVL3.5-8B attains the highest Near-Miss F1 (40.45%) but has zero Collision F1. MiniCPM-V-4.5-8B is the only model with non-zero Collision performance, yet its Collision precision and F1 are only 6.25% and 11.11%, and its Near-Miss F1 is

Table 5: Per-Class Risk Classification Results on SIREN-Bench

Model	Acc.	Normal		Near-Miss		Collision	
		Prec.	F1	Prec.	F1	Prec.	F1
Blaifa-InternVL3.5-8B	47.62	84.21	57.14	28.12	40.45	0.00	0.00
Gemma3-12B	26.67	90.00	21.43	23.75	36.19	0.00	0.00
LLaVA-Llama3-8B	22.86	0.00	0.00	23.08	37.21	0.00	0.00
MiniCPM-V-4.5-8B	49.52	85.96	74.81	0.00	0.00	6.25	11.11
Qwen3.5-9B	70.48	70.48	82.68	0.00	0.00	0.00	0.00

Accuracy (Acc.) is reported over the 105 video-level predictions. Precision (Prec.) and F1 are reported separately for the Normal, Near-Miss, and Collision classes. Values are percentages; higher is better.

zero. Gemma3-12B achieves 90.00% Normal precision but only 21.43% Normal F1 and no correct Collision identification. No evaluated model obtains non-zero F1 for all three classes.

Taken together, the models vary not only in overall performance but also in their characteristic error mode. Some default toward Normal, whereas others are overly sensitive to risky driving behavior and favor Near-Miss; none balances all three classes reliably. SIREN-Bench makes these opposing tendencies visible by deliberately presenting EMV-civilian interactions that can develop into Normal, Near-Miss, or Collision outcomes. Such privileged-agent interactions are uncommon in conventional driving data, but the repeated videos across SIREN-Bench’s seven templates provide a focused test of how VLMs interpret them. The aggregate results expose model-level biases; per-template confusion matrices would additionally be needed to attribute those biases to particular EMV behaviors.

5 Conclusion

We presented SIREN, a behavior-driven platform for generating emergency-vehicle interactions through closed-loop SUMO-CARLA co-simulation, and instantiated it as SIREN-Bench-v1 with seven parameterized interaction templates. Rather than prescribing complete scenarios, SIREN specifies privileged EMV behavior and adaptive civilian responses and lets the resulting interactions unfold with the surrounding traffic. Evaluations on trajectory prediction, 3D object detection, and risk understanding show that different EMV behaviors stress different aspects of existing models. Traffic-clearance episodes show the lowest detection scores and coincide with strongly reorganized nearby traffic, while privileged intersection traversal creates greater difficulty for motion prediction; risk-understanding models exhibit strong class-dependent biases, with no evaluated model obtaining non-zero F1 across all three risk categories. These results motivate behavior-driven generation as a complementary approach to fixed scenario suites for studying how transportation algorithms respond to privileged-agent interactions.

SIREN-Bench-v1 represents an initial instantiation of the platform. Each interaction template is currently evaluated at a single emergency level and on a single map. Detection and trajectory prediction use one base realization per template, which limits analysis across repeated seeds, while risk understanding is reported only at the aggregate benchmark level. These choices prevent separating level, map, and realization effects. Detection evaluation also uses the generic Car class rather than EMV-specific labels, and the current release uses only onboard sensing. Future work will evaluate the same interaction templates across behavior levels, maps, and randomized realizations, introduce EMV-specific and roadside annotations, and quantify the diversity induced by the platform’s behavioral parameters.

A Appendix

This supplement is organized in two parts, mirroring the two artifacts introduced in the main paper: the SIREN platform and the SIREN-Bench benchmark. Part A documents the **SIREN platform**: the co-simulation loop and control ownership (Sec. A.1.1), the onboard sensor suite and placement (Sec. A.1.2), the behavior implementation as per-step control logic (Sec. A.1.3), the per-mode controller target speeds (Sec. A.1.4), and the data formats and coordinate conventions (Sec. A.1.5). Part B documents the **SIREN-Bench evaluation**: the metric definitions (Sec. A.2.1), the task-level protocols and model setup (Sec. A.2.2), model and checkpoint provenance (Sec. A.2.3), extended trajectory-prediction metrics (Sec. A.2.4), and the detection true-positive error breakdown (Sec. A.2.5). It is self-contained and does not introduce any additional results except those summarized in the main paper.

A.1 The SIREN Platform

A.1.1 Co-Simulation Loop and Control Ownership

SIREN advances SUMO and CARLA in lockstep. All base episodes are generated on the CARLA Town10HD_Opt map with CARLA 0.9.16 and SUMO 1.24.0 in synchronous mode at a fixed 0.05 s step (20 Hz); actor states are logged at 10 Hz, giving 250–450 actor-state frames per 25–45 s episode. Detection and trajectory prediction use one such base episode per template. The risk-understanding set is organized separately as 105 front-camera videos, with 15 videos per template and 190 frames per video, for 19,950 video frames in total. On a compute cluster, each simulation job is allocated four CPU cores, 32 GB of memory, and one 32-GB NVIDIA Tesla V100S GPU.

The simulator boundary is a moving, fixed-radius interaction region centered on the EMV (a 40 m inner / 50 m outer hysteresis band; Table 8). Traffic outside the circle evolves primarily in SUMO; actors entering the region join the CARLA-focused synchronization and control set. At each synchronous step, SUMO supplies the EMV’s next-link route sequence (`getNextLink`), its left/right/sublane lane-change intent (`getLaneChangeIntent`), and per-vehicle `rescueLane` status, plus, at level L3, rescue-corridor waypoints and the leader information used to detect a blocked EMV. CARLA converts the selected path into continuous throttle, brake, and steering through a shared `WaypointNavigator` whose waypoint source, target speed, and collision handling change with the active mode. All lateral requests are monitored, but only feasible ones are executed; infeasible requests are deferred and reconsidered at later steps.

Control ownership shifts with the emergency level (Table 6). The privileged EMV policy (stop- and red-signal traversal and nonstandard road-space use) is shared across L1–L3; the levels differ in the emergency cue and the civilian response they induce. L0 is a non-emergency control setting and is not released in SIREN-Bench-v1.

Table 6: Control ownership by emergency level. “TM” is the CARLA Traffic Manager; “WPN” is the shared `WaypointNavigator`. Levels L1–L3 share the same privileged EMV policy and differ in the civilian response.

Level	EMV controller	Civilian controller	Siren
L0	TM (no privilege)	TM (nominal)	off
L1	WPN (route + intent)	TM (nominal)	off
L2	WPN (route + intent)	WPN (feasible-yield LC)	on
L3	WPN (<code>copy_sumo</code> , <code>gap_escape</code>)	WPN (pull-over, hold)	on

A.1.2 Onboard Sensor Suite and Placement

Sensing uses a fixed EMV-mounted suite whose extrinsics are given in Table 7, expressed in the CARLA vehicle frame (x forward, y right, z up, meters; yaw in degrees). The LiDAR, GNSS, and IMU are co-located at $z = 1.93$ m, and the four RGB cameras give front, rear, and left/right rear-facing coverage; the suite has no pure side-facing camera, so near-lateral civilian yielding and pull-over are captured only obliquely. The 64-beam LiDAR (120 m range, 1.3×10^6 points/s, 20 Hz rotation, $+5^\circ / -25^\circ$ vertical field of view) is denser than the 32-beam sensor used in nuScenes, which explains why the pretrained detectors are not directly comparable to their published nuScenes scores. The released benchmark annotations are based on this suite. Auxiliary control-only sensors used internally by the generator (a forward obstacle probe and an RSS sensor) are not part of the released observations.

Table 7: EMV-mounted sensor suite and placement (CARLA vehicle frame: x forward, y right, z up, in meters; yaw in degrees). All cameras are 800×600 at 100° horizontal FOV.

Sensor	x	y	z	yaw	Key attributes
LiDAR (64-beam)	0.0	0.0	1.93	0	120 m, 1.3 Mpps, 20 Hz
Cam. front	2.5	0.0	1.0	0	800×600 , 100°
Cam. right-rear	0.0	0.3	1.8	100	800×600 , 100°
Cam. left-rear	0.0	-0.3	1.8	-100	800×600 , 100°
Cam. rear	-2.0	0.0	1.5	180	800×600 , 100°
GNSS	0.0	0.0	1.93	0	co-located w/ LiDAR
IMU	0.0	0.0	1.93	0	accel/gyro noise model

A.1.3 Behavior Implementation: Per-Step Control Logic

Behaviors in SIREN are not scripted trajectories. Each actor runs a control routine evaluated at every synchronous step over latched flags that persist across steps, so response delay, incomplete lane clearing, and corridor formation emerge from the evolving traffic rather than from prescribed motion. Since a tick evaluates guarded overrides from top to bottom rather than occupying a single state, we present the logic in pseudocode. Algorithm 1 is the level-L3 EMV routine; Algorithm 2 is the civilian yield routine (`npc_behavior_lvl=1` at emergency level L2, `npc_behavior_lvl=2` at L3). The EMV priority order is `gap_escape` $\succ$ `copy_sumo` $\succ$ forced LC $\succ$ route-follow: `gap_escape` is checked first and, on activation, cancels an in-progress forced lane change, while `copy_sumo` suppresses new lane-change intent. Predicate names match the controller source. Algorithm 1 shows level L3; the L1 and L2 EMV routines are the same routine with the `gap_escape` and `copy_sumo` branches removed, leaving next-link route-following with optional intent-driven forced lane changes.

The EMV `gap_escape` routine is the highest-priority recovery mode: when the EMV stays below a low speed threshold long enough while a blocker is detected (from the SUMO leader query or the navigator collision snapshot), the controller repeatedly calls `build_emv_gap_escape_waypoints` to plan a local path through available gap space and temporarily disables normal collision avoidance. Its trigger and release constants, together with the other co-simulation control parameters, are given in Table 8.

Table 8: Control constants used by the co-simulation (from the controller implementation).

Constant	Meaning	Value
<i>Co-simulation and control</i>		
Interaction region (in / out)	EMV-centered hysteresis radius	40 / 50 m
Leader query range	SUMO leader look-ahead (<code>gap_escape</code>)	80 m
Lane-change cooldown	min. interval between forced-LC attempts	2.0 s
EMV-passed clearance	buffer for <code>EMVFULLYPASSED</code>	1.0 m
Heading-aligned tolerance	max. error for <code>HEADINGALIGNED</code>	8°
<i>EMV gap_escape</i>		
v_{stop} (<code>speed_threshold_mps</code>)	blocked-speed ceiling	0.5 m/s
t_{stop} (<code>stop_threshold_s</code>)	sustained-stop before entry	3.0 s
t_{grace} (<code>blocker_grace_s</code>)	blocker-free time to exit	2.0 s
<code>target_speed</code>	speed during recovery	20 km/h

A.1.4 Controller Target Speeds

Table 9 lists the mode-dependent target speed the shared `WaypointNavigator` enforces in each control mode. Values are in km/h (the navigator converts internally to m/s). Nominal civilian motion is governed by the CARLA Traffic Manager rather than a fixed navigator target.

Note that nominal civilian motion runs under the CARLA Traffic Manager at the road speed limit (a 0% Traffic-Manager speed difference). The L2 feasible-yield maneuver additionally sets the vehicle to 50% below that limit for the duration of the lane change.

Algorithm 1 EMV per-step control at level L3. Latched flags (`gap_escape_active`, `lane_change_forced`, `mode`) persist across ticks; guards are evaluated top-to-bottom. Constants: Table 8.

Require: `emergency_lvl=3`; latched `emv_state` persists across ticks

```

1: (1) Gap-escape (highest priority)
2: if speed(EMV) ≤ vstop then
3:   keep stop timer
4: else
5:   reset stop timer
6: end if
7:  $b \leftarrow$  SUMO leader within 80 m, else navigator collision snapshot
8: if gap_escape_active and  $b = \emptyset$  for  $\geq t_{\text{grace}}$  then
9:   gap_escape_active  $\leftarrow$  false
10: end if
11: if  $b \neq \emptyset$  and stopped  $\geq t_{\text{stop}}$  and not gap_escape_active then
12:   gap_escape_active  $\leftarrow$  true
13:   if lane_change_forced then
14:     RESTORELANECHANGE() {preempt forced LC}
15:   end if
16: end if
17: if gap_escape_active then
18:   replan BUILDGAPESCAPEWAYPOINTS(); disable collision avoidance
19: end if
20: (2) Rescue-corridor mode
21: corridor  $\leftarrow$  (rescueCount  $> 0 \vee$  brakingAhead)  $\wedge$  emvLvl  $\geq 1 \wedge$  npcLvl  $\geq 2$ 
22: if corridor then
23:   intent  $\leftarrow \emptyset$  {copy_sumo suppresses forced LC}
24: end if
25: (3) Forced lane-change
26: if not corridor and not lane_change_forced and intent  $\in \{L, R\}$  and cooldownOK then
27:    $W \leftarrow$  BUILDLANECHANGEWAYPOINTS(intent)
28:   if  $W \neq \emptyset$  then
29:     lane_change_forced  $\leftarrow$  true; navigator.SETWAYPOINTS(W)
30:   end if
31: end if
32: (4) Waypoint source and completion
33: if corridor and not gap_escape_active then
34:   navigator  $\leftarrow$  copied SUMO corridor waypoints
35: end if
36: if lane_change_forced and (enteredTargetLane  $\vee$  navigator.DONE()  $\vee$  reachedTarget) then
37:   RESTORELANECHANGE()
38: end if
39: (5) Target speed (km/h) by priority
40: if gap_escape_active then
41:   set_speed(20)
42: else if corridor then
43:   set_speed(30)
44: else
45:   set_speed(50)
46: end if
47: apply navigator control

```

A.1.5 Data Formats and Coordinate Conventions

Trajectory logs are stored as `trajectory.csv`, one row per actor per logged frame, with columns `step`, `timestamp`, `actor_id`, `type_id`, `x`, `y`, `z`, `yaw`, `vx`, `vy`, `speed_mps`, `is_emv`, in the CARLA world frame (x forward, y right, z up; yaw in degrees, increasing clockwise, i.e. a left-handed frame) at 10 Hz; `is_emv` marks the ego emergency vehicle.

For 3D detection, `carla_to_kitti` exports KITTI-format point clouds (`velodyne/`, float32 $x y z$ intensity) and per-frame labels (`label_2/`). Points and boxes are placed in the EMV sensor frame by rotating world coordinates by $-\psi_{\text{EMV}}$ about the vertical axis, with the LiDAR at $z = 1.93$ m; objects beyond 50 m are dropped, matching the nuScenes evaluation range. Since the KITTI LiDAR frame is right-handed (y points left) while

Algorithm 2 Civilian per-step yield control. `npc_behavior_lv1=1` gives the feasible-yield lane change (emergency L2); `=2` gives pull-over then braking hold (emergency L3). Latched state persists until the EMV passes.

```

1: Determine yielding (latches until EMV passes)
2: if rescueLane  $\neq \emptyset$  then
3:   yielding  $\leftarrow$  true; latch lateral alignment
4: else if braking or active planner or active target then
5:   yielding  $\leftarrow \neg$  EMVFULLYPASSED()
6: else
7:   yielding  $\leftarrow$  false
8: end if
9: if not yielding then
10:   remain under Traffic Manager; return
11: end if
12: npc_behavior_lv1=1: feasible-yield lane change
13: if not lane_change_forced and intent  $\in \{L, R\}$  and cooldownOK then
14:   W  $\leftarrow$  BUILDLANECHANGEWAYPOINTS(intent)
15:   if W  $\neq \emptyset$  then
16:     disable autopilot; store pre-maneuver path; TM speed  $-50\%$ 
17:     planner  $\leftarrow$  WAYPOINTNAVIGATOR(target=10 km/h)
18:     planner.SETWAYPOINTS(W); lane_change_forced  $\leftarrow$  true
19:   end if
20: end if
21: if reachedTarget or EMVFULLYPASSED() then
22:   RESTORELANECHANGE() {back to TM}
23: else if planner active then
24:   apply planner.RUNSTEP()
25: end if
26: npc_behavior_lv1=2: pull-over then braking hold
27: if no active planner then
28:   disable autopilot; planner  $\leftarrow$  WAYPOINTNAVIGATOR(target=15 km/h)
29: end if
30: if planner has no waypoints and alignment  $\in \{L, R\}$  then
31:   planner.SETWAYPOINTS(BUILDULLOVERWAYPOINTS(alignment)) {lane-edge, not SUMO copy}
32: end if
33: if reachedTarget and not HEADINGALIGNED() and alignment  $\in \{L, R\}$  then
34:   extend pull-over waypoints to finish lane alignment
35: end if
36: if reachedTarget and HEADINGALIGNED() then
37:   braking  $\leftarrow$  true; apply full brake + hand-brake {stationary hold}
38: else
39:   apply planner.RUNSTEP()
40: end if
41: Release (both levels): on EMVFULLYPASSED(), clear planner, re-enable autopilot, restore TM speed

```

CARLA is left-handed (y points right), the exporter negates the lateral axis of the exported boxes ($l_y \rightarrow -l_y$), matching the point cloud, which is already stored in this convention. Since a reflection maps a heading $\theta \rightarrow -\theta$, the sensor-frame heading is negated to stay consistent with the boxes. Omitting this negation leaves predicted and label headings differing by $\approx 2\theta$; whereas keeping it, median orientation error is $\approx 3^\circ$. Each label line is

type trunc occl alpha x1 y1 x2 y2 h w l lx ly lz heading.

A.2 SIREN-Bench Evaluation Details

A.2.1 Evaluation Metrics

For a predicted trajectory $\hat{\mathbf{p}}_{1:T}$ and ground truth $\mathbf{p}_{1:T}$ over T future steps, with $\|\cdot\|$ the Euclidean norm, we use the standard displacement metrics

$$\text{ADE} = \frac{1}{T} \sum_{t=1}^T \|\hat{\mathbf{p}}_t - \mathbf{p}_t\|, \quad \text{FDE} = \|\hat{\mathbf{p}}_T - \mathbf{p}_T\|. \quad (1)$$

Table 9: Per-mode target speeds enforced by the shared waypoint navigator.

Agent	Control mode	Target (km/h)
EMV	Next-link route-following	50
EMV	Intent-override lane change	50
EMV	copy_sumo corridor	30
EMV	gap_escape recovery	20
Civilian	Nominal (Traffic Manager)	TM-governed
Civilian	L2 feasible-yield lane change	10
Civilian	L3 pull-over (then braking hold)	15 (then 0)

For a multi-modal predictor emitting k hypotheses $\{\hat{\mathbf{p}}_{1:T}^{(i)}\}_{i=1}^k$, the min-of- k variants report, for each metric independently, the best of the k hypotheses,

$$\text{minADE}_k = \min_i \frac{1}{T} \sum_{t=1}^T \|\hat{\mathbf{p}}_t^{(i)} - \mathbf{p}_t\|, \quad (2)$$

$$\text{minFDE}_k = \min_i \|\hat{\mathbf{p}}_T^{(i)} - \mathbf{p}_T\|. \quad (3)$$

The NGSIM-style RMSE reports the root-mean-square position error at the 5-s horizon over the N scored samples,

$$\text{RMSE@5s} = \sqrt{\frac{1}{N} \sum_{n=1}^N \|\hat{\mathbf{p}}_T^{(n)} - \mathbf{p}_T^{(n)}\|^2}. \quad (4)$$

For 3D detection, we follow the nuScenes protocol: a prediction matches a ground-truth box when their bird’s-eye-view center distance is below a threshold $d \in \mathcal{D} = \{0.5, 1, 2, 4\}$ m. With AP_d the area under the precision–recall curve at threshold d ,

$$\text{mAP} = \frac{1}{|\mathcal{D}|} \sum_{d \in \mathcal{D}} \text{AP}_d. \quad (5)$$

The nuScenes detection score combines mAP with the five true-positive (TP) error terms—translation (ATE), scale (ASE), orientation (AOE), velocity (AVE), and attribute (AAE) errors—each averaged over matches and clipped to $[0, 1]$ as $1 - \min(1, \text{mTP})$:

$$\text{NDS} = \frac{1}{10} \left[5 \text{mAP} + \sum_{\text{mTP} \in \mathbb{TP}} (1 - \min(1, \text{mTP})) \right], \quad (6)$$

where $\mathbb{TP} = \{\text{ATE}, \text{ASE}, \text{AOE}, \text{AVE}, \text{AAE}\}$.

A.2.2 Evaluation Protocols and Model Setup

Trajectory prediction. All methods are scored on a common grid: a 5-s future at 0.2 s (25 steps), one sample per (vehicle, frame) pair with a fully observed window, stride one frame; every qualifying vehicle is scored, including the EMV. Observation windows are fixed by each released checkpoint and differ by family: CSP, STDAN, BAT, and the non-learned references (CV, IDM) use a 3-s history at 0.2 s (NGSIM convention), whereas EMP-M, EMP-D, and DeMo use a 5-s history at 0.1 s and natively emit a 6-s future, which we resample onto the common grid. The templates yield 7,062 scored samples in total (914/1,371/825/1,247/605/340/1,760 for S1–S7).

3D object detection. Four LiDAR-based detectors pretrained on nuScenes are evaluated: PointPillars, SECOND, VoxelNeXt, and TransFusion-L. Scoring follows the nuScenes protocol of Sec. A.2.1. Labeled vehicles all carry a single Car label. Absolute values are not comparable to published nuScenes numbers: the checkpoints run zero-shot on a denser 64-beam sensor and a different city layout.

A.2.3 Model and Checkpoint Provenance

Table 10 lists the source and training domain of every evaluated model; all learned models run zero-shot on SIREN-Bench from released checkpoints without fine-tuning. The trajectory predictors split by training domain—NGSIM highway car-following (CSP, STDAN, BAT) versus Argoverse 2 urban driving (EMP, DeMo, RealMotion)—which the main paper flags as a confound between families; CV and IDM are analytical references with no training data. The four detectors use nuScenes-pretrained checkpoints. The five VLMs use the exact released variants listed in the table, without SIREN-Bench fine-tuning; their input preprocessing and prompting follow SeeUnsafe as described in Sec. A.2.6.

Table 10: Provenance of evaluated models. All learned models run zero-shot from released pretrained checkpoints (no fine-tuning on SIREN-Bench).

Model	Task	Training data or checkpoint	Reference
CV	Traj.	— (analytical)	—
IDM	Traj.	— (car-following)	—
CSP	Traj.	NGSIM	[23]
STDAN	Traj.	NGSIM	[24]
BAT	Traj.	NGSIM	[25]
EMP-M / EMP-D	Traj.	Argoverse 2	[26]
DeMo	Traj.	Argoverse 2	[27]
RealMotion	Traj.	Argoverse 2	[28]
PointPillars	Det.	nuScenes	[29]
SECOND	Det.	nuScenes	[30]
VoxelNeXt	Det.	nuScenes	[31]
TransFusion-L	Det.	nuScenes	[32]
Blaifa-InternVL	Risk	Blaifa-InternVL3.5-8B	[34]
Gemma 3	Risk	Gemma3-12B	[35]
LLaVA-Llama3	Risk	LLaVA-Llama3-8B	[36]
MiniCPM-V 4.5	Risk	MiniCPM-V-4.5-8B	[37]
Qwen 3.5	Risk	Qwen3.5-9B	[38]

A.2.4 Extended Trajectory-Prediction Metrics

Table 11 reports NGSIM-style 5-s RMSE per template for all nine predictors, and Table 12 reports multimodal best-of-6 minADE₆/minFDE₆ for the four map-conditioned models; both use the common 5-s / 0.2-s grid of Table 1 in the main paper. Being a root-mean-square, RMSE is dominated by the largest per-step errors and exceeds the mean-of-distance ADE for every model.

Table 11: NGSIM-style RMSE at the 5-s horizon for each interaction template. Lower is better; values are in meters. All methods use the same evaluation grid as Table 3. [‡] denotes Argoverse 2 map-conditioned models evaluated zero-shot.

	Clearance		Traffic-control traversal				Road-space	
Model	S1	S2	S3	S4	S5	S6	S7	Mean
CV	5.61	5.26	4.64	3.56	6.49	8.55	4.82	5.56
IDM	7.06	6.40	5.16	3.88	8.01	9.20	5.72	6.49
CSP	7.52	10.07	8.67	7.27	8.76	11.16	5.84	8.47
STDAN	10.38	16.71	11.24	9.47	12.39	21.15	10.38	13.10
BAT	18.35	17.76	20.20	14.35	9.70	14.55	8.31	14.75
EMP-M [‡]	6.39	6.34	10.54	9.24	12.19	11.05	9.14	9.27
EMP-D [‡]	5.52	4.81	9.56	7.05	7.82	12.11	7.51	7.77
DeMo [‡]	5.35	5.62	9.22	6.66	9.80	12.31	5.89	7.84
DeMo+RealMotion [‡]	5.97	6.01	10.86	10.10	8.95	8.37	8.16	8.34

A.2.5 Detection True-Positive Error Breakdown

Table 13 reports the nuScenes true-positive error terms that enter NDS, averaged over the seven templates. Translation and scale errors are small and consistent across detectors (ATE 0.55–0.57 m, ASE 0.20–0.22), confirming that the detectors localize and size vehicles correctly; orientation error separates the architectures as expected.

The velocity and attribute terms behave differently. AVE exceeds 3.1 m/s per detector, far above typical nuScenes values. We checked this against the ground-truth velocity frame and against alternative sign and axis conventions, and the reported convention fits best. Hence, we treat the magnitude as a genuine cross-domain effect rather than a unit or frame error: the detectors are asked to regress velocity for traffic whose speed profile is different from

Table 12: Multimodal best-of-six minADE₆/minFDE₆ at the 5-s horizon for the four map-conditioned models. Lower is better; values are in meters. The anchors and NGSIM-based models are single-mode, so their minADE₆/minFDE₆ equal the ADE/FDE values reported in Table 3.

	Clearance		Traffic-control traversal				Road-space	
Model	S1	S2	S3	S4	S5	S6	S7	Mean
<i>minADE₆</i>								
EMP-M	0.58	0.52	0.89	0.66	1.06	0.93	0.58	0.74
EMP-D	0.58	0.48	0.81	0.52	0.81	0.80	0.37	0.62
DeMo	0.53	0.47	0.67	0.39	0.90	0.99	0.32	0.61
DeMo+RealMotion	0.58	0.41	0.93	0.77	0.82	0.80	0.50	0.69
<i>minFDE₆</i>								
EMP-M	1.30	1.26	2.72	2.20	2.71	2.34	2.25	2.11
EMP-D	1.21	1.07	2.44	1.58	1.96	1.96	1.30	1.65
DeMo	1.12	1.24	2.18	1.34	2.31	2.58	1.60	1.77
DeMo+RealMotion	1.28	1.05	2.72	2.34	2.00	1.95	1.59	1.85

the nuScenes training distribution; for example, stop-and-go queues interrupted by a fast EMV. Similar patterns are observed under AAE, as CARLA supplies no attribute labels, and the moving/stopped attribute is derived from speed. Both terms clip toward the low end of NDS, which is why we report mAP as the headline detection metric and NDS as secondary.

Table 13: True-positive error metrics for 3D object detection, averaged over the seven templates. Lower is better; units: ATE m, AOE rad, and AVE m/s.

Model	ATE ↓	ASE ↓	AOE ↓	AVE ↓	AAE ↓
PointPillars	0.553	0.215	0.396	3.165	0.459
SECOND	0.565	0.214	0.207	3.196	0.514
VoxelNeXt	0.562	0.216	0.313	3.404	0.576
TransFusion-L	0.561	0.196	0.330	3.223	0.461

A.2.6 Risk Understanding

The risk-understanding evaluation uses the preprocessing and prompting components of *SeeUnsafe* [33] unchanged, including its segmentation- and visual-grounding-based visual prompts and accompanying text prompt. We apply this pipeline to the SIREN-Bench videos and reference labels; implementation details follow *SeeUnsafe* and are not repeated here. The task treats risk classification as a behavioral measure of scene-level risk understanding: inferring the class requires interpreting the agents and their interactions, but the evaluation scores the resulting classification rather than the VLM’s intermediate reasoning process. The source data comprise 105 front-camera videos, with 15 videos for each of the seven interaction templates and 190 frames per video, yielding 19,950 frames in total. We evaluate the five vision-language models reported in the main paper: Blaifa-InternVL3.5-8B, Gemma3-12B, LLaVA-Llama3-8B, MiniCPM-V-4.5-8B, and Qwen3.5-9B.

Each MP4 video produces two intermediate predictions assigned to one of three risk classes: Normal, Near-Miss, or Collision. Following *SeeUnsafe*, the more severe prediction is selected using the ordering Normal < Near-Miss < Collision, yielding one final prediction per video. The evaluation therefore contains 105 video-level predictions per model. Reference labels are derived from the recorded EMV–civilian interactions and collision events. Evaluation is based on overall classification accuracy and class-specific precision and F1. The class-specific results are reported in Table 5 of the main paper.

Acknowledgements

This work was supported by the Small World Lab (SWL) at Rochester Institute of Technology. Haoxin Leng and Tao Li are supported by CityU internal grant No. 9610792. The contents of this paper only reflect the views of the authors who are responsible for the facts and do not represent any official views of any sponsoring organizations or agencies.

Author Contributions

Yicheng Zhu: Pipeline methodology, software, validation, and writing.

Tianmu Zhao: Behavior-model methodology, software, and writing—review & editing.

Haoxin Leng: Data collection and evaluation pipeline.

Fan Zuo: Conceptualization and writing—review & editing.

Tao Li: Conceptualization and writing—review & editing.

Zilin Bian: Conceptualization, methodology, supervision, and writing—review & editing.

References

- [1] Jeff J. Clawson, Robert L. Martin, Geoff A. Cady, and Ronald F. Maio. The Wake-Effect—Emergency Vehicle-Related Collisions. *Prehospital and Disaster Medicine*, 12(4):41–44, December 1997. ISSN 1049-023X, 1945-1938. doi: 10.1017/S1049023X00037791. URL https://www.cambridge.org/core/product/identifier/S1049023X00037791/type/journal_article.
- [2] Hongwei Hsiao, Joonho Chang, and Peter Simeonov. Preventing Emergency Vehicle Crashes: Status and Challenges of Human Factors Issues. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 60(7):1048–1072, November 2018. ISSN 0018-7208, 1547-8181. doi: 10.1177/0018720818786132. URL <https://journals.sagepub.com/doi/10.1177/0018720818786132>.
- [3] Holger Caesar, Varun Bankiti, Alex H Lang, Sourabh Vora, Venice Erin Liong, Qiang Xu, Anush Krishnan, Yu Pan, Giancarlo Baldan, and Oscar Beijbom. nuScenes: A multimodal dataset for autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11621–11631, 2020.
- [4] Pei Sun, Henrik Kretschmar, Xerxes Dotiwalla, Aurelien Chouard, Vijaysai Patnaik, Paul Tsui, James Guo, Yin Zhou, Yuning Chai, Benjamin Caine, et al. Scalability in perception for autonomous driving: Waymo open dataset. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2446–2454, 2020.
- [5] Runsheng Xu, Hubert Lin, Wonseok Jeon, Hao Feng, Yuliang Zou, Liting Sun, John Gorman, Ekaterina Tolstaya, Sarah Tang, Brandyn White, et al. WOD-E2E: Waymo open dataset for end-to-end driving in challenging long-tail scenarios. *arXiv preprint arXiv:2510.26125*, 2025.
- [6] Zhiyu Huang, Johnson Liu, Rui Song, Zewei Zhou, Ruining Yang, Yun Zhang, Tianhui Cai, Hanyin Zhang, Mingxuan Gao, Valeria Xu, Jiali Chen, Yishan Shen, Yiluan Guo, Xuewei Qi, and Jiaqi Ma. nuReasoning: A reasoning-centric dataset and benchmark for long-tail autonomous driving. *arXiv preprint arXiv:2605.31572*, 2026.
- [7] Pablo Alvarez Lopez, Michael Behrisch, Laura Bieker-Walz, Jakob Erdmann, Yun-Pang Flötteröd, Robert Hilbrich, Leonhard Lücken, Johannes Rummel, Peter Wagner, and Evamarie Wießner. Microscopic traffic simulation using SUMO. In *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*, pages 2575–2582. IEEE, 2018. doi: 10.1109/ITSC.2018.8569938.
- [8] Haoran Su, Yaofeng Desmond Zhong, Biswadip Dey, and Amit Chakraborty. EMVLight: A decentralized reinforcement learning framework for efficient passage of emergency vehicles. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 4593–4601, 2022. doi: 10.1609/aaai.v36i4.20383.
- [9] Alexey Dosovitskiy, German Ros, Felipe Codevilla, Antonio Lopez, and Vladlen Koltun. CARLA: An open urban driving simulator. In *Conference on Robot Learning (CoRL)*, pages 1–16. PMLR, 2017.
- [10] Xiaosong Jia, Zhenjie Yang, Qifeng Li, Zhiyuan Zhang, and Junchi Yan. Bench2Drive: Towards multi-ability benchmarking of closed-loop end-to-end autonomous driving. *Advances in Neural Information Processing Systems*, 37:819–844, 2024.
- [11] Laura Bieker-Walz, Michael Behrisch, and Marek Junghans. Analysis of the traffic behavior of emergency vehicles in a microscopic traffic simulation. pages 1–13. doi: 10.29007/bv4j. URL <https://easychair.org/publications/paper/dMh9>.
- [12] Cristián E. Cortés and Bruno Stefoni. Trajectory Simulation of Emergency Vehicles and Interactions with Surrounding Traffic. *Journal of Advanced Transportation*, 2023(1):5995950, 2023. ISSN 2042-3195. doi: 10.1155/2023/5995950. URL <https://onlinelibrary.wiley.com/doi/abs/10.1155/2023/5995950>. _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1155/2023/5995950>.

- [13] Haoran Su, Yaofeng D. Zhong, Joseph Y. J. Chow, Biswadip Dey, and Li Jin. EMVLight: A multi-agent reinforcement learning framework for an emergency vehicle decentralized routing and traffic signal control system. *Transportation Research Part C: Emerging Technologies*, 146:103955, January 2023. ISSN 0968-090X. doi: 10.1016/j.trc.2022.103955. URL <https://www.sciencedirect.com/science/article/pii/S0968090X22003680>.
- [14] Haoyi Niu, Jianming Hu, Zheyu Cui, and Yi Zhang. Tactical Decision Making for Emergency Vehicles Based on A Combinational Learning Method, January 2021. URL <http://arxiv.org/abs/2009.04203>. arXiv:2009.04203 [cs.AI].
- [15] Tao Li, Haozhe Lei, and Quanyan Zhu. Self-adaptive driving in nonstationary environments through conjectural online lookahead adaptation. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pages 7205–7211, 2023. doi: 10.1109/ICRA48891.2023.10161368.
- [16] Runsheng Xu, Hao Xiang, Xu Han, Xin Xia, Zonglin Meng, Chia-Ju Chen, Camila Correa-Jullian, and Jiaqi Ma. The OpenCDA Open-Source Ecosystem for Cooperative Driving Automation Research. *IEEE Transactions on Intelligent Vehicles*, 8(4):2698–2711, April 2023. ISSN 2379-8904. doi: 10.1109/TIV.2023.3244948. URL <https://ieeexplore.ieee.org/document/10045043/authors>.
- [17] Wenhao Ding, Chejian Xu, Mansur Arief, Haohong Lin, Bo Li, and Ding Zhao. A Survey on Safety-Critical Driving Scenario Generation – A Methodological Perspective, June 2023. URL <http://arxiv.org/abs/2202.02215>. arXiv:2202.02215 [cs.RO].
- [18] Holger Caesar, Juraj Kabzan, Kok Seang Tan, Whye Kit Fong, Eric Wolff, Alex Lang, Luke Fletcher, Oscar Beijbom, and Sammy Omari. NuPlan: A closed-loop ML-based planning benchmark for autonomous vehicles, February 2022. URL <http://arxiv.org/abs/2106.11810>. arXiv:2106.11810 [cs].
- [19] Cole Gulino, Justin Fu, Wenjie Luo, George Tucker, Eli Bronstein, Yiren Lu, Jean Harb, Xinlei Pan, Yan Wang, Xiangyu Chen, John Co-Reyes, Rishabh Agarwal, Rebecca Roelofs, Yao Lu, Nico Montali, Paul Mougin, Zoey Yang, Brandyn White, Aleksandra Faust, Rowan McAllister, Dragomir Anguelov, and Benjamin Sapp. Waymax: An Accelerated, Data-Driven Simulator for Large-Scale Autonomous Driving Research. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 7730–7742. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/1838feeb71c4b4ea524d0df2f7074245-Paper-Datasets_and_Benchmarks.pdf.
- [20] Daniel Dauner, Marcel Hallgarten, Tianyu Li, Xinshuo Weng, Zhiyu Huang, Zetong Yang, Hongyang Li, Igor Gilitschenski, Boris Ivanovic, Marco Pavone, Andreas Geiger, and Kashyap Chitta. NAVSIM: Data-Driven Non-Reactive Autonomous Vehicle Simulation and Benchmarking. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 28706–28719. Curran Associates, Inc., 2024. doi: 10.52202/079017-0902. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/32768f7faf1995026ef9821c696f3404-Paper-Datasets_and_Benchmarks_Track.pdf.
- [21] Zhongyu Xia, Guanyu Zhu, Guo Tang, Wenhao Chen, and Yongtao Wang. HiDrive: A Closed-Loop Benchmark for High-Level Autonomous Driving, May 2026. URL <https://arxiv.org/abs/2605.09972v1>.
- [22] Fan Zuo, Jingqin Gao, Di Sha, Joseph Chow, Y. J., and Kaan Ozbay. A hybrid evolutionary algorithm and reinforcement learning (EA-RL) approach for calibrating emergency medical vehicle behavior in microscopic simulation. In *The 105th Annual Meeting of the Transportation Research Board*, 2026.
- [23] Nachiket Deo and Mohan M. Trivedi. Convolutional social pooling for vehicle trajectory prediction. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*, pages 1468–1476, 2018. doi: 10.1109/CVPRW.2018.00196.
- [24] Xiaobo Chen, Huanjia Zhang, Feng Zhao, Yu Hu, Chenkai Tan, and Jian Yang. Intention-aware vehicle trajectory prediction based on spatial-temporal dynamic attention network for internet of vehicles. *IEEE Transactions on Intelligent Transportation Systems*, 23(10):19471–19483, 2022. doi: 10.1109/TITS.2022.3170551.
- [25] Haicheng Liao, Zhenning Li, Huanming Shen, Wenxuan Zeng, Dongping Liao, Guofa Li, Shengbo Eben Li, and Chengzhong Xu. BAT: Behavior-aware human-like trajectory prediction for autonomous driving. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 10332–10340, 2024. doi: 10.1609/aaai.v38i9.28900.

- [26] Alexander Prutsch, Horst Bischof, and Horst Possegger. Efficient motion prediction: A lightweight and accurate trajectory prediction model with fast training and inference speed. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 9411–9417, 2024. doi: 10.1109/IROS58592.2024.10802425.
- [27] Bozhou Zhang, Nan Song, and Li Zhang. DeMo: Decoupling Motion Forecasting into Directional Intentions and Dynamic States, October 2024. URL <http://arxiv.org/abs/2410.05982>. arXiv:2410.05982 [cs.CV].
- [28] Nan Song, Bozhou Zhang, Xiatian Zhu, and Li Zhang. Motion forecasting in continuous driving. In *Advances in Neural Information Processing Systems*, volume 37, pages 78147–78168, 2024.
- [29] Alex H. Lang, Sourabh Vora, Holger Caesar, Lubing Zhou, Jiong Yang, and Oscar Beijbom. PointPillars: Fast encoders for object detection from point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12697–12705, 2019.
- [30] Yan Yan, Yuxing Mao, and Bo Li. SECOND: Sparsely embedded convolutional detection. *Sensors*, 18(10):3337, 2018. doi: 10.3390/s18103337.
- [31] Yukang Chen, Jianhui Liu, Xiangyu Zhang, Xiaojuan Qi, and Jiaya Jia. VoxelNeXt: Fully sparse VoxelNet for 3d object detection and tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21674–21683, 2023.
- [32] Xuyang Bai, Zeyu Hu, Xinge Zhu, Qingqiu Huang, Yilun Chen, Hongbo Fu, and Chiew-Lan Tai. TransFusion: Robust LiDAR–camera fusion for 3d object detection with transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1090–1099, 2022.
- [33] Ruixuan Zhang, Beichen Wang, Juexiao Zhang, Zilin Bian, Chen Feng, and Kaan Ozbay. When language and vision meet road safety: Leveraging multimodal large language models for video-based traffic accident analysis. *Accident Analysis & Prevention*, 219:108077, 2025. doi: 10.1016/j.aap.2025.108077.
- [34] Weiyun Wang, Zhangwei Gao, Lixin Gu, Hengjun Pu, Long Cui, Xingguang Wei, Zhaoyang Liu, Linglin Jing, Shenglong Ye, Jie Shao, et al. InternVL3.5: Advancing open-source multimodal models in versatility, reasoning, and efficiency. *arXiv preprint arXiv:2508.18265*, 2025. doi: 10.48550/arXiv.2508.18265.
- [35] Gemma Team. Gemma 3. 2025. URL <https://google/Gemma3Report>.
- [36] XTuner Contributors. Xtuner: A toolkit for efficiently fine-tuning llm. <https://github.com/InternLM/xtuner>, 2023.
- [37] Tianyu Yu, Zefan Wang, Chongyi Wang, Fuwei Huang, Wenshuo Ma, Zhihui He, Tianchi Cai, Weize Chen, Yuxiang Huang, Yuanqian Zhao, Bokai Xu, Junbo Cui, Yingjing Xu, Liqing Ruan, Luoyuan Zhang, Hanyu Liu, Jingkun Tang, Hongyuan Liu, Qining Guo, Wenhao Hu, Bingxiang He, Jie Zhou, Jie Cai, Ji Qi, Zonghao Guo, Chi Chen, Guoyang Zeng, Yuxuan Li, Ganqu Cui, Ning Ding, Xu Han, Yuan Yao, Zhiyuan Liu, and Maosong Sun. MiniCPM-V 4.5: Cooking Efficient MLLMs via Architecture, Data, and Training Recipe, September 2025. URL <http://arxiv.org/abs/2509.18154>. arXiv:2509.18154 [cs.LG].
- [38] Qwen Team. Qwen3.5: Towards native multimodal agents, 2026. URL <https://qwen.ai/blog?id=qwen3.5>.