

CARO: Contact-Agnostic Residual Observation for Zero-Shot Robust Quadruped Locomotion

Zihan Yang¹, Shixuan Han², Kexin Guo^{1,†}, and Xiang Yu²

Abstract—We propose CARO, a contact-agnostic residual observation framework for policy adaptation. CARO embeds a fixed-base Euler-Lagrange model into the reinforcement learning control loop and constructs a torque-level residual observation without requiring torque sensors, explicit contact estimation, or vision-based measurements of the floating-base position and linear velocity. A disturbance observer extracts a structured signal representing dynamics mismatch, while the policy learns to exploit this feedback for online adaptation. CARO is trained under the same terrain, command, and domain-randomization conditions as the nominal policy, without specialized disturbance curricula or additional adaptation supervision. Nevertheless, it achieves substantially improved zero-shot robustness in simulation and sim-to-real transfer tasks involving out-of-distribution payloads, center-of-mass shifts, terrain geometries, abrupt dynamics changes, and elevated-platform landings.

I. INTRODUCTION

Reinforcement learning (RL) has enabled agile and versatile quadruped locomotion, achieving impressive performance in high-speed running [1], perturbation recovery [2], and complex-terrain traversal [3]. Despite this progress, deployment robustness remains a persistent limitation. When a robot encounters conditions outside the training distribution, the performance of learned policies can degrade significantly. Most existing pipelines achieve robustness implicitly, either through large-scale simulation and domain randomization or through adaptation modules that infer latent environment properties and adjust policy behavior accordingly [3]–[6]. Although effective under moderate distribution shifts, these approaches generally lack an explicit, physically structured feedback channel for detecting abrupt changes in the robot’s dynamics and contact conditions.

A complementary line of research incorporates model-based control structures into learning-based policies [7]–[10]. Predictive errors, disturbance estimates, and adaptive signals can provide informative closed-loop feedback to the policy and improve robustness under model mismatch. However, applying internal-model-based and observer-based methods to quadruped locomotion remains challenging because legged dynamics are hybrid, nonlinear, and strongly affected by contact interactions. Accurate floating-base inverse-dynamics calculations typically require reliable estimates of the floating-base state, actuator behavior, and contact forces. These sensing and modeling requirements can be difficult

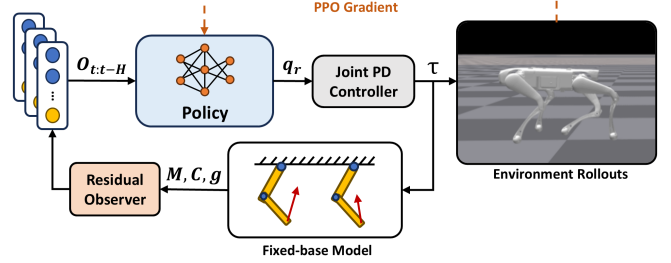


Fig. 1. Overview of the CARO framework. The fixed-base Euler-Lagrange internal model is embedded within the RL control loop, and the resulting joint-level residual is provided to the policy as an adaptation signal.

to satisfy during terrain transitions, foot impacts, slipping, and large body motions, limiting the direct deployment of conventional observer-based feedback in learned locomotion systems.

In this work, we propose Contact-Agnostic Residual Observation (CARO), a framework for robust quadruped locomotion. CARO embeds a fixed-base Euler-Lagrange internal model into the RL control loop and constructs a lightweight joint-level residual observation. Although the internal model omits explicit floating-base dynamics, payload changes, external pushes, and terrain variations remain observable through their effects on contact-force distribution and joint-space loading. Here, contact-agnostic means that CARO captures the joint-space consequences of contact interactions without explicitly estimating contact states, locations, or wrenches. Rather than directly applying the estimated residual as joint-level compensation, CARO provides it to the policy as an internal-model adaptation signal.

CARO is trained under the same terrain, command, and domain-randomization conditions as the nominal policy, without specialized disturbance curricula or additional adaptation supervision. We evaluate the resulting policy through systematic payload-terrain sweeps and sudden payload changes in simulation. CARO consistently improves locomotion robustness relative to representative baselines based on standard RL, history-based adaptation, and adaptive control. Real-world experiments further demonstrate zero-shot traversal of unseen terrains, heading maintenance under center-of-mass shifts, increased payload capacity, and improved robustness during elevated-platform landings.

The main contributions of this work are summarized as follows:

- **Deployable contact-agnostic internal-model adaptation.** We introduce a fixed-base Euler-Lagrange residual

[†] Corresponding author.

¹School of Aeronautic Science and Engineering, Beihang University, Beijing 100035, China

²School of Automation Science and Electrical Engineering, Beihang University, Beijing 100035, China

observer that can be directly integrated into a quadruped locomotion policy without explicit contact-force estimation, force/torque sensing, or measurements of the floating-base position and linear velocity.

- **Policy-level use of structured residual feedback.** Rather than using the observed residual for direct joint-level compensation, CARO provides it to the RL policy as an adaptation input, allowing the policy to determine an appropriate response under contact-rich and out-of-distribution conditions.
- **Zero-shot robustness without specialized robustness training.** Using the same training conditions as the nominal policy, CARO improves robustness to out-of-distribution payloads, center-of-mass shifts, terrain geometries, and abrupt dynamics changes in both simulation and real-world experiments.

II. RELATED WORK

A. Robustness in RL-Based Legged Locomotion

Policy learning has become a dominant paradigm for legged locomotion, with large-scale simulation, curriculum learning, and domain randomization forming the foundation of robust policy training [11]. To handle distribution shifts at deployment, a prominent line of work augments RL policies with latent adaptation modules or context encoders that infer hidden environment properties from proprioceptive histories [3]–[6]. RMA [3] trains a rapid adaptation module to reproduce a privileged environment representation online, while DreamWaQ [4] extends history-based adaptation through imagination-augmented learning. Other methods learn control-relevant latent variables or history-dependent representations to improve robustness [12], [13]. Although effective, their adaptation signals are generally inferred implicitly from history rather than explicitly derived from a structured closed-loop residual.

A complementary direction incorporates control-inspired structures into learning-based policies [7], [9], [10]. These methods introduce predictive errors, observer states, adaptive terms, or residual signals into the policy input. An estimator network [7] learns to predict unmeasured state information to improve policy performance, but the learned estimator is not guaranteed to provide structured feedback under out-of-distribution conditions. RL2AC [9] combines learned context representations with adaptive control signals for robust legged locomotion but requires onboard torque sensing for its adaptive controller. Neural-IMC [10] provides body-level model-prediction errors to the policy as auxiliary feedback. However, body-level prediction errors and generic adaptive signals do not directly provide the joint-space internal-model feedback needed to characterize contact-rich locomotion dynamics. Additionally, the requirement for floating-base state estimation limits the direct deployment of these methods on legged robots. DeepDOB [2] learns a disturbance observer to reject residual effects associated with predicted desired actions. Its results show improved locomotion-policy robustness by calibrating the current action with a desired action.

CARO constructs a lightweight joint-level residual observation using the fixed-base Euler–Lagrange internal model. The residual is provided to the policy as an adaptation signal, enabling structured feedback under out-of-distribution contact distribution and torque residuals without explicitly identifying contact forces. ADAPT [14] similarly combines an Euler–Lagrange model and a momentum observer with an RL policy, using a two-phase training framework for force-aware humanoid locomotion. However, its objective is to provide the policy with accurate end-effector force information. It also requires a floating-base model and base-velocity estimates, which may not be available on all platforms. In contrast, CARO uses a fixed-base model, requires no root velocity estimation, and targets zero-shot robustness without specialized two-phase training.

B. Disturbance Estimation for Legged Robots

Contact-rich dynamics present unique challenges for disturbance estimation without contact-state or force/torque sensing. Classical disturbance observers [15], [16] and generalized-momentum observers [17]–[19] infer external joint torques from discrepancies between nominal robot dynamics and measured motion [19], [20]. Such methods have been applied to manipulators for contact estimation and physical interaction control [18], [21].

Recent work extends sensorless estimation to legged and humanoid robots. Proprioceptive external torque learning estimates external joint torques and contact wrenches for floating-base humanoids using internal measurements [13], [22], [23], but generalization to unseen payloads and contact conditions remains challenging. MOB-Net [24] combines a momentum observer with learned model-uncertainty calibration to improve external-torque estimation in high-dimensional humanoid robots. Sensor-fusion approaches have also been developed to estimate effective joint torques on humanoid robots without dedicated torque sensors [25].

Rather than recovering physically accurate external torques for force control, collision handling, or contact localization, CARO uses the observed joint-level residual as an adaptation input to an RL locomotion policy. This relaxes the need for precise disturbance identification and allows the policy to exploit internal-model feedback under contact-rich and out-of-distribution conditions.

III. CONTACT-AGNOSTIC RESIDUAL OBSERVATION

A. Preliminaries

Consider a quadruped robot with a floating base and n actuated joints. Let $\mathbf{x}_b$ denote the floating-base configuration, and let

$$\boldsymbol{\nu} = [\mathbf{v}_b^\top \quad \dot{\mathbf{q}}^\top]^\top \in \mathbb{R}^{n+6}, \quad (1)$$

denote the generalized velocity, where $\mathbf{v}_b \in \mathbb{R}^6$ is the floating-base spatial velocity and $\mathbf{q}, \dot{\mathbf{q}} \in \mathbb{R}^n$ are the actuated joint positions and velocities. The full floating-base dynamics can be written as

$$\mathbf{M}_{\text{full}}(\mathbf{x}_b, \mathbf{q})\dot{\boldsymbol{\nu}} + \mathbf{h}_{\text{full}}(\mathbf{x}_b, \mathbf{q}, \boldsymbol{\nu}) = \mathbf{S}^\top \boldsymbol{\tau} + \mathbf{J}_c^\top(\mathbf{x}_b, \mathbf{q})\mathbf{f}_c + \boldsymbol{\tau}_{\text{ext}}, \quad (2)$$

where $\mathbf{M}_{\text{full}}$ is the generalized inertia matrix, $\mathbf{h}_{\text{full}}$ is the nonlinear bias term containing the Coriolis and gravitational terms, $\boldsymbol{\tau} \in \mathbb{R}^n$ is the actual joint torque, $\mathbf{f}_c$ contains the stacked contact wrenches, and $\boldsymbol{\tau}_{\text{ext}}$ denotes additional generalized disturbances. The actuation selection matrix is

$$\mathbf{S} = [\mathbf{0}_{n \times 6} \quad \mathbf{I}_n]. \quad (3)$$

The generalized contact-force vector can be partitioned into its floating-base and actuated-joint components:

$$\mathbf{J}_c^\top \mathbf{f}_c = \begin{bmatrix} \mathbf{J}_{c,b}^\top \mathbf{f}_c \\ \mathbf{J}_{c,j}^\top \mathbf{f}_c \end{bmatrix}, \quad (4)$$

where $\mathbf{J}_{c,b}^\top \mathbf{f}_c$ is the contact wrench projected onto the floating base and $\mathbf{J}_{c,j}^\top \mathbf{f}_c$ is the corresponding joint-space loading.

The actuated rows of (2) are

$$\mathbf{M}_{jb} \dot{\mathbf{v}}_b + \mathbf{M}_{jj} \ddot{\mathbf{q}} + \mathbf{h}_j = \boldsymbol{\tau} + \mathbf{J}_{c,j}^\top \mathbf{f}_c + \boldsymbol{\tau}_{\text{ext},j}, \quad (5)$$

where $\mathbf{M}_{jb}$ characterizes the dynamic coupling between the floating base and actuated joints.

For example, a wrench $\mathbf{w}_b$ applied directly to the trunk can be represented as

$$\boldsymbol{\tau}_{\text{ext}} = \begin{bmatrix} \mathbf{w}_b \\ \mathbf{0}_n \end{bmatrix}. \quad (6)$$

Although such a disturbance has no direct component in the actuated coordinates, it affects the joint dynamics through the base-joint coupling term $\mathbf{M}_{jb} \dot{\mathbf{v}}_b$ and through changes in the contact wrenches $\mathbf{f}_c$.

The policy π_θ outputs a reference joint-position increment $\mathbf{q}_r$, which a low-level proportional-derivative (PD) controller converts into a torque command:

$$\boldsymbol{\tau}_{\text{cmd}} = \mathbf{K}_p(\mathbf{q}_0 + \mathbf{q}_r - \mathbf{q}) - \mathbf{K}_d \dot{\mathbf{q}}, \quad (7)$$

where $\mathbf{q}_0$ is the default joint position and $\mathbf{q}_r$ is the policy-generated reference joint-position increment. $\mathbf{K}_p$ and $\mathbf{K}_d$ are positive-definite diagonal gain matrices.

B. Fixed-Base Euler–Lagrange Internal Model

Constructing an internal-model observer from the full dynamics in (2) requires an accurately calibrated floating-base model and reliable estimates of the complete generalized state, including the floating-base linear velocity. CARO instead deliberately adopts a fixed-base Euler–Lagrange model as a lightweight and deployable internal model. The base is locked only within the internal model; the physical robot remains a floating-base system. The resulting joint-space model is

$$\mathbf{M}_f(\mathbf{q}) \ddot{\mathbf{q}} + \mathbf{h}_f(\mathbf{q}, \dot{\mathbf{q}}) = \boldsymbol{\tau}_{\text{cmd}} + \mathbf{r}, \quad (8)$$

where $\mathbf{M}_f \in \mathbb{R}^{n \times n}$, $\mathbf{C}_f \in \mathbb{R}^{n \times n}$, and $\mathbf{G}_f \in \mathbb{R}^n$ are, respectively, the inertia, Coriolis, and gravity terms computed from the fixed-base rigid-body model; $\mathbf{h}_f = \mathbf{C}_f(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathbf{G}_f(\mathbf{q}) \in \mathbb{R}^n$ is the nonlinear bias term; and $\mathbf{r} \in \mathbb{R}^n$ is the internal-model residual. In (9), we use $\boldsymbol{\tau}_{\text{cmd}}$ rather than $\boldsymbol{\tau}$ to

avoid the need for torque sensing during residual estimation. The internal-model residual is defined as

$$\mathbf{r} := \mathbf{M}_f(\mathbf{q}) \ddot{\mathbf{q}} + \mathbf{h}_f(\mathbf{q}, \dot{\mathbf{q}}) - \boldsymbol{\tau}_{\text{cmd}}. \quad (9)$$

Comparing (9) with the actuated floating-base dynamics in (5) gives

$$\mathbf{r} = \mathbf{J}_{c,j}^\top \mathbf{f}_c + \boldsymbol{\tau}_{\text{ext},j} + \Delta_{\text{fb}} + \boldsymbol{\delta}_\tau, \quad (10)$$

Here, the fixed-base discrepancy is

$$\begin{aligned} \Delta_{\text{fb}} := & (\mathbf{M}_f - \mathbf{M}_{jj}) \ddot{\mathbf{q}} - \mathbf{M}_{jb} \dot{\mathbf{v}}_b \\ & + \mathbf{C}_f(\mathbf{q}, \dot{\mathbf{q}}) \dot{\mathbf{q}} + \mathbf{G}_f(\mathbf{q}) - \mathbf{h}_j. \end{aligned} \quad (11)$$

The vector $\boldsymbol{\delta}_\tau := \boldsymbol{\tau} - \boldsymbol{\tau}_{\text{cmd}}$ denotes the motor torque-tracking error. CARO does not attempt to identify or separate the individual terms in (10). Instead, their combined effect is retained as a structured joint-space signal for policy adaptation.

The effects of a base-level perturbation become observable in the fixed-base residual. An attached payload changes the inertial and gravitational loading of the floating base and alters the support forces required from the stance legs. Similarly, an external push induces base acceleration and a transient redistribution of the contact wrenches. Although neither effect is explicitly represented by the fixed-base model, both modify the joint-space response through $\mathbf{J}_{c,j}^\top \mathbf{f}_c$ and Δ_{fb} , and therefore appear in the residual $\mathbf{r}$. Such residual signatures commonly arise when payload or terrain changes redistribute loading among the front, rear, left, and right legs.

CARO therefore does not explicitly recover contact states, locations, or wrenches; instead, it retains their joint-space effects in the residual.

C. Residual Observer

Direct evaluation of (9) requires joint acceleration $\ddot{\mathbf{q}}$, which is generally unavailable and can be noisy when obtained through numerical differentiation. We therefore introduce a momentum-based disturbance-observer structure to estimate $\mathbf{r}$ without explicitly measuring joint acceleration [16], [17].

Consider the first-order residual-estimation dynamics

$$\dot{\hat{\mathbf{r}}} = \mathbf{L}(\mathbf{r} - \hat{\mathbf{r}}), \quad (12)$$

where $\hat{\mathbf{r}} \in \mathbb{R}^n$ is the estimated residual and $\mathbf{L} \in \mathbb{R}^{n \times n}$ is a positive-definite diagonal observer-gain matrix, i.e., $\mathbf{L} \succ \mathbf{0}$.

Define the fixed-base momentum as $\mathbf{p}_f := \mathbf{M}_f(\mathbf{q}) \dot{\mathbf{q}}$. Differentiating this expression gives

$$\dot{\mathbf{p}}_f = \mathbf{M}_f(\mathbf{q}) \ddot{\mathbf{q}} + \dot{\mathbf{M}}_f(\mathbf{q}) \dot{\mathbf{q}}. \quad (13)$$

Using (9) to replace $\mathbf{M}_f(\mathbf{q}) \ddot{\mathbf{q}}$ in (13) yields

$$\dot{\mathbf{p}}_f = \mathbf{r} + \boldsymbol{\tau}_{\text{cmd}} + \mathbf{b}_f, \quad (14)$$

where $\mathbf{b}_f := \dot{\mathbf{M}}_f(\mathbf{q}) \dot{\mathbf{q}} - \mathbf{h}_f$ is the fixed-base momentum bias. To eliminate the dependence on $\ddot{\mathbf{q}}$, we introduce the auxiliary state

$$\mathbf{z} = \hat{\mathbf{r}} - \mathbf{L} \mathbf{p}_f, \quad \dot{\mathbf{z}} = \dot{\hat{\mathbf{r}}} - \mathbf{L} \dot{\mathbf{p}}_f. \quad (15)$$

Substituting (15) and (14) into (12) yields the implementable residual observer

$$\begin{aligned}\dot{\mathbf{z}} &= -\mathbf{L}(\mathbf{z} + \mathbf{L}\mathbf{p}_f + \boldsymbol{\tau}_{\text{cmd}} + \mathbf{b}_f), \\ \hat{\mathbf{r}}_{\text{eff}} &= \mathbf{z} + \mathbf{L}\mathbf{p}_f.\end{aligned}\quad (16)$$

In addition to the fixed-base model, the observer requires only measured joint positions and velocities and the torque command generated by (7). It therefore requires no force/torque sensors, explicit contact estimation, or measurements of the floating-base position and linear velocity. Let $\hat{\mathbf{b}}_f$ denote the estimated momentum bias from any available method, we approximate $\mathbf{b}_f$ with $\hat{\mathbf{b}}_f$ in (16). The observer then outputs effective residual $\hat{\mathbf{r}}_{\text{eff}}$ instead of $\hat{\mathbf{r}}$. Details of the fixed-base model and residual-observer implementation are provided in Appendix III-B.

D. Boundedness of Residual Estimation

The following result establishes a bound on the proposed residual observer's estimation error.

Theorem 1: Let $t_k = kT_s$ denote the sampling instants, and suppose that (16) is integrated using forward Euler. For the analysis, define the Euler-consistent sampled residual

$$\boldsymbol{\rho}_k := \frac{\mathbf{p}_{f,k+1} - \mathbf{p}_{f,k}}{T_s} - \boldsymbol{\tau}_{\text{cmd},k} - \hat{\mathbf{b}}_{f,k}. \quad (17)$$

Assume that $0 < T_s \lambda_i(\mathbf{L}) < 2$ for every eigenvalue of $\mathbf{L}$, and define $\mathbf{A} := \mathbf{I} - T_s \mathbf{L}$ and $\alpha := \|\mathbf{A}\|_2 < 1$. If

$$\|\boldsymbol{\rho}_k - \boldsymbol{\rho}_{k-1}\|_2 \leq \beta, \quad k \geq 1, \quad (18)$$

then the one-step-delayed estimation error $\mathbf{e}_k := \boldsymbol{\rho}_{k-1} - \hat{\mathbf{r}}_{\text{eff},k}$ satisfies, for every $k \geq 1$,

$$\|\mathbf{e}_k\|_2 \leq \alpha^{k-1} \|\mathbf{e}_1\|_2 + \frac{\alpha(1 - \alpha^{k-1})}{1 - \alpha} \beta. \quad (19)$$

Consequently,

$$\limsup_{k \rightarrow \infty} \|\mathbf{e}_k\|_2 \leq \frac{\alpha}{1 - \alpha} \beta. \quad (20)$$

The proof is provided in Appendix I.

E. Integration with the RL Policy

Let $\mathbf{o}_t^{\text{nom}}$ denote the observation used by the nominal locomotion policy. CARO augments the nominal observation with the estimated fixed-base residual:

$$\mathbf{o}_t^{\text{CARO}} = \left[(\mathbf{o}_t^{\text{nom}})^\top \quad \hat{\mathbf{r}}_{\text{eff},t}^\top \right]^\top. \quad (21)$$

The actor then generates the reference joint-position increment according to

$$\mathbf{q}_r = \pi_\theta(\mathbf{o}_t^{\text{CARO}}). \quad (22)$$

In our simulation implementation, the nominal observation contains joint positions, joint velocities, the previous action, projected gravity, velocity commands, base linear velocity, and base angular velocity. The base-state quantities are not inputs to the fixed-base residual observer in (16). The CARO module itself requires only joint-side measurements and the torque command. Note that base linear velocity is omitted from the real-world observations because it is not

directly measurable without an estimator. It is included in the simulation observations to facilitate comparison with the baselines.

During training, the critic additionally receives privileged information:

$$\mathbf{o}_t^{\text{critic}} = \left[(\mathbf{o}_t^{\text{CARO}})^\top \quad (\mathbf{o}_t^{\text{priv}})^\top \right]^\top, \quad (23)$$

where $\mathbf{o}_t^{\text{priv}}$ includes contact states, friction coefficients, payload mass, center-of-mass (CoM) displacement, motor strength scales, and the randomized PD gains. These quantities are provided only to the critic during training and are unavailable to the actor at deployment.

The residual observer is activated from the beginning of policy training, allowing the policy to learn how the internal-model residual relates to its closed-loop response.

IV. EMPIRICAL STUDY

We evaluate CARO through two simulation studies and four real-world experiments. First, we conduct systematic payload-terrain sweeps to assess zero-shot robustness under simultaneous changes in robot dynamics and contact conditions. Second, we examine the transient response of each policy to an abrupt payload change during locomotion. Finally, we deploy CARO on a physical *DeepRobotics Lite3* quadruped robot and evaluate its performance on unseen terrains, under center-of-mass shifts and increased payloads, and during elevated-platform landings.

All methods are trained on *flat terrain* with the same command distribution, domain-randomization ranges, reward function, and set of available privileged variables. CARO does not use a broader randomization distribution, a specialized disturbance curriculum, or additional adaptation supervision. Its only augmentation over the nominal policy is the residual observation introduced in Section III. The shared training environment and objective allow the comparison to focus on the effect of different adaptation mechanisms on out-of-distribution generalization.

The domain-randomization parameters used during training are summarized in Table I, while the complete reward specification is provided in Appendix II (Table III). As shown in Table I, the training-time added-mass range is limited to $[-1.0, 3.0]$ kg, while the remaining randomized quantities cover contact, center-of-mass, actuator, and low-level control variations. As detailed in Table III, all policies are optimized with the same velocity-tracking objectives and the same stability, smoothness, and safety penalties. Thus, the payload and terrain evaluations below test the generalization of the learned adaptation mechanisms rather than differences in the training objectives or randomization budgets. Each method is trained for 8,000 iterations, requiring approximately 4 hours on a laptop equipped with a single NVIDIA GeForce RTX 4060 GPU. Our training and evaluation environment is built on *legged-gym* [26], with *Isaac Gym* [27] as the simulator.

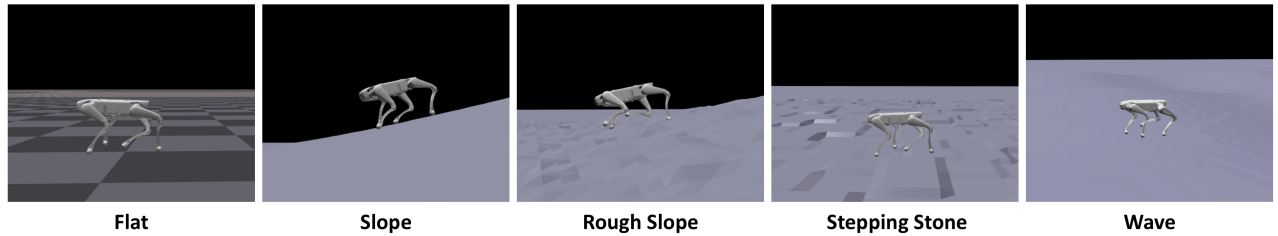


Fig. 2. Simulation environments for zero-shot payload-terrain generalization. The robot is evaluated on five terrain types: *flat*, *slope*, *rough slope*, *stepping stones*, and *wave*. All terrain difficulty levels are set to 0.7.

TABLE I
DOMAIN RANDOMIZATION SHARED BY ALL METHODS DURING
TRAINING.

Term	Range	Unit
Added base mass	$[-1.0, 3.0]$	kg
Friction coefficient	$[0.1, 1.25]$	-
CoM offset x	$[-0.05, 0.01]$	m
CoM offset y	$[-0.03, 0.03]$	m
CoM offset z	$[-0.03, 0.03]$	m
Motor strength scale	$[0.8, 1.2]$	-
K_p scale	$[0.8, 1.2]$	-
K_d scale	$[0.8, 1.2]$	-

A. Zero-Shot Payload-Terrain Generalization

We compare CARO against three representative baselines in *Isaac Gym*: a vanilla Proximal Policy Optimization (PPO) policy (*Vanilla*), the teacher-student adaptation framework RMA [3], and the adaptive-control-enhanced locomotion method RL2AC [9]. The trained policies are evaluated without fine-tuning under out-of-distribution payload and terrain conditions. We refer to Appendix III for details of the baseline implementations.

For each payload-terrain combination, we evaluate a fixed checkpoint of each trained policy across 1,024 independently initialized parallel environments. We define the success rate as the fraction of 15-second rollouts in which the robot traverses 10 m without falling.

We evaluate each policy on five terrain types: *flat*, *slope*, *rough slope*, *stepping stones*, and *wave*. Only the *flat* terrain is used for training; the remaining terrain geometries are unseen. For each terrain type, the base-mass multiplier is selected from

$$\rho_m \in \{1.0, 1.5, 2.0, 2.5, 3.0\}, \quad (24)$$

where $\rho_m = 1.0$ corresponds to the nominal base mass (5.6 kg). For the mass sweep in (24), the flat-terrain evaluation assesses generalization to payload changes in isolation, whereas the unseen-terrain evaluations jointly assess robustness to variations in dynamics and terrain-induced changes in contact conditions.

Table II summarizes the sweep using terrain-wise marginal success rates, two representative high-payload slices, and metrics aggregated over all 25 payload-terrain combinations.

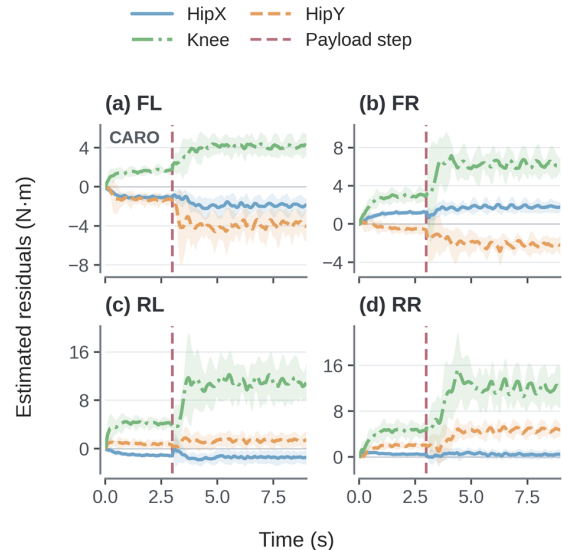


Fig. 4. CARO residual estimates for the hip- x , hip- y , and knee joints of the (a) front-left (FL), (b) front-right (FR), (c) rear-left (RL), and (d) rear-right (RR) legs. Curves show trial means, shaded regions indicate trial-to-trial variability, and the vertical dashed line marks the payload step.

CARO achieves the highest mean success rate, 88.6%. The advantage is most evident in the largest tabulated payload slice. At $3.0\times$ nominal base mass, CARO retains a 64.5% success rate, compared with 36.4% for RMA, 0.2% for RL2AC, and 0% for Vanilla. At $2.5\times$ mass, CARO exceeds RMA by 2.8 percentage points (87.4% versus 84.6%); at $3.0\times$, this margin widens to 28.1 percentage points (64.5% versus 36.4%). It ranks first on four of the five terrains; the exception is the rough slope, on which RMA obtains 74.0% and CARO obtains 65.0%. RMA’s teacher-student framework may provide a more direct adaptation signal for this particular terrain.

The aggregate metrics in Table II show the robustness-tracking trade-off from a complementary perspective. CARO travels the longest mean distance (13.189 m) and has the lowest yaw-rate error (0.080 rad/s). RMA achieves a slightly higher reward per step (0.0145 versus 0.0143) and a slightly lower linear-velocity error (0.097 m/s versus 0.105 m/s), whereas CARO maintains a substantially higher success rate at the heaviest tabulated payload. These results therefore do

TABLE II
ZERO-SHOT PAYLOAD-TERRAIN ROBUSTNESS AND TRACKING PERFORMANCE.

Method	Success by Terrain (%) $\uparrow$						Success by Payload (%) $\uparrow$		Aggregate Performance $\uparrow$		Tracking Error $\downarrow$	
	Flat	Slope	Rough	Stones	Wave	Mean	2.5 $\times$	3.0 $\times$	Walk Dist. (m)	Reward per Step	Linear (m/s)	Yaw Rate (rad/s)
Vanilla	54.3	54.2	36.4	41.1	50.2	47.2	1.0	0.0	8.224	0.0128	0.138	0.135
CARO	94.9	94.4	<u>65.0</u>	89.4	91.9	87.1	87.4	64.5	13.189	<u>0.0143</u>	<u>0.105</u>	0.080
RMA	<u>92.6</u>	<u>90.0</u>	74.0	<u>76.5</u>	<u>75.6</u>	<u>81.7</u>	<u>84.6</u>	<u>36.4</u>	<u>12.768</u>	0.0145	0.097	<u>0.084</u>
RL2AC	70.3	72.7	34.7	69.4	59.0	61.2	44.9	0.2	9.752	0.0133	0.112	0.122

Boldface denotes the best result; underlining denotes the second-best result. “Rough” denotes rough slope and “Stones” denotes stepping stones. Each terrain column reports an average over the five mass scales in (24); the two payload columns report selected high-payload slices averaged over the five terrains. Aggregate metrics are averaged over all 25 payload-terrain combinations.

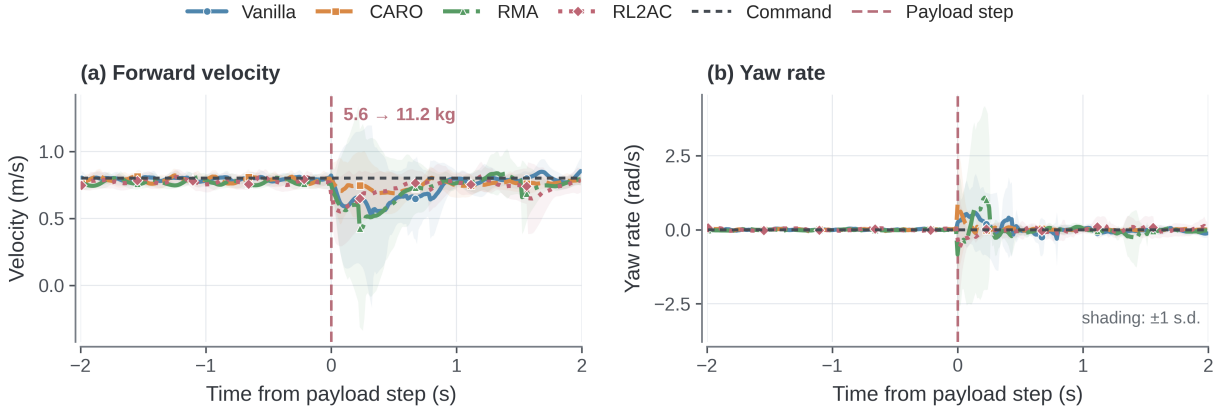


Fig. 3. Response to the abrupt payload change: (a) forward velocity and (b) yaw rate. Curves show trial means, shaded regions denote one standard deviation, and the vertical dashed line at $t = 3.0$ s marks the doubling of torso mass from 5.6 to 11.2 kg. The black dashed lines denote the commanded velocities.

not imply uniform dominance on every metric; rather, they indicate that the residual observation particularly improves task-completion robustness under large, simultaneous shifts in dynamics and contact conditions.

B. Reaction to Sudden Payload Changes

We next evaluate how rapidly each policy responds to an abrupt change in robot dynamics. We initialize 100 environments with the robot walking forward on flat terrain at a commanded velocity of 0.8 m/s. At $t = 3.0$ s, the torso mass of each robot is instantaneously doubled from 5.6 kg to 11.2 kg by adding a payload to the robot’s back while locomotion continues. The added 5.6 kg equals 50% of the robot’s nominal total mass and exceeds the maximum 3.0 kg added mass used during training (Table I).

Figure 3 compares the transient command-tracking responses of all four policies. Before the step, their mean forward velocities all converge to the 0.8 m/s command. Immediately after the step, Vanilla and especially RMA exhibit a larger forward-speed drop and a wider trial-to-trial spread in Figure 3(a), whereas CARO’s mean forward velocity remains closer to the command and recovers quickly, with a comparatively narrow variability band. All methods show a transient yaw-rate response in Figure 3(b), but CARO’s mean yaw rate quickly returns to the zero command.

RMA has the largest initial dispersion, while Vanilla and RL2AC exhibit larger fluctuations later in the trial.

The corresponding residual estimates are shown in Figure 4. The observed change is not a uniform offset shared by all twelve joints. In particular, the knee residual increases on every leg, with the largest sustained changes on the rear legs in panels (c) and (d) of Figure 4. The increased post-step variability, most visibly in the rear-knee channels, also reflects trial-dependent transient loading. These spatially distinct signatures are consistent with a redistribution of support loads and give the policy more information than a scalar payload flag, without requiring CARO to identify either the payload mass or individual contact forces. The nonzero values before the step are expected because the residual also contains nominal contact loading and the fixed-base discrepancy defined in (10).

Figure 6 aggregates the transient traces. Among the plotted post-step means, CARO has the lowest error in both panels. CARO’s linear-velocity error increases only slightly, from roughly 0.08 m/s to 0.09 m/s, whereas Vanilla’s error rises from about 0.075 m/s to 0.125 m/s and RL2AC’s rises from about 0.09 m/s to 0.14 m/s; RMA’s remains near 0.09 m/s but exhibits greater uncertainty. The yaw-rate comparison is more pronounced: CARO’s error increases from approximately 0.05 rad/s to 0.07 rad/s, whereas the



Fig. 5. Real-world robustness experiments. (a) CARO traverses four representative unseen terrains while carrying a 2.5 kg payload. (b) Time-composited trials with a 2.5 kg payload attached laterally: the Vanilla baseline deviates from the commanded heading, whereas CARO maintains it. (c) The Vanilla baseline falls with a 6.5 kg payload, whereas CARO maintains stable forward locomotion with an 8.5 kg payload. (d) Time-composited landings from a 0.2 m platform: the Vanilla baseline falls after impact, whereas CARO recovers and continues forward. Successive overlaid poses indicate temporal progression; yellow arrows in (c) and (d) denote the commanded travel direction.

post-step means for Vanilla, RMA, and RL2AC are about 0.18 rad/s, 0.13 rad/s, and 0.22 rad/s, respectively. These results show that CARO can detect and respond to an abrupt shift in dynamics without an explicit payload estimator or online parameter identification.

C. Real-World Experiments

We deploy CARO on a physical *DeepRobotics Lite3* quadruped without hardware-specific policy fine-tuning. To provide temporal context, we supply the policy with a history of the five most recent observations, rather than a single observation. We found this modification to be critical for reducing vibration on the real robot. Additional details on the sim-to-real observer setup are provided in Appendix III-B. The experiments evaluate four complementary aspects of deployment robustness: generalization across contact surfaces, adaptation to asymmetric mass distributions, maximum payload capacity, and recovery from high-impact landings. Figure 5 summarizes representative trials from these four real-world evaluations.

1) *Zero-Shot Multi-Terrain Traversal*: The robot is commanded to traverse flat ground, a gravel-covered slope, sand, grass, and stepping stones while carrying a 2.5 kg payload. Of these terrain conditions, only flat ground is included during policy training. Representative trials on the four

unseen terrains are shown in Figure 5(a). CARO maintains stable locomotion across all tested surfaces without terrain-specific adaptation or fine-tuning. The results demonstrate that the estimated fixed-base residual provides useful feedback under substantial changes in both payload and foot-ground interaction.

2) *Center-of-Mass Shifts*: To evaluate robustness to asymmetric mass distributions, we attach a 2.5 kg payload to one side of the robot and command it to walk forward at 1 m/s on flat ground. We repeat the evaluation three times for each policy. This configuration introduces both a payload increase and a substantial lateral center-of-mass shift. The time-composited trials in Figure 5(b) visualize the resulting locomotion trajectories. CARO rapidly restores a near-level body attitude and maintains the commanded forward heading. In contrast, the Vanilla policy develops a persistent roll toward the loaded side and exhibits substantial heading deviation. This experiment indicates that the residual observation allows the policy to react not only to changes in total mass but also to asymmetries in load distribution.

3) *Maximum Payload Capacity*: We incrementally increase the payload by 0.5 kg attached to the base until the policy can no longer complete the prescribed locomotion trial without falling. Under this test protocol, CARO maintains

stable forward locomotion with an 8.5 kg payload, as shown in Figure 5(c). The Vanilla policy, in comparison, fails to complete the trial with a 6.5 kg payload. The increased payload capacity provides direct hardware evidence that CARO extends the operating range of the locomotion policy beyond the payload distribution used during training.

4) *Elevated-Platform Landings*: Finally, we evaluate recovery from high-impact contact transitions using repeated elevated-platform landing trials. The robot is released from a 0.2 m-high platform and lands on flat ground using a policy trained only for flat-terrain locomotion. We repeat the test three times for each policy, CARO achieves 3/3 successful landings, whereas the Vanilla policy falls in all three trials. Figure 5(d) compares the corresponding time-composited landing sequences. CARO absorbs the landing impact and rapidly regains a stable body attitude, whereas the Vanilla policy frequently falls or exhibits prolonged post-impact instability. This experiment demonstrates that the residual observation improves robustness to abrupt contact impulses and large transient deviations, despite the absence of elevated-platform landing scenarios during training.

V. CONCLUSION

This paper presented CARO, a contact-agnostic residual observation framework that embeds a fixed-base Euler-Lagrange internal model in an RL locomotion policy. The observer converts the mismatch between the modeled joint dynamics and commanded joint torques into a structured adaptation input rather than using it for direct torque compensation. It thereby retains the joint-space consequences of changes in payload and contact conditions without explicitly estimating contact states or wrenches. Under the sampling and bounded-increment conditions of Theorem 1, the resulting residual-estimation error is ultimately bounded.

Under matched training conditions, CARO achieved an 88.6% mean success rate across the 25 payload-terrain combinations and retained a 64.5% success rate at $3.0\times$ nominal base mass. It also produced the lowest plotted post-change tracking errors following a sudden 5.6 kg payload addition, equal to 50% of the nominal total mass. On the physical *DeepRobotics Lite3*, CARO traversed four unseen terrains with a 2.5 kg payload, maintained the commanded heading under a lateral center-of-mass shift, and sustained forward locomotion with an 8.5 kg payload. By comparison, the Vanilla policy failed to complete its trial with a 6.5 kg payload. CARO also recovered after landing from a 0.2 m-high platform. Together, these results show that a deliberately simplified internal model can provide useful deployment-time feedback for out-of-distribution changes in dynamics and contact conditions without online payload or contact identification.

VI. LIMITATIONS AND OPEN PROBLEMS

Several limitations remain. **First**, the boundedness result applies to the residual-estimation error when the Euler-consistent sampled residual has bounded step-to-step increments. It does not establish the stability of the complete

learned closed-loop system. The observer gain also introduces a trade-off between response bandwidth and sensitivity to measurement noise. A higher gain allows the observer to track faster residual changes, but it also amplifies noise in the joint-position and joint-velocity measurements. **Second**, the residual is intentionally lumped and does not provide physically identifiable contact forces, disturbance locations, or model parameters. During highly dynamic motions, large floating-base accelerations may also cause the fixed-base approximation error to dominate the observation. Future work will investigate adaptive residual filtering and evaluate the method on highly dynamic motions and under a broader range of actuator and contact perturbations.

APPENDIX I

PROOF OF THE RESIDUAL-ESTIMATION BOUND

Applying forward Euler to the auxiliary-state dynamics in (16) gives

$$\mathbf{z}_{k+1} = \mathbf{z}_k - T_s \mathbf{L}(\mathbf{z}_k + \mathbf{L}\mathbf{p}_{f,k} + \boldsymbol{\tau}_{\text{cmd},k} + \hat{\mathbf{b}}_{f,k}). \quad (25)$$

Using $\hat{\mathbf{r}}_{\text{eff},k} = \mathbf{z}_k + \mathbf{L}\mathbf{p}_{f,k}$ and the definition of $\boldsymbol{\rho}_k$ in (17), we obtain

$$\begin{aligned} \hat{\mathbf{r}}_{\text{eff},k+1} &= \mathbf{z}_{k+1} + \mathbf{L}\mathbf{p}_{f,k+1} \\ &= \hat{\mathbf{r}}_{\text{eff},k} + \mathbf{L}(\mathbf{p}_{f,k+1} - \mathbf{p}_{f,k}) \\ &\quad - T_s \mathbf{L}(\hat{\mathbf{r}}_{\text{eff},k} + \boldsymbol{\tau}_{\text{cmd},k} + \hat{\mathbf{b}}_{f,k}) \\ &= \mathbf{A}\hat{\mathbf{r}}_{\text{eff},k} + (\mathbf{I} - \mathbf{A})\boldsymbol{\rho}_k. \end{aligned} \quad (26)$$

Thus, (26) is an exact algebraic description of the implemented Euler update. The use of $\mathbf{p}_{f,k+1}$ in (17) is limited to this analysis; the online update (25) remains causal and does not require a momentum difference.

From the definition $\mathbf{e}_k = \boldsymbol{\rho}_{k-1} - \hat{\mathbf{r}}_{\text{eff},k}$ and (26),

$$\begin{aligned} \mathbf{e}_{k+1} &= \boldsymbol{\rho}_k - \hat{\mathbf{r}}_{\text{eff},k+1} \\ &= \mathbf{A}(\boldsymbol{\rho}_k - \hat{\mathbf{r}}_{\text{eff},k}) \\ &= \mathbf{A}[\mathbf{e}_k + (\boldsymbol{\rho}_k - \boldsymbol{\rho}_{k-1})]. \end{aligned} \quad (27)$$

Iterating (27) yields

$$\mathbf{e}_k = \mathbf{A}^{k-1}\mathbf{e}_1 + \sum_{j=1}^{k-1} \mathbf{A}^{k-j}(\boldsymbol{\rho}_j - \boldsymbol{\rho}_{j-1}). \quad (28)$$

Because $\mathbf{L}$ is positive definite and diagonal, $\mathbf{A}$ is symmetric, and the condition $0 < T_s \lambda_i(\mathbf{L}) < 2$ implies

$$\alpha = \|\mathbf{A}\|_2 = \max_i |1 - T_s \lambda_i(\mathbf{L})| < 1. \quad (29)$$

Taking the Euclidean norm of (28) and using submultiplicativity together with the bound in (18), we obtain

$$\begin{aligned} \|\mathbf{e}_k\|_2 &\leq \alpha^{k-1}\|\mathbf{e}_1\|_2 + \beta \sum_{j=1}^{k-1} \alpha^{k-j} \\ &= \alpha^{k-1}\|\mathbf{e}_1\|_2 + \frac{\alpha(1 - \alpha^{k-1})}{1 - \alpha} \beta, \end{aligned} \quad (30)$$

which proves (19). Finally, $\alpha^{k-1} \rightarrow 0$ as $k \rightarrow \infty$; taking the limit superior then proves (20).

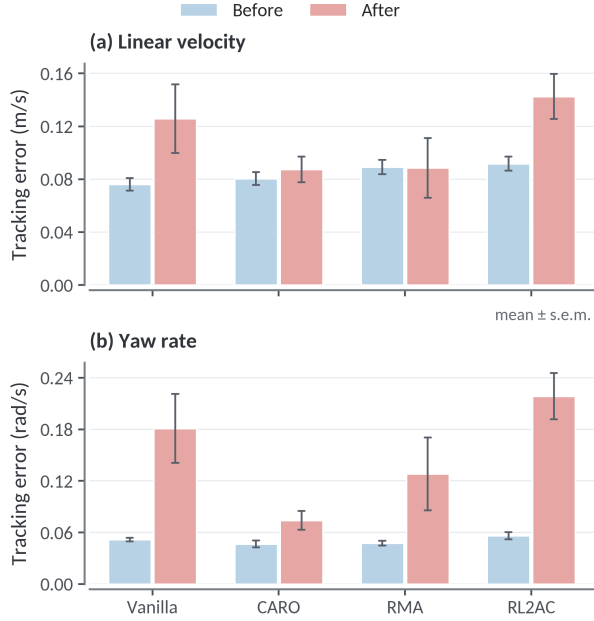


Fig. 6. Mean (a) linear-velocity and (b) yaw-rate tracking errors over the pre-step and post-step intervals. Error bars denote the standard error of the mean.

APPENDIX II REWARD TERMS

All policies use the reward terms and weights listed in Table III.

TABLE III
REWARD TERMS USED FOR POLICY TRAINING.

Name	Expression	Weight
Linear-velocity tracking	$\exp(-\ \mathbf{v}_{xy}^{\text{cmd}} - \mathbf{v}_{xy}\ ^2/\sigma)$	1.0
Yaw-rate tracking	$\exp(- \omega_z^{\text{cmd}} - \omega_z ^2/\sigma)$	0.5
Vertical velocity	v_z^2	-2.0
Roll/pitch angular velocity	$\ \boldsymbol{\omega}_{xy}\ ^2$	-0.05
Base orientation	$\ \mathbf{g}_{xy}\ ^2$	-0.2
Base height	$(h - 0.36)^2$	-1.0
Torque penalty	$\ \boldsymbol{\tau}\ ^2$	-1.0×10^{-5}
Joint acceleration	$\ (\dot{\mathbf{q}}_t - \dot{\mathbf{q}}_{t-1})/\Delta t\ ^2$	-2.5×10^{-7}
Action rate	$\ \mathbf{a}_t - \mathbf{a}_{t-1}\ ^2$	-0.01
Collision	$\sum_i \mathbb{I}(\ \mathbf{f}_i^{\text{contact}}\ > 0.1)$	-1.0
Joint position limit	$\sum_i \text{clip}(q_i - q_i^{\text{lim}})$	-10.0
Foot air time	$\sum_i (t_i^{\text{air}} - 0.5) \mathbb{I}_i^{\text{first}}$	1.0
Standstill	$\ \mathbf{q}_{\text{pen}} - \mathbf{q}_{\text{pen}}^{\text{default}}\ _1$	-0.05
Foot slip velocity	$\sum_i \mathbb{I}_i^{\text{contact}} \ \mathbf{v}_i^{\text{foot}}\ $	-0.05

APPENDIX III IMPLEMENTATION DETAILS

A. Baseline Implementations

For all methods, both the actor and critic use multilayer perceptrons with hidden-layer dimensions [512, 256, 128]. Each deployable actor receives its method-specific observation, whereas the critic additionally receives privileged information, as described in Section III-E. Domain randomization

and reward terms are shared across all methods, as described in Tables I and III. The baselines are configured as follows.

- The Vanilla policy is a plain multilayer perceptron (MLP) without an adaptation mechanism.
- The RMA baseline is implemented following the original paper [3]. The teacher encoder is a two-layer MLP with hidden-layer dimensions [256, 128] and a latent dimension of 32. The student encoder has the same architecture as the teacher encoder and is trained to predict the latent representation from a 25-step observation history using a mean-squared-error loss. We deploy the student encoder as the adaptation module in the actor.
- The RL2AC baseline is implemented following the original paper [9]. Its context-aided estimator network (CENet) takes a temporal history of proprioceptive observations and uses a two-layer encoder with hidden-layer dimensions [128, 64]. Separate linear heads parameterize the means and log variances of the estimated body velocity, the next-step joint position $\mathbf{q}_r$, and the latent context. The resulting code is passed to a two-layer decoder with hidden-layer dimensions [64, 128] to reconstruct a single observation step. CENet is trained jointly with PPO using mean-squared-error losses for the velocity and next-step joint-position estimates, together with the reconstruction and Kullback–Leibler losses of a β -variational autoencoder. During control, the actor receives the estimated velocity and latent context and outputs the action $\mathbf{a}$, while $\mathbf{q}_r$ serves as the tracking reference for the adaptive controller. Following the RL2AC formulation, the compensating torque $\widehat{\mathbf{K}}_u(\mathbf{a} - \mathbf{q}_r)$ is added to the nominal PD torque, and $\widehat{\mathbf{K}}_u$ is updated online using the original bounded-gain-forgetting composite adaptive law.

B. Realization of the Residual Observer

The fixed-base residual observer requires the computation of fixed-base dynamics terms and robot-model Jacobians in *legged_gym*. We compute $\mathbf{M}_f$ and $\mathbf{G}_f$ in PyTorch using the Jacobians provided by the *Isaac Gym* API. However, the current version of *Isaac Gym* does not support the computation of $\mathbf{C}_f$. We therefore approximate $\mathbf{C}_f$ using the diagonal relation $\text{diag}(\mathbf{C}_f) = 0.1 \cdot \text{diag}(\mathbf{M}_f)$. This approximation is sufficient for the residual observer to provide useful feedback to the policy and to support batched training in simulation. We integrate the residual observer using the forward Euler method with the same time step as the simulation, $T_s = \Delta t = 0.02$ s. Higher-order integration methods can improve residual-estimation accuracy, but they are not necessary for the current implementation. All diagonal entries of the observer-gain matrix $\mathbf{L}$ are set to 2.0.

For real-world deployment, we use the *Pinocchio* library [28] to compute the Jacobians of the observer model. We use *rl_sar* [29] to implement the residual observer alongside a LibTorch-compiled policy network for real-time inference at 50 Hz.

REFERENCES

- [1] T. He, C. Zhang, W. Xiao, G. He, C. Liu, and G. Shi, "Agile But Safe: Learning Collision-Free High-Speed Legged Locomotion," May 2024.
- [2] F. Muhamad, A. A. K. A. Kusuma, J.-H. Park, and J.-S. Kim, "Enhancing robustness of locomotion policy for quadrupedal robot with deep disturbance observer," *IEEE Robotics and Automation Letters*, vol. 10, no. 9, pp. 9376–9383, 2025.
- [3] A. Kumar, Z. Fu, D. Pathak, and J. Malik, "RMA: Rapid Motor Adaptation for Legged Robots," Jul. 2021.
- [4] I. M. A. Nahrendra, B. Yu, and H. Myung, "DreamWaQ: Learning Robust Quadrupedal Locomotion With Implicit Terrain Imagination via Deep Reinforcement Learning," Mar. 2023.
- [5] W. Xiao, T. He, J. Dolan, and G. Shi, "Safe Deep Policy Adaptation," Apr. 2024.
- [6] J. Long, Z. Wang, Q. Li, J. Gao, L. Cao, and J. Pang, "Hybrid Internal Model: Learning Agile Legged Locomotion with Simulated Robot Response," Jan. 2024.
- [7] G. Ji, J. Mun, H. Kim, and J. Hwangbo, "Concurrent Training of a Control Policy and a State Estimator for Dynamic and Robust Legged Locomotion," *IEEE Robotics and Automation Letters*, vol. 7, no. 2, pp. 4630–4637, Apr. 2022.
- [8] K. Huang, R. Rana, A. Spitzer, G. Shi, and B. Boots, "DATT: Deep Adaptive Trajectory Tracking for Quadrotor Control," in *8th Annual Conference on Robot Learning*, Aug. 2023.
- [9] S. Lyu, X. Lang, H. Zhao, H. Zhang, P. Ding, and D. Wang, "RL2AC: Reinforcement Learning-based Rapid Online Adaptive Control for Legged Robot Robust Locomotion," in *Robotics: Science and Systems XX*. Robotics: Science and Systems Foundation, Jul. 2024.
- [10] F. Gao, C. Yu, Y. Wang, and Y. Wu, "Neural Internal Model Control: Learning a Robust Control Policy via Predictive Error Feedback," May 2025.
- [11] N. Rudin, D. Hoeller, P. Reist, and M. Hutter, "Learning to Walk in Minutes Using Massively Parallel Deep Reinforcement Learning," in *5th Annual Conference on Robot Learning*, Jun. 2021.
- [12] J. Long, W. Yu, Q. Li, Z. Wang, D. Lin, and J. Pang, "Learning H-Infinity Locomotion Control," in *8th Annual Conference on Robot Learning*, 2024.
- [13] P. Zhi, P. Li, J. Yin, B. Jia, and S. Huang, "Learning a Unified Policy for Position and Force Control in Legged Loco-Manipulation," May 2025.
- [14] B. Lyu, J. Jia, K. Zuo, Y. Lu, S. Han, G. Li, B. Ma, J. Li, G. Li, and J. Yang, "Adapt: Analytical disturbance-aware policy training for humanoid locomotion," 2026.
- [15] W.-H. Chen, D. Ballance, P. Gawthrop, and J. O'Reilly, "A nonlinear disturbance observer for robotic manipulators," *IEEE Transactions on Industrial Electronics*, vol. 47, no. 4, pp. 932–938, Aug. 2000.
- [16] W.-H. Chen, "Disturbance observer based control for nonlinear systems," *IEEE/ASME Transactions on Mechatronics*, vol. 9, no. 4, pp. 706–710, Dec. 2004.
- [17] A. De Luca and R. Mattone, "Actuator failure detection and isolation using generalized momenta," in *2003 IEEE International Conference on Robotics and Automation (Cat. No.03CH37422)*, vol. 1, Sep. 2003, pp. 634–639 vol.1.
- [18] S. Haddadin, A. De Luca, and A. Albu-Schäffer, "Robot collisions: A survey on detection, isolation, and identification," *IEEE Transactions on Robotics*, vol. 33, no. 6, pp. 1292–1312, 2017.
- [19] A. De Luca and R. Mattone, "Sensorless robot collision detection and hybrid force/motion control," in *Proceedings of the 2005 IEEE International Conference on Robotics and Automation*. IEEE, 2005, pp. 999–1004.
- [20] S. Haddadin, A. De Luca, and A. Albu-Schäffer, "Robot collisions: A survey on detection, isolation, and identification," *IEEE Transactions on Robotics*, vol. 33, no. 6, pp. 1292–1312, 2017.
- [21] E. Magrini, F. Flacco, and A. De Luca, "Control of generalized contact motion and force in physical human–robot interaction," in *2015 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2015, pp. 2298–2304.
- [22] D. Lim, M.-J. Kim, J. Cha, D. Kim, and J. Park, "Proprioceptive external torque learning for floating base robot and its applications to humanoid locomotion," in *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2023, pp. 8510–8517.
- [23] R. Kamalapurkar, B. Reish, G. Chowdhary, and W. E. Dixon, "Concurrent learning for parameter estimation using dynamic state-derivative estimators," *IEEE Transactions on Automatic Control*, vol. 62, no. 7, pp. 3594–3601, 2017.
- [24] D. Lim, M.-J. Kim, J. Cha, and J. Park, "MOB-Net: Limb-modularized uncertainty torque learning of humanoids for sensorless external torque estimation," *The International Journal of Robotics Research*, vol. 44, no. 1, pp. 96–128, 2025, first published online in 2024.
- [25] I. Sorrentino, G. Romualdi, and D. Pucci, "UKF-based sensor fusion for joint-torque sensorless humanoid robots," in *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2024, pp. 13 150–13 156.
- [26] N. Rudin, "Isaac gym environments for legged robots," 2021.
- [27] V. Makoviychuk, L. Wawrzyniak, Y. Guo, M. Lu, K. Storey, M. Macklin, D. Hoeller, N. Rudin, A. Allshire, A. Handa, and G. State, "Isaac gym: High performance gpu-based physics simulation for robot learning," *arXiv preprint arXiv:2108.10470*, 2021.
- [28] J. Carpentier, G. Saurel, G. Buondonno, J. Mirabel, F. Lamiraux, O. Stasse, and N. Mansard, "The pinocchio c++ library – a fast and flexible implementation of rigid body dynamics algorithms and their analytical derivatives," in *IEEE International Symposium on System Integrations (SII)*, 2019.
- [29] Z. Fan, "rl.sar: Simulation verification and physical deployment of robot reinforcement learning algorithm," 2024.