

Deformable Object Manipulation under Partial Observability via Real-Time Full-Shape Estimation

Kosar Behnia¹, Ville Kyrki², Gokhan Alcan¹

Abstract—Manipulating deformable objects (DOs) is challenging due to their high-dimensional state space, underactuated dynamics, and partial observability. In this paper, we propose cRVAE, a lightweight conditional recurrent variational autoencoder that estimates the full DO state from only partial corner-node observations during inference. The resulting model is used as the forward model in a receding-horizon optimal control framework for obstacle-aware collaborative DO manipulation. In simulation on rope and fabric, cRVAE estimates the full DO state from the available corner-node measurements alone, matching the accuracy of a parameter-identified XPBD model. At inference it uses no physical parameters as model inputs and performs no online parameter identification. It also runs $\approx 350\times$ faster on the rope and over $1500\times$ faster on the fabric per forward pass, keeping horizon-based planning within the 100 ms control budget where XPBD exceeds it already at short horizons. Full-shape estimation from corner sensing at in-loop speed is what makes the model deployable on hardware, which we demonstrate on a Unitree Go2 robot.

I. INTRODUCTION

Manipulating deformable objects (DOs) is a central challenge for robots operating in everyday environments, where objects such as fabrics, cables, and cleaning materials deform continuously under contact and motion. Unlike rigid objects, DOs have high-dimensional configurations, underactuated dynamics and states that are only partially observable from practical sensing setups. These properties make accurate modeling difficult, however such models are essential when a controller must predict the object shape before selecting collision-free manipulation actions.

Learning-based approaches can represent complex DO dynamics from visual, point-cloud, or dense state observations [1], [2], [3], [4]. These methods can capture rich geometric details, including cloth wrinkles and rope curvature, and are therefore attractive for prediction and manipulation. However, for control, such fidelity often depends on dense observations or full-state reconstruction, which can be expensive, occlusion-sensitive, and difficult to maintain on physical systems.

Physics-based models provide an alternative by propagating DO motion from a compact set of model parameters [5], [6], [7]. They are attractive for model-based planning because they can be computationally efficient and interpretable. However, when used with limited feedback, model mismatch and sim-to-real errors can accumulate over time, causing predicted shapes to drift precisely where long-horizon obstacle avoidance requires reliable forecasts.

¹Faculty of Engineering and Natural Sciences, Tampere Univ., Finland.

²Electrical Engineering and Automation Department, Aalto Univ., Finland.

This work was supported by the Research Council of Finland Project under Grant 370881 and by the NVIDIA Academic Grant Program through the provision of RTX PRO 6000 Blackwell Max-Q GPUs.

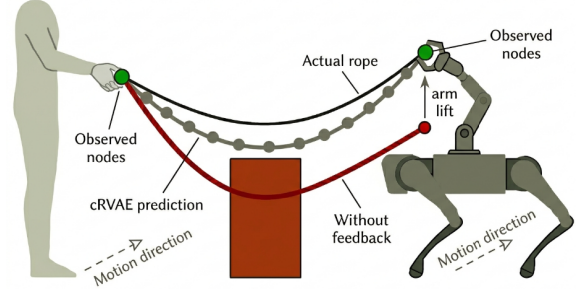


Fig. 1: Collaborative rope manipulation between a human (leader) and a Unitree Go2 robot (follower). cRVAE estimates the full rope shape (grey dots) using only the two corner node measurements (green dots), enabling the controller to anticipate collisions and lift the robot arm to avoid the obstacle (black rope). Without a full-shape estimate, the controller cannot anticipate the collision and the rope hits the obstacle (red rope).

This creates a practical gap for control-oriented DO manipulation: the planner needs a full-state, differentiable, and fast predictive model, while the physical system may provide only sparse measurements such as endpoints or corner nodes. A suitable model should therefore infer the full DO shape from partial observations, correct its internal estimate with available measurements, and remain lightweight enough for repeated receding-horizon optimization.

In this work, we propose cRVAE, a control-oriented conditional recurrent variational autoencoder that estimates the full DO state from sparse corner-node measurements and manipulation inputs.

During inference, cRVAE replaces the encoder with a learned conditional prior and injects measurement feedback into both the estimated state and the recurrent hidden state, reducing estimation error when measurements arrive at a high rate.

The resulting model is differentiable and lightweight enough for receding-horizon optimization, while retaining the full-shape predictions needed for obstacle-aware manipulation, as illustrated in Fig. 1. The main contributions of this work are as follows:

- We introduce cRVAE, a conditional recurrent VAE for full-state DO estimation from sparse corner-node observations.
- We integrate the learned differentiable model into a receding-horizon optimal control framework for collaborative, obstacle-aware DO manipulation under partial observability.
- We show that cRVAE estimates the full state from the available corner-node observations and attains accuracy comparable to a parameter-identified XPBD model without physical parameters as model inputs or online identification during inference, while requiring ≈ 9 ms per

rollout on the rope against 3.2 s ($\approx 360\times$, both including controller derivatives) for XPBD, meeting the real-time budget required for in-loop use and enabling a horizon-based controller to complete narrow-gap tasks where a reactive baseline fails.

II. RELATED WORKS

A model that can accurately predict the future full state of a deformable object is needed to manipulate it with a robot. Such a model has to be fast enough to be used inside an optimization-based controller, such as iLQR or MPC, and remain accurate despite the partial observation and limited sensing typically available on a physical system. We organize related work around these three requirements: full-state prediction models for DOs, predictive models for optimization-based DO control, and methods for handling partial observation and feedback in real-world DO manipulation.

a) Full-State Prediction Models for DOs: Learning-based models have been widely used to obtain compact representations of DO dynamics from high-dimensional observations. PointNet-based encoders, for example, can map RGB-D point clouds to a compact latent space [8], while variational autoencoders map dense RGB observations into a latent space in which the dynamics are modeled by a learned function of the previous latent state [9]. This function can take the form of an MLP [1], a linear model [10], [3], an RBF [11], a recurrent state-space model [12], or a graph-based model that captures relations between object parts [2]. These methods can capture rich geometric detail and generalize across tasks, but they typically require dense or full-state observations during training and inference, which can be costly and difficult to obtain on physical systems. Physics-based models offer an alternative, using a compact set of physical parameters, such as stiffness and mass, to propagate DO motion directly, as in position-based dynamics [13]. Such models have been used for collaborative obstacle avoidance [5], for dual-arm cable manipulation [14], and for planning and control of deformable linear objects [6]. These models are interpretable once their parameters are known, but their accuracy depends on simulator parameters, such as stiffness and damping coefficients, that must be carefully identified to match the real object. Overall, many existing full-state predictors need dense sensing, full-state reconstruction, or accurate simulator parameters, which are difficult to obtain in practical manipulation settings. In contrast, our proposed method, cRVAE, estimates the full DO state using only sparse corner-node observations, without requiring full DO node observations or carefully identified simulator parameters at inference.

b) Predictive Models for Optimization-Based DO Control: To use optimization-based control strategies such as MPC, a model of the DO dynamics is required that is both differentiable and fast enough to evaluate repeatedly at every planning step. Several works learn this model directly. For example, [15] learns a model of DLO shape that can be differentiated through within gradient-based MPC, while [16] learns a state representation using a differentiable physics engine. However, both approaches require full DO node observations

during inference, which can be computationally expensive and difficult to obtain in practice. Other approaches use physics-based simulators, such as XPBD [7], [5] or PBD [6], to obtain derivatives directly for use within a differentiable controller for DO manipulation. However, computing gradients through such physics-based simulators can be computationally expensive, and their accuracy remains sensitive to mismatch between the simulated and real object parameters. Overall, many of these methods are useful for planning but can be costly, require dense state, or are sensitive to model mismatch. In contrast, cRVAE is differentiable and provides fast gradient computation.

c) Partial Observation and Feedback in Real-World DO Manipulation: Deploying DO manipulation methods in practice is challenging because predictions made in simulation do not always transfer to the real world, especially under limited sensing [17]. Physics-based models, for instance, can fail in practice without real measurement feedback, as model mismatch and sim-to-real error accumulate over time [6]. To address this, some methods calibrate simulator parameters online using a residual mapping between the simulation and real observations [18], but each update of this online optimization can take up to several seconds, limiting its use within a real-time receding-horizon controller. Rather than calibrating a full-state model, other methods avoid predicting the full state altogether. [19] controls only the endpoint poses of a deformable linear object, without estimating its full pose. [20] does not estimate the DO's shape for human-robot collaborative transportation, and [21] treats the DO as effectively rigid during formation planning for a similar task. Existing sparse-feedback methods often do not reconstruct or control the full DO shape over long horizons, instead relying on local corrections or task-specific, output-based formulations. In contrast, cRVAE reconstructs the full DO shape from sparse measurements, without an iterative online optimization step, making it suitable for real-time receding-horizon control.

III. PROBLEM FORMULATION

We model a deformable object as a set of N nodes. The position of the i -th node at time step k is denoted by $x_k^i \in \mathbb{R}^3$, and the full object state is represented by the stacked vector

$$P_k = [(x_k^1)^\top, \dots, (x_k^N)^\top]^\top \in \mathbb{R}^{3N}, \quad (1)$$

Given a manipulation input $f_k \in \mathbb{R}^m$, the deformable object dynamics are modeled by an unknown transition function

$$P_{k+1} = F(P_k, f_k). \quad (2)$$

In practical manipulation tasks, the full state P_k is not directly available during inference. Instead, the robot observes only a sparse subset of $K < N$ boundary or corner nodes, indexed by $\mathcal{I} = \{c_1, \dots, c_K\}$,

$$\mathcal{C}_k = \{x_k^{c_1}, \dots, x_k^{c_K}\} \in \mathbb{R}^{3K}. \quad (3)$$

The generic problem considered in this paper is to obtain a control-oriented predictor that estimates the full future object state from sparse observations and manipulation inputs. More generally, the predictor may maintain an internal state η_k that summarizes past observations and predictions,

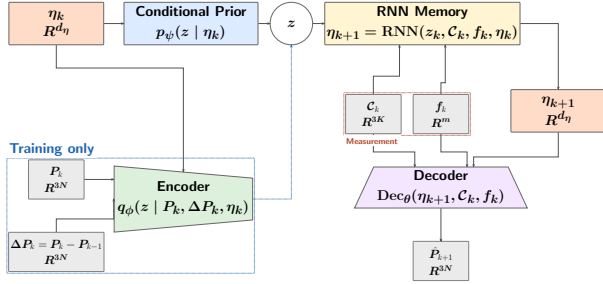


Fig. 2: Architecture of the proposed cRVAE model. During training, the encoder posterior $q_\phi(z | P_k, \Delta P_k, \eta_k)$ is used to sample the latent variable z ; during inference, it is replaced by the conditional prior $p_\psi(z | \eta_k)$.

$$(\hat{P}_{k+1}, \eta_{k+1}) = \Phi_\theta(\mathcal{C}_k, f_k, \eta_k), \quad (4)$$

where $\hat{P}_{k+1}$ is the estimated full DO state, and we denote by $\hat{\mathcal{C}}_k$ the entries of $\hat{P}_k$ at the measured node indices $\mathcal{I}$, i.e. the predicted counterpart of $\mathcal{C}_k$ in (3). The desired predictor should be accurate enough for obstacle-aware planning and computationally light enough to be evaluated repeatedly inside a receding-horizon controller.

IV. PROPOSED METHOD

The formulation in Section III requires a predictor that can infer the full DO state from sparse measurements, retain temporal information, and remain differentiable and lightweight for receding-horizon optimization. To instantiate the generic predictor Φ_θ in (4), we propose cRVAE, a conditional recurrent variational autoencoder.

During training, full simulated states are available and are used to learn a posterior latent distribution and reconstruct the next full state. *During inference*, the full state is unavailable, therefore, the encoder is replaced by a learned conditional prior and the decoder estimates the full state using only the hidden state, sparse measurements, and manipulation input. Measurement feedback from the available nodes is then used to correct both the estimated state and the recurrent hidden state, limiting drift during multi-step prediction. Fig. 2 shows the overall architecture of cRVAE.

In the following subsections, we detail each model component (Section IV-A), the inference procedure with measurement feedback (Section IV-B), and the control problem formulation (Section IV-C).

A. Model Components

a) Encoder: The encoder maps the current full state P_k , its temporal difference $\Delta P_k = P_k - P_{k-1}$, and the previous hidden state η_k to the parameters of a Gaussian posterior:

$$\mu_k, \log \sigma_k^2 = \text{Enc}_\phi(P_k, \Delta P_k, \eta_k), \quad z_k \sim \mathcal{N}(\mu_k, \sigma_k^2). \quad (5)$$

b) Conditional Prior: The prior estimates the latent distribution conditioned only on the hidden state:

$$\mu_k^p, \log(\sigma_k^p)^2 = \text{Prior}_\psi(\eta_k), \quad z_k \sim \mathcal{N}(\mu_k^p, (\sigma_k^p)^2). \quad (6)$$

c) Decoder: The decoder reconstructs the full next state from the hidden state, and the partial observations:

$$\hat{P}_{k+1} = \text{Dec}_\theta(\eta_{k+1}, \mathcal{C}_k, f_k). \quad (7)$$

d) RNN Module: The hidden state is updated at each step as:

$$\eta_{k+1} = \text{RNN}(z_k, \mathcal{C}_k, f_k, \eta_k). \quad (8)$$

e) Training Objective: The model is trained by minimizing a combination of reconstruction loss and KL divergence:

$$\begin{aligned} \mathcal{L} = & \sum_{k=1}^{T-1} \left[\underbrace{\|P_{k+1} - \hat{P}_{k+1}\|^2}_{\text{Reconstruction}} + \underbrace{w_c \|\mathcal{C}_{k+1} - \hat{\mathcal{C}}_{k+1}\|^2}_{\text{Corner nodes}} \right. \\ & \left. + \underbrace{\lambda D_{\text{KL}}(q_\phi(z_k | P_k, \Delta P_k, \eta_k) \| p_\psi(z_k | \eta_k))}_{\text{KL Divergence}} \right] \end{aligned} \quad (9)$$

where λ balances reconstruction accuracy against the consistency between the encoder posterior and the conditional prior, and w_c weights the corner-node term.

B. Inference with Measurement Feedback

During inference, the estimated corner node positions $\hat{\mathcal{C}}_k$ may drift from the real sensor measurements due to model errors and the sim-to-real gap. To address this, we define the residual $r_k \in \mathbb{R}^{3K}$ between the measured corner nodes and the corresponding estimated values as:

$$r_k = \mathcal{C}_k^{\text{dyn}} - \hat{\mathcal{C}}_k, \quad (10)$$

where $\mathcal{C}_k^{\text{dyn}}$ is the corner node position, obtained from the actual measurement at every T_m steps and propagated by the input dynamics in between:

$$\mathcal{C}_k^{\text{dyn}} = \begin{cases} \mathcal{C}_k & \text{if } k \bmod T_m = 0, \\ g(\mathcal{C}_{k-1}^{\text{dyn}}, f_{k-1}) & \text{otherwise,} \end{cases} \quad (11)$$

where $g(\cdot)$ is a known propagation function that estimates the corner node positions between measurement steps, which can be obtained, for example, from the robot kinematics or dynamics. In this work, we consider the case where f_k represents the velocity of the actuated node, giving $g(\mathcal{C}_{k-1}^{\text{dyn}}, f_{k-1}) = \mathcal{C}_{k-1}^{\text{dyn}} + \Delta t f_{k-1}$.

The residual r_k is used to correct both the estimated full state and the hidden state via:

$$\hat{P}_k^{\text{corr}} = \hat{P}_k + \alpha J_k^{\text{nodes}} r_k, \quad (12)$$

$$\eta_k^{\text{corr}} = \eta_k + \beta J_k^\top r_k, \quad (13)$$

where $J_k^{\text{nodes}} = \frac{\partial \hat{P}_k}{\partial \mathcal{C}_k} \in \mathbb{R}^{3N \times 3K}$ and $J_k = \frac{\partial \hat{\mathcal{C}}_k}{\partial \eta_k} \in \mathbb{R}^{3K \times d_\eta}$ are the Jacobians of the estimated state with respect to the corner node positions and the internal state, respectively, and α, β are gains controlling the trust between the model estimate and the measurement.

By correcting the hidden state directly, the feedback ensures that the temporal context carried by the RNN is also adjusted, limiting error accumulation and partially compensating for the sim-to-real gap. The corrected state $\hat{P}_k^{\text{corr}}$ is not fed back into the recurrence, which is anchored through η_k^{corr} alone; it is the measurement-corrected estimate of the current state, and is used to initialize the receding-horizon problem of Section IV-C at each planning cycle.

C. Control Problem Formulation

Given the learned model Φ_θ , we formulate the DO manipulation task as a receding-horizon optimal control problem. At each planning cycle, the following problem is solved over a horizon of H steps:

$$\begin{aligned} \text{Given: } & \mathcal{O} \subset \mathbb{R}^3, \mathcal{C}_0, \eta_0, \\ \min_{f_0, \dots, f_{H-1}} & \mathcal{J} = \sum_{k=0}^{H-1} \ell(\hat{P}_k, f_k) + \ell_T(\hat{P}_H) \\ \text{subject to: } & \mathcal{D}(\hat{P}_k, f_k, \mathcal{O}) \geq 0, \\ & (\hat{P}_{k+1}, \eta_{k+1}) = \Phi_\theta(\mathcal{C}_k, f_k, \eta_k), \end{aligned}$$

where $f_k \in \mathbb{R}^m$ is the applied input to be optimized, $\ell(\cdot)$ and $\ell_T(\cdot)$ are the running and terminal cost functions that can encode, for example, a tracking error toward a desired DO configuration, and $\mathcal{D}(\cdot)$ represents the inequality constraint function defining the feasible region $\mathcal{O} \subset \mathbb{R}^3$. The dynamics constraint uses Φ_θ as the forward model, with the corner node inputs propagated within the horizon by (11).

V. EXPERIMENTS

The proposed method is evaluated in three stages: (1) a rope simulation, assessing cRVAE’s prediction accuracy and its use in leader-follower obstacle avoidance (Section V-A); (2) a fabric simulation, extending the evaluation to a 2D deformable object (Section V-B); (3) real-world rope manipulation on a Unitree Go2 robot, assessing the framework on physical hardware under the sim-to-real and real-to-sim gap (Section V-C). The same cRVAE architecture is used throughout: encoder 512–256, prior 256, decoder 256–512 (ReLU MLPs), and a GRU with $d_\eta=32$ and latent dimension 32, giving 491k parameters for the rope ($N=33$, $K=2$, $m=3$) and 1.38M for the fabric ($N=225$, $K=4$, $m=6$), of which 225k and 524k remain at inference once the encoder is discarded. Both are trained with Adam (lr 10^{-3} , batch 16), λ annealed $0 \rightarrow 0.05$ over 40 epochs, and a rollout curriculum from 1 to 10 steps.

A. Rope Simulation

a) cRVAE Training and Modeling Accuracy: The cRVAE is trained on rope dynamics generated by an XPBD-based simulator [5], where the rope, with a length of 1.5 m, is discretized into $N = 33$ nodes. Node 27 is selected as the actuated node, with the applied input $f(k)$ defined as its velocity, using a time step of $\Delta t = 0.1$ s. Node 3 is taken as the other corner node, so the corner node measurement is given by $\mathcal{C}_k = \{x_k^{27}, x_k^3\}$. The training dataset consists of 10 trajectories, each approximately one minute long, covering circular movements, translations along the x , y , and z directions, and random motions. Fig. 3 shows the cRVAE prediction error versus horizon, reported as mean absolute error (MAE) per coordinate, averaged over all nodes, axes, and time steps (cm). We compare against two references. The geometric baseline holds the rope’s initial shape and maps it at each step by the least-squares similarity transform (rotation, scale, translation) aligning its two corner nodes to the observed

corners. The physics reference is an XPBD rope model with stretching and bending constraints on point particles, with parameters identified on a held-out sequence. The generator [5] additionally models orientation and bend–twist constraints, so the reference cannot represent torsion and part of its error is structural rather than a consequence of poor identification. As shown in Fig. 3, cRVAE reaches 0.81 cm at $h = 1$ and 2.51 cm at $h = 40$, against 2.75 and 3.28 cm for the physics reference and 2.79 and 5.66 cm for the baseline. The physics reference starts near the baseline at $h = 1$ but grows more slowly, ending 2.38 cm below it at $h = 40$, while cRVAE stays below both across the horizon.

b) Ablation of the Latent Variable: To isolate the effect of the stochastic latent prior, we retrain a deterministic variant in which the prior is replaced by a feature map of identical width and depth, with the encoder and KL term removed and all else unchanged (parameter counts within 4%). Both are retrained and evaluated under the same protocol, but on a different held-out set from Fig. 3, so the values are comparable to each other but not to that figure. cRVAE is more accurate at every horizon tested, by 0.57 cm at $h = 1$ and 0.55 cm at $h = 10$, indicating that the latent variable contributes beyond the recurrent structure alone.

c) What Do the Corner Measurements Anchor?: We ablate the feedback correction ((12)–(13)) on nine held-out rope trajectories, comparing no feedback ($\alpha=\beta=0$), α only, β only, and full feedback across measurement intervals T_m (as in (11), distinct from the prediction horizon h). The gains were selected by a grid search on a single training trajectory ($\alpha \in \{0, 0.3, 0.5, 1.0\}$, $\beta \in \{0, 1, 2, 3\}$) minimizing interior-node MAE, giving $\alpha=1.0$, $\beta=2.0$, held fixed for all evaluations. Since the correction is derived entirely from the two measured corners, the unmeasured interior nodes are the meaningful test. As every condition is evaluated on the same trajectories, we test the paired per-trajectory differences and report the Wilcoxon signed-rank p alongside the number of trajectories improved.

At short measurement intervals the correction is effective and consistent in direction: the full correction reduces interior MAE from 1.256 to 1.058 cm at $T_m=1$ (+13.1% $\pm$ 7.2) and from 1.226 to 1.058 cm at $T_m=5$ (+10.4% $\pm$ 8.7), improving all nine held-out trajectories in both cases ($p = 0.004$). The measured corners improve considerably more (+65.4% at $T_m=1$), as expected since the residual constrains them directly. The per-trajectory spread is comparable to the mean, reflecting genuine variation in how much each motion benefits; the direction of the effect, however, is consistent across every trajectory. The benefit decreases as the measurement interval grows, and

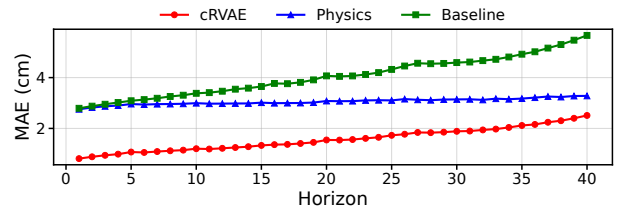


Fig. 3: cRVAE prediction MAE (cm) versus prediction horizon on the rope simulation, against a similarity-transform baseline and an XPBD rope reference.

by $T_m=10$ no condition is statistically distinguishable from the no-feedback baseline ($p \geq 0.16$). To understand why the correction saturates, we ask how much interior shape each measurement set identifies: at each step we fit the hidden state to reproduce the measured nodes (by gradient descent through the frozen decoder) and score the unmeasured interior. Fitting the full state reaches 0.35 cm (+72% over no feedback), so a good interior is representable by the decoder, whereas fitting only the two corners is net-negative (2.04 cm, -62%): many hidden states reproduce them equally well with different interiors, so an unconstrained fit drifts, while the damped update (12) stays near an already-plausible prediction. Adding node 12 reaches 0.56 cm (+56%). The corners thus carry little interior information, which is why the α - β gain is small. Such an interior measurement can enter the hidden-state correction (13) without appearing among the network inputs, so no retraining is needed: replacing the fixed-gain update with one damped gradient step on $E(\eta) = \|\hat{P}(\eta)|_{\{3,12,27\}} - \mathcal{C}^+\|^2$, where $\mathcal{C}^+$ denotes the two corners augmented with node 12, reduces interior MAE, scored on the nodes measured by neither the corners nor the added sensor, from 1.29 to 0.88 cm at $T_m=1$ (+28%, $p = 0.004$, 9/9). Sensor placement, rather than gain tuning, is therefore the lever that matters.

d) Comparison: The proposed method is compared against [5] in a rope manipulation task where node 3 acts as the leader and node 27 as the follower, which should maintain a desired offset of (0, -0.4, -0.5) m in the x , y , and z directions, respectively, while avoiding obstacles. The leader moves at mean speeds of 0.005, 0.015, 0.025 and 0.05 m/s in the Baseline scenario, and at 0.005 and 0.015 m/s in the Challenging scenario, where running XPBD in the loop is too costly to repeat at every speed. The standard deviation is 10% of the mean and each setting is repeated 10 times. In some scenarios, such as the Baseline scenario described below, both methods succeed regardless of horizon-based planning. However, in other configurations, such as the Challenging scenario, the feasible path between obstacles is narrow enough that a horizon-based controller is needed to find a collision-free trajectory. We use iLQR [22] as the horizon-based controller. Since iLQR requires the rope’s state at each future step within the horizon, cRVAE is used to predict these intermediate states.

A run is considered successful if the smoothed minimum distance to the obstacle never remains below the safety threshold for longer than $t > 0.5$ s, distinguishing real contact from transient measurement noise. In addition to the success criterion, we report the clearance, defined as the smallest value of the smoothed distance to the obstacle observed during a run, with its mean and standard deviation reported across all runs in a scenario.

Baseline Scenario: Two rectangular obstacles are placed at $x = 0$, centered at $(y, z) = (\pm 0.85, 0.75)$ m, each 1.0 m wide and 1.5 m high. Both methods complete all runs at all four speeds with positive clearance, confirming that neither collides with the obstacle. cRVAE’s clearance falls with speed (0.15, 0.09, 0.05, 0.04 m), while CBF-QP [5] stays near 0.04–0.05 m up to 0.025 m/s and reaches 0.12 m at 0.05 m/s. At the highest speed CBF-QP therefore keeps the larger margin, while cRVAE stays closer to the nominal shape and trades

TABLE I: Task Completion – Baseline Scenario. Both methods complete 100% of runs at every speed.

Clearance (m)	0.005	0.015	0.025	0.05
cRVAE (Ours)	0.15 ± 0.003	0.09 ± 0.004	0.05 ± 0.01	0.04 ± 0.003
CBF-QP [5]	0.05 ± 0.004	0.04 ± 0.01	0.04 ± 0.01	0.12 ± 0.016

Columns are leader speeds in m/s.

TABLE II: Task Completion – Challenging Scenario

Method	Task Completion (%)	Leader Speed (m/s)	Clearance (m)
cRVAE (Ours)	100%	0.005	0.097 ± 0.014
XPBD + iLQR	100%	0.005	0.127 ± 0.039
CBF-QP [5]	0%	0.005	0.0 ± 0.0
cRVAE (Ours)	100%	0.015	0.098 ± 0.029
XPBD + iLQR	100%	0.015	0.073 ± 0.044
CBF-QP [5]	0%	0.015	0.0 ± 0.0

clearance for tracking accuracy.

Challenging Scenario: The obstacle configuration is modified by placing two obstacles vertically stacked at $x = 0$. The lower obstacle has center $(y, z) = (0.75, 0.75)$ m, width 0.8 m and height 1.5 m, and the upper obstacle has center $(y, z) = (0.75, 2.95)$ m with the same dimensions.

As reported in Table II, the proposed method completes the task successfully across all speed scenarios, maintaining a consistent clearance of approximately 0.10 m regardless of speed, while [5] fails to complete the task and reaches zero clearance. Passing through a narrow gap requires the rope to stretch, which is achieved by planning the deformation ahead using the horizon-based controller. Fig. 4 shows the rope shape at $t = 0.0$ s before reaching the obstacle, $t = 5.2$ s at the obstacle, and $t = 12.3$ s after passing the obstacle. At $t = 5.2$ s, the proposed method stretches the rope along the y -axis to clear the gap, while [5] collides with the lower obstacle. At $t = 0.0$ s and $t = 12.3$ s, the rope shapes of the two methods are near each other. Since [5] is a reactive CBF-QP controller, the contrast in Table II reflects the benefit of horizon-based planning rather than a difference between the two models. To isolate the forward model from the controller, we additionally run XPBD as the forward model inside the same iLQR loop, under identical cost, constraints, initial conditions, and plant, differing only in the model used for prediction and its derivatives. As reported in Table II, XPBD+iLQR also completes the task and avoids the obstacle, with clearances comparable to cRVAE across both speeds. Under the same horizon-based controller, cRVAE thus achieves task performance comparable to XPBD while reconstructing the full rope state from two observed nodes, without parameter identification at inference, and with substantially faster forward and derivative computation. As shown in Fig. 5, XPBD exceeds the 100 ms control budget at every horizon, taking 396 ms at $h = 5$ and 3.2 s at $h = 40$, whereas cRVAE stays well within budget (≈ 9 ms at $h = 40$); both are total times, including the derivatives iLQR requires. For a fair comparison, XPBD is reimplemented in JAX so that both models are JIT-compiled, differentiated by the same autodiff system, and timed on the same GPU, with each model’s forward pass and iLQR Jacobians measured separately. XPBD is therefore accurate enough to plan with but too slow to deploy in the loop, which is precisely the gap cRVAE closes.

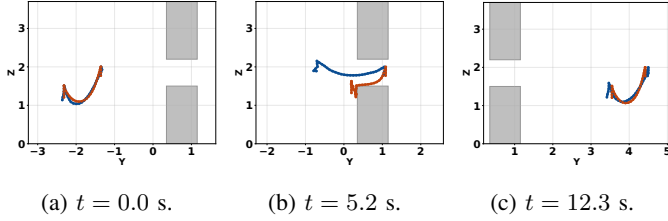


Fig. 4: Rope shape near the obstacle in the Challenging scenario, shown at $t = 0.0$ s before reaching the obstacle, $t = 5.2$ s at the obstacle, and $t = 12.3$ s after passing the obstacle.

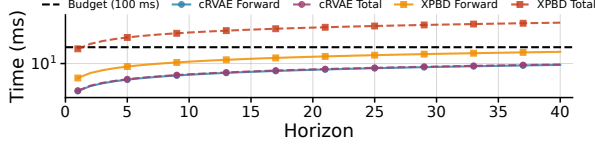


Fig. 5: Per-horizon compute time on the rope (log scale) versus horizon h , for cRVAE and XPBD. “Total” includes forward prediction and derivative computation using each model.

B. Fabric Simulation

a) cRVAE Training and Modeling Accuracy: The cRVAE is trained on fabric dynamics generated by a mesh-based Hooke’s law simulator [23]. The fabric is modeled as a 15×15 node mesh spanning a $1 \text{ m} \times 1 \text{ m}$ area. Nodes 0 and 210 act as the actuated nodes, with the input $f(k) \in \mathbb{R}^6$ given by their velocities in the x , y , and z directions at a time step of $\Delta t = 0.1$ s, while nodes 14 and 224 serve as the remaining corner nodes, giving $\mathcal{C}_k = \{x_k^0, x_k^{210}, x_k^{14}, x_k^{224}\}$. The training data consists of 29 trajectories of 12 seconds each, covering both joint and independent movements of the two actuated nodes. As shown in Fig. 6, using the same MAE metric defined in Section V-A, averaged over all 225 nodes, the physics reference is the XPBD counterpart for cloth, with stretching, shear, and bending constraints. cRVAE reaches 0.66 cm at $h = 1$ and 0.98 cm at $h = 40$, against 0.57 and 1.44 cm for the physics reference and 4.02 and 4.92 cm for the baseline. At short horizons cRVAE and the physics reference are within 0.1 cm of each other, but their error curves diverge as the horizon grows, with cRVAE 0.46 cm below the physics reference at $h = 40$. Both remain below the baseline, which stays above 4 cm across all horizons. While cRVAE and the physics reference are comparable in accuracy, they differ in compute cost. Fig. 7 reports the compute time on the fabric mesh. Per forward pass, XPBD is roughly $1550\times$ slower than cRVAE and exceeds the 100 ms budget at $h = 3$, whereas cRVAE stays at 1.5 ms at $h = 40$ even including the controller derivatives. The gap is wider than on the rope because XPBD’s cost grows with the number of nodes and constraints. XPBD’s total time is omitted, as its Jacobian exceeds memory at this state dimension. cRVAE thus matches a parameter-identified physics model in accuracy while estimating the full state from only sparse corner nodes and remaining fast enough for in-the-loop planning.

b) Comparison: The proposed method is compared against [5], which proposes a reactive control barrier function (CBF)-based quadratic programming (QP) controller that computes the control input from the current distance to the obstacle, without predicting future object states over a horizon; we refer to this method as *CBF-QP* throughout this paper. The method

TABLE III: Task Completion – Fabric Scenarios

Method	Compl.	Free gap g (m)	Clearance	Max Err. P1	Max Err. P2
CBF-QP [5]	100%	3.1	0.029 ± 0.016	0.43	0.44
cRVAE (Ours)	100%	3.1	0.23 ± 0.005	0.98	0.52
CBF-QP [5]	80%	2.1	0.0 ± 0.0	0.90	0.40
cRVAE (Ours)	100%	2.1	0.23 ± 0.005	0.98	0.52
CBF-QP [5]	0%	1.6	N/A	N/A	N/A
cRVAE (Ours)	100%	1.6	0.23 ± 0.004	0.98	0.59
CBF-QP [5]	0%	1.1	N/A	N/A	N/A
cRVAE (Ours)	100%	1.1	0.20 ± 0.01	1.14	1.17

is evaluated in a fabric manipulation task where nodes 14 and 224 act as the leaders and nodes 0 and 210 as the followers, which should maintain a desired offset of $(0, -0.2, 0.4)$ m while avoiding obstacles. The leaders move forward in the y direction at a mean speed of 0.02 m/s with a standard deviation of 10% of the mean. Two obstacles are placed on top of each other along the path: the lower obstacle is a cube with side length 0.9 m centered at $(0.0, 0.5, 0.45)$ m, and the upper obstacle is a box with dimensions $3 \text{ m} \times 3 \text{ m} \times 0.5 \text{ m}$ centered at $(0.0, 0.5, c_2)$ m, where c_2 varies across four scenarios to narrow the feasible path. The lower cube occupies $z \in [0, 0.9]$ m and the upper box $z \in [c_2 - 0.25, c_2 + 0.25]$ m, so the free vertical passage between them is $g = c_2 - 1.15$ m. Each scenario is repeated 10 times using an MPPI solver.

For free gaps $g \geq 2.1$ m and above, both methods complete most runs; in this wide-gap regime the clearance is governed by the lower obstacle rather than the gap, and cRVAE keeps a larger obstacle margin than CBF-QP (0.23 m vs. 0.029 m) at the cost of higher tracking error (0.98 m vs. 0.43 m), widening the desired offset to preserve clearance. As the gap narrows, CBF-QP’s success rate drops to 0% for $g \leq 1.6$ m, while cRVAE completes all runs by stretching the fabric through the gap.

C. Real-World Experiments

We validate the proposed method on a real rope manipulation task using a Unitree Go2 robot. We first describe the experimental setup and data collection, followed by simulator calibration to reduce the sim-to-real gap and cRVAE training to reduce the real-to-sim gap, and finally report the real-world control results.

a) Experimental Setup: The real-world experiments are conducted using a Unitree Go2 quadruped robot equipped with

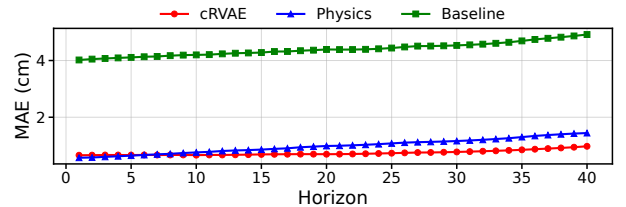


Fig. 6: cRVAE prediction MAE (cm) versus prediction horizon on the fabric simulation, against a similarity-transform baseline and an XPBD cloth reference.

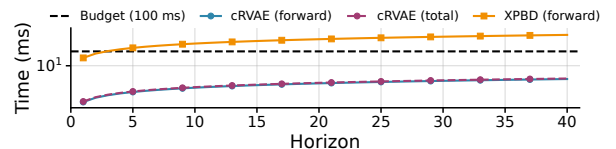


Fig. 7: Per-horizon compute time on the fabric (15×15 mesh, log scale) versus horizon h . “Total” is shown for cRVAE only and includes derivative computation.

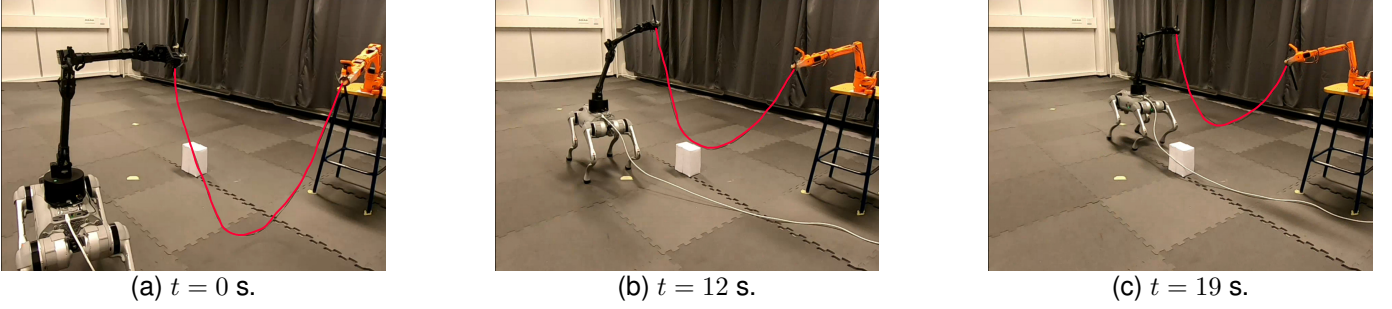


Fig. 8: Real-world obstacle avoidance, shown as snapshots from a fixed camera with the rope highlighted in red for visibility. At $t = 0$ s (a), the rope approaches the box at low height. At $t = 12$ s (b), the manipulator lifts the rope to clear the box. At $t = 19$ s (c), the manipulator returns to a lower height after clearing the obstacle.

a Unitree D1 manipulator, which grasps one end of the rope and acts as the actuated node. The other end is held by an SO-101 manipulator, which acts as the leader. The rope has a length of 180 cm. For capturing the rope state, six motion capture sensors are placed uniformly along the rope, providing the x , y , z position of each sensor node. Nodes 0 and 5, corresponding to the two rope endpoints, are used as the corner nodes by the cRVAE during inference. The six-marker configuration is used for data collection and calibration only; during the control runs the markers are reallocated to the two rope corners, the obstacle, and the robot base, so no ground truth is available for the interior nodes during control. Eight real-world datasets are collected using the motion capture system, including random motions.

b) Simulator Calibration: To reduce the sim-to-real gap, the XPBD simulator’s physical parameters, including the bending and stretching stiffness and damping coefficients, the rope mass and rest length, and the continuous positions of the six motion capture sensors along the rope, are calibrated by minimizing the difference between the simulated and real sensor positions over a single real-world dataset. The optimization is solved using differential evolution to find a global solution. A single real-world dataset is used for calibration, since the underlying optimization problem is computationally expensive. Using the optimized parameters, additional simulated data is generated covering circular movements and translations along the x , y , and z directions.

c) cRVAE Training and Calibration: The cRVAE is first trained on high-resolution simulated data generated using the calibrated XPBD simulator, where the rope is modeled with $N = 31$ nodes. To reduce the real-to-sim gap, the decoder is calibrated on the real-world data while the encoder, prior, and RNN weights are kept frozen. Since the encoder expects the full 31-node rope state while the real-world data provides only 6 mocap markers, the model is run in prior sampling mode during calibration — bypassing the encoder entirely and sampling the latent variable from the prior (i.e., $p_\psi(z | \eta_k)$). The decoder is the only component retrained, as it directly maps RNN output to physical rope and has the most direct influence on the real-to-sim gap.

Since the cRVAE predicts the full high-resolution rope state of 31 nodes but only 6 ground truth positions are available from the real-world mocap sensors, no ground truth is available for the remaining intermediate nodes. The stretching and bending constraints are therefore included in the loss to

TABLE IV: Decoder calibration MAE (cm): simulation, the real-world calibration set, and a held-out real-world validation set.

	Sim	Real	Validation
Before calibration	1.32	4.05	2.88
After calibration	4.22	2.63	1.85

TABLE V: Mean signed z -error (cm) per marker on the real-world calibration set. Positive values indicate the model predicts the rope above its true position, i.e. it underestimates the sag.

Node	0	6	12	18	24	30
Before calibration	1.09	1.38	1.95	3.73	1.35	0.01
After calibration	0.01	-0.52	-1.03	-1.09	-0.47	-0.01

provide gradient signal for these nodes, and the calibration loss is defined as:

$$\mathcal{L}_{cal} = \sum_{k=1}^H \gamma^k \left[\|\tilde{P}_k - \hat{P}_k[\mathcal{M}]\|^2 + w_c \|\mathcal{C}_k - \hat{\mathcal{C}}_k\|^2 + \lambda_s \mathcal{L}_{stretch}(\hat{P}_k) + \lambda_b \mathcal{L}_{bend}(\hat{P}_k) \right], \quad (14)$$

where $\tilde{P}_k \in \mathbb{R}^{18}$ are the real mocap marker positions, $\hat{P}_k \in \mathbb{R}^{93}$ is the predicted full rope state, $\hat{P}_k[\mathcal{M}]$ are the predicted positions at the indices corresponding to the real-world marker locations, $\mathcal{C}_k, \hat{\mathcal{C}}_k \in \mathbb{R}^6$ are the measured and predicted endpoint positions, $\lambda_s, \lambda_b \in \mathbb{R}$ are weighting coefficients for the stretching and bending terms, $w_c \in \mathbb{R}$ is the corner-node loss weight, and $\gamma \in (0, 1]$ is a discount factor. The stretching and bending terms, $\mathcal{L}_{stretch}$ and $\mathcal{L}_{bend}$, provide gradient signal for all 31 nodes by penalizing deviations from the rope’s rest segment length between neighboring nodes and from sharp bends along the rope.

The decoder is calibrated on seven of the eight collected real-world datasets, with one held out for validation. Training the decoder with this calibration loss reduces the real-world MAE from 4.05 cm to 2.63 cm on the calibration trajectory, at the cost of increasing the simulation MAE from 1.32 cm to 4.22 cm (Table IV). On a held-out validation trajectory, MAE also decreases after calibration, from 2.88 cm to 1.85 cm. Looking at the error per marker, before calibration the model consistently predicts the rope higher than it really is. This bias is largest in the middle of the rope (3.73 cm at node 18) and almost zero at the grasped end (0.01 cm at node 30), as shown in Table V. Since the error is in the middle of the rope and not at the end effector, the manipulator has to lift more than the error itself to correct it, and this lift is bounded by the D1’s vertical workspace. Calibration reduces this mid-span offset from 3.73 cm to 1.09 cm.

TABLE VI: Real-world experiment results across two scenarios.

Scenario	$\bar{e}_{xy}$ (mm)	$\bar{d}_z$ (mm)	t_{comp} (ms)	Successful Runs
Scenario 1	50.5 ± 3.4	138.6 ± 55.9	65.57 ± 9.94	10/10
Scenario 2	52.8 ± 4.7	78.1 ± 6.0	63.58 ± 6.38	10/10

$\bar{e}_{xy}$: mean XY leader–follower error; $\bar{d}_z$: mean manipulator lift; t_{comp} : computation time per control action; Successful Runs: runs with no observed rope–obstacle contact, out of 10 runs per scenario. Values reported as mean $\pm$ std across 10 runs per scenario.

d) Real-World Control Experiments: The proposed method is validated on a real-world rope manipulation task using two scenarios with different obstacle geometries. The controller plans over a horizon of 5, while new corner measurements arrive at every control step. In both scenarios, the Unitree Go2 acts as the follower and the SO-101 arm as the leader. The follower is required to maintain a desired radial offset and angular synchrony with the leader along a circular arc. The x and y motion of the follower is controlled by the Go2 base, while the z motion is controlled by the D1 manipulator, keeping the two axes decoupled. The problem is solved using iLQR [22] in an event-based manner. The purpose of this experiment is to demonstrate feasibility on physical hardware. cRVAE runs on the real system using only the two corner nodes available from sensing, within the control budget. A direct comparison against [5] is challenging, since it requires the full rope state, which the real hardware does not provide.

Scenario 1 uses an obstacle of dimensions $0.075 \text{ m} \times 0.09 \text{ m} \times 0.18 \text{ m}$, while Scenario 2 uses $0.156 \text{ m} \times 0.07 \text{ m} \times 0.10 \text{ m}$. Each scenario is evaluated across 10 runs with different initial positions of the robot and obstacle. Table VI summarizes the results across both scenarios. Task success is determined directly from the recorded videos of each run by checking for physical contact between the rope and the obstacle; no collision was observed in any run. The computation time per control action, 65.6 and 63.6 ms across the two scenarios (Table VI), stays within the 100 ms control period set by $\Delta t = 0.1 \text{ s}$.

VI. CONCLUSION

This work presented cRVAE, a conditional recurrent variational autoencoder for modeling deformable object dynamics from partial node observations, integrated into a receding-horizon optimal control framework for manipulation. In simulation, at horizon $h = 40$ cRVAE reached 2.51 cm on the rope and 0.98 cm on the fabric, against 3.28 and 1.44 cm for a parameter-identified XPBD reference and 5.66 and 4.92 cm for a geometric baseline. It estimates the full state from two observed nodes on the rope and four on the fabric. A rollout including derivatives takes $\approx 9 \text{ ms}$ on the rope against 3.2 s for XPBD, and 1.5 ms on the fabric, where XPBD is $\approx 1550 \times$ slower per forward pass. On real hardware, cRVAE completed 10/10 rope runs on a Unitree Go2 without observed obstacle contact.

Future work will extend cRVAE to model contact, enabling manipulation tasks in which the object interacts with its environment. A second direction is to extend the measurement feedback with vision, using it to obtain interior measurements that the two corner nodes cannot supply and thereby improve the prediction accuracy of the unmeasured nodes.

REFERENCES

- [1] C. Li, Z. Ai, T. Wu, X. Li, W. Ding, and H. Xu, “DeformNet: Latent space modeling and dynamics prediction for deformable object manipulation,” in *Proc. IEEE ICRA*, 2024, pp. 14770–14776.
- [2] X. Ma, D. Hsu, and W. S. Lee, “Learning latent graph dynamics for visual manipulation of deformable objects,” in *Proc. IEEE ICRA*, 2022, pp. 8266–8273.
- [3] H. Lu, Y. Teng, and Y. Li, “Learning latent dynamics for autonomous shape control of deformable object,” *IEEE Trans. Intell. Transp. Syst.*, vol. 24, no. 11, pp. 13133–13140, 2023.
- [4] P. M. Scheikl, E. Tagliabue, B. Gyenes, M. Wagner, D. Dall’Alba, P. Fiorini, and F. Mathis-Ullrich, “Sim-to-real transfer for visual reinforcement learning of deformable object manipulation for robot-assisted surgery,” *IEEE Robot. Autom. Lett.*, vol. 8, no. 2, pp. 560–567, 2023.
- [5] B. Aksoy and J. T. Wen, “Collaborative manipulation of deformable objects with predictive obstacle avoidance,” in *Proc. IEEE ICRA*, 2024, pp. 16766–16772.
- [6] B. Aksoy and J. T. Wen, “Planning and control for deformable linear object manipulation,” *IEEE Trans. Autom. Sci. Eng.*, vol. 23, pp. 1093–1111, 2026.
- [7] F. Liu, E. Su, J. Lu, M. Li, and M. C. Yip, “Robotic manipulation of deformable rope-like objects using differentiable compliant position-based dynamics,” *IEEE Robot. Autom. Lett.*, vol. 8, no. 7, pp. 3964–3971, 2023.
- [8] T. Coleman, R. Babuška, J. Kober, and C. D. Santina, “An empirical investigation on variational autoencoder-based dynamic modeling of deformable objects from RGB data,” in *Proc. Mediterr. Conf. Control Autom. (MED)*, 2024, pp. 921–928.
- [9] W. Yan, A. Vangipuram, P. Abbeel, and L. Pinto, “Learning predictive representations for deformable objects using contrastive estimation,” in *Proc. Conf. Robot Learn. (CoRL)*, 2020, pp. 564–574.
- [10] W. Zhang, K. Schmeckpeper, P. Chaudhari, and K. Daniilidis, “Deformable linear object prediction using locally linear latent dynamics,” in *Proc. IEEE ICRA*, 2021, pp. 13503–13509.
- [11] M. Yu, K. Lv, H. Zhong, S. Song, and X. Li, “Global model learning for large deformation control of elastic deformable linear objects: An efficient and adaptive approach,” *IEEE Trans. Robot.*, vol. 39, no. 1, pp. 417–436, 2023.
- [12] T. Missal, L. Domingues, B. Guler, S. Manschitz, J. Peters, and P. D. P. Costa, “RopeDreamer: A kinematic recurrent state space model for dynamics of flexible deformable linear objects,” 2026, arXiv:2604.28161.
- [13] M. Macklin, M. Müller, and N. Chentanez, “XPBD: Position-based simulation of compliant constrained dynamics,” in *Proc. 9th Int. Conf. Motion Games*, 2016, pp. 49–54.
- [14] J. Zhu, B. Navarro, P. Fraise, A. Crosnier, and A. Cherubini, “Dual-arm robotic manipulation of flexible cables,” in *Proc. IEEE/RSJ IROS*, 2018, pp. 479–484.
- [15] Y. Yang, J. A. Stork, and T. Stoyanov, “Learning differentiable dynamics models for shape control of deformable linear objects,” *Robot. Auton. Syst.*, vol. 158, p. 104258, 2022.
- [16] S. Chen, Y. Liu, S. W. Yao, J. Li, T. Fan, and J. Pan, “DiffSRL: Learning dynamical state representation for deformable object manipulation with differentiable simulation,” *IEEE Robot. Autom. Lett.*, vol. 7, no. 4, pp. 9533–9540, 2022.
- [17] D. Blanco-Mulero, O. Barbany, G. Alcan, A. Colomé, C. Torras, and V. Kyrki, “Benchmarking the sim-to-real gap in cloth manipulation,” *IEEE Robot. Autom. Lett.*, vol. 9, no. 3, pp. 2981–2988, 2024.
- [18] X. Liang, F. Liu, Y. Zhang, Y. Li, S. Lin, and M. Yip, “Real-to-sim deformable object manipulation: Optimizing physics models with residual mappings for robotic surgery,” in *Proc. IEEE ICRA*, 2024, pp. 15471–15477.
- [19] T. Toner, V. Molazadeh, M. Saez, D. M. Tilbury, and K. Barton, “Sequential manipulation of deformable linear object networks with endpoint pose measurements using adaptive model predictive control,” 2024, arXiv:2402.10372.
- [20] D. Sirintuna, A. Giammarino, and A. Ajoudani, “An object deformation-agnostic framework for human–robot collaborative transportation,” *IEEE Trans. Autom. Sci. Eng.*, vol. 21, no. 2, pp. 1986–1999, 2024.
- [21] W. Zhang, C. Street, and M. Mansouri, “Collaborative human-robot object transportation using a deformable sheet,” in *Proc. IEEE ICRA*, 2026.
- [22] G. Alcan and V. Kyrki, “Differential dynamic programming with nonlinear safety constraints under system uncertainties,” *IEEE Robot. Autom. Lett.*, vol. 7, no. 2, pp. 1760–1767, 2022.
- [23] V.-L. De Gussemme, “Cloth folding through differentiable physics simulation,” M.S. thesis, Ghent Univ., Ghent, Belgium, 2020.