

Provably Safe Decentralized Contingency MPC under State-Only Information and Limited Sensing for Nonlinear Multi-agent Systems

Max Studt¹, Georg Schildbach¹

Abstract—This paper considers decentralized contingency MPC for multi-agent control under a state-only information pattern, with particular focus on limited sensing and plug-and-play operation. The objective is to retain recursive feasibility, safety, and Lyapunov-type convergence while reducing conservatism in local interaction handling. The framework relies on agent-wise fallback regions (safe sets) in which a feasible contingency maneuver to a safe equilibrium is always available. A novel safe-set update mechanism is introduced that supports less conservative decentralized interaction while preserving the underlying guarantees. This, in turn, enables memory-free local interaction and finite sensing ranges without requiring agents to reconstruct the exact neighbor geometry. The resulting scheme remains fully decentralized and preserves the shared-first-input contingency MPC structure. Theoretical guarantees and simulation results illustrate the effectiveness of the approach in dense multi-agent scenarios.

I. INTRODUCTION

Decentralized collision avoidance without inter-agent communication is a challenging problem in multi-agent control. In this setting, each agent has to plan its own motion based only on local state measurements of nearby agents, while future trajectories, inputs, and intentions of other agents are unavailable. Such a state-only information pattern is particularly relevant when communication is unreliable, unavailable, or undesirable, and when agents can only rely on finite-range sensing.

Reactive geometric methods, such as velocity obstacles and reciprocal collision avoidance, address collision avoidance under limited information and without trajectory exchange [1], [2]. These approaches are attractive due to their decentralized nature and low computational complexity. However, they are typically not formulated as predictive controllers with explicit multi-step state and input constraints, recursive feasibility, and closed-loop convergence guarantees. Predictive approaches can handle such constraints and optimize performance over a horizon, but decentralized MPC schemes often require some form of communication, trajectory exchange, or coordination [3], [4], [5]. Communication-free predictive control schemes based on local sensing, neighbor-trajectory prediction, or iterative learning have also been proposed [6], [7]. However, these approaches rely on predicted neighbor behavior or data from previous task executions, or do not jointly provide MPC-style closed-loop guarantees under state-only information. This leaves a gap between communicationless local interaction and predictive control with rigorous closed-loop guarantees.

Contingency MPC is particularly useful in this setting because it separates performance optimization from safety certification [8]. Each agent computes a nominal trajectory for its control objective and, in parallel, a contingency trajectory that certifies the existence of a feasible fallback maneuver. In the context of communicationless decentralized collision avoidance, contingency trajectories together with separating bisecting planes have been used to establish recursive feasibility and closed-loop collision avoidance [9]. However, this approach is formulated only for a linear double-integrator robot-swarm model and does not provide a general framework for nonlinear agent dynamics or a Lyapunov-type convergence result.

A contingency MPC approach based on local safe sets provides a complementary framework [10]. However, in this framework, agents require information about other agents from previous time steps, introducing a history dependence that complicates plug-and-play operation and limited sensing.

This paper builds on [10] and removes the need for history-dependent neighbor reconstruction by introducing a memory-free, state-dependent interaction mechanism. The active safe set is constructed such that it always remains contained in a region computable from the agent's current state. The resulting scheme preserves the contingency-MPC guarantees of recursive feasibility, collision avoidance, and Lyapunov-type convergence, while replacing history-dependent neighbor reconstruction by a memory-free, state-dependent interaction mechanism. This makes the approach naturally compatible with finite sensing and continuous plug-and-play operations.

The main contributions of this paper are as follows:

- C1 A memory-free, state-dependent interaction mechanism for decentralized contingency MPC.
- C2 A safe-set construction with a memory-free outer representation recoverable from current state information.
- C3 A finite-sensing and plug-and-play formulation with reduced conservatism.
- C4 Recursive-feasibility, collision-avoidance, and Lyapunov-type convergence guarantees.
- C5 A four-way intersection study with nonlinear vehicle dynamics and continuous plug-and-play operations.

II. PRELIMINARIES AND PROBLEM STATEMENT

A. Notation and Agent Model

Let $\mathcal{I} := \{1, \dots, M\}$ denote the set of agents. Discrete time is indexed by $t \in \mathbb{Z}_+$, with $t^+ := t + 1$. For $a, b \in \mathbb{Z}$, $a \leq b$, define $\mathbb{Z}_a^b := \{k \in \mathbb{Z} \mid a \leq k \leq b\}$. The Euclidean

¹Institute for Electrical Engineering in Medicine of the University of Luebeck, Germany, ([m.studt](mailto:m.studt@uni-luebeck.de), [georg.schildbach](mailto:georg.schildbach@uni-luebeck.de))

norm is denoted by $\|\cdot\|$. For $c \in \mathbb{R}^{n_p}$ and $R \geq 0$, let $\mathbb{B}(c, R) := \{p \in \mathbb{R}^{n_p} \mid \|p - c\| \leq R\}$, define the Euclidean Ball. Predicted quantities use the MPC index $(k|t)$.

Each agent $i \in \mathcal{I}$ is modeled by the discrete-time nonlinear system

$$x_i(t^+) = f_i(x_i(t), u_i(t)), \quad (1)$$

with state $x_i(t) \in \mathbb{R}^{n_i}$, input $u_i(t) \in \mathbb{R}^{m_i}$, and position $p_i(t) = C_i x_i(t) \in \mathbb{R}^{n_p}$. The state and input constraints are given by $\mathcal{X}_i \subset \mathbb{R}^{n_i}$ and $\mathcal{U}_i \subset \mathbb{R}^{m_i}$. The body of agent i is modeled as the ball $\mathbb{B}(p_i(t), r_i)$, with radius $r_i > 0$.

Each agent is assigned a reference state x_i^{ref} , with reference position $p_i^{\text{ref}} = C_i x_i^{\text{ref}}$. The reference is assumed to be an admissible equilibrium, i.e., there exists $u_i^{\text{ref}} \in \mathcal{U}_i$ such that $x_i^{\text{ref}} = f_i(x_i^{\text{ref}}, u_i^{\text{ref}})$, $x_i^{\text{ref}} \in \mathcal{X}_i$. An equilibrium of agent i is denoted by $(\bar{x}_i, \bar{u}_i)$, and its position by $\bar{p}_i = C_i \bar{x}_i$. Terminal contingency equilibria are denoted by $(\bar{x}_i^c, \bar{u}_i^c)$.

B. Standing Assumptions

Assumption 1 (Exact dynamics): The closed-loop evolution of each agent is exactly described by (1). No model mismatch or external disturbance is considered.

Assumption 2 (Position invariance): The dynamics are translation invariant. For each agent i , there exists an embedding $\phi_i : \mathbb{R}^{n_p} \rightarrow \mathbb{R}^{n_i}$ such that $C_i \phi_i(\delta) = \delta$ and

$$f_i(x_i + \phi_i(\delta), u_i) = f_i(x_i, u_i) + \phi_i(\delta)$$

for all admissible (x_i, u_i) and all $\delta \in \mathbb{R}^{n_p}$.

Assumption 3 (Finite-sensing information pattern): At each time $t \in \mathbb{Z}_+$, agent i can measure its own state $x_i(t)$ and the current states $x_j(t)$ of agents $j \in \mathcal{N}_i(t)$, where $\mathcal{N}_i(t) \subseteq \mathcal{I} \setminus \{i\}$ denotes its sensing neighborhood. The reference positions, future inputs, and predicted trajectories of other agents are not available.

C. State-dependent Safe Sets

The safety mechanism is based on local safe sets in the position space. A safe set represents a region in which an agent admits a feasible contingency maneuver to an admissible safe equilibrium while remaining inside the region.

For each agent i , let Γ_i denote a deterministic state-dependent safe-set generator. For any $x_i \in \mathcal{X}_i$, $\Gamma_i(x_i)$ is the safe set generated from x_i . At time t , we write

$$\mathcal{G}_i(t) := \Gamma_i(x_i(t)) \subset \mathbb{R}^{n_p}. \quad (2)$$

The set $\mathcal{G}_i(t)$ is induced by the current state of agent i and can be computed from state information alone. Its specific construction is arbitrary as long as the requirements stated in this paper are satisfied, in particular the existence of a feasible contingency maneuver to an admissible safe equilibrium within $\mathcal{G}_i(t)$.

The set actually used to constrain the optimal control problem (OCP) is called the active safe set and is denoted by $\mathcal{S}_i(t)$. In general, the active safe set need not coincide with $\mathcal{G}_i(t)$. It may be restricted further in order to maintain safe interaction with neighboring agents. The key structural property imposed in this paper is

$$\mathcal{S}_i(t) \subseteq \mathcal{G}_i(t), \quad \forall t \in \mathbb{Z}_+.$$

Thus, the active safe set is always contained in a set that can be computed directly from the current state. This property will later enable neighboring agents to use $\mathcal{G}_i(t)$ as a conservative outer representation of $\mathcal{S}_i(t)$, without knowing the exact active safe set or its update history.

Assumption 4 (Local reconstructability): The safe-set generators Γ_j , of all agents are commonly known. Hence, whenever agent i observes the state $x_j(t)$ of an agent $j \in \mathcal{N}_i(t)$, it can reconstruct the generated safe set $\mathcal{G}_j(t) = \Gamma_j(x_j(t))$.

The contingency plan of agent i at time t consists of predicted states and inputs

$$X_i^c(t) := \{x_{i,(k|t)}^c\}_{k=0}^{N_c}, \quad U_i^c(t) := \{u_{i,(k|t)}^c\}_{k=0}^{N_c-1}, \quad (3)$$

with predicted positions $p_{i,(k|t)}^c = C_i x_{i,(k|t)}^c$.

Accounting for the physical extent of agent i , the contingency trajectory is constrained by

$$\mathbb{B}(p_{i,(k|t)}^c, r_i) \subseteq \mathcal{S}_i(t), \quad k \in \mathbb{Z}_0^{N_c}. \quad (4)$$

Definition 1 (Admissible safe equilibrium): Let $\mathcal{A} \subseteq \mathbb{R}^{n_p}$ be a safe set. A pair $(\bar{x}_i, \bar{u}_i) \in \mathcal{X}_i \times \mathcal{U}_i$ is called an admissible safe equilibrium for agent i with respect to $\mathcal{A}$ if $\bar{x}_i = f_i(\bar{x}_i, \bar{u}_i)$ and, with $\bar{p}_i := C_i \bar{x}_i$, $\mathbb{B}(\bar{p}_i, r_i) \subseteq \mathcal{A}$.

The contingency trajectory is required to terminate in an admissible safe equilibrium with respect to the active safe set $\mathcal{S}_i(t)$. Thus, the terminal contingency state satisfies

$$x_{i,(N_c|t)}^c = \bar{x}_i^c(t), \quad (5)$$

where $(\bar{x}_i^c, \bar{u}_i^c)$ is an admissible safe equilibrium with respect to $\mathcal{S}_i(t)$ in the sense of Definition 1. Once this equilibrium is reached, the agent can remain inside the active safe set by applying the constant input $\bar{u}_i^c$.

The role of the safe sets in multi-agent collision avoidance is geometric. If the active safe sets of two agents are disjoint,

$$\mathcal{S}_i(t) \cap \mathcal{S}_j(t) = \emptyset, \quad i \neq j,$$

and both agents keep their bodies inside their respective active safe sets, then their bodies are disjoint as well. Therefore, maintaining disjoint active safe sets is sufficient to certify collision avoidance. How the active safe sets are updated locally while preserving pairwise disjointness is detailed in Section IV.

III. DECENTRALIZED CONTINGENCY MPC FORMULATION

A. Nominal and Contingency Plans

Let $N_n \in \mathbb{Z}_{>0}$ and $N_c \in \mathbb{Z}_{>0}$ denote the nominal and contingency prediction horizons, respectively. The nominal horizon N_n is chosen according to the desired performance behavior, while the contingency horizon N_c must be long enough to represent a feasible fallback maneuver to an admissible safe equilibrium.

At time t , agent i optimizes a nominal state-input sequence

$$X_i^n(t) := \{x_{i,(k|t)}^n\}_{k=0}^{N_n}, \quad U_i^n(t) := \{u_{i,(k|t)}^n\}_{k=0}^{N_n-1},$$

and a contingency state-input sequence as in (3). The corresponding predicted positions are denoted by

$$p_{i,(k|t)}^n := C_i x_{i,(k|t)}^n, \quad p_{i,(k|t)}^c := C_i x_{i,(k|t)}^c.$$

Both prediction plans are initialized at the measured state,

$$x_{i,(0|t)}^n = x_{i,(0|t)}^c = x_i(t).$$

The nominal trajectory is optimized for the control objective of the agent, while the contingency trajectory is constrained to remain inside the active safe set $\mathcal{S}_i(t)$ and to terminate in an admissible safe equilibrium. The terminal contingency equilibrium

$$(\bar{x}_i^c(t), \bar{u}_i^c(t)) \in \mathcal{X}_i \times \mathcal{U}_i,$$

is included as a decision variable and is required to be admissible with respect to $\mathcal{S}_i(t)$ according to Definition 1, with the terminal condition (5).

The two prediction plans share the first input, which is applied to the real system after optimization:

$$u_i(t) = u_{i,(0|t)}^{n,*} = u_{i,(0|t)}^{c,*}. \quad (6)$$

This coupling ensures that the applied control action is nominally optimal while remaining contingency-feasible.

B. Objective Function

The local objective consists of a nominal performance term and a contingency-offset term. The nominal term is used to drive the agent towards its reference, while the contingency-offset term favors safe terminal equilibria close to the desired reference x_i^{ref} .

Let $\ell_i^n(\cdot)$ denote a nominal stage cost and $V_i^n(\cdot)$ a nominal terminal cost. Moreover, let $V_i^c(\cdot)$ denote an offset cost for the selected terminal contingency equilibrium. The objective of agent i at time t is given by

$$J_i(t) := \sum_{k=0}^{N_n-1} \ell_i^n \left(x_{i,(k|t)}^n, u_{i,(k|t)}^n \right) + V_i^n \left(x_{i,(N_n|t)}^n, x_i^{\text{ref}} \right) + \gamma V_i^c \left(\bar{x}_i^c(t), x_i^{\text{ref}} \right),$$

where $\gamma > 0$ weights the preference for terminal contingency equilibria that are close to the reference. It can be shown, that for a large enough γ the contingency terminal state is optimal with respect to the global reference x_i^{ref} , see [4, Lemma 1].

C. Safety and Tail-Containment Constraints

By (4) the contingency trajectory must remain inside the active safe set $\mathcal{S}_i(t)$, including the physical radius of the agent. This constraint certifies safety of the contingency plan with respect to the active safe set at the current time t .

For recursive feasibility, however, it is not sufficient to certify only the current contingency plan. After the first input has been applied, the remaining tail of the contingency trajectory must still be compatible with the safe set available at the successor state $x_i(t^+)$. Therefore, for each prediction step k , the remaining contingency tail from k onward is required to be contained in a safe set that can be generated from the predicted state $x_{i,(k|t)}^c$.

Let

$$\mathcal{G}_{i,(k|t)}^c := \Gamma_i(x_{i,(k|t)}^c)$$

denote the safe set generated from the predicted contingency state at stage k . The tail-containment condition is

$$\mathbb{B}(p_{i,(\ell|t)}^c, r_i) \subseteq \mathcal{G}_{i,(k|t)}^c, \quad k \in \mathbb{Z}_0^{N_c}, \quad \ell \in \mathbb{Z}_k^{N_c}.$$

This condition ensures that, after the first input is applied, the shifted contingency tail remains contained in the state-induced safe set generated at the successor state. It is therefore the key compatibility condition used in the recursive-feasibility argument.

D. Lyapunov-Type Constraint

To obtain a Lyapunov-type convergence property, the contingency plan is also constrained by a decreasing cost bound. Let ℓ_i^c denote a nonnegative contingency stage cost. Define the contingency cost

$$J_i^c(t) := \sum_{k=0}^{N_c-1} \ell_i^c \left(x_{i,(k|t)}^c - \bar{x}_i^c(t), u_{i,(k|t)}^c - \bar{u}_i^c(t) \right) + V_i^c \left(\bar{x}_i^c(t), x_i^{\text{ref}} \right).$$

A scalar bound $\hat{J}_i^c(t) \in \mathbb{R}_+$ is maintained recursively, and the local MPC problem imposes

$$J_i^c(t) \leq \hat{J}_i^c(t).$$

After applying the shared first input, the bound is updated according to the shifted contingency tail,

$$\hat{J}_i^c(t^+) := J_i^{c,*}(t) - \ell_i^c \left(x_i(t) - \bar{x}_i^{c,*}(t), u_i(t) - \bar{u}_i^{c,*}(t) \right).$$

This update is independent of the particular safe-set construction. Once recursive feasibility of the contingency candidate has been established, the standard shifted-tail argument yields monotone decrease of the optimal contingency cost.

E. Local Finite-Horizon Optimal Control Problem

At each time t , agent i solves the following local finite-horizon optimal control problem:

$$\min_{\substack{x_{i,(0|t)}^{n,c}, U_{i,(0|t)}^{n,c}, \\ \bar{x}_i^c(t), \bar{u}_i^c(t)}} J_i(t) \quad (7a)$$

$$\text{s.t. } x_{i,(0|t)}^n = x_{i,(0|t)}^c = x_i(t) \quad (7b)$$

$$u_{i,(0|t)}^n = u_{i,(0|t)}^c \quad (7c)$$

$$x_{i,(k+1|t)}^n = f_i(x_{i,(k|t)}^n, u_{i,(k|t)}^n), \quad k \in \mathbb{Z}_0^{N_n-1} \quad (7d)$$

$$x_{i,(k+1|t)}^c = f_i(x_{i,(k|t)}^c, u_{i,(k|t)}^c), \quad k \in \mathbb{Z}_0^{N_c-1} \quad (7e)$$

$$x_{i,(k+1|t)}^n \in \mathcal{X}_i, \quad u_{i,(k|t)}^n \in \mathcal{U}_i, \quad k \in \mathbb{Z}_0^{N_n-1} \quad (7f)$$

$$x_{i,(k+1|t)}^c \in \mathcal{X}_i, \quad u_{i,(k|t)}^c \in \mathcal{U}_i, \quad k \in \mathbb{Z}_0^{N_c-1} \quad (7g)$$

$$\mathbb{B}(p_{i,(k|t)}^c, r_i) \subseteq \mathcal{S}_i(t), \quad k \in \mathbb{Z}_0^{N_c} \quad (7h)$$

$$x_{i,(N_c|t)}^c = \bar{x}_i^c(t) \quad (7i)$$

$$\bar{x}_i^c(t) = f_i(\bar{x}_i^c(t), \bar{u}_i^c(t)), \quad (\bar{x}_i^c(t), \bar{u}_i^c(t)) \in \mathcal{X}_i \times \mathcal{U}_i \quad (7j)$$

$$\mathbb{B}(p_{i,(k|t)}^c, r_i) \subseteq \mathcal{S}_i(t), \quad \bar{p}_i^c(t) := C_i \bar{x}_i^c(t) \quad (7k)$$

$$\mathbb{B}(p_{i,(\ell|t)}^c, r_i) \subseteq \Gamma_i(x_{i,(k|t)}^c), \quad k \in \mathbb{Z}_0^{N_c}, \quad \ell \in \mathbb{Z}_k^{N_c}, \quad (7l)$$

$$J_i^c(t) \leq \hat{J}_i^c(t). \quad (7m)$$

IV. SAFE SET CONSTRUCTION

This section defines the active safe sets $\mathcal{S}_i(t)$ used in (7). Agent i first constructs its own generated safe set $\mathcal{G}_i(t)$ and, for every sensed neighbor $j \in \mathcal{N}_i(t)$, reconstructs $\mathcal{G}_j(t)$ from the measured state $x_j(t)$.

Whenever the generated safe sets are disjoint,

$$\mathcal{G}_i(t) \cap \mathcal{G}_j(t) = \emptyset,$$

agent i locally constructs a pairwise separator. Let $n_{ij}(t)$ denote a separating unit direction from $\mathcal{G}_i(t)$ towards $\mathcal{G}_j(t)$ and define

$$\alpha_i(t) := \max_{p \in \mathcal{G}_i(t)} n_{ij}(t)^\top p, \quad \alpha_j(t) := \min_{p \in \mathcal{G}_j(t)} n_{ij}(t)^\top p.$$

The separating boundary is placed at

$$b_{ij}(t) := \frac{1}{2} (\alpha_i(t) + \alpha_j(t)),$$

yielding

$$\mathcal{H}_{ij}^{\text{new}}(t) := \{p \in \mathbb{R}^{n_p} \mid n_{ij}(t)^\top p < b_{ij}(t)\}.$$

Agent j performs the corresponding construction locally. The stored separator is updated whenever the generated safe sets are disjoint and otherwise retained:

$$\mathcal{H}_{ij}(t) = \begin{cases} \mathcal{H}_{ij}^{\text{new}}(t), & \mathcal{G}_i(t) \cap \mathcal{G}_j(t) = \emptyset, \\ \mathcal{H}_{ij}(t-1), & \mathcal{G}_i(t) \cap \mathcal{G}_j(t) \neq \emptyset, \end{cases} \quad (8)$$

whenever a valid previous separator exists.

Define the currently overlapping sensed neighbors by

$$\mathcal{N}_i^{\text{ov}}(t^+) := \{j \in \mathcal{N}_i(t^+) \mid \mathcal{G}_i(t^+) \cap \mathcal{G}_j(t^+) \neq \emptyset\}.$$

Let $R_{\max}$ uniformly bound the spatial extent of the generated safe sets. The sensing condition

$$R_{\text{sense}} \geq 2R_{\max} \quad (9)$$

ensures that generated safe sets cannot overlap while the corresponding agents are outside each other's sensing range.

A special case occurs if a neighbor is first sensed at t^+ with already overlapping generated safe sets, i.e., $j \notin \mathcal{N}_i(t)$ and $j \in \mathcal{N}_i^{\text{ov}}(t^+)$. Then no valid separator is available. By (9), $\mathcal{G}_i(t) \cap \mathcal{G}_j(t) = \emptyset$, and the agents initialize the bootstrap restrictions

$$\mathcal{B}_{ij} := \mathcal{G}_i(t), \quad \mathcal{B}_{ji} := \mathcal{G}_j(t).$$

These restrictions are retained until the generated safe sets become disjoint again and regular separators are initialized.

Let $\mathcal{N}_i^{\text{sep}}(t^+)$ denote the overlapping neighbors for which a valid stored separator exists and $\mathcal{N}_i^{\text{boot}}(t^+)$ those for which a bootstrap restriction is active. Agent i then locally constructs

$$\mathcal{S}_i(t^+) := \mathcal{G}_i(t^+) \cap \bigcap_{j \in \mathcal{N}_i^{\text{sep}}(t^+)} \mathcal{H}_{ij}(t^+) \cap \bigcap_{j \in \mathcal{N}_i^{\text{boot}}(t^+)} \mathcal{B}_{ij}. \quad (10)$$

Consequently, $\mathcal{S}_i(t) \subseteq \mathcal{G}_i(t)$, $\forall i \in \mathcal{I}$, $t \in \mathbb{Z}_+$.

Hence, $\mathcal{G}_i(t)$ remains a state-dependent outer representation of the active safe set. The construction requires only current sensed neighbor states and locally stored separators or bootstrap restrictions; no neighbor trajectories or neighbor safe-set update histories are required.

V. CLOSED-LOOP GUARANTEES

A. Assumptions

Assumption 5 (Initial feasibility and separation): At $t = 0$, the local MPC problem is feasible for every agent $i \in \mathcal{I}$. Moreover,

$$\mathcal{S}_i(0) \subseteq \mathcal{G}_i(0), \quad \mathcal{S}_i(0) \cap \mathcal{S}_j(0) = \emptyset, \quad i \neq j.$$

Assumption 6 (Sensing completeness): Every pair with overlapping generated safe sets is mutually detected, i.e.,

$$\mathcal{G}_i(t) \cap \mathcal{G}_j(t) \neq \emptyset \implies j \in \mathcal{N}_i(t), \quad i \in \mathcal{N}_j(t).$$

B. Recursive Feasibility and Collision Avoidance

Remark 1 (Nominal completion): Whenever a feasible contingency candidate exists, there also exists a nominal candidate satisfying (7b), (7c), (7d), and (7f).

Lemma 1 (Safe-set containment and separation): Under Assumptions 5 and 6, the active safe sets satisfy

$$\mathcal{S}_i(t) \subseteq \mathcal{G}_i(t), \quad \mathcal{S}_i(t) \cap \mathcal{S}_j(t) = \emptyset, \quad i \neq j, \quad \forall t \in \mathbb{Z}_+. \quad (11)$$

Proof: Containment follows directly from (10).

For pairwise separation, consider arbitrary $i \neq j$. If $\mathcal{G}_i(t) \cap \mathcal{G}_j(t) = \emptyset$, then $\mathcal{S}_i(t) \cap \mathcal{S}_j(t) = \emptyset$ follows immediately from $\mathcal{S}_i(t) \subseteq \mathcal{G}_i(t)$ and $\mathcal{S}_j(t) \subseteq \mathcal{G}_j(t)$.

If a regular separator is active, then

$$\mathcal{S}_i(t) \subseteq \mathcal{H}_{ij}(t), \quad \mathcal{S}_j(t) \subseteq \mathcal{H}_{ji}(t),$$

and the separating construction gives $\mathcal{H}_{ij}(t) \cap \mathcal{H}_{ji}(t) = \emptyset$.

Finally, if the bootstrap rule is active, then

$$\mathcal{S}_i(t) \subseteq \mathcal{B}_{ij}, \quad \mathcal{S}_j(t) \subseteq \mathcal{B}_{ji}.$$

At bootstrap initialization, $\mathcal{B}_{ij} = \mathcal{G}_i(\tau)$ and $\mathcal{B}_{ji} = \mathcal{G}_j(\tau)$ for a time τ at which the pair was not sensed. Hence, $\mathcal{B}_{ij} \cap \mathcal{B}_{ji} = \emptyset$ by (9). Thus the active safe sets remain pairwise disjoint. ■

Theorem 1 (Recursive feasibility): Suppose Assumptions 1, 5, and 6 hold and $\ell_i^c(0,0) = 0$. Then all local MPC problems are recursively feasible, i.e., feasibility at time t implies feasibility at t^+ for all $t \in \mathbb{Z}_+$.

Proof: Fix an arbitrary agent i and let an optimal solution at time t be given. Since the applied input is the shared first contingency input and the dynamics are exact,

$$x_i(t^+) = x_{i,(1|t)}^{c,*}. \quad (12)$$

Consider the standard shifted contingency candidate

$$\tilde{x}_{i,(k|t^+)}^c = x_{i,(k+1|t)}^{c,*}, \quad k \in \mathbb{Z}_0^{N_c-1}, \quad (13)$$

$$\tilde{x}_{i,(N_c|t^+)}^c = \bar{x}_i^{c,*}(t), \quad (14)$$

$$\tilde{u}_{i,(k|t^+)}^c = u_{i,(k+1|t)}^{c,*}, \quad k \in \mathbb{Z}_0^{N_c-2}, \quad (15)$$

$$\tilde{u}_{i,(N_c-1|t^+)}^c = \bar{u}_i^{c,*}(t), \quad (16)$$

with $\tilde{x}_i^c(t^+) = \bar{x}_i^{c,*}(t)$, $\tilde{u}_i^c(t^+) = \bar{u}_i^{c,*}(t)$.

Together with (12), the contingency dynamics, state/input constraints, and terminal-equilibrium constraints follow directly from feasibility at time t .

It remains to verify the constraints affected by the safe-set update. First, (71) at time t with $k = 1$ gives

$$\mathbb{B}(\tilde{p}_{i,(k|t^+)}^c, r_i) \subseteq \Gamma_i(x_{i,(1|t)}^{c,*}) = \mathcal{G}_i(t^+), \quad k \in \mathbb{Z}_0^{N_c}. \quad (17)$$

Moreover, since the shifted candidate consists only of the remaining states of the feasible contingency trajectory at time t , including the repeated terminal equilibrium,

$$\mathbb{B}(\tilde{p}_{i,(k|t^+)}^c, r_i) \subseteq \mathcal{S}_i(t), \quad k \in \mathbb{Z}_0^{N_c}. \quad (18)$$

Every regular separator used in the construction of $\mathcal{S}_i(t^+)$ contains $\mathcal{S}_i(t)$. Indeed, if it was already active at time t , this follows directly from the previous safe-set construction; if it is newly activated at t^+ , it was constructed from the disjoint generated safe sets at time t and hence contains $\mathcal{G}_i(t) \supseteq \mathcal{S}_i(t)$. Similarly, an already active bootstrap restriction contains $\mathcal{S}_i(t)$, whereas a newly initialized one satisfies

$$\mathcal{B}_{ij} = \mathcal{G}_i(t) \supseteq \mathcal{S}_i(t).$$

Together with (17)–(18) and the update (10), this yields

$$\mathbb{B}(\tilde{p}_{i,(k|t^+)}^c, r_i) \subseteq \mathcal{S}_i(t^+), \quad k \in \mathbb{Z}_0^{N_c}.$$

Hence, the active safe-set containment constraint is feasible at t^+ ; the terminal safe-set constraint follows from $k = N_c$.

It remains to verify tail containment. For each prediction stage define the remaining shifted contingency tail by

$$\tilde{\mathcal{T}}_{i,k}(t^+) := \bigcup_{\ell=k}^{N_c} \mathbb{B}(\tilde{p}_{i,(\ell|t^+)}^c, r_i).$$

For every $k \in \mathbb{Z}_0^{N_c-1}$, the shift gives

$$\tilde{\mathcal{T}}_{i,k}(t^+) = \bigcup_{\ell=k+1}^{N_c} \mathbb{B}(p_{i,(\ell|t)}^{c,*}, r_i),$$

where repetition of the terminal equilibrium does not change the union. Applying (71) at time t with prediction stage $k+1$ therefore yields

$$\tilde{\mathcal{T}}_{i,k}(t^+) \subseteq \Gamma_i(x_{i,(k+1|t)}^{c,*}) = \Gamma_i(\tilde{x}_{i,(k|t^+)}^c).$$

For $k = N_c$, the same property follows directly from (71) at the terminal stage. Thus, the tail-containment constraint is feasible at t^+ .

Finally, the terminal equilibrium is unchanged and the appended equilibrium stage contributes zero stage cost. Hence,

$$\begin{aligned} \tilde{J}_i^c(t^+) &= J_i^{c,*}(t) - \ell_i^c(x_i(t) - \bar{x}_i^{c,*}(t), u_i(t) - \bar{u}_i^{c,*}(t)) \\ &= \hat{J}_i^c(t^+), \end{aligned} \quad (19)$$

so the Lyapunov-bound constraint is feasible as well.

By Remark 1, the feasible contingency candidate constructed above admits a corresponding nominal completion with the same first input. Hence, the complete local MPC problem is feasible at t^+ . Since feasibility holds at $t = 0$ by Assumption 5, induction establishes recursive feasibility for all $t \in \mathbb{Z}_+$. ■

Theorem 2 (Collision avoidance): Under the assumptions of Theorem 1, the closed-loop execution is collision-free for all $t \in \mathbb{Z}_+$.

Proof: Recursive feasibility implies $\mathbb{B}(p_i(t), r_i) \subseteq \mathcal{S}_i(t)$. By Lemma 1, the active safe sets are pairwise disjoint. Hence,

$$\mathbb{B}(p_i(t), r_i) \cap \mathbb{B}(p_j(t), r_j) = \emptyset, \quad i \neq j. \quad \blacksquare$$

Corollary 1 (Plug-and-play operation): If a joining agent has a feasible local MPC problem and an initial active safe set disjoint from all active agents, and Assumptions 6 remain satisfied, recursive feasibility and collision avoidance are preserved under join and leave events.

C. Lyapunov-Type Convergence

By Theorem 1,

$$J_i^{c,*}(t^+) \leq J_i^{c,*}(t) - \ell_i^c(x_i(t) - \bar{x}_i^{c,*}(t), u_i(t) - \bar{u}_i^{c,*}(t)).$$

Under the standard arguments of Lyapunov stability theory [11], the shifted-tail Lyapunov argument applies unchanged. The corresponding proof is given in [10], [4] and is therefore not repeated here.

VI. SIMULATION STUDY

The proposed framework is evaluated in an autonomous-driving scenario in which multiple vehicles traverse a four-way intersection, see Fig. 1. The setup incorporates nonholonomic vehicle dynamics, lane constraints, different driving maneuvers, and a continuously changing set of active agents. A demonstration video illustrating the intersection scenario is available at <https://youtu.be/t0YpBUVS6nU>.

A. Setup

Each vehicle is modeled by the kinematic bicycle model

$$\dot{p}_x = v \cos(\psi), \quad \dot{p}_y = v \sin(\psi), \quad \dot{\psi} = \frac{v}{l} \tan(\delta), \quad \dot{v} = a, \quad (20)$$

with state x and input u :

$$x = [p_x, p_y, \psi, v]^\top \quad u = [a, \delta]^\top. \quad (21)$$

Here, p_x and p_y denote the Cartesian position, ψ the vehicle heading, v the longitudinal velocity, a the longitudinal acceleration, and δ the steering angle. The wheelbase is set to $l = 1$ m. The continuous-time dynamics are discretized using a fourth-order Runge–Kutta scheme with a sampling time of $T_s = 0.2$ s.

For collision avoidance, each vehicle is represented by a Euclidean disc of radius $r_{\text{agent}} = 0.4$ m. The state and input constraints are

$$0 \frac{m}{s} \leq v \leq 3 \frac{m}{s}, \quad -2 \frac{m}{s^2} \leq a \leq 1 \frac{m}{s^2}, \quad \text{and } |\delta| \leq 28^\circ. \quad (22)$$

Furthermore, the vehicle position is constrained to the 20×20 m² workspace. The contingency prediction is subject to hard lane-keeping constraints, whereas the nominal trajectory employs softened lane constraints to retain performance flexibility.

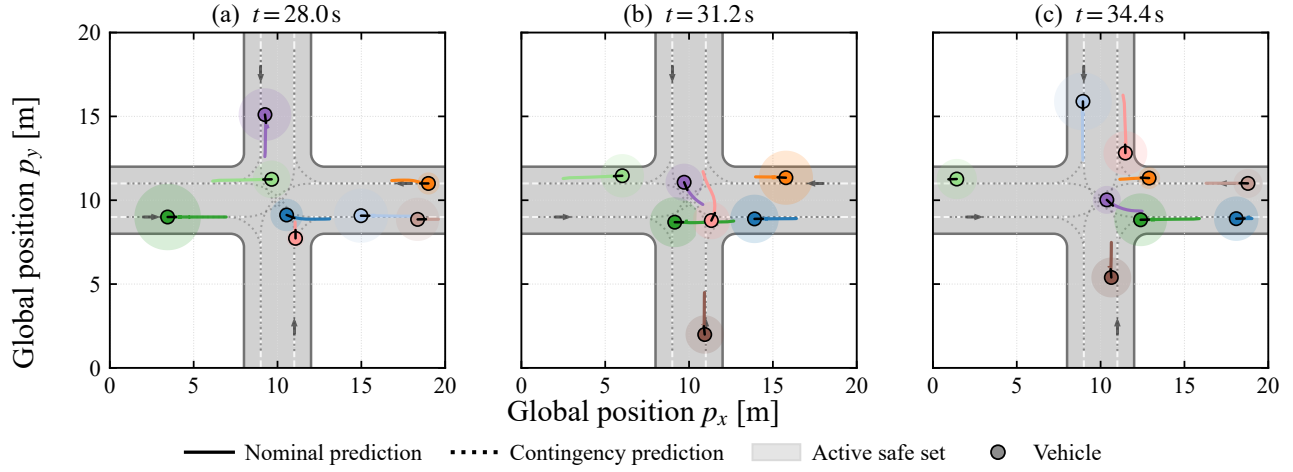


Fig. 1. Representative snapshots of the closed-loop intersection scenario at different timesteps t . Solid lines denote the nominal predictions, dotted lines the contingency predictions, and shaded regions the locally active safe sets. The driving maneuver of each vehicle is unknown to all other agents.

Vehicles enter the intersection from all four directions and may proceed straight, turn left, or turn right. New vehicles are spawned every 2 s whenever sufficient entrance clearance is available, while completed vehicles leave the active agent set $\mathcal{I}$. Maneuvers are sampled with probabilities 0.5, 0.25, and 0.25, respectively, until 50 vehicles have traversed the intersection.

Following the construction in Section IV, the generated safe set of agent i is chosen such that it contains a complete stopping maneuver after the shared first input. Let

$$v_i^+(t) = \min \{v_i(t) + a_{\max}T_s, v_{\max}\} \quad (23)$$

denote the largest velocity attainable after one time step. The radius of the generated safe set is then given by

$$R_i(t) = r_{\text{agent}} + \frac{v_i(t) + v_i^+(t)}{2}T_s + \frac{(v_i^+(t))^2}{2|a_{\min}|}. \quad (24)$$

The second term bounds the displacement during the shared first input under maximum acceleration, while the third term corresponds to the subsequent braking distance. Since the Euclidean displacement from the current position cannot exceed the traveled path length, the stopping-distance bound remains valid independently of the steering motion. The generated safe set is therefore chosen as

$$\mathcal{G}_i(t) = \mathcal{B}(p_i(t), R_i(t)). \quad (25)$$

The active safe sets $\mathcal{S}_i(t)$ are constructed via the update rule from Section IV.

For the selected bounds, the maximum generated radius is $R_{\max} = 3.25$ m and the finite sensing range is chosen as

$$R_{\text{sense}} = 2R_{\max} = 6.5 \text{ m}. \quad (26)$$

The nominal prediction horizon is set to $N_n = 10$. The contingency horizon is selected such that one shared first input can always be followed by sufficiently many braking

inputs to reach zero velocity,

$$N_c = 1 + \left\lceil \frac{v_{\max}}{|a_{\min}|T_s} \right\rceil = 9. \quad (27)$$

All local nonlinear MPC problems are implemented in CasADi and solved using IPOPT [12].

B. Results

Figure 1 illustrates three representative time steps of the closed-loop simulation. The displayed situations highlight interactions between vehicles approaching the intersection from different directions and following mutually unknown maneuvers. The contingency predictions remain confined to the resulting admissible regions, while the nominal predictions retain sufficient flexibility to efficiently follow the assigned routes through the intersection.

The complete closed-loop behavior is summarized in Fig. 2, which shows the executed trajectories of all 50 vehicles. Despite repeated arrivals and departures and simultaneous straight, left-turn, and right-turn maneuvers, all vehicles successfully traverse the intersection and leave the workspace through their assigned exits. In particular, vehicles remain close to their prescribed lanes while locally coordinating their motion only through the state-based safe-set construction.

The minimum center-to-center distance observed over the complete simulation is

$$d_{\min} = 1.026 \text{ m}, \quad (28)$$

which remains above the physical collision threshold

$$d_{\text{col}} = 2r_{\text{agent}} = 0.8 \text{ m}. \quad (29)$$

Thus, no collision occurs throughout the complete experiment despite the plug-and-play operation of vehicles and the absence of communicated maneuver intentions.

Finally, the contingency costs, normalized with respect to the initial value of each individual vehicle, exhibit the

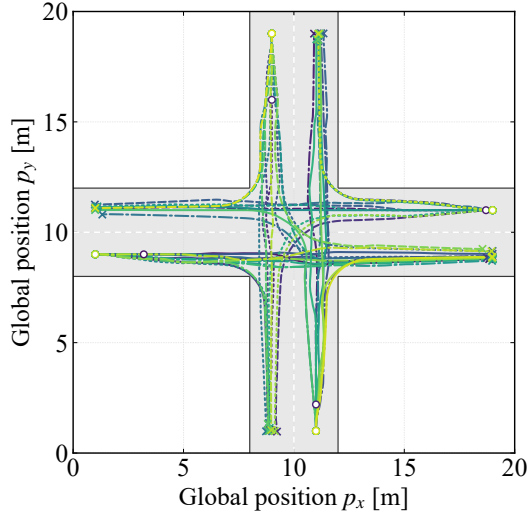


Fig. 2. Closed-loop trajectories of all 50 vehicles traversing the intersection. Each color corresponds to an individual vehicle. All agents successfully reach their assigned exit while remaining collision-free.

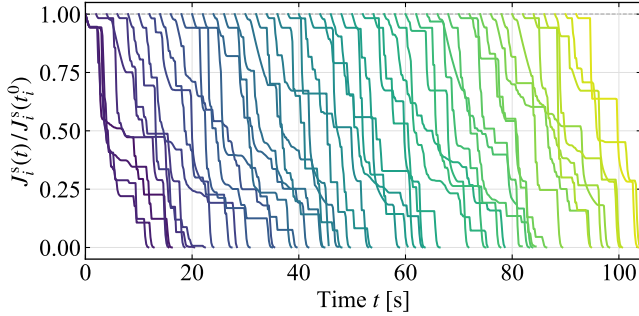


Fig. 3. Closed-loop trajectories of all 50 vehicles traversing the intersection. Each color corresponds to an individual vehicle, and t_i^0 denotes the joining time of agent i . All agents successfully reach their assigned exit while remaining collision-free.

Lyapunov-type behavior enforced by the contingency MPC formulation, see Fig. 3.

Overall, the simulation demonstrates that the proposed decentralized scheme can handle nonlinear vehicle dynamics, different and mutually unknown driving maneuvers, and dynamically changing intersection traffic while retaining a purely state-based information pattern.

VII. CONCLUSION AND DISCUSSION

This paper introduced the first provable decentralized MPC under finite sensing and a state-only information pattern. By maintaining a state-dependent outer representation of the active safe sets, the proposed scheme avoids history-dependent neighbor reconstruction while preserving recursive feasibility, collision avoidance, and Lyapunov-type convergence. The intersection study demonstrates the applicability of the framework to nonlinear vehicle dynamics, unknown maneuver intentions, and plug-and-play multi-agent operation.

The present guarantees rely on exact agent models and complete detection of potentially interacting agents. Future

work will therefore address robustness against model uncertainty and disturbances, as well as experimental validation and larger-scale real-time implementations.

REFERENCES

- [1] P. Fiorini and Z. Shiller, "Motion planning in dynamic environments using velocity obstacles," *The International Journal of Robotics Research*, vol. 17, no. 7, pp. 760–772, 1998.
- [2] J. van den Berg, S. J. Guy, M. Lin, and D. Manocha, "Reciprocal n-body collision avoidance," *The International Journal of Robotics Research*, vol. 30, no. 4, pp. 371–383, 2011.
- [3] W. B. Dunbar and R. M. Murray, "Distributed receding horizon control for multi-vehicle formation stabilization," *Automatica*, vol. 42, no. 4, pp. 549–558, 2006.
- [4] D. Saccani, L. Fagiano, M. N. Zeilinger, and A. Carron, "Model predictive control for multi-agent systems under limited communication and time-varying network topology," arXiv preprint arXiv:2304.01649, 2023.
- [5] P. D. Christofides, R. Scattolini, D. Muñoz de la Peña, and J. Liu, "Distributed model predictive control: A tutorial review and future research directions," *Computers & Chemical Engineering*, vol. 51, pp. 21–41, 2013.
- [6] Z. Niu, X. Jia, and W. Yao, "Communication-free mpc-based neighbors trajectory prediction for distributed multi-uav motion planning," *IEEE Access*, vol. 10, pp. 13 481–13 489, 2022.
- [7] E. L. Zhu, Y. R. Stürz, U. Rosolia, and F. Borrelli, "Trajectory optimization for nonlinear multi-agent systems using decentralized learning model predictive control," in *2020 59th IEEE Conference on Decision and Control (CDC)*, 2020, pp. 6198–6203.
- [8] J. P. Alsterda, M. Brown, and J. C. Gerdes, "Contingency model predictive control for automated vehicles," in *Proceedings of the American Control Conference*, 2019.
- [9] G. Schildbach, "Contingency model-based control (CMC) for communicationless cooperative collision avoidance in robot swarms," 2025. [Online]. Available: <https://arxiv.org/abs/2512.20391>
- [10] M. Studt and G. Schildbach, "Decentralized contingency MPC based on safe sets for nonlinear multi-agent collision avoidance," 2026. [Online]. Available: <https://arxiv.org/abs/2605.10738>
- [11] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. M. Scokaert, "Constrained model predictive control: Stability and optimality," *Automatica*, vol. 36, no. 6, pp. 789–814, 2000.
- [12] A. Wächter and L. T. Biegler, "On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming," *Mathematical Programming*, vol. 106, no. 1, pp. 25–57, 2006.