

Visible-Reachable Workspace for Perception-Aware Humanoid Design

Boxi Xia, Zijiang Yang, Ryan Shin, Bokuan Li, Eric Wun-Hao Lu, Jacob Lee, Jiaxun Liu, Boyuan Chen

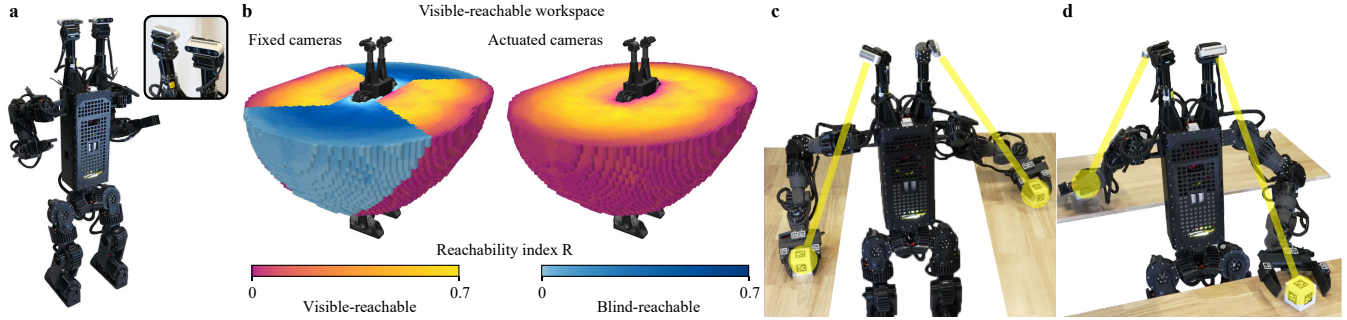


Fig. 1. From reachable space to visually usable manipulation space. (a) Duke Humanoid V2 carries two independently actuated yaw-pitch RGB-D cameras, allowing gaze to move independently of torso heading. (b) Visible-reachable workspace (VRW) distinguishes arm-reachable voxels that are visible (plasma) from those that are reachable but blind (blue). Shade encodes orientation reachability R . On this platform, camera actuation raises visible-reachable coverage from 38% to 97%. (c,d) Two independent views can be assigned to spatially separated work regions during left/right and front/back manipulation.

Abstract—Workspace analysis measures where a robot can place its end effector. For visually guided manipulation, reachability alone is insufficient: a kinematically reachable target may not be visible in the specific pose required to reach it. The robot must then redirect its sensing or move its body to acquire a view, turning a perception limitation into additional motion. Existing humanoids largely inherit this limitation when copying human form factors. We introduce the *visible-reachable workspace* (VRW), a design-stage measure that conditions visibility on feasible reaching configurations and extends it to concurrent visibility of spatially separated work regions. We apply VRW by building a 31-DoF humanoid with independently actuated RGB-D cameras. On the same robot, camera articulation increases visible-reachable coverage from 38% to 97%. With actuated camera layouts, a second camera raises pairwise coverage from 0.45 to 0.95, while a third changes it only to 0.97. In a controlled two-target reach-and-grasp benchmark, our dual-actuated design reduces mean completion time by 17% and mechanical energy by 19% relative to the same robot with its cameras fixed. Hardware experiments demonstrate simultaneous observation and manipulation of front/back and left/right target pairs without torso reorientation. The results suggest that reachability becomes a more informative design quantity for perception-driven humanoid manipulation when it is evaluated together with the sensing configurations that make the reachable space observable. We will open-source all software and the humanoid hardware design. Our website is <https://generalroboticslab.com/DukeHumanoidv2>.

I. INTRODUCTION

Reachability is one of the classical measures for describing a robot’s manipulation capability [1], [2]. However, for a perception-driven humanoid robot that relies on onboard sensors, this geometric question is incomplete. A target

can lie inside the arm workspace while remaining outside every available camera view at the configurations that realize the reach. Existing humanoids inherit this mismatch from human form factors, with broad arm workspaces paired with constrained vision concentrated in the head or the chest. The mechanism can therefore reach a target that the perception system cannot directly observe, leaving a perception-driven manipulation stack unable to localize, monitor, or plan around the target without first changing the sensing geometry.

This gap matters increasingly as humanoid control becomes more perception-dependent. Whether the downstream controller is model-based or learned, manipulation commonly relies on visual estimates of targets, obstacles, and task progress. When sensing and manipulation geometry are poorly matched, the robot must compensate by redirecting a camera, rotating its torso, or walking to a new viewpoint. Thus, a limitation that appears to be perceptual at design time can become whole-body motion at execution time.

The problem becomes more prominent in tasks spanning multiple work regions. For example, a robot may need to work across two benches or shelves, or interact with a person while monitoring another task. Steerable camera heads [3]–[5] can redirect gaze from one region to the other, but their cameras are aimed at a common target, providing only one viewing direction at a time. Therefore, one steerable view may provide high single-target visibility while still forcing sequential sensing or frequent body reorientation when two separated regions matter at once. Omnidirectional or distributed sensors provide broader passive coverage [6]–[8] but require more sensors and greater computational power.

We introduce the *visible-reachable workspace* (VRW) to study sensing and manipulation capability as a coupled design principle. VRW starts from the conventional reachable workspace and retains only targets that can also be observed

*All authors are from Duke University. This work is supported by DARPA FoundSci program under award HR00112490372, DARPA TIAMAT program under award HR00112490419, ARO under award W911NF2410405, ARL STRONG program under awards W911NF2320182, W911NF2220113, and W911NF242021.

from a feasible reaching configuration. The definition is task-dependent, which means joints that are required to realize the active manipulation are distinguished from joints that remain independently available to aim cameras. This distinction is important for cameras placed on the manipulators. For example, a wrist-mounted camera could be included in the visibility model, but its pose is coupled to the arm configuration used for the current reach. Hence, it is not treated as an independently steerable gaze degree of freedom. In contrast, a camera gimbal that does not affect the end-effector pose can contribute independent sensing actuation. We further extend VRW to a manipulation target paired with a second region of interest, capturing whether a camera layout can maintain concurrent views of separated regions.

We use these measures to guide and evaluate the sensing layout of a 31-DoF quasi-direct-drive (QDD) humanoid with two independently actuated yaw-pitch RGB-D cameras (Fig. 1a). Across several existing humanoid embodiments, the analysis reveals a gap between what the arms can reach and what the onboard cameras can observe. Under our common geometric evaluation, the visible-reachable fraction ranges from 16% for the fixed-head Unitree G1 to 48–76% for platforms with an actuated neck, including PAL Talos, Booster T1, Fourier GR-3, and Aptronik Apollo. On Duke Humanoid V2, independently actuating the cameras raises this fraction from 38% with the same cameras fixed to 97% (Fig. 1b).

Single-target coverage, however, captures only part of the sensing problem. When two spatially separated regions must be observed, a steerable but shared viewing direction remains coupled. On Duke Humanoid V2, pairwise coverage rises from 0.45 with one independently actuated camera to 0.95 with two, while a third camera adds little, reaching 0.97. The geometric deficit also appears during execution. In controlled two-target simulations, the dual-actuated configuration completes successful tasks 17% faster and uses 19% less mechanical energy than the same robot with its cameras fixed. The reduction occurs across search, approach, and manipulation time, suggesting a direct physical consequence of blind-but-reachable space. When the eyes cannot acquire the workspace, the body must move instead. Our physical experiments reproduce the intended dual-region behavior in front/back and left/right manipulation (Fig. 1c,d).

II. RELATED WORK

Reachability as a robot capability. Workspace and capability maps summarize where a manipulator can reach and, in richer formulations, which end-effector orientations are feasible [1], [2]. These representations are useful for mechanism evaluation, base placement, and grasp planning, but the usual reachable set does not encode whether an onboard sensor can observe the target from a feasible reaching configuration. For visually guided manipulation, this omission can make geometric reachability an optimistic measure of locally usable workspace.

Visibility-aware manipulation and active vision. Prior work has coupled visibility with action at planning or control

time. Mightability maps combine reachability and visibility for human-robot perspective taking [13]. MoMaGen checks reachability and visibility while sampling base and head configurations [14], and visibility-aware controllers explicitly preserve line of sight during whole-body motion [15]. Active-vision systems redirect a camera, stereo pair, or pan-tilt head toward task-relevant regions [3], [16]–[19], including convergent gaze systems such as HelpMate [4] and iCub [5]. These methods demonstrate the value of moving the sensor during a task. Our emphasis is complementary. We evaluate the sensor arrangement itself, before execution, by asking how its coverage range overlaps the robot’s manipulation capability.

Sensor layout and humanoid perception. Humanoid platforms span human-mimetic, compliant, learning-oriented, and locomotion-efficient designs [20]–[26]. Their onboard perception is commonly fixed to the torso or head, or moved through a shared neck. Other systems broaden coverage with omnidirectional or distributed sensing [6], [7], while Argus uses active multi-camera perception on a non-humanoid platform [8]. Camera-planning and workcell-design methods optimize camera poses or fixed coverage using scene and optical constraints [27], [28]. We propose a design-stage measure of how humanoid onboard camera placement and articulation interact with the workspace of its arms, including whether separated regions can be viewed concurrently.

III. VISIBLE-REACHABLE WORKSPACE

VRW begins with the classical fixed-base reachable workspace and asks which of those reaches are supported by the robot’s onboard sensing. The floating base is fixed at a nominal stance during workspace analysis. This excludes locomotion and isolates the relationship between the robot’s arm reach and onboard sensing from a given body pose. Allowing the base to move would confound this geometric property with the robot’s ability to acquire a new viewpoint by walking, which we evaluate separately in the dynamic experiments (Section V).

Task-relative configuration partition. Let $q \in \mathcal{Q} \subset \mathbb{R}^n$ denote the robot configuration and let $\mathcal{Q}^{\text{feas}}$ contain configurations satisfying the joint limits and self-collision constraints used by the inverse-kinematics solver. Consider a task with active end-effectors A (one hand for unimanual analysis and both hands when evaluating the union of their local workspaces). For end effector i , let $f_i(q) \in \mathbb{R}^3$ denote its position, and for camera k let $g_k(q) \in \text{SE}(3)$ denote its pose.

The degrees of freedom available for sensing depend on the manipulation being evaluated. We therefore partition the configuration as $q = (q_m, q_p, q_0)$, where q_m contains every joint on which any active end-effector pose depends, q_p contains the remaining joints on which at least one camera pose depends, and q_0 contains all other joints, held at specified nominal values. The assignment gives manipulation priority. If a joint affects both an active end effector and a camera, it belongs to q_m rather than q_p .

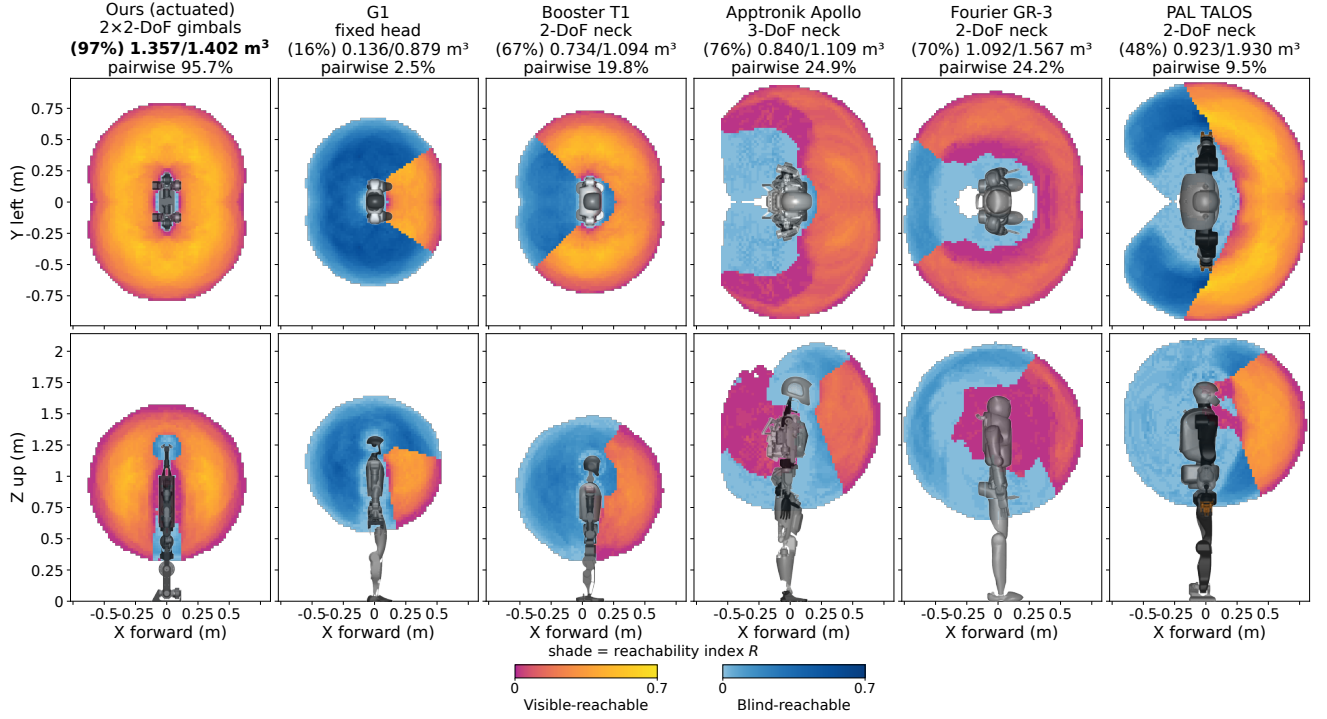


Fig. 2. **Visible-reachable workspace.** Collision-free IK is solved at each 20 mm target grid point for 64 near-uniform SO(3) orientations [9]. Color encodes the orientation reachability index R , the fraction of those orientations that admit a solution. Columns compare our actuated configuration (Act₂ of Section V), Unitree G1, Booster T1, Appttronik Apollo, Fourier GR-3, and PAL Talos, with the external models taken from mjlabs [10], Fourier Intelligence’s GRx repository [11], and MuJoCo Menagerie [12]. Top: X – Y section at shoulder height. Bottom: X – Z cutaway $y \geq 0$, each cell showing the frontmost voxel nearest the cut plane. Plasma and blue denote visible-reachable and blind voxels. Each heading reports visible percentage, visible-reachable and reachable volumes in m³, camera articulation, and pairwise coverage η_2 . $\tilde{\eta}$ is the VRW coverage computed with the canonical arms-down occlusion model. None of the external platforms can aim two camera views independently.

This partition clarifies the treatment of manipulation-coupled sensing. A wrist-mounted camera is not excluded from VRW. Its visibility can be evaluated through $g_k(q_m)$, but because the camera moves with the active arm, it contributes no independent q_p actuation. Its gaze can change only through alternative feasible reaching configurations. Conversely, a pan-tilt unit whose joints do not affect the end effector belongs to q_p and can be aimed after the manipulation configuration is fixed. Our experiments focus on head-mounted RGB-D cameras because the design question is independent gaze for separated work regions, but the formulation itself does not require that mounting choice. Throughout this section, $(q_m, q_p) \in \mathcal{Q}^{\text{feas}}$ abbreviates the full configuration (q_m, q_p, q_0) with q_0 fixed to its nominal value.

From reachable to visible-reachable workspace. For active end effector $i \in A$, the conventional reachable workspace is

$$\mathcal{W}_R^{(i)} = \{x \in \mathbb{R}^3 \mid \exists (q_m, q_p) \in \mathcal{Q}^{\text{feas}} : f_i(q_m) = x\}. \quad (1)$$

Because f_i does not depend on q_p , Eq. (1) is the usual manipulation workspace over the task-relevant kinematic chain, subject to the complete robot’s feasibility constraints. Camera modules remain in the collision model, so changing the sensor layout can slightly change $\mathcal{W}_R^{(i)}$. As in capability-map analysis, we additionally report an orientation reachability index $R(x)$, the fraction of sampled end-effector orientations at x for which collision-free IK succeeds.

For a specific reaching configuration q_m , define condi-

tional visibility by

$$V(x; q_m) = 1 \iff \exists q_p, k : (q_m, q_p) \in \mathcal{Q}^{\text{feas}}, \quad \text{vis}(x; k, q) = 1, \quad (2)$$

where $\text{vis}(x; k, q) = 1$ when x lies within camera k ’s modeled field of view and range and the camera-to-target segment is not self-occluded. This conditioning is the key distinction from an unconstrained visibility map. The robot receives credit only for a view compatible with a configuration that realizes the manipulation. Independent sensing joints may move through q_p ; manipulation-coupled sensor motion is inherited from q_m and cannot be optimized as a separate gaze action.

The visible-reachable workspace is then

$$\mathcal{W}_{VR}^{(i)} = \{x \in \mathbb{R}^3 \mid \exists q_m : f_i(q_m) = x, V(x; q_m) = 1\}, \quad (3)$$

with coverage

$$\eta = \frac{\mu(\mathcal{W}_{VR}^{(i)})}{\mu(\mathcal{W}_R^{(i)})} \in [0, 1]. \quad (4)$$

Here μ denotes volume, estimated by occupancy on a discretized workspace grid. The complement $\mathcal{W}_R^{(i)} \setminus \mathcal{W}_{VR}^{(i)}$ is blind-reachable: kinematically reachable, but not observable by onboard sensing from any compatible configuration under the stated task partition.

For dense cross-layout visualization, we use a canonical-occlusion approximation $\tilde{\eta}$. Self-occlusion is evaluated with the arms in a common arms-down pose while camera articulation and all other sensor-model constraints are retained.

This approximation makes the maps consistent and computationally tractable, but does not retain the reach-conditioned occlusion in Eq. (2). Unless otherwise noted, the reported VRW coverage values use $\tilde{\eta}$.

For whole-robot maps we report the union $\mathcal{W}_R^A = \bigcup_{i \in A} \mathcal{W}_R^{(i)}$ and $\mathcal{W}_{VR}^A = \bigcup_{i \in A} \mathcal{W}_{VR}^{(i)}$, with A containing the two hands. This union summarizes local coverage of either hand and should not be interpreted as simultaneous bimanual feasibility.

Concurrent visibility of separated regions. Single-target VRW can make one- and two-camera systems appear nearly equivalent when either system can eventually direct a view toward an individual target. This equivalence breaks down in multi-region manipulation, where the relevant capability is not eventual visibility of each target in isolation, but **concurrent visibility**: maintaining observation of the active manipulation region while simultaneously monitoring a second region without altering the manipulation configuration.

For a reachable manipulation target x_i and a second region-of-interest point x_j , define

$$C_i(x_i, x_j) = 1 \iff \exists (q_m, q_p) \in \mathcal{Q}^{\text{feas}}, \exists k_i, k_j : \\ f_i(q_m) = x_i, \quad \text{vis}(x_i; k_i, q) = 1, \quad (5) \\ \text{vis}(x_j; k_j, q) = 1.$$

The cameras k_i and k_j need not be distinct. A single camera therefore receives credit when both regions fit inside one unoccluded frustum, whereas independently actuated cameras can instead direct different views toward the two regions.

We summarize this property by

$$\eta_2 = \Pr_{(x_i, x_j) \sim \nu_i \times \nu_j} [C_i(x_i, x_j) = 1]. \quad (6)$$

The distribution ν_i samples reachable grid points in proportion to orientation reachability $R(x_i)$, emphasizing locations that admit more grasp orientations, while ν_j samples the specified evaluation volume uniformly. The second point is intentionally not required to be reachable. η_2 asks whether the robot can manipulate in one region while maintaining perception of another. If a task instead requires simultaneous bimanual manipulation, the same construction can restrict x_j to the second arm's reachable set and impose its reach constraint explicitly.

The scalar η_2 is distribution dependent and should not be interpreted as a universal cross-platform ranking. Different embodiments induce different evaluation volumes and target-separation distributions. Figure 2 therefore uses cross-platform values only as descriptive context. The camera-count study in Section V-A provides the controlled comparison, evaluating all layouts on the same robot using a common grid and separation bins.

IV. HUMANOID REALIZATION

The VRW metric is embodiment-agnostic. We evaluate it on various platforms and present Duke Humanoid V2 for systematic design studies that demonstrate the effectiveness of this sensing-manipulation design metric.

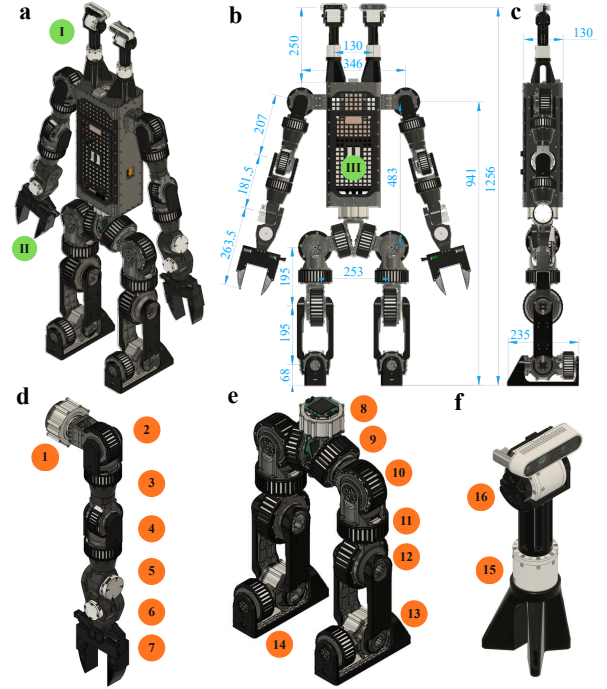


Fig. 3. **Duke Humanoid V2 with individually controlled dual cameras.** Orange numbers indicate actuated joints: (1) shoulder pitch, (2) shoulder roll, (3) shoulder yaw, (4) elbow, (5) wrist roll, (6) wrist pitch, (7) wrist yaw, (8) waist, (9) hip pitch, (10) hip roll, (11) hip yaw, (12) knee, (13) ankle pitch, (14) ankle roll, (15) camera yaw, (16) camera pitch. Green labels identify hardware modules: (I) camera module, (II) gripper, (III) onboard computer. (a) 27-DoF body with 4-DoF dual-camera head. (b) Front view (mm). (c) Side view (mm). (d) 7-DoF arm and parallel gripper. (e) Lower body. (f) Yaw-pitch camera gimbal.

TABLE I: Duke Humanoid V2 per-joint ROM and max torque (N-m). Values are for the left-side joints, mirrored on the right.

Joint	ROM (°)	Torque	Joint	ROM (°)	Torque
Waist yaw	[−90, 90]	60	Shoulder roll	[−180, 30]	36
Hip pitch	[−105, 105]	60	Shoulder yaw	[−180, 180]	17
Hip roll	[−105, 30]	60	Elbow	[−125, 125]	17
Hip yaw	[−90, 90]	60	Wrist roll	[−180, 180]	17
Knee	[−130, 130]	120	Wrist pitch	[−92, 92]	14
Ankle pitch	[−50, 50]	60	Wrist yaw	[−90, 90]	5.5
Ankle roll	[−60, 60]	36	Camera yaw	[−270, 270]	5.5
Shoulder pitch	[−108, 108]	60	Camera pitch	[−90, 90]	5.5

Duke Humanoid V2 is a 31-DoF QDD humanoid comprising one waist joint, two 6-DoF legs, and two 7-DoF arms, plus two 2-DoF camera gimbals (Fig. 3). Each parallel gripper adds another actuated DoF. The robot is 1.2 m tall, has a mass of 36 kg, a 0.46 m arm reach, and a leg length of 0.39 m. The robot uses CNC-machined 6061 aluminum and 3D-printed Nylon 12 for the main structure, PLA for electronics mounts, and TPU for protection.

Mechanical layout. The shoulder pitch motor is packaged inside the torso to reduce shoulder width, and the shoulder/elbow ranges permit reaches in front of and behind the torso. The lower body uses an offset hip-roll axis and approximately symmetric sagittal ranges to support forward, lateral, and backward locomotion. This symmetric design for both locomotion and manipulation supports more versatile whole-body motion with less need for body reorientation.

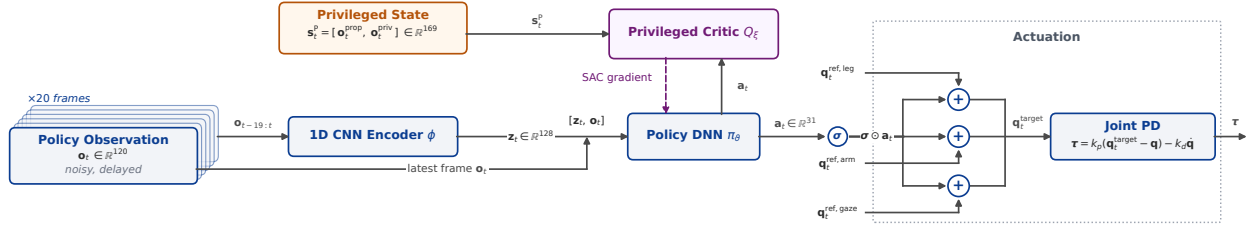


Fig. 4. **Control architecture.** We train the whole-body policy using FlashSAC [29]. The actor encodes a 20-frame observation history and outputs residual joint-position commands for the legs, arms, and cameras. The residual commands are added to the reference joint positions and tracked by joint-level PD control. The asymmetric critic (dashed) uses privileged information only during training.

Actuation and end effectors. All non-gripper joints use QDD motors (RobStride, 7.75:1–10:1 reduction, dual 14-bit encoders). Per-joint range of motion (ROM) and motor torque are listed in Table I. Locomotion uses an IMU (TransducerM TM171) and motor state feedback. An onboard MINISFORUM X1-470 computer communicates with the actuators over CAN. Each wrist carries a parallel gripper (350 g, 184 mm maximum opening) that uses UMI-inspired finger geometry [30]. We mount eight AprilTags on each gripper for pose tracking. Workspace IK is referenced to the grasp center.

Independently actuated sensing. Two yaw-pitch camera modules are mounted on top of the robot. Each module uses an Intel RealSense D436 RGB-D camera with a $90^\circ \times 65^\circ$ RGB field of view and a 0.1–3.0 m sensing range. Each module is actuated independently, allowing the two cameras to simultaneously view spatially separated regions. Section V-A evaluates alternative camera configurations and whether adding an independent view justifies the additional hardware cost.

Control policy. A whole-body RL policy runs at 50 Hz with 200 Hz joint-level PD tracking. We train it with FlashSAC [29], an off-policy soft actor-critic method [31] with an asymmetric critic. A 1D CNN actor encodes a 20-frame history of noisy, delayed proprioception together with base-twist, arm, and gaze references (Fig. 4). Each frame is embedded from 120 to 32 dimensions and then processed by three 1D convolutions and mean pooling over the history. The resulting 128-D latent and the current observation are passed to an MLP that outputs the residual joint-position action. The critic additionally receives privileged simulator quantities during training. The 31-D residual joint-position action is added to group-specific references for the legs, planned arm waypoints, and left/right yaw-pitch gaze targets.

The command curriculum spans $v_x, v_y \in [-1, 1]$ m/s and $\omega_z \in [-1, 1]$ rad/s. The reward is a weighted sum of task-tracking terms (base linear and angular velocity, arm pose, and gaze), posture and balance, gait shaping (swing timing, clearance, slip, and impact), and regularization (action smoothness, joint limits, self-collision, and energy). Training uses 4096 parallel environments for 15k iterations in mlab [10], randomizing contact parameters, PD gains, body and wrist-payload inertia, and per-DoF friction, with periodic pushes.

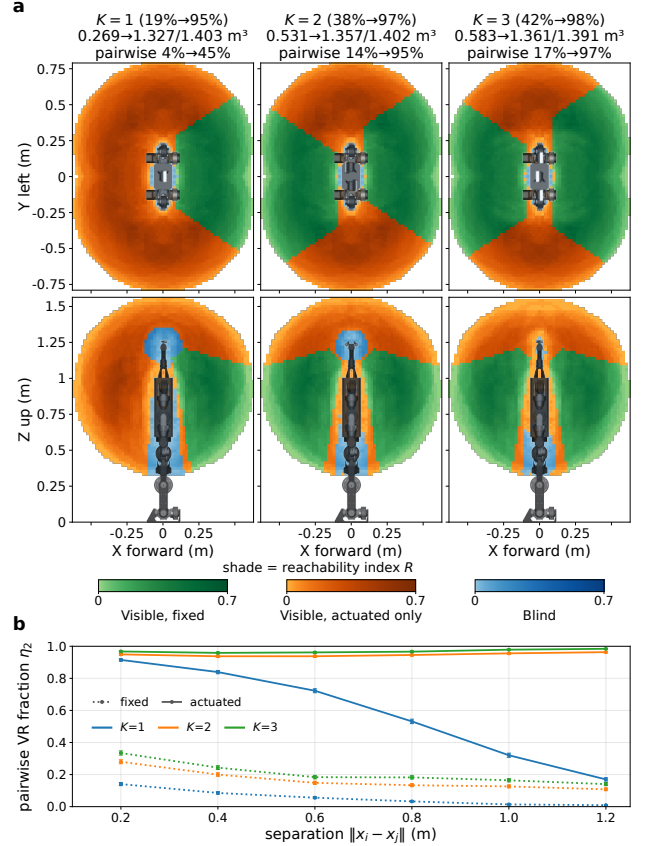


Fig. 5. **Camera configurations.** (a) Visible-reachable workspace for the $K = 1, 2$, and 3 camera configurations. Top: X - Y section at shoulder height. Bottom: X - Z cutaway for $y \geq 0$. Green denotes voxels visible with fixed camera joints, orange voxels visible only by actuating the camera joints, and blue blind voxels. Shade encodes reachability index R . Headings show fixed-to-actuated coverage, $\bar{\eta}$, and scalar pairwise coverage. $K = 2$ and $K = 3$ appear similar because the third camera module adds lateral voxels outside these cut planes. (b) Pairwise coverage η_2 against target separation, with 95% Wilson intervals. Solid lines and dotted curves indicate actuated and fixed camera configurations, respectively.

V. RESULTS

Duke Humanoid V2 has a symmetric reachable workspace. To provide the camera coverage needed for visual manipulation, we used VRW to guide the design of the camera configuration. We considered two questions: **Q1**: How can VRW guide the design of the camera configuration? **Q2**: Does designing for higher VRW improve visual grasping performance?

A. Camera configuration optimization

On Duke Humanoid V2, cameras could be mounted on the front, back, or top faces of the body. The front and back faces were not chosen because their visual coverage was limited to one side of the humanoid, whereas top-mounted cameras could cover the front, back, left, and right sides. We also did not consider wrist cameras because a wrist camera on the reaching arm offered no independent q_p actuation under the partition of Section III.

The remaining design decisions were camera count and articulation. We evaluated six layouts (Fig. 5a): $K = 1, 2$, and 3 camera modules, each either actuated (Act_K) or fixed (Fix_K). For the fixed layouts, $K = 2$ used one front-facing and one back-facing camera, while $K = 3$ used two front-facing cameras and one back-facing camera. All other robot configurations remained the same. We compared both single-target visible-reachable coverage $\tilde{\eta}$ and pairwise coverage η_2 .

Single-target coverage. Camera articulation had a larger effect on VRW coverage than camera count (Fig. 5a). Across all camera counts, actuating the cameras greatly increased VRW coverage. Once actuated, VRW coverage was already close to saturation with one camera module, and adding a second or third camera provided $< 4\%$ coverage gains.

Pairwise coverage. VRW coverage considers one manipulation target at a time and does not capture whether two targets can be viewed simultaneously. Camera count had a larger effect on pairwise coverage (Fig. 5b). With one camera, both regions must lie within the same unoccluded camera view, so pairwise coverage decreased as target separation increased. With two independently actuated cameras, each camera could maintain a separate view, and pairwise coverage remained nearly constant as target separation increased. Actuating the cameras increased VRW coverage more than adding more cameras, while adding a second independently actuated camera increased pairwise coverage. Adding a third camera provided only a small further increase in pairwise coverage and visible-reachable volume, while adding 0.58 kg, two gimbal DoF, and \$600 in hardware cost. Thus, we adopted the $K = 2$ configuration with independently actuated camera modules.

Comparison with other humanoids. We also evaluated VRW on the fixed-head Unitree G1 and humanoids with actuated neck-mounted cameras (Booster T1, Appttronik Apollo, Fourier GR-3, and PAL Talos) (Fig. 2). We used the published camera field of view when available. For G1, we used our $90^\circ \times 65^\circ$ camera model. For Apollo, we used a provisional $91.5^\circ \times 60^\circ$ model. The fixed-head G1 had much lower VRW coverage, while the platforms with actuated necks covered a larger portion of their reachable workspace, although all remained below our design. For pairwise coverage, the external platforms remained below our design, including those with actuated necks. Their cameras share the same neck joints and cannot aim independently at two separated regions. GR-3 had the widest camera field of view among these platforms, but still provided only one viewing direction and therefore had lower pairwise coverage

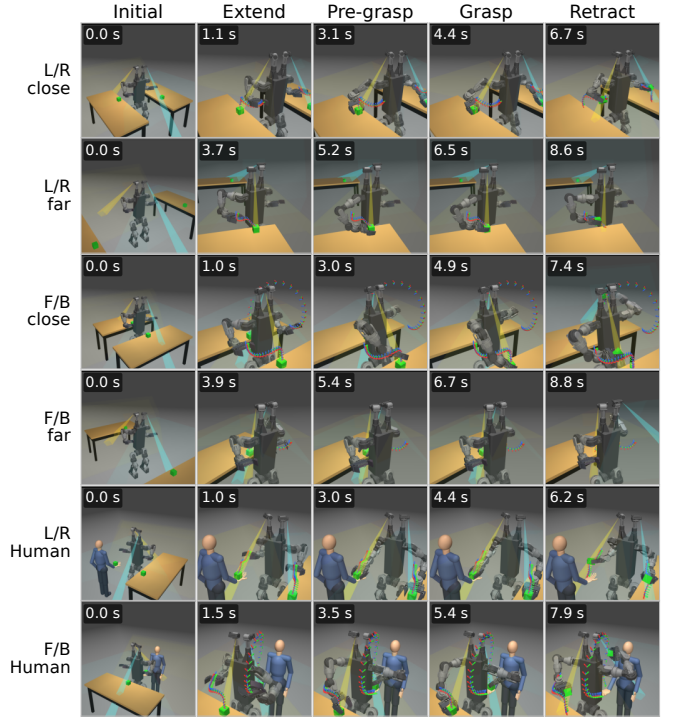


Fig. 6. **Time-lapse frames of Duke Humanoid V2 performing the two-target reach-and-grasp benchmark.** Rows: the six scenarios of Table II. Columns: reach-and-grasp keyframes for one target: initial stage, arm extension, pre-grasp, grasp, and retraction. The targets are 60 mm cubes shown in green. Shaded cones show the camera fields of view, cyan for the left module and orange for the right. The narrow, more transparent cone shows the central 10% of the field of view about the optical axis; the wider cone shows the full field of view, truncated at the camera near plane. Dotted coordinate frames show the planned collision-free arm trajectories.

than our design.

B. Two-Target Reach-and-Grasp Benchmark

To evaluate whether VRW-guided camera configurations can improve visual manipulation, we tested actuated and fixed camera configurations (Act_K , Fix_K , $K = 1, 2$) along with Unitree G1 in six simulated two-target reach-and-grasp tasks. In each scenario, the robot needed to locate and grasp two objects (Fig. 6), placed either to the left/right (L/R) or front/back (F/B) of the robot, with both targets on benches or one target on a bench and the other held by a human. For the bench scenes, the benches were either close to the robot (0.20 m), where the objects were within reach, or far from the robot (0.8 m), requiring the robot to walk before reaching for the targets.

The task was considered successful if the robot grasped both targets. *Completion time* $\bar{T}$ was the total time to locate and retrieve both targets. The mechanical energy $E = \int \sum_j |\tau_j \dot{q}_j| dt$ was computed by integrating absolute joint power as an estimate of energy usage. $\bar{T}$ includes three parts. $\bar{T}_{\text{search}}$ is the time spent locating a target, through camera motion where possible, or by walking toward a known region where the target could be located. $\bar{T}_{\text{approach}}$ is the time spent walking toward a target outside the arm's reach. $\bar{T}_{\text{manip}}$ is

TABLE II: Two-target reach-and-grasp in physics simulation. Each entry reports the average of 30 trials (10 target layouts $\times$ 3 trials). $\text{Fix}_K/\text{Act}_K$ denote fixed/actuated K -camera configurations, and G1 is the external baseline. *Human* indicates one target held by a person. Time and energy are averaged over successful trials. Bold marks the best value for each metric.

Scenario	Time $\bar{T}$ (s) $\downarrow$					Search time $\bar{T}_{\text{search}}$ (s) $\downarrow$					Approach time $\bar{T}_{\text{approach}}$ (s) $\downarrow$					Manipulation time $\bar{T}_{\text{manip}}$ (s) $\downarrow$					Energy E (J) $\downarrow$				
	G1	Fix ₂	Act ₂	Fix ₁	Act ₁	G1	Fix ₂	Act ₂	Fix ₁	Act ₁	G1	Fix ₂	Act ₂	Fix ₁	Act ₁	G1	Fix ₂	Act ₂	Fix ₁	Act ₁	G1	Fix ₂	Act ₂	Fix ₁	Act ₁
L/R close	29.3	15.9	10.6	20.7	12.8	3.2	0.3	0.1	2.8	0.3	5.9	1.9	0.2	3.5	0.0	20.2	13.7	10.3	14.4	12.5	575	264	81	514	36
L/R far	34.2	25.8	24.2	28.8	26.0	7.2	0.7	0.3	6.3	1.2	6.4	8.2	6.6	7.0	8.2	20.6	16.9	17.3	15.5	16.6	821	1059	978	1201	1095
F/B close	24.8	10.7	10.6	18.5	10.5	2.9	0.1	0.0	3.3	0.6	1.1	0.0	0.0	0.9	0.0	20.8	10.6	10.6	14.3	9.9	315	67	70	403	59
F/B far	31.7	23.6	22.4	26.3	25.9	5.1	0.0	0.1	3.8	0.7	6.3	6.9	5.8	6.7	8.6	20.3	16.7	16.5	15.8	16.6	671	825	880	989	1078
L/R Human	19.9	15.2	7.7	9.6	8.3	1.2	0.4	0.2	0.1	0.1	1.8	1.7	0.0	0.4	0.0	16.9	13.1	7.5	9.1	8.2	250	236	24	50	22
F/B Human	24.8	10.7	9.6	18.8	10.2	2.9	0.1	0.0	3.3	0.6	1.3	0.0	0.0	0.8	0.0	20.6	10.6	9.6	14.7	9.6	318	68	62	389	59
Mean	27.5	17.0	14.1	20.5	15.5	3.8	0.2	0.1	3.3	0.6	3.8	3.2	2.1	3.3	2.7	19.9	13.6	11.9	13.9	12.2	494	425	346	595	385

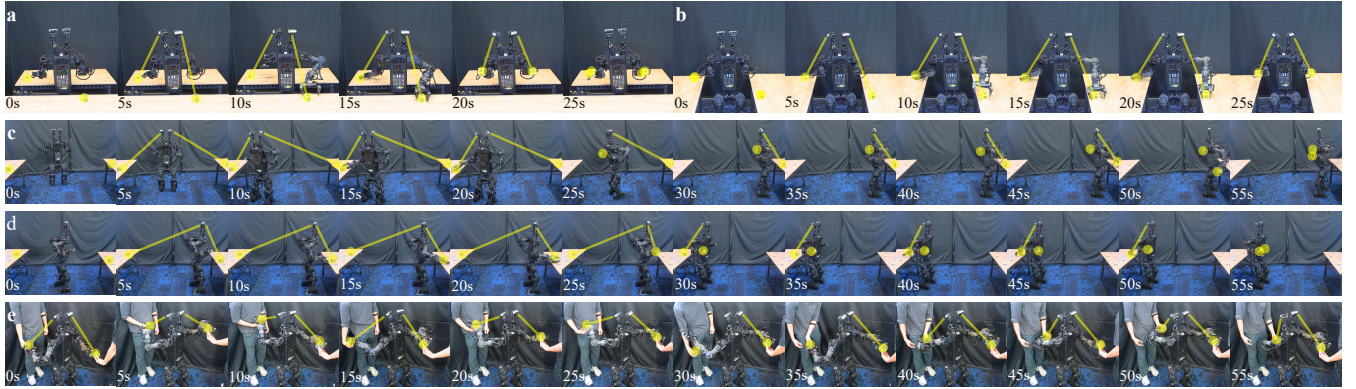


Fig. 7. **Real-world reach-and-grasp.** Time-lapse sequences at 5 s intervals. (a-b) The robot simultaneously observed and grasped targets in separated regions without reorienting its body: (a) front/back and (b) left/right. (c-d) For far targets, the robot observed both targets, walked closer, and grasped the objects: (c) left/right far and (d) front/back far. Only the first grasp is shown in (c,d). Yellow circles mark the targets, and yellow lines show the two camera-to-target viewing directions. (e) The robot tracked and reached two moving objects held by two people.

the time spent reaching, grasping, and retracting along the planned arm trajectories.

We used the same heuristic planner to locate the target object across all camera configurations. The robot would either move its camera, rotate its body (fixed camera), or walk to the nearby table to discover the object. Once a target was within the camera field of view and arm reach, the robot began collision-aware grasp trajectory planning using cuRobo [32]. The arm trajectory planner ran asynchronously with the whole-body controller. We found that camera joint speeds above 2.0 rad/s caused motion blur in the real world and made pose estimation unreliable, so we limited the maximum camera search speed to 2.0 rad/s. The planned path was followed by a Jacobian tracker that compensated for gravity and robot body motion during reaching. The planner generated trajectories for simultaneous reaching if both targets were visible and reachable, or for single-target reaching if only one target was visible and reachable. All simulation trials were run in MuJoCo with full contact dynamics. The robots were controlled by our whole-body RL policy architecture (Section IV).

Success rates were similar across the five configurations, ranging from 0.967 to 0.994. Compared with Fix_2 , Act_2 reduced mean completion time by 17% and energy by 19% (Table II). At $K = 1$, Act_1 reduced completion time by 24% and energy by 35% relative to Fix_1 .

Camera actuation reduced search time $\bar{T}_{\text{search}}$, approach time $\bar{T}_{\text{approach}}$, and manipulation time $\bar{T}_{\text{manip}}$ on average. Act_2 slightly reduced $\bar{T}_{\text{search}}$ relative to Fix_2 , and Act_1 reduced it

by 82% relative to Fix_1 (Table II). The reduction in search time mainly came from locating targets through camera motion rather than walking until the targets became visible. Camera actuation also reduced approach time because a far target could be located before walking, allowing the robot to walk directly toward the target rather than first toward the table. The second camera mainly increased pairwise coverage. Act_1 and Act_2 had similar single-target coverage $\tilde{\eta}$. Act_2 had higher pairwise coverage η_2 and could keep both targets in view for simultaneous reaching. In summary, camera configurations with higher visible-reachable and pairwise coverage reduced completion time and energy at similar success rates.

Real-world deployment. We deployed Duke Humanoid V2 (Act_2) in all tabletop reach-and-grasp scenarios (i.e., front/back close, left/right close, left/right far, and front/back far) in the real world as shown in Fig. 7. The two cameras observed the separated front/back or left/right targets, whereas the far scenarios additionally required the robot to walk closer before grasping. We also tested a dynamic scenario with two targets held and moved independently by two people (Fig. 7e). During the trial, the two cameras tracked the separated moving targets while the robot followed them with its arms. When an arm occluded a target and tracking was temporarily lost, the corresponding camera actively searched for the target and reacquired it once it became visible. Our physical demonstrations show that larger VRW can support more effective visually guided manipulation while reducing

the motion needed to acquire and maintain target views.

VI. CONCLUSION AND FUTURE WORK

Classical reachability does not capture whether a robot can perceive the workspace it can physically reach. We introduced the visible-reachable workspace (VRW) to couple these two capabilities, with a pairwise extension for concurrent observation of spatially separated regions. On Duke Humanoid V2, camera actuation increases visible-reachable coverage from 38% to 97%, while a second independent view raises pairwise coverage from 0.45 to 0.95. In two-target manipulation, this improved sensing geometry reduces completion time and mechanical energy cost, with reductions in search, approach, and manipulation time. These results suggest that VRW is a useful design signal because improving visible-reachable coverage can translate into more efficient whole-body execution.

Future work can extend VRW beyond geometric visibility to incorporate sensing quality, uncertainty, and task-dependent perception requirements. We also plan to use the framework for automated co-design of sensing, morphology, and control across broader tasks and embodiments.

REFERENCES

- [1] F. Zacharias, C. Borst, and G. Hirzinger, "Capturing robot workspace structure: representing robot capabilities," in *2007 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2007, pp. 3229–3236.
- [2] I. Akinola, J. Varley, B. Chen, and P. K. Allen, "Workspace aware online grasp planning," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2018, pp. 2917–2924.
- [3] F. Saidi, O. Stasse, and K. Yokoi, "Active visual search by a humanoid robot," in *Recent Progress in Robotics: Viable Robotic Service to Human: An Edition of the Selected Papers from the 13th International Conference on Advanced Robotics*. Springer, 2007, pp. 171–184.
- [4] J. Peng, A. Srikaew, M. Wilkes, K. Kawamura, and A. Peters, "An active vision system for mobile robots," in *Proceedings of the IEEE International Conference on Systems, Man, and Cybernetics (SMC)*, 2000.
- [5] G. Pasquale, T. Mar, C. Ciliberto, L. Rosasco, and L. Natale, "Enabling depth-driven visual attention on the icub humanoid robot: Instructions for use and new perspectives," *Frontiers in Robotics and AI*, vol. 3, p. 35, 2016.
- [6] P. Qu, Z. Li, Y. Jia, Z. Liu, L. Zhu, H. Li, J. Zhou, and J. Ma, "Omni-manip: Beyond-fov large-workspace humanoid manipulation with omnidirectional 3d perception," 2026.
- [7] D. Kim, M. Srouji, C. Chen, and J. Zhang, "Armor: Egocentric perception for humanoid robot collision avoidance and motion planning," 2024.
- [8] J. Liu, B. Xia, and B. Chen, "Extreme dynamic symmetry enables omnidirectional and multifunctional robots," *Science Robotics*, vol. 11, p. eac1725, 2026.
- [9] M. Alexa, "Super-fibonacci spirals: Fast, low-discrepancy sampling of $SO(3)$," in *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022, pp. 1–9.
- [10] K. Zakka, Q. Liao, B. Yi, L. L. Lay, K. Sreenath, and P. Abbeel, "mjlab: A lightweight framework for gpu-accelerated robot learning," 2026. [Online]. Available: <https://arxiv.org/abs/2601.22074>
- [11] Fourier Intelligence, "Wiki-GRx-Models," <https://github.com/FFTAI/Wiki-GRx-Models>, 2026.
- [12] K. Zakka, Y. Tassa, and MuJoCo Menagerie Contributors, "MuJoCo Menagerie: A collection of high-quality simulation models for MuJoCo," <https://github.com/google-deepmind/mujoco.menagerie>, 2022.
- [13] A. K. Pandey and R. Alami, "Mightability maps: A perceptual level decisional framework for co-operative and competitive human-robot interaction," in *2010 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2010, pp. 5842–5848.
- [14] C. Li, M. Xu, A. Bahety, H. Yin, Y. Jiang, H. Huang, J. Wong, S. Garlanka, C. Gokmen, R. Zhang, W. Liu, J. Wu, R. Martín-Martín, and L. Fei-Fei, "Momagen: Generating demonstrations under soft and hard constraints for multi-step bimanual mobile manipulation," in *The Fourteenth International Conference on Learning Representations*, 2026. [Online]. Available: <https://openreview.net/forum?id=bGPDviEtZ1>
- [15] K. He, R. Newbury, T. Tran, J. Haviland, B. Burgess-Limerick, D. Kulić, P. Corke, and A. Cosgun, "Visibility maximization controller for robotic manipulation," *IEEE Robotics and Automation Letters*, vol. 7, no. 2, pp. 2587–2592, 2022.
- [16] J. Kerr, K. Hari, E. Weber, C. M. Kim, B. Yi, T. Bonnen, K. Goldberg, and A. Kanazawa, "Eye, robot: Learning to look to act with a bc-rl perception-action loop," in *Conference on Robot Learning (CoRL)*, 2025.
- [17] Z. Zhao, Y. Zhao, G. Zhang, C. Liu, M. Zheng, and W. Lian, "Halomi: Learning humanoid loco-manipulation with active perception from human demonstrations," 2026.
- [18] I. Chuang, A. Lee, D. Gao, M.-M. Naddaf-Sh, and I. Soltani, "Active vision might be all you need: Exploring active vision in bimanual robotic manipulation," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2025, pp. 7952–7959.
- [19] R. Kühn, M. Schappeler, T. Seel, and D. Bank, "Active stereo-camera outperforms multi-sensor setup in act imitation learning for humanoid manipulation," 2026.
- [20] Y. Asano, K. Okada, and M. Inaba, "Design principles of a human mimetic humanoid: Humanoid platform to study human intelligence and internal body system," *Science Robotics*, vol. 2, no. 13, p. eaaq0899, 2017.
- [21] N. Paine, J. S. Mehling, J. Holley, N. A. Radford, G. B. Johnson, C.-L. Fok, and L. Sentis, "Actuator control for the nasa-jsc valkyrie humanoid robot: A decoupled dynamics approach for torque control of series elastic robots," *Journal of Field Robotics*, vol. 32, no. 3, pp. 378–396, 2015.
- [22] Boston Dynamics, "Atlas humanoid robot," <https://bostondynamics.com/products/atlas/>, 2026.
- [23] H. Shi, W. Wang, S. Song, and K. Liu, "Toddlerbot: Open-source ml-compatible humanoid platform for loco-manipulation," in *9th Annual Conference on Robot Learning*, 2025.
- [24] Y. Chi, Q. Liao, J. Long, X. Huang, S. Shao, B. Nikolic, Z. Li, and K. Sreenath, "Demonstrating berkeley humanoid lite: An open-source, accessible, and customizable 3d-printed humanoid robot," 2025.
- [25] Q. Liao, B. Zhang, X. Huang, X. Huang, Z. Li, and K. Sreenath, "Berkeley humanoid: A research platform for learning-based control," in *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2025, pp. 2897–2904.
- [26] B. Xia, B. Li, J. Lee, M. Scutari, and B. Chen, "The duke humanoid: Design and control for energy-efficient bipedal locomotion using passive dynamics," in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2025, pp. 6579–6586.
- [27] K. A. Tarabanis, R. Y. Tsai, and P. K. Allen, "The MVP sensor planning system for robotic vision tasks," *IEEE Transactions on Robotics and Automation*, vol. 11, no. 1, pp. 72–85, 1995.
- [28] P. Ošćádal, T. Kot, T. Spurný, J. Suder, M. Vocetka, L. Dobeš, and Z. Bobovský, "Camera arrangement optimization for workspace monitoring in human-robot collaboration," *Sensors*, vol. 23, no. 1, p. 295, 2023.
- [29] D. Kim, Y. Lee, M. Park, K. Kim, I. M. A. Nahendra, T. Seno, S. Min, D. Palenicek, F. Vogt, D. Kragic, J. Peters, J. Choo, and H. Lee, "Flashsac: Fast and stable off-policy reinforcement learning for high-dimensional robot control," *arXiv preprint arXiv:2604.04539*, 2026.
- [30] C. Chi, Z. Xu, C. Pan, E. Cousineau, B. Burchfiel, S. Feng, R. Tedrake, and S. Song, "Universal manipulation interface: In-the-wild robot teaching without in-the-wild robots," in *Proceedings of Robotics: Science and Systems (RSS)*, 2024.
- [31] T. Haarnoja, A. Zhou, P. Abbeel, and S. Levine, "Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor," in *International Conference on Machine Learning (ICML)*, 2018.
- [32] B. Sundaralingam, S. K. S. Hari, A. Fishman, C. Garrett, K. Van Wyk, V. Blukis, A. Millane, H. Oleynikova, A. Handa, F. Ramos, N. Ratliff, and D. Fox, "curobo: Parallelized collision-free robot motion generation," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2023.

APPENDIX I RL DETAILS

A. Reward terms

TABLE III: Reward terms r_i and weights w_i for the reported direct controller ($r_t = \sum_i w_i r_i$). $a \rightarrow b =$ curriculum. $\langle \cdot \rangle =$ mean over joints/feet; $\ell_j =$ shared and joint-specific kernel widths; $\mathbf{v}_{xy}, \omega_z =$ base linear/yaw velocity ($^c =$ commanded); $\mathbf{g}_{xy} =$ horizontal projected gravity; $\mathbf{q}^0 =$ home pose, $\mathbf{q}^{\text{ref}} =$ moving reference; $p_f^z, \mathbf{v}_f^{xy} =$ foot height/planar velocity; $t^{\text{air}} =$ swing duration, $\Delta t^{\text{air}} = t_L^{\text{air}} - t_R^{\text{air}}$, $t_{\min} = 0.05$ s, $t_{\max} = 0.5$ s; $v_{\downarrow} = \max(0, -\dot{p}^z)$; $\mathbb{I}^c =$ indicator, $\mathbb{I}_{\text{land, valid}}^c =$ foot landing with two completed swings; $\bar{q}, \bar{q} =$ soft limits; $\tau_j, \bar{\tau}_j =$ joint torque/limit; $d_f =$ foot-flat gravity alignment; $h^* = 0.1$ m, $v_0 = 0.3$ m/s, $\kappa = 4$ s/m, $\sigma_\omega = 0.5$ rad/s; $(x)_+ = \max(x, 0)$.

Term	Expression r_i	w_i
<i>Task tracking</i>		
Linear-velocity	$\exp(-\ \mathbf{v}_{xy}^c - \mathbf{v}_{xy}\ ^2 / \ell^2)$	2.0
Angular-velocity	$\exp(-(\omega_z^c - \omega_z)^2 / \ell^2)$	2.5
Command-integral	$\exp(-\ \mathbf{I}\ ^2 / \ell^2)$, $\mathbf{I} = \int (\mathbf{c} - \mathbf{v}) dt$	1.0
Arm-pose	$\exp(-\langle (\mathbf{q}_{\text{arm}} - \mathbf{q}_{\text{arm}}^{\text{ref}})^2 \rangle / \ell^2)$	2.0
Gaze	$\exp(-\langle (\mathbf{q}_{\text{cam}} - \mathbf{q}_{\text{cam}}^{\text{ref}})^2 \rangle / \ell^2)$	1.0
<i>Posture & balance</i>		
Upright	$\exp(-\ \mathbf{g}_{xy}\ ^2 / \ell^2)$	1.0
Variable posture	$\exp(-\langle (\mathbf{q} - \mathbf{q}^0)^2 \rangle / \ell_j^2)$	1.0
Foot flat orient.	$\langle \exp(-\langle (1 - d_f^2) / \ell^2 \rangle) \rangle_{\text{feet}}$	0.2
<i>Gait shaping</i>		
Feet air-time	$\sum_f \mathbb{I}^c[t_f^{\text{air}} \in [t_{\min}, t_{\max}]]$	0.2
Foot contact balance	$(\Delta t^{\text{air}})^2 \mathbb{I}_{\text{land, valid}}^c \exp(-\ \omega_{xy}\ / \sigma_\omega)$	-1.0
Foot clearance	$\sum_f p_f^z - h^* \tanh(\kappa \ \mathbf{v}_f^{xy}\)$	-1.0
Foot swing height	$\sum_f (p_f^z - h^*)^2 \mathbb{I}_{\text{land}}^c$	-0.25
Foot slip	$\sum_f \ \mathbf{v}_f^{xy}\ ^2 \mathbb{I}_{\text{contact}}^c$	-0.2
Foot impact vel.	$\sum_f \max(v_{\downarrow, f}^2 - v_0^2, 0) \mathbb{I}_{\text{contact}}^c$	-0.5
<i>Regularization & energy</i>		
Action rate	$\ \mathbf{a}_t - \mathbf{a}_{t-1}\ ^2$	-0.5
Arm action	$\ \mathbf{a}_{\text{arm}}\ ^2$	-0.01 $\rightarrow$ -0.5
Base angular-vel.	$\ \omega_{xy}^{\text{base}}\ ^2$	-0.05
Joint-limit	$\sum_j [(q_j - \bar{q}_j)_+ + (\bar{q}_j - q_j)_+]$	-1.0
Self-collision	$N_{\text{self-contact}}$	-1.0
Joint torque	$\sum_j (\tau_j - \frac{1}{2} \bar{\tau}_j)_+^2$	-2×10^{-3}
Joint power	$\sum_j \dot{q}_j \tau_j $	-4×10^{-4}

B. Observation space

TABLE IV: Observation space. The actor stacks the listed noisy, delayed 120-D frame over 20 steps; the asymmetric critic receives the current clean 169-D observation. The top block is shared; the bottom block is critic-only. Noise is additive per step ($\mathcal{U}$ uniform, $\mathcal{N}$ Gaussian); joint position also has a per-episode $\mathcal{U}(\pm 0.05)$ bias, and both joint position and joint velocity have a 0–2-step random delay.

Term	Dim	Noise / delay
Base angular velocity (IMU)	3	$\mathcal{N}(0, 0.1)$
Projected gravity (IMU)	3	$\mathcal{U}(\pm 0.05)$
Joint position	31	$\mathcal{U}(\pm 0.01)$, bias, delay
Joint velocity	31	$\mathcal{U}(\pm 1.0)$, delay
Last action	31	—
Command (twist $\mathbf{c}_t$)	3	—
Arm reference $\mathbf{q}_{\text{arm}}^{\text{ref}}$	14	—
Gaze reference $(\psi^*, \theta^*)_{L,R}$	4	—
<i>Privileged (critic only)</i>		
Command integral $\int (\mathbf{c}_t - \mathbf{v}_t) dt$	3	—
Base linear velocity	3	—
Foot height / air-time / contact	2/2/2	—
Foot contact forces	6	—
Joint torque	31	—

C. Training hyperparameters

TABLE V: FlashSAC training hyperparameters. Off-policy SAC with a distributional (C51) asymmetric critic and RMA-CNN actor-history encoder.

Parameter	Value	Parameter	Value
Parallel envs	4096	Discount γ	0.99
Steps/env per iter	24	Target smoothing τ_{target}	0.01
Iterations	15 000	Actor / critic LR	3×10^{-4}
Replay buffer/env	256	Temperature LR	2×10^{-4}
Batch size	4096	α	0.01
History length	20	α_{init} (auto-tuned)	0.15
Encoder embed / latent	32/128	Target entropy $\mathcal{H}_{\text{target}}$	0.15
MLP trunk	512/256/128	Critic nets (C51 atoms)	2×101
		Critic support $[v_{\min}, v_{\max}]$	$[-5, 5]$
<i>Actor / critic observation groups</i>			
Actor observation (deployed)	120	Critic observation (privileged)	169

D. Domain randomization

TABLE VI: Domain randomization. Applied at episode reset (R) or at fixed time intervals (I). Scale = multiply nominal; add = additive offset.

Parameter	Range	When
Foot friction	$[0.3, 2.5]$ (abs)	I
Foot contact impedance (solimp)	zero-penetration $d_0 [0.85, 0.99]$, transition width $[2, 10]$ mm	I
Foot contact response (solref)	time constant $\tau_{\text{contact}} [15, 25]$ ms, damping ratio $\zeta [0.9, 1.1]$	I
PD gains k_p, k_d	$\times [0.9, 1.05]$	R
Body mass	$\times [0.85, 1.15]$	I
Base CoM offset	± 1 cm (add)	I
Wrist EE CoM offset	± 5 mm (add)	I
Joint friction loss	± 0.01 (add)	R
Joint damping	$[0, 0.01]$ (add)	R
Push (lin./ang. vel.)	± 0.5 m/s, ± 0.5 rad/s	I (5–15 s)
Init. pose / joints	yaw $[-\pi, \pi]$, ± 0.1 rad	R

E. Command sampling

Yaw is driven in heading mode with stiffness 0.5, and heading is sampled over $[-\pi, \pi]$. In 20% of environments, the robot is commanded to stand. Commands are resampled every 2–8 s.