

Remotely Detectable Keyed Communication through Motion

Benjamin Chang
Dept. of Engineering
University of Cambridge
United Kingdom
btyc3@cam.ac.uk

Michael Amir
Dept. of Computer Science and Technology
University of Cambridge
United Kingdom
ma2151@cam.ac.uk

Manon Flageat
Dept. of Computer Science and Technology
University of Cambridge
United Kingdom
mf873@cam.ac.uk

Amanda Prorok
Dept. of Computer Science and Technology
University of Cambridge
United Kingdom
asp45@cam.ac.uk

Abstract: Messages from electronic devices are conventionally received as text, audio, or radio signals. But robots move with rich, articulate motion in the real world, opening up the possibility of transmitting messages through motion itself. In this paper, we consider the problem of *motion-based communication*, where we seek to modify a robot’s movements so as to transmit messages detectable from remote sensing (e.g., video or motion capture), without degrading policy performance. We introduce a method for *messaging through motion* capable of encoding arbitrary message content over short payloads—such as an agent’s current intent—as noise in any pre-trained policy’s actions. This brings a new kind of robustness to robot communication: this ‘physical’ channel complements standard wireless communications channels but does not depend on them, requiring no extra hardware nor the establishment of a direct link to the robot. We systematically characterize the space of encoding schemes and derive design heuristics, then validate them across simulated environments and real-robot deployment; on real robots running at 50 Hz, four robots jointly recover an 8-bit message at an aggregate 0.67 bits/s.

Keywords: Motion-based communication, Policy watermarking

1 Introduction

This work explores robot communication through motion. Humans already use motion as a communication medium: body language, gestures, and pantomime all convey meaning through deliberately legible movements. Robots can communicate in this way too, and prior work has explored motion that helps human observers infer a robot’s goal or intent [1, 2]. But robots also open a different, less human-like possibility. Because their motion can be controlled to high precision with small, repeatable perturbations, robots can use motion not only for visible signalling, but also as a carrier for keyed messages. We study arbitrary message content, over short payloads, embedded subtly in robot motion, such that the behaviour looks ordinary and does not disturb task performance, yet remains recoverable from remote sensor data such as video or motion capture.

Motion-based transmission becomes increasingly useful as robots are deployed everywhere. A robot’s motion is visible to anyone with a camera, and phone and CCTV cameras are ubiquitous—

Project website and code: <https://sites.google.com/view/motionbasedmessaging/home>

so motion is a channel that reaches everyone, not just operators with dedicated wireless links and compatible receivers. This opens the message up to bystanders, regulators, and third-party auditors: an autonomous vehicle could signal which fleet protocol it is running, or a robot could broadcast its operator ID, all recoverable from an ordinary video. Motion can also complement conventional communication when wireless channels may be unavailable, jammed, incompatible, or untrusted. In such scenarios, motion can serve as a physical handshake, i.e. an authentication signal binding the channel’s identity to a given robot embodiment.

At the same time, not every message should be legible to everyone: privacy matters, and a robot may need to communicate with a specific auditor without broadcasting to every camera in range. This calls for a keyed channel, where only a recipient holding a shared secret key can recover the message. We introduce *Messaging Through Motion* (MTM): a method that encodes arbitrary, keyed messages into a robot’s motion, recoverable from remote motion observations by a recipient holding the key. Observers without the key recover symbols only at or near chance in the null conditions we evaluate; we do not claim the presence of the watermark is hidden.

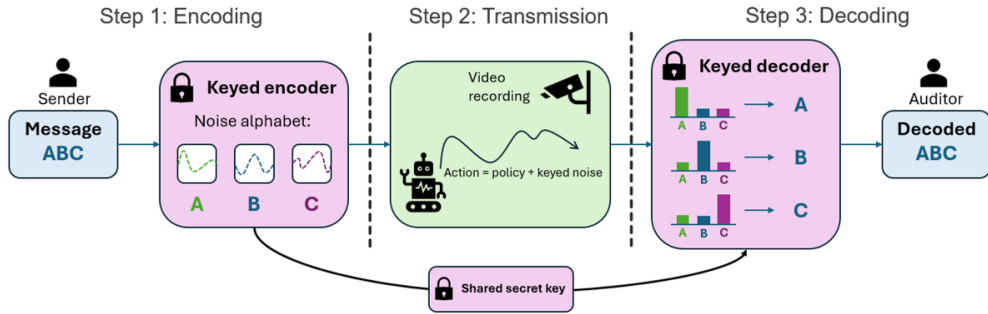


Figure 1: **Messaging through motion.** A keyed encoder maps each message symbol to a distinct noise pattern, which is added to a pre-trained policy’s actions. An auditor, using the shared secret key, matches observed motion from video against candidate patterns to recover the message.

Realising this requires a method that can (i) encode arbitrary messages in reasonable time; (ii) decode reliably from remote sensor data, such as video footage or motion capture traces; (iii) keep the channel secure, so only auditors with the shared key recover the message; and (iv) deploy on existing stochastic policies without retraining, architectural changes, or extra hardware. We present the first method to meet all four requirements, and formalize the underlying design space of this method. Our main insight is that recent advances in remotely detectable policy watermarking, which embeds keyed signals into a robot’s behaviour recoverable from remote sensors, can be extended into a full multi-symbol messaging method. While remotely detectable schemes, such as CoNoCo [3], recover only a single bit, extending to arbitrary messages brings new challenges: every symbol must be decoded correctly, so errors compound across the message, and total transmission time becomes an important constraint. Our contribution is therefore the problem and its design space rather than the underlying primitive, which we use as a black box.

MTM targets stochastic policies, which map observations to actions, and are common in learning, particularly in reinforcement learning [4] and learning for robotics. Rather than adding a separate perturbation, MTM shapes the policy’s existing noise into a keyed signal at inference time. Prior work [3] shows that, for Gaussian policies, this preserves the policy’s marginal action distribution and thus its performance and overall behaviour; a guarantee MTM inherits. MTM also applies to deterministic policies by injecting a small Gaussian perturbation, with performance-detectability trade-off controlled by the perturbation amplitude. We confirm this empirically in App. A.14.

Our contributions are as follows:

- **Motion messaging.** We introduce MTM, a keyed method for embedding arbitrary message content into the action-noise channel of pre-trained stochastic policies at inference time, recoverable from passive remote motion observations (e.g., video or motion capture).
- **Watermark-to-message construction.** We show how to turn a remotely detectable single-watermark primitive into a multi-symbol communication channel by mapping message symbols to keyed signals and decoding them from video-derived motion traces.
- **Design space.** We formalize the trade-offs between alphabet size, symbol duration, and channel allocation, showing how to choose the fastest scheme that meets a target decoding accuracy.
- **Evaluation.** Across five environments (Discovery, Lunar Lander, Reacher, Football, and real-robot RoboMaster [5]), the same-message scheme achieves 100% message recovery in simulation, including the adversarial multi-agent Football setting; on hardware, the split-message scheme recovers an 8-bit message across four robots in 12 s (App. A.11).

2 Related Work

Watermarking. Digital watermarking embeds hidden signals in media for provenance and ownership, with spread-spectrum methods distributing signals across frequency bands for robustness [6, 7, 8]; related ideas now appear in generative models [9, 10, 11]. In cyber-physical systems, dynamic watermarking injects secret probes into control inputs to detect spoofed sensors [12, 13], but assumes access to internal control and privileged internal sensors rather than passive remote observation. Neural-network and policy watermarking similarly target ownership or identification through weights, triggers, safe states, or query behavior [14, 15, 16, 17, 18, 19]; these approaches do not provide a keyed, remote, multi-symbol communication channel through physical motion.

Remotely detectable robot-policy watermarking. Closest to our work, CoNoCo [3] embeds keyed colored noise into a stochastic policy and detects it from video via spectral coherency. CoNoCo establishes the remote watermarking primitive we need, but its decision is binary: whether a known keyed signal is present. MTM builds a communication layer on top of such a primitive, assigning distinct keyed signals to message symbols, and decoding over successive time windows. CoNoCo does not address symbol design, channel allocation, or transmission time, which are the axes any multi-symbol deployment must navigate.

Steganography. Classical steganography hides messages in a carrier signal, whereas watermarking usually emphasizes provenance or ownership. A recent line of work hides messages in the sampling distributions of generative models, e.g. diffusion models [20, 21] and LLMs [22]. These methods embed messages into the latent noise or token-sampling steps, so that the output remains statistically indistinguishable from an ordinary sample. MTM extends this idea from generative models in software to policy execution in the physical world: the randomness exploited is the exploration noise of a stochastic policy, and the resulting motion is the carrier observed by a remote auditor. Unlike these methods, we make no claim of statistical undetectability: our scheme hides message content from observers without the key, but not the presence of a watermark.

Legible motion. Dragan et al. [1], Dragan and Srinivasa [2] shape goal-directed trajectories so that an observer can quickly infer which goal, from a known set, the robot is pursuing. By design, the conveyed information is the task goal itself, and it is expressed by deliberately deviating the trajectory away from the efficient path so the goal is unmistakable—and is therefore readable by anyone watching. Our scheme instead encodes arbitrary messages, decoupled from the task, as subtle perturbations on a channel closed to anyone without the key.

3 Problem Setting

A robot operates in state space $\mathcal{S}$ and action space $\mathcal{A}$, executing a fixed, pre-trained stochastic policy $\pi : \mathcal{S} \times \mathcal{A} \rightarrow [0, 1]$ on its primary task. We wish to transmit a message m —a sequence of L symbols over an alphabet of size M —to a remote auditor holding a shared secret key k , by perturbing π ’s actions at inference time. Crucially, the perturbation may not retrain π , alter its architecture, or introduce additional hardware. The auditor never sees the commanded actions; it observes only the robot’s resulting motion through remote sensing. The goal is a keyed encoder–decoder pair such that the auditor recovers m with probability at least $1 - \epsilon$, in the shortest transmission time T , while: (i) task performance is preserved, and (ii) an observer without k recovers m only at or near chance.

4 Preliminaries

Our method builds on Colored Noise Coherency (CoNoCo) [3], a framework for embedding remotely detectable watermarks into a robot’s motion. CoNoCo formalises the *Physical Observation Gap*: a remote auditor does not observe the policy’s commanded actions, but only their physical consequences (e.g. motion in video). Any watermark must thus survive: (C1) synchronization uncertainty between the policy’s execution clock and the sensor’s sampling rate; (C2) system dynamics filtering commanded actions through the robot’s unknown physics; and (C3) interference from the policy’s primary behavior and from sensor and environmental noise. Formally, the policy runs at unknown times $\{T_k\}$ and its executed action $a_{\text{exec}}(t)$ drives state evolution $\dot{s}(t) = S_{\text{dyn}}(s(t), a_{\text{exec}}(t))$. A remote sensor samples at times $\{t_i\}$ (rate f_g), yielding the auditor’s sole data: a *glimpse sequence* $\mathcal{G} = (G_i)_{i=0}^{N-1}$ where $G_i = G_{\text{map}}(s(t_i)) + \eta_i$, and G_{map} maps state to a remote observation (e.g. a velocity estimate from video) and η_i is measurement noise.

CoNoCo addresses (C1)–(C3) by replacing a stochastic policy’s exploration noise with keyed colored Gaussian noise (CGN) concentrated in a secret band B , and detecting it via spectral coherency between the candidate CGN and $\mathcal{G}$ —a metric invariant to LTI dynamics (C2), searched over candidate policy rates to resolve (C1). CoNoCo’s output is binary: a policy is either identified or not. It is this single-bit case that our method extends to multi-symbol messages.

We use CoNoCo as a *black-box* remotely detectable watermarking primitive inside MTM. Given a secret key, the primitive generates a statistical signal that can be injected into the stochastic policy’s actions. Given a remote sensing-derived motion trace, it returns a score for how strongly that seeded signal appears. MTM turns this single-watermark primitive into a messaging scheme by assigning different seeds to different symbols and decoding each symbol window by choosing the highest-scoring seed. In our experiments, CoNoCo instantiates this primitive using keyed CGN and spectral coherency. The MTM message construction only requires this generate–score interface, so another remotely detectable watermarking method could replace CoNoCo should one arise.¹

5 Method

Our approach, *Messaging through Motion* (MTM), sends a message by introducing remotely detectable, secret key-dependent signals to a robot policy’s actions. In stochastic policies, this can be done without degrading policy performance by modifying the pre-existing random noise of the policy rather than adding the noise signal naively [3]. Each possible message symbol is assigned its own noise signal, generated from a secret key. To send a symbol, the robot introduces the corresponding noise signal to one or more action channels while continuing to run its normal policy.

A remote auditor who knows the key can regenerate the candidate noise signals. From the observed motion, the auditor checks which candidate signal is most present, and decodes that as the transmitted symbol. The message is recovered by repeating this process over successive time windows. We use CoNoCo [3] as the *watermarking primitive* in all experiments. It generates the keyed

¹To our knowledge at the time of writing, CoNoCo is the only remotely detectable robot-policy watermark.

noise signals and scores their presence in remote observations, using CGN for injection and spectral coherency for detection. MTM wraps around this primitive by mapping symbols to seeds and combining scores across channels.

MTM has three parts. We first define the available motion *channels*, i.e. the observable degrees of freedom that can carry a signal (§5.1). We then describe the *encoding*: how message symbols are mapped to keyed noise signals, and how the auditor decodes them from remote observation (§5.2). Finally, we define the *design space*: how to choose the channel strategy, alphabet size, and time per symbol to transmit a message as quickly and reliably as possible (§5.3).

5.1 Channels

A *channel* is any observable degree of freedom into which a watermark can be injected, i.e. any actuated part that can be tracked from remote sensors. For example, channels can correspond to different limbs of a single agent, or to separate agents in a multi-agent setting. Since different channels have different capacities and reliability, we consider three ways of using them:

- **Single-channel:** one channel carries the full message (symbol sequence).
- **Same-message:** all N channels carry the same symbol sequence; detection scores are pooled across channels (averaging or majority vote) to reduce noise.
- **Split-message:** each channel carries an independent part of the message in parallel, increasing time per symbol by a factor of N for N channels (total message time unchanged).

5.2 Encoding and Decoding

Encoding. We encode messages over a finite alphabet of size M , where each symbol $i \in \{0, \dots, M-1\}$ is associated with a distinct keyed random seed k_i . The watermarking primitive uses k_i to generate the perturbation injected during that symbol’s time window. In our CoNoCo instantiation, this perturbation is a colored Gaussian noise sequence concentrated in a secret frequency band. Suppose the total time budget available for transmission is T . Under M -ary encoding, each symbol conveys $\log_2 M$ bits, so larger M requires fewer symbol windows for the same payload, allowing a longer window per symbol. This improves decoding accuracy through noise averaging — though it also increases confusion risk, as the decoder must distinguish between more candidates.

Decoding. The auditor, who shares the secret keys $(k_i)_{i \in \{0, \dots, M-1\}}$, decodes each symbol independently. For each candidate symbol i , the auditor computes the primitive’s detection score between the candidate watermark generated from k_i and the observed glimpse sequence for that time window, then selects the highest-scoring candidate. In our CoNoCo instantiation, this score is the spectral coherency between the keyed CGN reference and the observed motion. Repeating this across all symbol windows recovers the full message.

5.3 Design Space

Together, §5.2 and §5.1 define the design axes: channel strategy, alphabet size, and time per symbol.

Design procedure. Given a target message accuracy $1 - \epsilon$, we select the scheme transmitting the message in the shortest total time T . Let $a_c(t, M)$ be the per-symbol decoding accuracy on a single channel c at time-per-symbol t and alphabet size M , and $a_{\mathcal{I}}(t, M)$ the per-symbol accuracy when a subset of channels $\mathcal{I}$ redundantly carry the same symbol (pooled via averaging or majority vote); both are measured empirically. Under the working approximation that per-symbol errors are independent, an L -symbol message is decoded correctly with probability equal to the product of per-symbol accuracies. For each scheme we minimise T subject to this product meeting the target:

1. **Single-channel:** over M and channel c , s.t. $a_c(T/L, M)^L \geq 1 - \epsilon$.
2. **Same-message:** over M and channel subset $\mathcal{I}$, s.t. $a_{\mathcal{I}}(T/L, M)^L \geq 1 - \epsilon$.

3. **Split-message:** over M , channel subset $\mathcal{I}$, and allocations $\{l_c\}_{c \in \mathcal{I}}$ with $\sum_c l_c = L$, s.t. $\prod_{c \in \mathcal{I}} a_c(T/l_c, M)^{l_c} \geq 1 - \epsilon$.

Because the accuracy functions are empirical, each minimisation is a direct search over the measured accuracy table; we select the scheme with the smallest T .

6 Results

We evaluate MTM across four simulated environments of increasing difficulty in the VMAS, Box2D and MuJoCo simulators [23, 24, 25] (Figure 2), decoding from video alone. We further validate the method on the real RoboMaster [5] platform. In each environment, the encoded message is the agent’s goal; in Football, it is the team strategy. Encoding and decoding depend only on the symbol sequence, so these goal IDs and team strategies are chosen payloads rather than a requirement of the method. We systematically explore the design space, studying how alphabet size, channel allocation strategy, and time budget affect decoding accuracy.

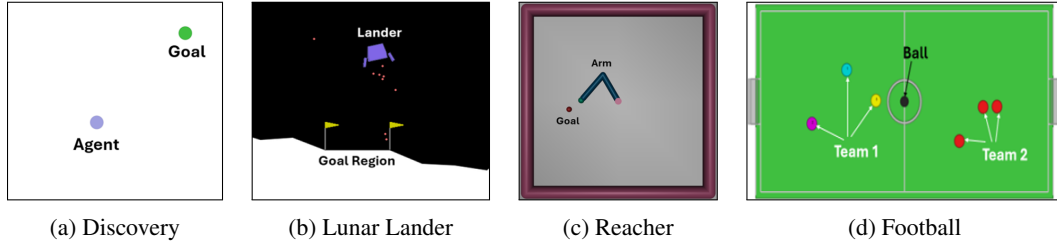


Figure 2: Simulated environments: **(a)** Discovery: single-agent navigation (VMAS [23]). **(b)** Lunar Lander: powered descent (Box2D [24]). **(c)** Reacher: 2-DOF planar robotic arm (MuJoCo [25]). **(d)** Football: 3v3 multi-agent team play (VMAS [23]).

Discovery: General Design Choices. The single-agent Discovery task offers a controlled, low-noise setting ideal for isolating core design choices. The agent navigates at 10 Hz to one of 8 goal locations, with the goal ID as the message (3-bit message), and the action direction (x or y) as the channel. Figure 3 shows that accuracy increases with both alphabet size M and time budget T . Combining both x and y channels under the same-message scheme consistently outperforms single-channel; notably, $M=8$ reaches 95% accuracy across all T and 100% at $T = 108$ policy calls. The two channels achieve similar individual accuracies, motivating an equal symbol allocation in the split-message scheme (App. A.7), which performs better than same-message at smaller T .

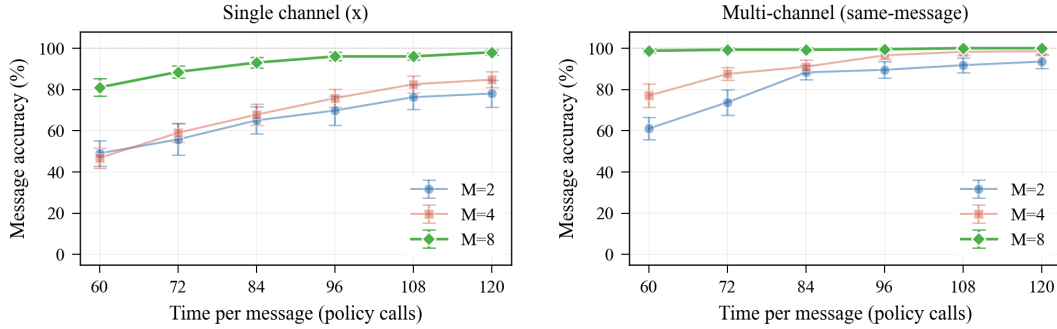


Figure 3: Discovery: decoding accuracy from video across 50 replications as a function of alphabet size M and time per message T (policy runs at 10 Hz) for single-channel (left) and same-message multi-channel (right) allocation. Results for other single-channel and split-message in App. A.7.

Lunar Lander: Challenging Dynamics. We use the Lunar Lander environment to investigate watermark robustness under challenging dynamics. The agent must land a rocket at one of 8 possible

landing pads, but its control loop actively combats noisy fluctuations, interfering with the watermark. The landing pad ID serves as the message (3-bit message), and the action directions (side engine and main engine) as channels, sampled at 50 Hz. Figure 4 shows that reliable decoding remains achievable despite the dynamics, with the $M=8$ same-message scheme reaching 100% accuracy at $T = 288$ policy calls. Interestingly, the y -channel achieves higher accuracy at lower T : the environment’s weaker action threshold on the main engine causes less watermark clipping, making it a stronger channel. This asymmetry motivates an unequal symbol allocation in the split-message scheme (App. A.8), favouring the stronger y -channel, which reaches 90% accuracy at smaller T .

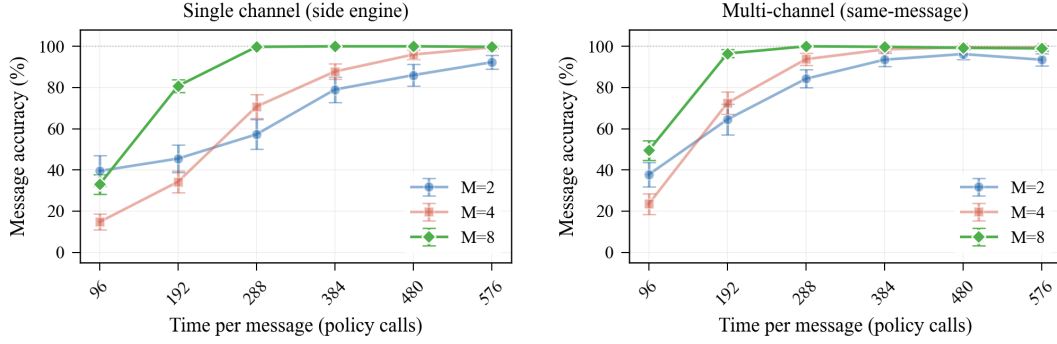


Figure 4: Lunar Lander: decoding accuracy from video across 50 replications as a function of alphabet size M and time per message T (policy runs at 50 Hz) for single-channel (left) and same-message multi-channel (right) allocation. Results for other single-channel and split-message in App. A.8.

Reacher: Articulated Motion. We use the Reacher environment to investigate watermark robustness under articulated motion: angular velocity, a nonlinear function of joint torques, is harder to track, and the two linked arms can interfere with each other. The agent reaches one of 8 goal positions at 50 Hz, with the goal ID as the message (3-bit message), and the arm whose torque carries the watermark (inner or outer) as the channel. Figure 5 shows that a single channel (inner arm) achieves 100% accuracy at $T=240$. The same-message scheme, however, yields little improvement: mechanical coupling between the linked arms causes watermark signals to interfere destructively, cancelling rather than reinforcing each other. This coupling also explains why the split-message scheme (App. A.9) falls well short of its predicted accuracy.

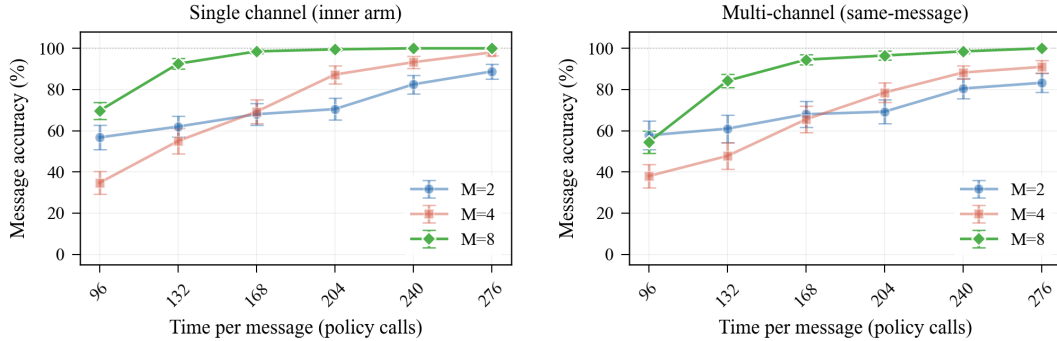


Figure 5: Reacher: decoding accuracy from video across 50 replications as a function of alphabet size M and time per message T (policy runs at 50 Hz) for single-channel (left) and same-message multi-channel (right) allocation. Results for other single-channel and split-message in App. A.9.

Football: Multi-Agent and Adversarial. We use the Football environment to push our method into three more challenging settings simultaneously. First, this task is *multi-agent*: three agents play on a team, each serving as a separate channel, controlled at 10 Hz. Second, it is *adversarial*: an opposing team interferes with the agents’ trajectories, adding collision noise that makes the team

strategy difficult to recover from video. Third, the message is *higher-level intent*: one of 64 team strategies (6-bit message), defined by four behavioural parameters, rather than the simple goal IDs used previously. Figure 6 shows that the same-message scheme reaches 100% accuracy at $M = 64$ and $T = 516$ policy calls. Since the three agents contribute similarly, we allocate symbols equally in the split-message scheme (App. A.10), which outperforms same-message at smaller M .

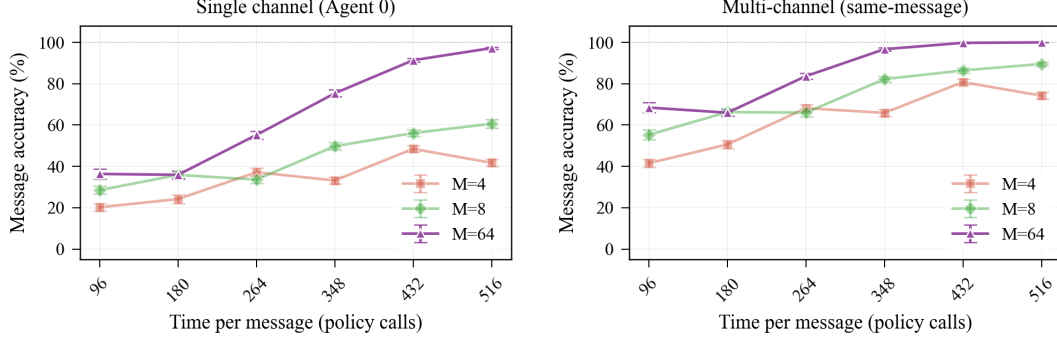


Figure 6: Football: decoding accuracy from video across 50 replications as a function of alphabet size M and time per message T (policy runs at 10 Hz) for single-channel (left) and same-message multi-channel (right) allocation. Results for other single-channel and split-message in App. A.10.

RoboMaster: Real-World Deployment. We validate our method on physical hardware with a team of four RoboMaster robots [5], controlled at 50 Hz, each acting as an independent emitter transmitting which of 4 goal locations it navigates to (2-bit message). A motion capture system serves as the auditor’s remote-sensing feed. Despite real-world noise and dynamics, all four robots decode correctly in every rollout under the split-message scheme at $T=600$ policy calls (35% of the trajectory length), well before the robots reach their goals. This corresponds to 8 bits in 12 s: an aggregate 0.67 bits/s across the team, or 0.167 bits/s per robot. This demonstrates the practical value of the method: an auditor recovers each robot’s intent well before its behaviour reveals it.

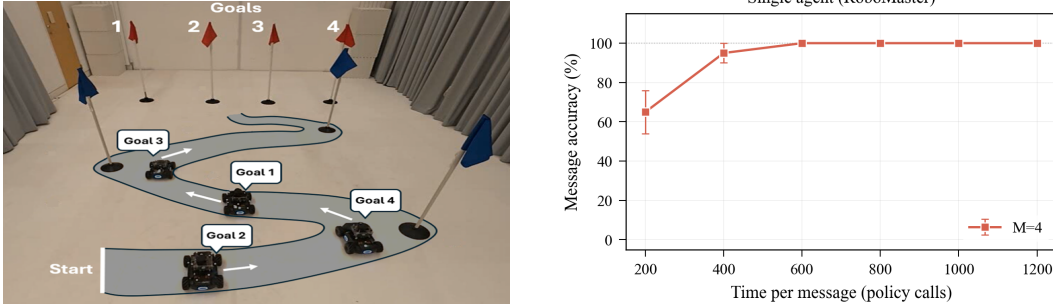


Figure 7: Real-world RoboMaster: (left) the real environment, where each robot acts as an independent emitter transmitting its own message; (right) decoding accuracy from motion capture across 20 replications, as a function of time per message T (policy runs at 50 Hz).

Null conditions. We test two null conditions at the headline operating point of every environment, hardware included: decoding with the wrong key, and decoding a rollout in which no message was transmitted. App. A.12 reports both arms at or near the $1/M$ chance rate, against 100% keyed recovery at the same operating points, with sample sizes and intervals. This establishes keyed closed-set decoding; we do not evaluate steganalysis, known-plaintext, or codebook-learning attacks.

Results Summary. The experiments suggest three design heuristics: (i) larger M often improves accuracy for a fixed payload and time budget, as fewer symbols allow longer averaging windows; (ii) same-message encoding is the strongest general-purpose scheme, benefiting from pooling score

across channels; (iii) split-message encoding reduces transmission time when channels have asymmetric accuracies, as unequal symbol allocation lets stronger channels carry more of the message.

7 Conclusion

We introduced *Messaging Through Motion* (MTM), a method for transmitting keyed messages through a robot’s physical movement. MTM wraps a remotely detectable watermarking primitive with a message-coding layer: symbols are mapped to keyed noise signals, injected through a pre-trained stochastic policy’s action-noise channel at inference time, and decoded from remote motion observations by an auditor holding the shared key. The method requires no policy retraining, no architectural modification, and no additional communication hardware.

Across four simulated domains and a real-robot RoboMaster deployment, MTM shows that motion can carry useful message content at little cost to the robot’s primary behavior — though not none: in Football, watermarking costs scoring rate $1.00 \rightarrow 0.90$. The experiments expose the main design trade-offs: (i) larger alphabets reduce total transmission time, (ii) redundant same-message encoding improves robustness, and (iii) channels can differ substantially in reliability.

More broadly, this work demonstrates that subtle statistical signals in robot motion can serve as a communication medium. Unlike conventional robot communication, which depends on explicit communication links or onboard logs access, motion is already observable whenever a robot acts. A keyed motion channel can therefore complement existing communication systems, giving auditors a way to recover intent, identity, or protocol information from physical behavior alone.

8 Limitations

The framework assumes messages are discrete and piecewise constant over each symbol window; continuously evolving messages (e.g., precise scalar quantities) cannot be represented. MTM works for stochastic policies; policies with low randomness cannot use it. The payloads we evaluate are short, and per-symbol errors compound across a message, so reliability over substantially longer payloads is untested. Finally, the scheme hides the message content from observers without the key but not the presence of a watermark; and it authenticates the sender but not the message, since a key-holder can embed an arbitrary, possibly malicious, message.

Our security claim is correspondingly narrow: we establish keyed closed-set decoding, not covertness, authentication, integrity, or replay resistance, and we do not claim robustness to steganalysis or known-plaintext attacks. Where the payload is the robot’s goal, our claim is only that a key-holder decodes it much sooner than an unkeyed observer could infer it from the motion, not that the goal is hidden indefinitely. Our simulated results decode from rendered video, but the hardware runs use motion capture, so the decoder is untested on a real, uncalibrated RGB camera and under occlusion. We have no precise bound on performance degradation: preserving the marginal action distribution constrains per-timestep actions, not the closed-loop trajectory. Tracking error is equivalent between watermarked and clean rollouts, but energy and actuator wear were not measured. Key management and synchronisation are discussed in App. A.5. We view these as promising future directions toward making MTM more robust and diversely applicable.

References

- [1] A. D. Dragan, K. C. Lee, and S. S. Srinivasa. Legibility and predictability of robot motion. In *Proc. 8th ACM/IEEE Int. Conf. on Human-Robot Interaction*, pages 301–308, 2013.
- [2] A. Dragan and S. Srinivasa. Generating legible motion. In *Proceedings of Robotics: Science and Systems*, Berlin, Germany, June 2013. doi:10.15607/RSS.2013.IX.024.
- [3] M. Amir, M. Flageat, and A. Prorok. Remotely detectable robot policy watermarking. In *International Conference on Learning Representations*, 2026.

- [4] R. S. Sutton, A. G. Barto, et al. *Reinforcement learning: An introduction*, volume 1. MIT press Cambridge, 1998.
- [5] J. Blumenkamp, A. Shankar, M. Bettini, J. Bird, and A. Prorok. The cambridge robomaster: An agile multi-robot research platform. *arXiv preprint arXiv:2405.02198*, 2024.
- [6] H. Berghel and L. O’Gorman. Protecting ownership rights through digital watermarking. *Computer*, 29(7):101–103, 1996.
- [7] M. D. Swanson, M. Kobayashi, and A. H. Tewfik. Multimedia data-embedding and watermarking technologies. *Proceedings of the IEEE*, 86(6):1064–1087, 1998.
- [8] I. J. Cox, J. Kilian, F. T. Leighton, and T. Shamoan. Secure spread spectrum watermarking for multimedia. *IEEE Transactions on Image Processing*, 6(12):1673–1687, 1997.
- [9] Y. Wen, J. Kirchenbauer, J. Geiping, and T. Goldstein. Tree-ring watermarks: Fingerprints for diffusion images that are invisible and robust. In *Advances in Neural Information Processing Systems*, 2023.
- [10] J. Kirchenbauer, J. Geiping, Y. Wen, J. Katz, I. Miers, and T. Goldstein. A watermark for large language models. In *International Conference on Machine Learning*, pages 17061–17084, 2023.
- [11] S. Dathathri, A. See, S. Ghaisas, P.-S. Huang, R. McAdam, J. Welbl, V. Bachani, A. Kaskasoli, R. Stanforth, T. Matejovicova, J. Hayes, N. Vyas, M. Al Merey, J. Brown-Cohen, R. Bunel, B. Balle, T. Cemgil, Z. Ahmed, K. Stacpoole, I. Shumailov, C. Baetu, S. Goyal, D. Hassabis, and P. Kohli. Scalable watermarking for identifying large language model outputs. *Nature*, 634(8035):818–823, 2024.
- [12] B. Satchidanandan and P. R. Kumar. Dynamic watermarking: Active defense of networked cyber-physical systems. *Proceedings of the IEEE*, 105(2):219–240, 2016.
- [13] W.-H. Ko, B. Satchidanandan, and P. R. Kumar. Theory and implementation of dynamic watermarking for cybersecurity of advanced transportation systems. In *2016 IEEE Conference on Communications and Network Security (CNS)*, pages 416–420, 2016.
- [14] B. Darvish Rouhani, H. Chen, and F. Koushanfar. DeepSigns: An end-to-end watermarking framework for ownership protection of deep neural networks. In *Proceedings of the Twenty-Fourth International Conference on Architectural Support for Programming Languages and Operating Systems*, pages 485–497, 2019.
- [15] Y. Adi, C. Baum, M. Cissé, B. Pinkas, and J. Keshet. Turning your weakness into a strength: Watermarking deep neural networks by backdooring. In *27th USENIX Security Symposium (USENIX Security 18)*, pages 1615–1631, 2018.
- [16] V. Behzadan and W. H. Hsu. Sequential triggers for watermarking of deep reinforcement learning policies. *arXiv preprint arXiv:1906.01126*, 2019.
- [17] K. Chen, S. Guo, T. Zhang, S. Li, and Y. Liu. Temporal watermarks for deep reinforcement learning models. In *Proceedings of the 20th International Conference on Autonomous Agents and Multiagent Systems*, pages 314–322, 2021.
- [18] S. Szyller, B. G. Atli, S. Marchal, and N. Asokan. Dawn: Dynamic adversarial watermarking of neural networks. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 4417–4425, 2021.
- [19] K. Huang, Z. Zhang, Z. Yang, and L. Zhou. Agent guide: A simple agent behavioral watermarking framework. *arXiv preprint arXiv:2504.05871*, 2025.

- [20] D. Kim, C. Shin, J. Choi, D. Jung, and S. Yoon. Diffusion-stego: Training-free diffusion generative steganography via message projection. *arXiv preprint arXiv:2305.18726*, 2023.
- [21] J. Jiang, Z. Wang, Z. Yuan, and X. Zhang. Generative image steganography based on text-to-image multimodal generative model. *IEEE Transactions on Circuits and Systems for Video Technology*, 35(9):8907–8916, 2025. doi:10.1109/TCSVT.2025.3556892.
- [22] A. Norelli and M. Bronstein. LLMs can hide text in other text of the same length. In *International Conference on Learning Representations*, 2026.
- [23] M. Bettini and A. Prorok. Vmas: A vectorized multi-agent simulator for reinforcement learning. *arXiv preprint arXiv:2207.03530*, 2022.
- [24] M. Towers, A. Kwiatkowski, J. Terry, J. U. Balis, G. De Cola, T. Deleu, M. Goulão, A. Kallinteris, M. Krimmel, A. KG, R. Perez-Vicente, A. Pierré, S. Schulhoff, J. J. Tai, H. Tan, and O. G. Younis. Gymnasium: A standard interface for reinforcement learning environments. *arXiv preprint arXiv:2407.17032*, 2024.
- [25] E. Todorov, T. Erez, and Y. Tassa. Mujoco: A physics engine for model-based control. In *Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2012.
- [26] Z. Jiang, M. Guo, Y. Hu, Y. Wang, and N. Z. Gong. Watermark-based attribution of AI-generated content. In *International Conference on Learning Representations*, 2026.
- [27] J. H. Cho and B. Hariharan. On the efficacy of knowledge distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4794–4802, 2019.

A Additional Experimental Details

A.1 Notation

Table 1: Key mathematical symbols used in this paper.

Symbol	Description
<i>Problem setting</i>	
π	Pre-trained stochastic policy
m	Message transmitted to the auditor
L	Message length (number of symbols)
M	Alphabet size (symbols per window)
k	Shared secret key
T	Total transmission time
ϵ	Decoding error tolerance
<i>Glimpse / physical observation</i>	
$\{T_k\}$	Policy execution times
$a_{\text{exec}}(t)$	Executed action
S_{dyn}	State dynamics
$\{t_i\}, f_g$	Remote sensor sampling times and rate
$\mathcal{G} = (G_i)_{i=0}^{N-1}$	Glimpse sequence (auditor’s sole data)
G_{map}	State $\rightarrow$ remote observation map
η_i	Measurement noise on glimpse G_i
B	Secret frequency band for CGN injection
<i>Encoding / decoding</i>	
k_i	Per-symbol keyed seed for symbol i
c	Channel index (observable degree of freedom)
$\mathcal{I}$	Subset of channels used for transmission
l_c	Number of symbols allocated to channel c
$a_c(t, M)$	Empirical per-symbol accuracy on channel c
$a_{\mathcal{I}}(t, M)$	Pooled per-symbol accuracy over $\mathcal{I}$

A.2 Policy and Controller Details

For all environments, each rollout uses a distinct codebook ($\text{wm_master_seed} = \text{base} + i$) paired with a distinct env seed, so the 50 rollouts per (M, T) cell are i.i.d. draws from the joint (codebook, env-seed) distribution. This removes single-codebook bias from the reported accuracies. It is a variance-reduction measure rather than part of the protocol; see App. A.5.

Discovery. A scripted navigation controller steers the agent toward the current goal at unit speed at 10 Hz. Watermarks are injected as additive CGN perturbations on the 2D velocity command ($\sigma=0.03$). The agent visits 8 sequential goals per rollout; each goal encodes a 3-bit goal index. Results are averaged over 50 independently seeded rollouts per (M, T) setting, each with its own codebook. Video is recorded at 704×704 px.

Lunar Lander. A PD hover controller guides the lander toward the target pad at 50 Hz. A 150-step off-camera warmup lets the lander descend into the trackable viewport before watermark injection and video recording begin. $\sigma=0.5$; 8 goals per rollout, 50 independently seeded rollouts per (M, T) setting, each with its own codebook. Video is recorded at 600×400 px.

Reacher. SAC (Stable-Baselines3, seed 42) trained for 1.9×10^5 steps on a modified Reacher with target positions sampled within ± 0.20 in each axis, controlled at 50 Hz. During injection the arm visits 8 sequential targets on a ring of radius $r=0.14$, each encoding a 3-bit sector index. $\sigma=1.0$; 50 independently seeded rollouts per (M, T) setting, each with its own codebook. Video is recorded at 480×480 px.

Football. A heuristic PD controller drives a team of three agents in a 3v3 adversarial setting at 10 Hz ($\Delta t=0.1$ s). 64 team strategies are generated by varying four behavioral parameters (tempo, approach bias, formation, passing frequency). All three agents carry the same CGN pattern on their 2D action vectors ($\sigma=0.3$). For each (M, T) cell every one of the 64 strategies is evaluated, each with 50 rollouts using independent (codebook, env-seed) pairs (3,200 rollouts per cell). Video is recorded at 1200×800 px (VMAS default), rendered to an invisible pyglet window to avoid display-context contention between parallel workers.

A.3 Detection Pipeline Details

All environments share a common coherency-based detector. Each rollout regenerates the CGN reference table from the rollout’s `wm_master_seed` (the same seed used at injection time), so detection sees a different codebook on every rollout. Cross-spectral densities are estimated via Welch’s method with a Hann window, segment length $n_{\text{perseg}} = \min(128, \lfloor L/2 \rfloor)$, overlap $\frac{3}{4} \times n_{\text{perseg}}$, and $n_{\text{fft}}=L$ to align Welch frequency bins with CGN injection frequencies. The watermark band is $[0.5, 5.0]$ Hz for Lunar Lander and Reacher, $[0.10, 0.20]$ Hz for Discovery, and $[0.10, 0.35]$ Hz for Football (the latter two normalised, $f_s=1.0$). A grid of 101 candidate frequency scales over $[0.8 f_\pi, 1.2 f_\pi]$ is searched to account for synchronisation uncertainty between the policy execution rate and the observer’s sampling rate.

Tracking methods. Discovery uses color-centroid tracking. Lunar Lander uses brightness-centroid tracking of bright pixels in a region of interest. Reacher uses HSV color segmentation to track the inner and outer arm centroids from the top-down camera view; joint angular velocities are recovered via $\omega = (\mathbf{r} \times \mathbf{v}_{\text{rel}})/|\mathbf{r}|^2$. For the capacity-allocation experiment (App. A.6), LK optical flow with Kalman filtering is used instead, providing a less precise outer-link signal that creates asymmetric channel conditions. Football uses HSV color segmentation (cyan/magenta/yellow agents at the native 1200×800 render; velocity via finite differences with spike removal to suppress goal-reset teleport artifacts). Tracked positions in Lunar Lander and Reacher are smoothed with a constant-velocity Kalman filter (process noise std = 6.0, measurement noise std = 0.8).

A.4 Codebook Construction

Attribution errors arise when multiple hypotheses yield similar coherency scores on the same glimpse sequence.

One mitigation is using different frequency bands per symbol, though this is constrained by available bandwidth and the maximum frequency at which video-based detection remains reliable.

Iterative codebook construction (e.g. via A-BSTA [26]) could also reduce inter-symbol confusion, but is only approximate in our setting since detection operates between observed glimpses and CGN references rather than between CGN sequences directly.

Orthogonal frequency-domain signals (e.g. Hadamard matrices) face the same limitation: they optimise inter-signal orthogonality rather than the magnitude coherence between observed residuals and keyed references that our detector actually scores.

In practice, independently sampled random seeds provide sufficient separation without explicit optimisation; we additionally vary the codebook across rollouts (`wm_master_seed = base + i` for rollout i) so reported accuracies are averaged over the codebook ensemble rather than fixed to a single draw. We leave principled codebook design to future work.

A.5 Keys and Synchronisation

In deployment the codebook is fixed, derived from a long-lived key shared between the robot’s operator and the auditor. The per-rollout fresh codebook used throughout our experiments (App. A.2) is a variance-reduction measure that averages reported accuracies over the codebook ensemble; it is not part of the protocol, and our results should not be read as evaluating a one-time-key regime.

The symbol rate and any onset offset between the policy’s execution clock and the observer’s sampling are recoverable by the primitive’s frequency-scale search and GCC-PHAT alignment, as in CoNoCo [3]. Message length, alphabet size and symbol boundaries are agreed in advance alongside the key, so the receiver does not infer them from the recording. Replay and message substitution by another key-holder are not prevented: the scheme proves possession of the key, not message origin or integrity. Binding a message to a sender or a time would require an authentication layer above MTM, which we leave to future work.

A.6 Approximate Multi-Channel Symbol Allocation

For the multi-channel split-message method, it is straightforward to empirically find the optimum allocation of symbols across the channels for small L . However, for large L , we propose a fast heuristic allocation of message symbols across channels using their capacities.

Since we care only whether each symbol is decoded correctly or not, we model each channel as an M -ary symmetric channel with symbol accuracy a_c . This is reasonable because, since each symbol uses an independent random seed and each window a fresh noise realisation, we can approximate a_c as constant across symbols and errors as independent across windows. The capacity of the channel is

$$C_M(a_c) = \log_2 M - H_2(a_c) - (1 - a_c) \log_2(M - 1) \text{ bits/symbol}, \quad (1)$$

where $H_2(\cdot)$ is the binary entropy function. This correctly vanishes at $a_c = 1/M$, where the decoder conveys no information about the transmitted symbol. So if each channel c is allocated l_c message symbols, the maximum number of reliably decodable message symbols per channel is

$$R_c = l_c \cdot C_M(a_c), \quad (2)$$

i.e. more symbols are allocated to more reliable channels. It should be noted that this is an approximation: the capacity-based allocation assumes a target accuracy of 100%, the same total number of symbols per channel (coded and uncoded), and an asymptotically long message. An earlier binary-symmetric formulation of this heuristic reproduces every allocation reported here exactly, so the correction affects the justification rather than the allocations themselves. The single-channel accuracy curves used to select allocations are not held out: calibration and evaluation share seeds.

A.7 Discovery: Numerical Results

Throughout, σ denotes the watermark noise amplitude and n the number of independently seeded rollouts per setting. Errors are reported as standard error of the mean. The Discovery environment is symmetric in x/y , so we only sweep one single-channel axis.

Table 2: Discovery single-channel (x-dim): message accuracy (%) vs. T and M ($\sigma=0.03$, 8 goals/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
48	43.3 $\pm$ 3.4	33.8 $\pm$ 2.6	79.0 $\pm$ 1.8	0.09	0.05	0.04
60	49.0 $\pm$ 3.1	46.8 $\pm$ 2.4	81.0 $\pm$ 2.1	0.11	0.06	0.05
72	55.8 $\pm$ 3.8	59.0 $\pm$ 2.3	88.5 $\pm$ 1.5	0.11	0.05	0.06
84	65.0 $\pm$ 3.3	67.8 $\pm$ 2.6	93.0 $\pm$ 1.3	0.11	0.07	0.06
96	69.8 $\pm$ 3.5	75.8 $\pm$ 2.2	96.0 $\pm$ 1.0	0.12	0.06	0.07
108	76.3 $\pm$ 2.9	82.5 $\pm$ 2.0	96.0 $\pm$ 0.8	0.12	0.09	0.07
120	78.0 $\pm$ 3.3	84.8 $\pm$ 1.9	98.0 $\pm$ 0.6	0.13	0.07	0.09

Table 3: Discovery multi-channel same-message: message accuracy (%) ($\sigma=0.03$, 8 goals/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
48	49.0 $\pm$ 2.7	55.8 $\pm$ 3.3	96.5 $\pm$ 0.9	0.10	0.07	0.07
60	61.0 $\pm$ 2.7	77.0 $\pm$ 2.8	98.8 $\pm$ 0.5	0.13	0.09	0.09
72	73.8 $\pm$ 3.1	87.5 $\pm$ 1.5	99.3 $\pm$ 0.4	0.13	0.09	0.10
84	88.3 $\pm$ 1.8	91.0 $\pm$ 1.6	99.3 $\pm$ 0.4	0.15	0.12	0.11
96	89.5 $\pm$ 2.0	96.5 $\pm$ 1.0	99.5 $\pm$ 0.3	0.15	0.11	0.12
108	91.8 $\pm$ 1.8	98.3 $\pm$ 0.8	100.0	0.16	0.13	0.12
120	93.5 $\pm$ 1.6	98.5 $\pm$ 0.7	100.0	0.16	0.12	0.13

Table 4: Discovery multi-channel split-message: message accuracy (%) at $M=4$, $L=2$ symbols per goal, allocation $(l_x, l_y)=(1, 1)$ ($\sigma=0.03$, 8 goals/rollout, $n=50$).

T	Msg. Acc. (%)	Margin
48	75.8 $\pm$ 2.4	0.06
60	83.5 $\pm$ 2.0	0.08
72	89.5 $\pm$ 1.4	0.08
84	92.0 $\pm$ 1.4	0.09
96	95.8 $\pm$ 1.3	0.10
108	95.8 $\pm$ 1.2	0.10
120	98.0 $\pm$ 0.7	0.11

A.8 Lunar Lander: Numerical Results

Table 5: Lunar Lander single-channel (x-dim / lateral thrust): message accuracy (%) vs. T and M ($\sigma=0.5$, 8 goals/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	39.5 $\pm$ 3.7	14.8 $\pm$ 1.9	33.0 $\pm$ 2.4	0.12	0.07	0.04
192	45.5 $\pm$ 3.4	34.3 $\pm$ 2.6	80.8 $\pm$ 1.6	0.12	0.06	0.06
288	57.3 $\pm$ 3.6	70.8 $\pm$ 2.9	99.8 $\pm$ 0.2	0.11	0.08	0.13
384	79.0 $\pm$ 3.1	87.8 $\pm$ 1.9	100.0	0.12	0.10	0.23
480	86.0 $\pm$ 2.6	96.0 $\pm$ 1.1	100.0	0.13	0.12	0.28
576	92.3 $\pm$ 1.7	99.5 $\pm$ 0.3	99.8 $\pm$ 0.2	0.14	0.15	0.31

Table 6: Lunar Lander single-channel (y-dim / main engine): message accuracy (%) vs. T and M ($\sigma=0.5$, 8 goals/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	23.3 $\pm$ 2.1	12.8 $\pm$ 2.0	31.5 $\pm$ 2.3	0.13	0.07	0.04
192	43.3 $\pm$ 3.3	56.3 $\pm$ 3.4	93.3 $\pm$ 1.1	0.13	0.08	0.10
288	78.3 $\pm$ 2.8	89.5 $\pm$ 1.6	99.3 $\pm$ 0.4	0.13	0.11	0.17
384	89.0 $\pm$ 1.9	94.3 $\pm$ 1.3	99.5 $\pm$ 0.3	0.17	0.13	0.27
480	94.0 $\pm$ 1.5	96.0 $\pm$ 1.1	99.0 $\pm$ 0.5	0.17	0.15	0.33
576	90.8 $\pm$ 2.0	96.3 $\pm$ 1.0	98.0 $\pm$ 0.6	0.18	0.19	0.36

Table 7: Lunar Lander multi-channel same-message: message accuracy (%) ($\sigma=0.5$, 8 goals/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	37.8 $\pm$ 2.9	23.5 $\pm$ 2.5	49.5 $\pm$ 2.3	0.11	0.06	0.03
192	64.5 $\pm$ 3.7	72.5 $\pm$ 2.7	96.5 $\pm$ 0.9	0.11	0.07	0.10
288	84.3 $\pm$ 2.2	93.8 $\pm$ 1.5	100.0	0.11	0.12	0.18
384	93.5 $\pm$ 1.6	98.5 $\pm$ 0.6	99.8 $\pm$ 0.2	0.16	0.13	0.28
480	96.3 $\pm$ 1.3	99.5 $\pm$ 0.3	99.3 $\pm$ 0.4	0.16	0.15	0.33
576	93.5 $\pm$ 1.5	99.5 $\pm$ 0.3	99.0 $\pm$ 0.6	0.16	0.20	0.36

At $M=2$, accuracy dips slightly at $T=576$ versus $T=480$ for both the y -channel and same-message scheme. The longer watermark requires an extended hover phase, where the control loop dominates near the goal and interferes most with the final symbol (3 of 3 at $M=2$); per-symbol diagnostics confirm it carries the bulk of the added errors.

Table 8: Lunar Lander multi-channel split-message: empirical validation of the predicted optimal allocation for a 10-bit message ($L=5$ symbols) at $M=4$, $\sigma=0.5$, $n=50$. The $(l_x, l_y)=(2, 3)$ allocation was selected by the analytic simulator from the single-channel curves; measured message accuracy matches the prediction (0.90 vs 0.91 predicted).

M	L	(l_x, l_y)	t_x	t_y	T	Msg. Acc. (%)	Sym. Acc. (%)	Margin
4	5	(2, 3)	288	192	576	90.0 $\pm$ 4.2	98.0 $\pm$ 0.8	0.14

A.9 Reacher: Numerical Results

Table 9: Reacher single-channel (inner arm / shoulder joint): message accuracy (%) vs. T and M ($\sigma=1.0$, 8 targets/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	56.8 $\pm$ 2.9	34.8 $\pm$ 2.8	69.8 $\pm$ 2.0	0.15	0.09	0.06
132	62.0 $\pm$ 2.5	55.0 $\pm$ 3.1	92.5 $\pm$ 1.3	0.19	0.11	0.11
168	68.0 $\pm$ 2.6	69.3 $\pm$ 2.9	98.5 $\pm$ 0.6	0.18	0.13	0.15
204	70.5 $\pm$ 2.6	87.3 $\pm$ 2.2	99.5 $\pm$ 0.3	0.19	0.16	0.18
240	82.5 $\pm$ 2.2	93.3 $\pm$ 1.5	100.0	0.20	0.18	0.20
276	88.8 $\pm$ 1.8	98.0 $\pm$ 0.8	100.0	0.21	0.20	0.24

Table 10: Reacher single-channel (outer arm / elbow joint): message accuracy (%) vs. T and M ($\sigma=1.0$, 8 targets/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	47.0 $\pm$ 3.3	27.5 $\pm$ 2.9	50.8 $\pm$ 2.7	0.14	0.08	0.05
132	54.8 $\pm$ 2.7	43.3 $\pm$ 2.8	79.0 $\pm$ 2.4	0.17	0.09	0.08
168	56.0 $\pm$ 3.0	51.0 $\pm$ 3.1	87.0 $\pm$ 1.8	0.16	0.09	0.10
204	61.3 $\pm$ 2.6	74.8 $\pm$ 3.0	92.8 $\pm$ 1.2	0.16	0.12	0.12
240	72.5 $\pm$ 2.3	85.0 $\pm$ 2.3	97.0 $\pm$ 0.8	0.16	0.13	0.14
276	74.3 $\pm$ 2.6	88.8 $\pm$ 1.7	98.8 $\pm$ 0.5	0.17	0.15	0.18

The inner arm is the stronger channel: its fixed base point allows a clean angular-velocity estimate from a single tracked endpoint, whereas the outer arm requires two.

Table 11: Reacher multi-channel same-message: message accuracy (%) ($\sigma=1.0$, 8 targets/rollout, $n=50$).

T	Message Accuracy (%)			Margin		
	$M=2$	$M=4$	$M=8$	$M=2$	$M=4$	$M=8$
96	57.8 $\pm$ 3.5	38.0 $\pm$ 2.8	54.5 $\pm$ 2.6	0.12	0.07	0.05
132	61.0 $\pm$ 3.3	47.8 $\pm$ 3.2	84.3 $\pm$ 1.6	0.14	0.08	0.07
168	68.0 $\pm$ 3.2	65.5 $\pm$ 3.2	94.5 $\pm$ 1.2	0.14	0.09	0.09
204	69.3 $\pm$ 2.9	78.5 $\pm$ 2.4	96.5 $\pm$ 1.1	0.14	0.10	0.10
240	80.5 $\pm$ 2.4	88.3 $\pm$ 1.6	98.5 $\pm$ 0.6	0.14	0.10	0.11
276	83.3 $\pm$ 2.3	91.0 $\pm$ 1.6	100.0	0.14	0.11	0.16

Table 12: Reacher multi-channel split-message with optimal allocation ($n=50$). Each row uses the minimum T and $(l_{\text{inner}}, l_{\text{outer}})$ allocation satisfying the 95% target predicted from single-channel curves.

M	T	$(l_{\text{inner}}, l_{\text{outer}})$	Msg. (%)	Sym. (%)	Dim 0 (%)	Dim 1 (%)
2	2112	(16, 8)	89.8 $\pm$ 2.5	96.4 $\pm$ 0.9	99.5	90.3
4	1920	(12, 4)	63.7 $\pm$ 3.1	81.8 $\pm$ 1.6	78.0	93.0
8	1152	(6, 2)	58.2 $\pm$ 5.5	58.2 $\pm$ 5.5	52.3	76.0

This is a deliberate negative result rather than an oversight (Fig. 5): the allocation heuristic assumes independent channels and breaks down when the arms are mechanically coupled, which is exactly the failure mode a deployment on such a platform must anticipate.

A.10 Football: Numerical Results

Table 13: Football single-channel (agent 0): goal-decoding accuracy (%) and margin vs. T and M ($n=50$ rollouts, 64 strategies per cell).

T	Accuracy (%)			Margin		
	$M=4$	$M=8$	$M=64$	$M=4$	$M=8$	$M=64$
96	20.2	28.5	36.3	0.07	0.06	0.03
180	24.2	35.9	35.9	0.06	0.05	0.02
264	37.2	33.6	55.2	0.06	0.04	0.02
348	33.2	49.8	75.4	0.05	0.04	0.04
432	48.5	56.1	91.4	0.06	0.04	0.06
516	41.7	60.6	97.2	0.05	0.04	0.08

Table 14: Football multi-channel same-message: goal-decoding accuracy (%) vs. T and M ($n=50$ rollouts, 64 strategies per cell).

T	Accuracy (%)			Margin		
	$M=4$	$M=8$	$M=64$	$M=4$	$M=8$	$M=64$
96	41.5	55.3	68.5	0.06	0.06	0.03
180	50.6	66.2	66.0	0.05	0.05	0.02
264	68.2	66.0	83.7	0.06	0.04	0.03
348	65.9	82.2	96.7	0.05	0.04	0.04
432	80.8	86.4	99.8	0.05	0.04	0.07
516	74.2	89.6	100.0	0.04	0.04	0.09

Table 15: Football multi-channel split-message ($M=4$, $4^3=64$ strategies): each agent transmits one quaternary symbol independently using its own 2D velocity signal ($n=50$ rollouts).

T	Accuracy (%)	Margin
96	41.4	0.06
180	37.2	0.04
264	55.3	0.05
348	74.1	0.06
432	90.7	0.08
516	97.1	0.10

A.11 RoboMaster: Numerical Results

We validate the multi-channel split-message scheme on physical hardware using four RoboMaster ground robots in a motion-capture arena. Each robot follows a fixed six-waypoint zigzag trajectory and transmits its own distinct $M=4$ symbol (the index of one of four top-edge targets it ultimately drives to). The four robots constitute four independent CGN channels carrying a single 4-symbol (8-bit) message per rollout. A proportional go-to-goal controller at 50 Hz drives the platform; watermark noise is added on the 2D velocity command ($\sigma=0.1$, base speed 0.5 m/s). Detection uses the same coherency-based decoder as the simulation experiments, run offline on the motion-capture position traces. Each rollout draws an independent codebook seed and an independent random permutation mapping robots to targets, so the four reported decodes per rollout are scored against rollout-specific references. Results are aggregated over $n=20$ rollouts (80 per-robot symbol decodes per setting); reported errors are standard errors across rollouts.

Table 16: RoboMaster multi-channel split-message: per-symbol and joint-message accuracy (%) vs. T at $M=4$, $\sigma=0.1$, 4 robots/rollout ($L=4$ symbols, $(l_1, l_2, l_3, l_4)=(1, 1, 1, 1)$), $n=20$ rollouts. “Msg. Acc.” is the joint probability that all four robots’ symbols decode correctly in the same rollout. At 50 Hz policy rate, $T=200$ steps corresponds to 4 s of time per symbol.

T	Msg. Acc. (%)	Sym. Acc. (%)	Margin
200	65.0 $\pm$ 10.9	88.8 $\pm$ 4.2	0.102 $\pm$ 0.007
400	95.0 $\pm$ 5.0	98.8 $\pm$ 1.2	0.239 $\pm$ 0.011
600	100.0	100.0	0.278 $\pm$ 0.011
800	100.0	100.0	0.317 $\pm$ 0.011
1000	100.0	100.0	0.336 $\pm$ 0.012
1200	100.0	100.0	0.354 $\pm$ 0.013

The underlying margin between the correct symbol and its nearest competitor increases monotonically across the sweep, confirming that the decoder’s confidence grows continuously with window length.

With $n=20$ rollouts, the exact 95% binomial confidence interval on the 100% joint recovery reported at $T=600$ is $[83.2, 100]\%$, and $[95.5, 100]\%$ per symbol over the 80 per-robot decodes. At $T=600$ the four robots carry 8 bits in 12 s: an aggregate 0.67 bits/s, or 0.167 bits/s per robot.

A.12 Null Conditions

Table 17: Null-condition symbol accuracy (%) at each environment’s headline (M, T) , against the $1/M$ chance rate.

Env	M	T	$1/M$ (%)	Wrong key			No message		
				n_{dec}	Acc.	95% CI	n_{dec}	Acc.	95% CI
Discovery	8	108	12.50	2000	12.10	[10.60, 13.60]	400	11.75	[8.50, 15.25]
Lunar Lander	8	288	12.50	1000	14.70	[12.60, 16.90]	200	8.50	[5.00, 12.50]
Reacher	8	240	12.50	2000	13.60	[12.20, 15.05]	400	10.50	[7.75, 13.50]
Football	64	516	1.56	16000	1.46	[1.28, 1.65]	400	1.50	[0.50, 2.75]
RoboMaster	4	600	25.00	1600	25.25	[22.56, 27.88]	60	16.67	[6.67, 28.33]

In the wrong-key condition the decoder is supplied codebooks regenerated from master seeds unrelated to the one used at injection, several decoys per rollout; in the no-message condition the policy runs without watermark injection and the decoder is supplied the correct codebook. Both are evaluated at the operating point of the corresponding results cell. n_{dec} counts individual symbol decodes, not rollouts, and is larger for the wrong-key arm because each rollout is decoded against several decoys.

Recovery at or near chance establishes that decoding requires the key and that the decoder does not report spurious symbols from unwatermarked motion. It does not establish secrecy against an adversary who performs steganalysis, observes repeated messages under a fixed codebook, or trains a classifier to distinguish watermarked from clean rollouts; we do not evaluate these.

A.13 Error-Correcting Codes Analysis

A natural ECC choice for M -ary alphabets are Reed–Solomon codes.

We consider applying RS codes at the goal level: since each message is one of 8 goal IDs, we apply $\text{RS}(n, k)$ over $\text{GF}(8)$, correcting wrongly-decoded goals rather than individual transmission symbols. Table 18 shows the lowest-redundancy code for each correction capability t and alphabet size M .

Table 18: Best-case RS overhead factor for T per data goal, for each correction capability (num. errors) t and alphabet size M .

t	Best code	$M=8$	$M=4$	$M=2$
1	RS(7, 5)	$1.4\times$	$2.8\times$	$4.2\times$
2	RS(7, 3)	$2.3\times$	$4.7\times$	$7.0\times$
3	RS(7, 1)	$7.0\times$	$14\times$	$21\times$

Each multiplier increases T by the same factor. Whether RS coding pays off depends on the shape of the per-environment accuracy curve: spending the same total budget on a longer uncoded T often matches or beats RS, particularly where the same-message curve is still climbing and a $1.4\text{--}7\times$ increase in T pushes per-goal accuracy close to 1. RS only tends to help when the uncoded curve has plateaued below 1, so that further increasing T no longer reliably eliminates goal errors and the spare budget is better spent on parity goals.

A.14 Task Performance Preservation

We compare reward distributions of watermarked and unwatermarked policies to confirm performance is not degraded. We report three conditions: the clean controller, an equal-amplitude WGN stand-in for a stochastic base policy, and the watermarked policy. The WGN stand-in is a valid proxy only where the base policy is already stochastic, as learned policies typically are; Discovery, Lunar Lander and Football use scripted, PD or heuristic controllers, for which the clean controller is the relevant comparison.

Rewards. In VMAS Discovery, we use final Euclidean distance $\|p_{\text{agent}} - p_{\text{goal}}\|$. Lunar Lander uses Box2D’s standard reward (distance shaping to the landing pad, -0.3 per main-engine step, -0.03 per side-engine step, $+100$ on landing, -100 on crash), summed over the episode. Reacher uses MuJoCo’s dense reward $r_t = -\|p_{\text{fingertip}} - p_{\text{target}}\| - 0.1\|a_t\|^2$, summed over the episode. In VMAS Football, we report the mean distance from the ball to the attacking goal at $(+1.51, 0)$.

Table 19: Clean controller vs. equal-amplitude WGN vs. watermarked, 50 rollouts per env, each with an independent random seed. Reacher runs an already-stochastic learned policy, so the WGN condition is itself the appropriate baseline and no separate clean controller exists.

Env	Metric	Clean	Stochastic (WGN)	Watermarked
Discovery	final dist. to goal (m)	0.2404 ± 0.0479	0.2420 ± 0.0499	0.2403 ± 0.0481
Lunar Lander	episodic return	265.8 ± 85.2	254.8 ± 100.9	253.8 ± 101.6
Reacher	50-step return	n/a	-4.31 ± 1.21	-4.15 ± 1.23
Football	mean dist. to goal	0.818 ± 0.177	0.984 ± 0.252	0.917 ± 0.227
	scoring rate	1.00	0.88	0.90

Watermarking matches the clean controller in Discovery and shows no detectable effect in Lunar Lander or Reacher. In Football watermarking costs scoring rate $1.00 \rightarrow 0.90$ and increases mean ball-to-goal distance from 0.818 to 0.917; equal-amplitude WGN costs slightly more on both (0.88 and 0.984), so the cost comes from perturbing the controller at all rather than from colouring the noise. Tracking error is equivalent between watermarked and clean rollouts; jerk and speed are inconclusive, and energy and actuator wear were not measured.

A.15 Adversarial Robustness

We consider an adversary who has obtained the watermarked policy and wishes to suppress the embedded message while preserving task utility. The adversary does not hold the secret key k . Throughout, we assume the auditor’s threat model from CoNoCo [3] and discuss the additional considerations that arise when the watermark carries a L -symbol message rather than a single bit. We run all experiments on Discovery ($M=8$, $T=120$, watermark amplitude $\sigma_W=0.03$, $n=50$ i.i.d. rollouts per cell).

Additive noise. The adversary adds WGN $\eta_{\text{adv}} \sim \mathcal{N}(0, \sigma_{\text{adv}}^2 I)$ to the policy’s actions before execution. By the SINR-coherency relation, raising $P_N(f)$ lowers $|C_{WG}(f)|^2 = \text{SINR}/(\text{SINR}+1)$, reducing the per-symbol score margin and hence p_{sym} . Table 20 shows the resulting collapse: message accuracy is intact for $\sigma_{\text{adv}} \leq \sigma_W$, partial at $\sigma_{\text{adv}} \approx 1.7\sigma_W$, and at chance ($1/M$) by $\sigma_{\text{adv}} \approx 3\sigma_W$. As in CoNoCo, the noise required to suppress messaging is large relative to the policy’s nominal action range and degrades task performance accordingly.

Table 20: Additive-noise attack on Discovery.

$\sigma_{\text{adv}}/\sigma_W$	Msg. Acc. (%)	Margin
0.00	100.0	0.132
0.33	100.0	0.126
0.83	98.5	0.090
1.67	69.3	0.041
3.33	21.5	0.027
5.00	17.0	0.023
6.67	14.8	0.024

Band-stop filtering. A band-stop notch over the secret band B attenuates the watermark, but also removes any policy content in B . With B chosen to overlap the policy’s dominant frequencies, even a low-order notch suppresses detection only at a measurable utility cost (Table 21): an order-2 Butterworth filter drops message accuracy from 100% to 22% but inflicts 36% command-space distortion (RMS post- vs. pre-attack action) and a 4% increase in mean agent–goal distance; higher orders push command distortion to 66% and goal-distance degradation to 21%. The order-2 notch is therefore cheap (+4.3% goal distance) but leaves decoding above chance; driving accuracy to chance requires order 6, at +12.2%. We therefore do not claim a prohibitive attack cost. Noise replacement, whitening, causal prediction, desynchronisation and fixed-key codebook learning remain unevaluated.

Table 21: Band-stop attack on Discovery with B overlapping the policy’s dominant frequencies. “Cmd. distortion” is $\text{RMS}(a_{\text{post}} - a_{\text{pre}})/\text{RMS}(a_{\text{pre}})$; Δdist is the relative change in mean agent–goal distance vs. the order-0 baseline.

Filter order	Msg. Acc. (%)	Margin	Cmd. distortion (%)	Δdist (%)
0	100.0	0.128	0	0
2	22.5	0.035	36.2	+4.3
4	14.0	0.033	46.9	+8.1
6	12.3	0.031	53.6	+12.2
8	14.0	0.031	59.9	+16.7
10	12.0	0.030	66.5	+21.5

Structured Jamming. Beyond unstructured additive noise, a sophisticated adversary may attempt to learn a structured jamming signal J_k that actively *cancels* the watermark rather than merely raising the noise floor. We describe how such an attack would be implemented, then explain why we cannot rule it out.

Concretely, having access to the watermarked policy $\tilde{\pi}_\theta$ for offline rollouts, the adversary parameterises a learned jammer J_ϕ e.g., a neural network mapping the current observation and recent motion history to an additive correction on the commanded action, and trains ϕ against a proxy objective such as an adversarial discriminator distinguishing watermarked from clean rollouts. Cancellation requires predicting the instantaneous value of the pseudorandom watermark W_{k_i} .

We previously argued that, since the adversary cannot derive the per-symbol seed k_i , W_{k_i} and J_ϕ are independent stochastic processes, so that $\text{Var}(W + J) = \text{Var}(W) + \text{Var}(J)$ and cancellation is impossible. This does not hold. The watermark is coloured rather than white, so its samples are correlated across time, and a jammer conditioning on the current state and recent motion history observes the effects of previous watermark samples. It may therefore become correlated with, and partially predict, the current watermark without recovering the key. In general $\text{Var}(W + J) = \text{Var}(W) + \text{Var}(J) + 2\text{Cov}(W, J)$, and the covariance term need not vanish, so structured cancellation is not ruled out. We do not evaluate adaptive jamming.

Distillation. Behaviour-cloning the watermarked policy onto a fresh surrogate could in principle strip the watermark as a side-effect of imperfect approximation: MTM’s per-symbol signals live in the temporal correlation structure of the policy’s exploration noise rather than its marginal action distribution, so a surrogate that samples fresh exploration noise at each step would not preserve the keyed CGN that carries messages.

Two practical constraints limit this attack: (i) the adversary might not realistically be able to collect enough data to clone the policy well: the original was trained on huge, private datasets, whereas the adversary can only sample its behaviour by deploying it on a few robots or making API queries, which could be costly and have limited usage, and (ii) the performance degradation inherent in imperfect distillation [27], which reduces the value of the stolen IP. We do not experiment with this attack.