

GUIDED Network-Agnostic Feature Initialization for Spatial Transferability in GNN-based Models

Alessandro Scalese^a, Santhanakrishnan Narayanan^{a,*}, Constantinos Antoniou^a

^a*Technical University of Munich, Arcisstrasse 21, 80333 Munich, Germany*

Abstract

The macroscopic Traffic Assignment Problem is a fundamental but computationally expensive component of transportation planning. While Graph Neural Networks have emerged as fast, data-driven surrogates, their practical deployment is severely constrained by a spatial generalization gap. Standard models rely on transductive feature initializations that tie travel demand to fixed network topologies, preventing seamless transfer to new urban environments. To overcome this structural limitation, this research proposes a network-agnostic initialization layer, termed Geometrically Unconstrained Inductive Demand EmbeDding (GUIDED). By injecting travel demand as a scalar attribute on auxiliary virtual links rather than as specific node features, this modular framework standardizes the input space regardless of network scale or the number of active origin-destination pairs. Extensive experimental evaluation across multiple urban topologies demonstrates that a Heterogeneous Graph Attention Network (HetGAT) model integrated with the proposed GUIDED layer maintains state-of-the-art predictive accuracy on single-network tasks, while demonstrating superior robustness to out-of-distribution demand patterns and maintaining a distinct performance advantage over the baseline even under severe data scarcity. Notably, the proposed feature initialization enables highly parameter-efficient domain adaptation for inter-network transfer learning without artificial input homogenization, establishing a robust foundation for truly inductive models. At the same time, the optimized scatter operations of the initialization layer yield an approximate 50% reduction in training time per epoch compared to the baseline approach. Furthermore, while demonstrated on vehicular traffic, this fundamental abstraction of spatial topology provides a versatile blueprint for generalized origin-destination spatial interaction problems, such as freight logistics and multimodal network optimization.

Keywords: Traffic assignment problem; Graph neural networks; Transfer learning; Spatial generalization; Network agnostic modelling; Surrogate modelling.

1. Introduction

Traffic simulation models are invaluable tools in traffic planning and management. As mobility demands continue to grow and evolve, city planners and decision-makers rely heavily on travel demand modeling to foresee traffic bottlenecks, evaluate infrastructure investments, and shape transportation policies.

A critical component of the planning process is the Traffic Assignment Problem (TAP), which seeks to determine the distribution of traffic flows across a network given a set of Origin-Destination (OD) demands. Traditional approaches to solving the TAP rely on rigorous mathematical formulations and optimization techniques to find equilibrium solutions (Wardrop, 1952; Correa & Stier-Moses, 2011; Beckmann et al., 1956; Patriksson, 2015; de Dios Ortúzar & Willumsen, 2024). However, these methods often rely on expensive iterative algorithms that do not scale well with the size and complexity of real-world networks (Patriksson, 2015), making TAP a significant bottleneck in modern strategic planning processes, limiting the ability of planners to explore suitable options and make informed decisions (Boyce et al., 2004; Patriksson, 2015).

*Corresponding author

Email address: santhanakrishnan.narayanan@tum.de

In recent years, surrogate models based on machine learning approaches have emerged as promising alternatives to traditional TAP algorithms (Rahmani et al., 2023). These models aim to learn the underlying patterns of traffic assignment from data, providing fast approximations of traffic flows without computing the full solution of the TAP for each scenario. In particular, Graph Neural Networks (GNNs) have shown great potential in capturing the complex relationships between network structure, demand patterns, and the resulting traffic flows, thanks to their ability to operate directly on graph-structured data (e.g., Rahmani et al., 2023; Rahman & Hasan, 2023; Narayanan et al., 2024; Lassen et al., 2025). Recent advancements have further enhanced their accuracy and reliability by embedding domain knowledge, in the form of physics-informed constraints, directly into the training process (Liu & Meidani, 2024).

While these advancements demonstrate that GNNs can provide fast and accurate traffic flow approximations on fixed network topologies, architectural constraints limit their practical utility in strategic transport planning. Practical deployment in planning workflows fundamentally relies on scenario analysis, where decision-makers must evaluate the macroscopic impacts of physical network modifications, such as capacity expansions, infrastructure disruptions, or structural road closures. However, current GNN-based surrogates fail in these dynamic context variations due to structural limitations in their architecture or instantiation methods. Most models in the literature map the travel demand matrix, whose dimensions are tied to a specific network, directly onto node feature layouts, resulting in intrinsically transductive models. Consequently, evaluating any network modification or transferring the surrogate to an alternative urban topology requires modifying the underlying model architecture, severely restricting its practical applicability and potential for transfer learning.

To address this limitation, this research introduces the Geometrically Unconstrained Inductive Demand EmbeDding (GUIDED), a novel, modular, network-agnostic feature initialization framework designed for spatial transferability. Instead of relying on rigid matrix layouts, this approach re-frames demand initialization as a localized graph aggregation problem. By leveraging so-called virtual links in a heterogeneous graph, this procedure translates global travel demand (in the form of OD matrices) directly into localized, meaningful node and edge features. The systematic decoupling of the input feature dimensions from the physical scale of the specific network ensures that the dimensions of the input space remain strictly uniform across different networks, regardless of their size and topology. This standardization allows for straightforward transfer of surrogate models across different networks, removing the need for any structural modifications to the model. Crucially, this approach is also not bound to this specific application: any system reliant on the spatial interaction of origin-destination pairs can benefit from this network-agnostic initialization mechanism, leveraging it to achieve seamless spatial transferability.

To validate this approach, the proposed initialization procedure is integrated with a state-of-the-art heterogeneous GNN architecture for traffic assignment, and its performance is evaluated on multiple real-world networks. The results demonstrate that the proposed framework effectively enables surrogate models to be transferable across diverse network topologies. On single-network tasks, the integration of the GUIDED initialization layer allows the model to maintain high predictive accuracy and surpass the baseline’s robustness to out-of-distribution demand patterns. Even under severe data scarcity, the proposed layer grants the resulting model a distinct performance advantage. Notably, the framework also enables efficient domain adaptation, allowing cross-network transfer without artificial input homogenization.

The primary objectives of this work can therefore be summarized as:

- Formulate a robust, network-agnostic initialization procedure for surrogate GNN models.
- Integrate this procedure into an existing state-of-the-art surrogate GNN architecture for traffic assignment.
- Evaluate the performance of the proposed approach on real-world networks to validate its predictive accuracy, physical consistency and spatial transferability.

To achieve this final objective, the experimental framework is structured into four distinct evaluation phases. First, intra-network generalization establishes the model’s predictive accuracy and performance ceiling under standard conditions. Second, sample efficiency evaluations test the architecture’s robustness

to severe data scarcity during training. Third, semi-supervised inference assesses the model’s capacity to reconstruct unobserved macroscopic network states under partial link observability. Finally, inter-network transfer learning validates the model’s spatial generalizability across disparate urban topologies, utilizing layer-wise ablation to isolate transferable flow physics.

To illustrate the overarching structure and contributions of this research, Fig. 1 maps the top-down progression of the study, from the identification of the spatial generalization gap to the final conclusions, while the lateral expansions detail the core contributions of each section. The remainder of this article is structured as follows. Section 2 reviews state-of-the-art applications of GNNs to the TAP and previous spatial generalization approaches. Section 3 details the proposed network-agnostic initialization procedure and its integration with the surrogate GNN architecture. Section 4 presents the experimental setup, while the results of the performance evaluations and their implications are discussed in Section 5. Finally, Section 6 summarizes the core findings of this research, acknowledges its methodological limitations, and outlines promising directions for future work.

The entire codebase, including data generation, processing scripts, and model implementations, is provided in a private GitHub repository, which is found at <https://github.com/scal-o/guided-framework>. Access to the repository is available upon request.

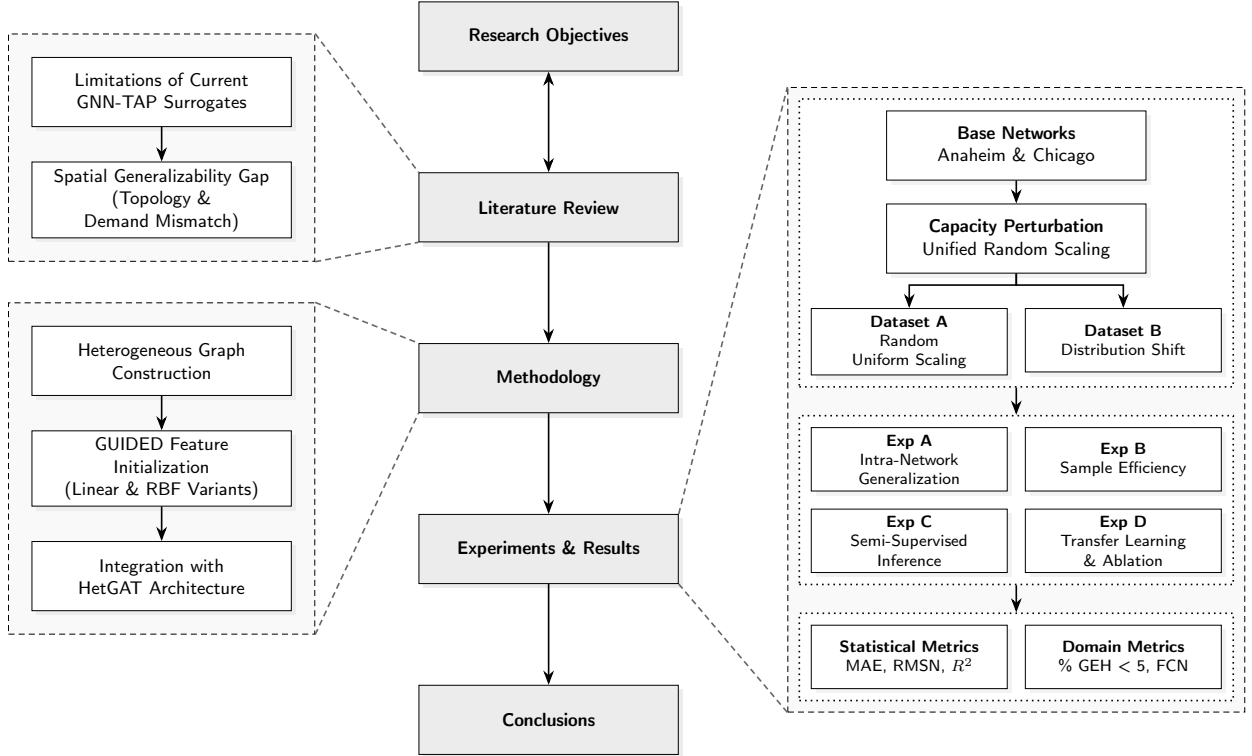


Figure 1: Overview of the research structure and methodological framework, mapping the top-down progression of the study.

2. Literature Review

The literature on the application of GNNs to the TAP has seen a rapid evolution in recent years, transitioning from basic adaptations of standard architectures to highly specialized models designed to capture the unique characteristics of transportation networks and traffic flow dynamics. In the following sections, we review the existing literature on the use of GNNs as surrogate models for traffic assignment (Section 2.1), analyze current methodological constraints regarding spatial generalization to unseen urban

networks (Section 2.2), and finally highlight the research gaps that motivate the proposed contribution of this work (Section 2.3).

2.1. Graph Neural Networks for the Traffic Assignment Problem

As Borde & Bronstein (2025) note, the fundamental objective of a GNN is to learn a signal over non-Euclidean graph structures, which involves capturing and representing the complex relationships and dependencies between nodes, edges, and the overall graph topology. Different GNN formulations approach this problem from different perspectives: Graph Convolutional Networks (GCNs) generalize the concept of convolution to graph-structured data (Kipf & Welling, 2016); spectral methods rely on the spectral decomposition of the graph Laplacian to define convolution operations in the frequency domain (Bruna et al., 2013); graph transformers extend the transformer architecture (Vaswani et al., 2017) to the graph domain, allowing for direct interactions between all nodes in a graph, regardless of their topological distance (Dwivedi & Bresson, 2020); Message Passing Graph Neural Networks (MPNNs) define convolution-like operations directly in the spatial domain of the graph, where nodes iteratively exchange and aggregate messages from their local neighborhoods (Gilmer et al., 2017, 2020; Borde & Bronstein, 2025).

In the context of the TAP, Rahman & Hasan (2023) first applied a GCN architecture to the problem, formulating it as a supervised learning problem mapped onto a fixed graph structure. They successfully demonstrated that a GCN could learn to approximate the equilibrium traffic flows on a given network with high accuracy, while significantly reducing the computational time compared to traditional algorithms.

Subsequent research from Narayanan et al. (2024); Makarov et al. (2024) focused on developing proof-of-concept architectures acting as surrogates for the entire four-step model. These models, based on message-passing Graph Attention Network (GAT) (Veličković et al., 2017; Brody et al., 2021), were designed to capture the complex interactions between the different stages of the four-step model and provide fast approximations of city-wide demand patterns. Hu & Xie (2025) also incorporated the GAT architecture to develop an encoder-decoder framework for traffic assignment. Moreover, the path-based variant of their model enforces link-level flow conservation as a strict mathematical constraint via path-to-link incidence relationships, ensuring that the predicted traffic flows adhere to fundamental physical principles.

To model transport supply and demand interactions more accurately, Liu & Meidani (2024) proposed a MPNN architecture based on Heterogeneous Graphs. They introduce the concept of auxiliary *virtual links* connecting OD node pairs, capturing travel demand aspects in the topology of the network itself. This approach extends the concept of local neighborhood aggregation by enabling direct message passing between physically non-adjacent nodes, resulting in increased feature propagation efficiency. Furthermore, rather than imposing hard topological constraints, they enforce node-based flow conservation as a soft penalty within the loss function, nudging the model towards physically realistic solutions. Their subsequent work then extends the model using multi-graph views to model modal split choices alongside the traffic assignment mechanics (Liu & Meidani, 2025).

Moving beyond the Message Passing paradigm, Lassen et al. (2025) incorporated global attention mechanisms into their GNN architecture, leveraging a GraphGPS (Rampásek et al., 2022) structure based on Graph Transformers (Dwivedi & Bresson, 2020). Their usage of global attention and network centroids, representing the nodes involved in OD pairs, leverages direct interactions between all nodes in the graph to capture long-range dependencies and complex interactions in the transportation network without being constrained by the local neighborhood structure or by the depth problems that arise in MPNN. More recently, Ameli et al. (2026) proposed a sequence-to-sequence Transformer-based architecture to learn User Equilibrium (UE) directly in the path-flow space by leveraging global self-attention mechanisms. Both approaches resemble the virtual link paradigm introduced by Liu & Meidani (2024), as they aim to model long-distance interactions between nodes in the transportation network, albeit through different architectural mechanisms.

Other recent advancements have focused on scalability and rapid adaptability. Liu et al. (2025) proposed a scalable learning approach utilizing GCNs coupled with graph partitioning to handle massive, large-scale urban networks. Concurrently, Agriesti et al. (2026) introduced meta-learning to traffic assignment, aiming to enable rapid adaptation of surrogate models to new, unseen traffic conditions, such as localized capacity drops or infrastructural disruptions.

2.2. Spatial Generalization for Graph Neural Networks

Despite the significant advancements in predictive accuracy and computational efficiency, GNN-based surrogate models remain constrained by a spatial generalization gap: they are unable to seamlessly transfer learned traffic dynamics to new and different urban topologies. Our research shows that this structural limitation stems from a two-fold input mismatch problem: a *topological* mismatch and a *demand feature* mismatch.

2.2.1. The Topological Mismatch

The topological mismatch arises from structural dependencies within the model architectures. Traditional configurations like the GCN framework used by [Rahman & Hasan \(2023\)](#) rely on convolutional filters calibrated on specific graph sizes and topologies. Because this approach fundamentally relies on a static, graph-specific Laplacian matrix, the resulting model is strictly transductive and as such structurally incapable of processing different networks. [Liu et al. \(2025\)](#) attempted to circumvent this issue through algorithmic partitioning, allowing the model to handle variable topology networks by breaking them into fixed-size subgraphs and employing zero-padding to maintain matrix dimensional consistency. However, this method introduces significant trade-offs, as the model’s limited exposure to only partitions of the graph during training prevents it from capturing global structural dependencies, leading to performance degradation when applied to larger networks requiring extensive partitioning (as noted by the authors themselves).

Recent efforts by [Agriesti et al. \(2026\)](#) investigated a meta-learning framework based on a GatedGCN architecture ([Bresson & Laurent, 2017](#)) to adapt to dynamic network conditions, such as road closures or localized capacity drops. While effective for localized topological adjustments, this approach operates under the assumption of a fixed global graph size, leaving the challenge of generalizing to unseen network scales and topologies unaddressed.

2.2.2. The Demand Feature Mismatch

While the topological mismatch can be managed using inductive paradigms such as MPNNs and Graph Transformers, the demand feature mismatch is a challenge specific to transportation engineering applications and to the TAP in particular. In the TAP, the primary demand-side input is the localized travel demand, represented by an OD matrix whose size is determined by the number of Traffic Analysis Zones (TAZs) and OD pairs in the network.

In most existing implementations, this matrix is mapped directly to node features, with each node containing a vector representing the travel demand originating from that node to all other nodes in the network (e.g. [Liu & Meidani, 2024](#); [Lassen et al., 2025](#); [Hu & Xie, 2025](#)). Similarly, the Transformer-based approach by [Ameli et al. \(2026\)](#) flattens the transportation network features into a tensor where each row represents an OD pair. These formulations tie input feature dimensions directly to a specific graph structure: consequently, even inherently inductive paradigms fail on alternative networks as the new input feature dimensions do not match the ones established during the model training.

To allow their model to be applied to different networks, [Liu & Yin \(2025\)](#) projected demand features into a fixed-size embedding space and relied on structural homogenization of the input space, padding the input matrix with dummy nodes up to a predefined maximum size. This approach allows for a consistent input dimension across different networks, but it also introduces limitations: it sets a rigid spatial ceiling, and introduces non-physical entities that can alter the model’s hidden message-passing representations. Similarly, the Graph Transformer implementation proposed by [Lassen et al. \(2025\)](#) also relies on a direct mapping of the OD matrix to node features.

To bypass raw demand matrix dependencies, [Liu et al. \(2025\)](#) use an All-Or-Nothing (AON) shortest-path algorithm to compute an initial traffic flow distribution on the network, encoded directly into the node embeddings of a dual graph representation. While this approach yields scale-agnostic input features, the AON flow distribution does not capture the complex demand-supply interactions in the transportation network, and thus might not provide a sufficiently informative representation of traffic dynamics for the GNN to learn true equilibrium states effectively.

2.2.3. Generalization Approaches

The pursuit of true inductive capabilities in traffic assignment remains an open challenge, with several distinct approaches emerging in the literature.

From a theoretical standpoint, Implicit Neural Networks (INNs) represent an ideal inductive framework due to their architectural scale-invariance. Building on this property, [Liu & Yin \(2025\)](#) introduced an end-to-end framework integrating INN layers, specifically designed to enforce Wardrop’s UE conditions, to jointly estimate both demand and traffic equilibrium states from multiday traffic state observations. Their work also provides rigorous theoretical bounds on the model expressivity and generalization capabilities, demonstrating that, given sufficient data, the framework can transfer learned observation dynamics to unseen traffic conditions. However, their reliance on fixed-point iterations presents significant practical challenges, such as the need for complex custom auto-differentiation solvers.

For cross-city transfer, [Erdol et al. \(2025\)](#) developed the City-Independent Spatial Graph Neural Network (CI-SGNN) architecture. However, their design focuses on distinct classification objectives (predicting local demand for bike-sharing services), leveraging standardized, scale-agnostic topological features (such as the Point of Interest (POI) data from OpenStreetMap (OSM)). This approach cannot be directly adapted to the context of TAP without a mechanism to integrate variable sized demand vectors as model features.

Alternatively, [Ju et al. \(2025\)](#) try to tackle the generalization gap from an architectural perspective through the introduction of the GraphBridge framework, pursuing arbitrary transfer learning across diverse graph topologies via side-tuning. Rather than retraining the underlying model for each new city, this framework introduces learnable auxiliary domain adapters to project input features and model outputs in the required graph- and task-specific spaces, respectively. This adapter-based approach, while architecturally sophisticated, attempts to reconcile dimensional mismatches in a *post-hoc* fashion, adding computational complexity to "bridge" inherently transductive models rather than resolving the feature mismatch at its root.

2.3. Summary of Research Gaps and Proposed Contribution

The current state of the art reflects a spatial generalization gap in GNN-based surrogate models for the TAP. While recent research has proposed promising solutions in the form of graph partitioning, post-hoc domain adaptation, and the integration of INN layers, these approaches often result in a loss of global topological context or in additional implementation, deployment, and computational complexity of the resulting models.

Crucially, a distinction must be made between the structural capacity of a model’s architecture and its input initialization procedures. While modern paradigms such as MPNNs and Graph Transformers are inherently inductive, their actual implementations fail on alternative networks because travel demand features are constructed transductively via rigid matrix layouts tied to a fixed spatial scale (e.g. [Liu & Meidani, 2024](#); [Lassen et al., 2025](#)).

To address these limitations without modifying the already existing downstream architectures, this work introduces a modular, network-agnostic initialization procedure that dynamically projects travel demand into a standardized latent space. Leveraging the virtual link paradigm introduced by [Liu & Meidani \(2024\)](#), we propose a two-step approach to demand features initialization:

- First, raw scalar travel demand values are expanded into high-dimensional edge embeddings directly on the auxiliary virtual links connecting OD pairs;
- Second, a specialized, permutation-invariant aggregation layer pools these virtual edge features to dynamically construct the initial physical node embeddings.

As this aggregation relies entirely on local graph connectivity rather than global matrix dimensions, it systematically decouples the initial input feature space from both the physical scale of the network and the semantic scale of the demand matrix. Furthermore, this procedure is designed to be architecturally agnostic. It functions as a standardized input-processing layer that can be implemented on top of existing inductive GNN frameworks, enabling spatial generalization and domain adaptation across heterogeneous urban networks for already existing models.

3. Methodology

The literature review in [Section 2](#) highlighted the spatial generalization gap in current GNN-based surrogate models for the TAP. This bottleneck is primarily driven by the structural inability of transductive feature initialization methods to handle varying network scales and demand feature dimensions. To overcome this limitation, this section details the mathematical formulation and architectural design of the proposed modular, network-agnostic initialization procedure, termed the GUIDED layer, and describes its integration within a state-of-the-art heterogeneous graph neural network architecture for traffic assignment.

3.1. Construction of the Heterogeneous Graph

The proposed framework is built upon a heterogeneous graph representation of the traffic network $\mathcal{G} = (\mathcal{V}, \mathcal{E}_r, \mathcal{E}_v)$, akin to the one introduced by [Liu & Meidani \(2024\)](#), where:

$\mathcal{V}$ is the set of vertices representing all physical intersections and TAZs within the network.

$\mathcal{E}_r$ is the set of directed real edges r , defining the actual road segments connecting the vertices in $\mathcal{V}$.

$\mathcal{E}_v$ is the set of directed virtual edges q , defining the auxiliary connections between OD pairs.

The real edges $r \in \mathcal{E}_r$ capture the physical topology of the network, and are associated with a static feature vector $\mathbf{e}_r \in \mathbb{R}^2$, containing the normalized capacity and free-flow travel time. The virtual edges, on the other hand, represent an augmentation of the physical graph with demand information: each OD pair (o, d) with a non-zero demand is connected by a directed virtual edge $q_{o,d}$, which serves as a structural routing conduit for the travel demand between the origin node o and the destination node d .

3.2. GUIDED Feature Initialization

The GUIDED initialization procedure consists of two sequential stages: first, the scalar travel demand associated with each virtual edge is projected into a high-dimensional embedding space, and second, these virtual edge embeddings are aggregated to construct the initial node embeddings. This two-stage process ensures that the initial node representations capture the global origin-destination interactions in a manner that is invariant to the specific network topology.

3.2.1. Initialization of the Virtual Link Embeddings

The first stage of the proposed initialization procedure focuses on the virtual link embeddings. Each virtual edge $q_{o,d} \in \mathcal{E}_v$, as defined in [Section 3.1](#), is initially assigned a scalar attribute $d_q \in \mathbb{R}_+$ representing the travel demand between the origin node o and the destination node d . The goal of this stage is to transform this scalar demand attribute into a high-dimensional embedding vector $\mathbf{e}_q \in \mathbb{R}^F$, where F is the desired embedding dimension.

To evaluate the sensitivity of the model to the initial demand representation, we formulated and tested two distinct projection functions: a linear expansion featuring a standard Multi-Layer Perceptron (MLP) architecture, and a Radial Basis Function (RBF) expansion followed by a learnable linear projection.

Projection via Linear Expansion. The first approach relies on a standard, configurable MLP to project the scalar demand into the embedding space. The linear expansion for the case of a MLP with a single layer can be formulated as:

$$\mathbf{e}_q = \text{MLP}(d_q) = \sigma(\mathbf{W}d_q + \mathbf{b}) \quad (1)$$

where $\mathbf{W} \in \mathbb{R}^{F \times 1}$ is the learnable weight matrix, $\mathbf{b} \in \mathbb{R}^F$ is the learnable bias vector, and σ is a non-linear activation function.

This formulation allows for a flexible mapping from the scalar demand to the embedding space, enabling the model to learn complex relationships between demand values and their corresponding embeddings.

Projection via RBF Expansion. The second approach utilizes a Gaussian RBF expansion, followed by a linear layer to obtain the final embedding. RBF expansion is a technique that decomposes a continuous scalar value into localized feature representations based on its (generalized) distance from a set of predefined centers. Given a set of K centers $\{\mu_k\}_{k=1}^K$ and a bandwidth parameter σ , the Gaussian RBF distance of the scalar demand d_q from center μ_k can be expressed as:

$$r_{q,k} = \exp\left(-\frac{(d_q - \mu_k)^2}{\sigma^2}\right) \quad (2)$$

The resulting RBF features $\mathbf{r}_q = [r_{q,1}, r_{q,2}, \dots, r_{q,K}]^\top$ are then linearly transformed to match the target embedding dimension:

$$\mathbf{e}_q = MLP(\mathbf{r}_q) = \sigma(\mathbf{W}\mathbf{r}_q + \mathbf{b}) \quad (3)$$

In this approach, each RBF feature captures the relationship between the demand value and a specific region of the demand space, mapping complex demand distributions into linearly separable features for the downstream layers. The choice of centers and bandwidth can be tuned to capture relevant patterns in the demand data effectively.

Similar distance-based expansions have proven effective in capturing complex continuous spatial interactions in various domains (e.g. Schütt et al., 2017), and such functional mappings have been shown to enhance the ability of neural networks to learn highly non-linear relationships from simple scalar inputs (e.g. Tancik et al., 2020).

3.2.2. Initialization of the Node Embeddings

The second stage of the proposed initialization procedure focuses on the node embeddings. To provide a standardized, network-agnostic input space, this stage leverages a permutation-invariant aggregation mechanism to pool information from virtual links directly into physical nodes. This abstracts global origin-destination interactions into localized, meaningful node embeddings $\mathbf{x}_v^{(0)}$ for each node $v \in \mathcal{V}$, ensuring spatial generalizability across disparate network topologies.

This initialization primarily involves the nodes that represent the centroids, or TAZs, of the network. Pure transit nodes, which are not the origin or destination of any trips, are simply initialized with a zero vector of the same dimension as the other node embeddings to maintain uniformity in the input space.

Centroid nodes can function as physical sources (trip generators) or sinks (trip attractors) for the traffic flow, or both. To explicitly preserve the directional nature of travel demand within the initial latent space, we perform two distinct, permutation invariant summation operations on the sets of incoming and outgoing virtual edges, respectively:

$$\mathbf{x}_{out,v} = \sum_{q \in \mathcal{E}_v^{out,v}} \mathbf{e}_q \quad (4)$$

$$\mathbf{x}_{in,v} = \sum_{q \in \mathcal{E}_v^{in,v}} \mathbf{e}_q \quad (5)$$

Here, $\mathcal{E}_v^{out,v}$ and $\mathcal{E}_v^{in,v}$ denote the sets of outgoing and incoming virtual edges incident to node v , respectively. The resulting aggregated embeddings $\mathbf{x}_{out,v}$ and $\mathbf{x}_{in,v}$ are then concatenated to form the final node embedding:

$$\mathbf{x}_v^{(0)} = [\mathbf{x}_{out,v} \parallel \mathbf{x}_{in,v}] \quad (6)$$

This approach ensures that the node embeddings capture the actual demand patterns associated with each node while maintaining a consistent embedding dimension across different networks.

3.3. Integration into an Existing Model Architecture

The GUIDED layer described in the previous sections is intentionally designed as a modular preprocessing layer and is therefore independent of the downstream GNN architecture. To demonstrate this architectural flexibility, the proposed initialization procedure is integrated into the state-of-the-art HetGAT architecture introduced by Liu & Meidani (2024).

The original HetGAT architecture consists of three sequential components:

1. **Node Preprocessing**, which projects the high-dimensional node representations, derived directly from the OD matrix, into a fixed latent embedding space;
2. **Heterogeneous Message Passing**, comprising a variable number of Virtual Encoder (V-Encoder) layers followed by Real Encoder (R-Encoder) layers. These attention-based layers propagate information across virtual OD connections and physical road links while maintaining separate message-passing mechanisms for the two edge types;
3. **Edge Prediction**, where the learned node embeddings are combined with the physical edge attributes to predict the corresponding link Volume-to-Capacity Ratio (V/C) through a dedicated MLP prediction module.

For a comprehensive reading on the model’s architecture and mathematical formulations, the reader is referred to the original paper by [Liu & Meidani \(2024\)](#).

The original implementation of the HetGAT model appends the OD matrix directly to the node features, assigning each node $i \in \mathcal{V}$ an input feature vector $\mathbf{x}_i \in \mathbb{R}^{|\mathcal{V}|}$, where $|\mathcal{V}|$ is the total number of nodes in the network, which are then projected into a fixed latent space in the node preprocessing stage. The proposed GUIDED framework modifies only the initialization stage of the architecture. Rather than directly mapping the OD matrix to node features, travel demand is first embedded on the virtual edges and subsequently aggregated to construct the initial node embeddings, as described in [Section 3.2](#). Once these embeddings have been initialized, the remaining computational pipeline, including the heterogeneous message-passing layers and the edge predictor, remains identical to the original HetGAT architecture.

This design has two important advantages. First, it demonstrates that the proposed initialization mechanism is modular and architecture-independent, allowing it to be incorporated into existing GNN models without redesigning their internal operations. Second, by leaving the downstream architecture unchanged, it enables a controlled comparison with the baseline model in which any observed performance differences can be attributed exclusively to the proposed initialization strategy.

In the rest of this paper, we refer to the modified architecture as GUIDED-Enhanced Heterogeneous Graph Attention Network (GUIDED-HetGAT). A high level comparative summary of the architectural differences and key hyperparameters for both the baseline HetGAT and the proposed GUIDED-HetGAT implementations is provided in [Table 1](#).

3.3.1. GUIDED-HetGAT Variants

To evaluate the sensitivity to the initial demand representation, the GUIDED is instantiated using two distinct variants: GUIDED-HetGAT-lin and GUIDED-HetGAT-rbf. Both variants expand the scalar demand embedded on each virtual edge to a high-dimensional embedding $\mathbf{e}_q \in \mathbb{R}^{32}$ using either a standard MLP or a RBF expansion, as described in [Section 3.2](#). For the linear variant of the model, this is achieved via a two-layer MLP with a 16-unit hidden layer. For the RBF variant, the scalar is projected onto 20 radial basis functions, with a shared learnable spread parameter σ , followed by a two-layer MLP that maps the resulting 20-dimensional vector to the final 32-dimensional edge embeddings. For both variants, following

Component	Baseline (HetGAT)	Proposed (GUIDED-HetGAT)
Demand representation	OD matrix on nodes	OD scalar on virtual edges
Node Embedding	Direct projection via MLP	Virtual edge aggregation via GUIDED Layer (<i>lin</i> and <i>rbf</i> variants)
Latent dimension	64	Identical
V-Encoder	2 layers, 8 heads	Identical
R-Encoder	6 layers, 8 heads	Identical
Edge Predictor	MLP ($130 \rightarrow 64 \rightarrow 1$)	Identical

Table 1: Summary of architecture components and key hyperparameters for the baseline and proposed models.

the concatenation of incoming and outgoing virtual edges, the final aggregated node embeddings maintain a fixed dimensionality of $F = 64$ to strictly align with the baseline HetGAT architecture.

3.4. Physics-Informed Training Objective

To ensure the predicted traffic flows adhere to the fundamental physical principles of macroscopic traffic flow, the optimization objective is formulated as a composite L_1 penalty comprising three distinct terms, derived from Liu & Meidani (2024). The total loss is defined as the weighted sum of the following components:

- **V/C Loss $\mathcal{L}_v$** : primary supervised metric, evaluating the error between the predicted and ground-truth V/C values.
- **Flow Loss $\mathcal{L}_f$** : secondary supervised metric, evaluating the error between the predicted flows (obtained by multiplying the predicted V/C with the link capacities) and the ground-truth flows.
- **Conservation Loss $\mathcal{L}_c$** : physics-based constraint enforcing the principle of flow conservation at the node level, penalizing any violations across the network, encouraging the model to learn representations that adhere to the fundamental physical principles governing traffic flow.

For a given graph, let $\hat{y}_r$ represent the predicted V/C value, c_r the link capacity, and $\hat{f}_r = \hat{y}_r \cdot c_r$ the derived predicted flow for edge r . Let y_r and f_r denote the ground-truth V/C and flow values for edge r , respectively. The total loss $\mathcal{L}$ is defined as:

$$\mathcal{L} = \lambda_v \mathcal{L}_v + \lambda_f \mathcal{L}_f + \lambda_c \mathcal{L}_c \quad (7)$$

where λ_v , λ_f , and λ_c are the weights for the V/C loss, flow loss, and conservation loss, respectively. The individual loss components are defined as follows:

$$\mathcal{L}_v = \frac{1}{|\mathcal{E}_r|} \sum_{r \in \mathcal{E}_r} |\hat{y}_r - y_r| \quad (8)$$

$$\mathcal{L}_f = \frac{1}{|\mathcal{E}_r|} \sum_{r \in \mathcal{E}_r} |\hat{f}_r - f_r| \quad (9)$$

$$\mathcal{L}_c = \frac{1}{|\mathcal{V}|} \sum_{i \in \mathcal{V}} \left| \sum_{r \in \mathcal{E}_r^{out,i}} \hat{f}_r - \sum_{r \in \mathcal{E}_r^{in,i}} \hat{f}_r - d_{net,i} \right| \quad (10)$$

where $\mathcal{E}_r^{out,i}$ and $\mathcal{E}_r^{in,i}$ denote the sets of outgoing and incoming physical edges for node i , respectively, and $d_{net,i}$ is the net generated or attracted demand at node i .

4. Experimental Setup

This section details the experimental framework designed to evaluate the efficacy, physical consistency, and spatial generalization capabilities of the proposed GUIDED initialization method for GNNs. The experiments are structured to assess the models' performance across four distinct tasks:

1. Intra-network generalization: evaluating the model's ability to approximate TAP solutions on the same network used for training.
2. Intra-network generalization efficiency: evaluating the model's ability to approximate TAP solutions on the same network used for training when trained on a limited number of demand scenarios.
3. Intra-network semi-supervised learning: evaluating the model's ability to approximate TAP solutions on the same network used for training when trained under partial observability of the network state.

4. Inter-network transfer learning: evaluating the model’s ability to approximate TAP solutions on a different network than the one used for training, with and without fine-tuning. The testing also includes an ablation study on the effectiveness of fine-tuning different layers of the model.

This section provides a detailed description of the dataset generation process (Section 4.1) and of the training procedure (Section 4.2), followed by a brief overview of the evaluation metrics (Section 4.3). Finally, the specific bounds and objectives of each experimental phase are detailed in Section 4.4, where we discuss the rationale behind the experimental design choices and how they align with the overarching research objectives.

4.1. Dataset Definition

This section describes the transportation networks and synthetic scenario generation procedures used to construct the datasets employed throughout the experimental evaluation. The datasets are designed to assess the models’ ability to generalize across different traffic demand scenarios and network topologies, while also evaluating their physical consistency and predictive accuracy.

4.1.1. Network Topologies

The experiments were conducted on two widely used urban transportation networks: the Anaheim network and the Chicago Sketch network. The original network topologies, demand matrices, link attributes, and other relevant data were obtained from the Transportation Network for Research Core Team (TNRC) repository (Stabler et al., 2024). A general overview of the networks’ statistics is provided in Table 2, and a visual representation of the network topologies is shown in Fig. 2.

The Anaheim network represents a medium-sized urban topology, located in Southern California. The network is characterized by a mix of arterial roads and highways, with varying link capacities and free-flow travel times. The Chicago Sketch network, on the other hand, represents a historical, aggregated, and larger urban topology, located in the city of Chicago. The network is characterized by a dense urban grid structure, with a high degree of connectivity and a wide range of link attributes, driven by the inclusion of both high-capacity freeway corridors and local, possibly residential streets.

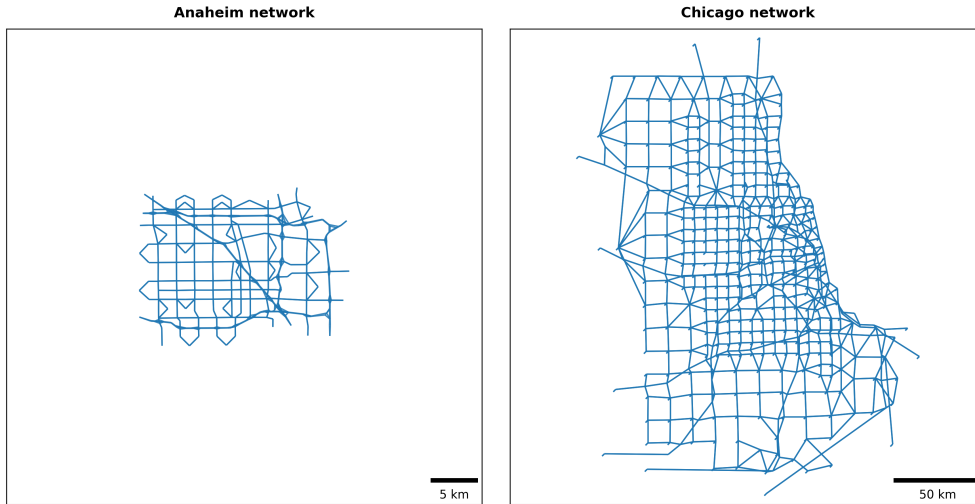


Figure 2: Visual representation of the Anaheim (left) and Chicago Sketch (right) network topologies.

4.1.2. Scenario Generation

To adequately train and evaluate the GNN ability to map topological and demand features to equilibrium flows, the generation of adequately diverse and representative datasets is crucial. For each of the networks,

Network	Nodes	Edges	Active OD Pairs	Avg. Degree	Total Demand
Anaheim	416	914	1406	4.39	10469
Chicago	933	2950	46762	6.32	125335

Table 2: Summary statistics of the baseline transportation networks.

we generated two distinct datasets, each based on a different demand generation process and sharing a common capacity perturbation process.

For each dataset, we define an individual scenario as a unique combination of a demand matrix $\mathbf{D} \in \mathbb{R}^{|\mathcal{Z}| \times |\mathcal{Z}|}$, where $\mathcal{Z} \subset \mathcal{V}$ represents the set of TAZs defined in the network, and a capacity vector $\mathbf{c} \in \mathbb{R}^{|\mathcal{E}_r|}$. Together, the demand matrix and capacity vector uniquely define the input features and the corresponding TAP solution for a single scenario. By varying both the demand and capacity across scenarios, we can create a rich and diverse dataset that allows us to thoroughly evaluate the performance of our proposed GNN model under a wide range of conditions.

Each dataset consists of $N = 700$ scenarios, generated by applying a unified capacity perturbation process to the baseline network, while varying the demand generation process to create distinct datasets with different characteristics and levels of difficulty for the GNN model. This dual-dataset structure is designed to test model performance under nominal, within-distribution daily variations (Dataset A), and under out-of-distribution, structurally decoupled demand profiles (Dataset B).

Capacity Perturbation. The capacity perturbation process was designed to simulate localized infrastructure degradation, which is a common occurrence in real-world transportation networks due to factors such as construction, accidents, or maintenance activities. For each scenario $z \in \{1, \dots, N\}$, the baseline capacity c_r associated with link $r \in \mathcal{E}_r$, is perturbed following:

$$c_r^{(z)} = c_r \delta_r^{(z)} \quad (11)$$

where $c_r^{(z)}$ is the perturbed capacity of link r in scenario z and $\delta_r^{(z)} \sim U(0.5, 1)$ is a random scaling factor for link r in scenario z , drawn from a uniform distribution $U(0.5, 1)$. This perturbation process results in a reduction of the capacity of each link by up to 50%, yielding various degrees of infrastructure degradation across the network.

Uniform Traffic Demand Perturbation (Dataset A: Random Uniform Scaling). The first dataset, hereafter referred to as Dataset A, leverages random uniform scaling to represent typical daily variations in traffic demand. The demand matrix for each scenario z is generated by independently scaling the original demand d_{ij} associated with each OD pair in the original demand matrix $\mathbf{D}$ as follows:

$$d_{ij}^{(z)} = d_{ij} \delta_{ij}^{(z)} \quad (12)$$

where $d_{ij}^{(z)}$ is the perturbed demand for the OD pair (i, j) in scenario z , and $\delta_{ij}^{(z)} \sim U(0.5, 1.5)$ is its associated random scaling factor drawn from a uniform distribution $U(0.5, 1.5)$.

This process allows for both increases and decreases in demand for each OD pair, simulating typical daily fluctuations in traffic patterns while maintaining the overall spatial distribution of demand across the network.

Dirichlet Traffic Demand Perturbation (Dataset B: Distribution Shift). The second dataset, hereafter referred to as Dataset B, introduces a distribution shift to evaluate the generalization capabilities of the model under more extreme and structurally novel demand conditions, as its demand generation process fundamentally departs from the baseline spatial distribution of the original demand matrix $\mathbf{D}$. The primary objective of this dataset is to assess whether the GNN can internalize the underlying physical principles of the TAP, i.e. flow conservation and Wardrop’s UE, rather than learning historical spatial correlations present in the training data.

To achieve this, every scenario in the dataset is structurally decoupled from the original demand matrix $\mathbf{D}$. Instead of applying localized scaling factors, the total network demand $D_{tot} = \sum_{i,j} d_{ij}$ is redistributed across all possible OD pairs using a probability simplex generated by a symmetric Dirichlet distribution (Bishop & Nasrabadi, 2006). For a given scenario z , the new demand entries are computed as:

$$d_{ij}^{(z)} = D_{tot} \cdot p_{ij}^{(z)} \quad (13)$$

where $p_{ij}^{(z)}$ is the element of the probability vector $\mathbf{p}^{(z)}$ corresponding to the OD pair (i, j) , drawn from a symmetric Dirichlet distribution with concentration parameter α :

$$\mathbf{p}^{(z)} \sim \text{Dir}(\alpha \cdot \mathbf{1}_K) \quad (14)$$

where K is the total number of OD pairs in the network, and $\mathbf{1}_K$ is a K -dimensional vector of ones.

The Dirichlet distribution is a multivariate generalization of the Beta distribution, commonly used to generate random probability vectors that sum to 1 (Bishop & Nasrabadi, 2006). By adjusting the concentration parameter α , we can control the sparsity and skewness of the generated demand patterns, with lower values ($\alpha \ll 1$) producing highly sparse and heavy-tailed distributions. A concentration parameter of $\alpha = 0.05$ was empirically determined to produce a demand distribution that closely resembled the original demand matrix in terms of sparsity and skewness, while being fundamentally different from the original baseline in terms of spatial distribution.

It is of fundamental importance to note that, as the resulting spatial distributions of the trips are mathematically randomized and do not follow realistic geographic constraints, Dataset B serves strictly as a synthetic stress-test benchmark. This design ensures that the model is evaluated purely on its robustness and its capacity to internalize the underlying physics of traffic flow, rather than relying on plausible, historical urban mobility patterns for its predictions.

Ground Truth Generation: UE Solutions. The final step in the dataset generation process is to compute the ground-truth UE flow solutions for each generated scenario. The macroscopic assignments for each scenario were computed by solving the deterministic TAP using the Bi-Conjugate Frank-Wolfe (BFW) algorithm implemented in the *AequilibraE* framework (Camargo, 2015). To ensure that the computed flow solutions represent a mathematically stable equilibrium state, the convergence criterion for the BFW algorithm was set to a gap threshold of 10^{-5} , as suggested by Boyce et al. (2004).

4.1.3. Comparison of Uniform Scaling (Dataset A) and Distribution Shift (Dataset B)

To visually illustrate the differences between the two datasets, Fig. 3 contrasts the spatial distribution of the baseline Anaheim demand matrix with two random synthesized demand matrices from Dataset A and B. While the demand matrix generated by the uniform scaling of Dataset A maintains a similar spatial structure to the original demand, the distribution shift of Dataset B leads to a demand matrix that exhibits a completely different spatial distribution, creating new demand patterns that are not correlated with the original demand matrix.

Furthermore, Fig. 4 compares the distribution of link equilibrium flows across all scenarios for 50 randomly selected links. As both datasets share an identical capacity perturbation process, any shift in the resulting traffic assignment is driven solely by the differences in the demand generation process. The distribution shift synthesized in Dataset B manifests as significantly higher flow variability and a wider range of extremes across all scenarios. Conversely, the uniform, daily variations generated in Dataset A lead to flow volumes that remain concentrated around the original baseline values for most links, with a much narrower variability across scenarios. This confirms that Dataset B is designed to be more challenging for the GNN model, as it requires the model to learn the underlying physical principles of the TAP rather than relying on historical spatial correlations present in the training data.

4.2. Training Framework

Following the definition of the datasets, this section describes the preprocessing, optimization strategy, and implementation details used to train both the baseline HetGAT and the proposed GUIDED-HetGAT models.

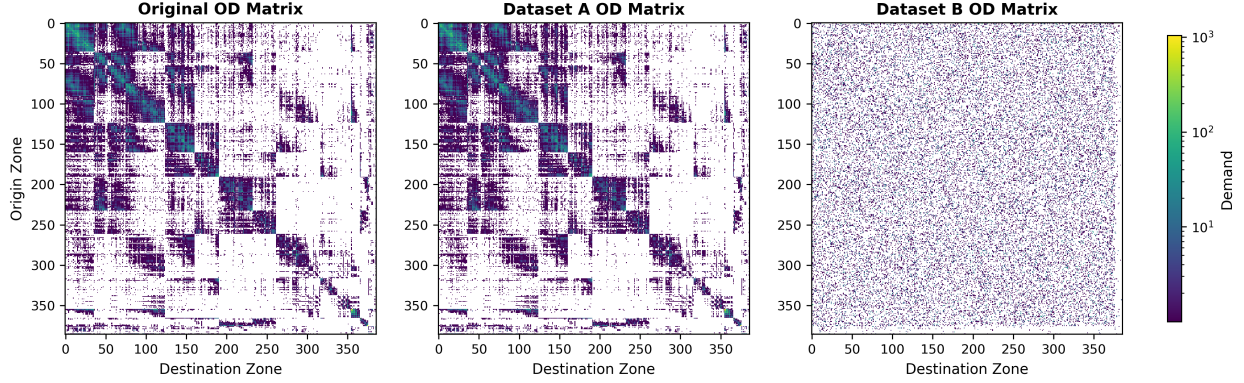


Figure 3: Comparison of the spatial distribution of the original demand matrix for the Anaheim network (left) with two random synthesized demand matrices from Dataset A (Random Uniform Scaling, center) and B (Distribution Shift, right).

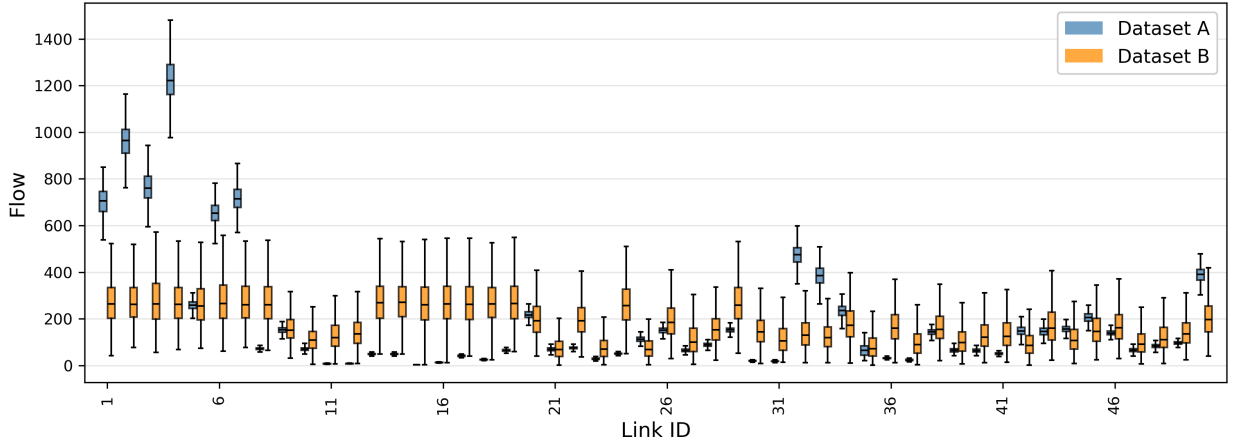


Figure 4: Comparison of the distribution of link capacities and equilibrium flows across scenarios in Datasets A (Random Uniform Scaling) and B (Distribution Shift), for a subset of 50 links in the Anaheim network.

4.2.1. Feature Engineering

All continuous input features were normalized independently using Min-Max scaling. Physical edge attributes, such as link capacities and free-flow travel times, were normalized to a $[0, 1]$ range, while the OD demands were scaled to a $[0, 100]$ range. The prediction target for the regression task was defined as the V/C , rather than the raw flow values, as suggested by Liu & Meidani (2024), and normalized to a range of $[0, 1]$ using Min-Max scaling.

To prevent data leakage, normalization parameters were computed strictly from the training subset of each dataset, utilizing a standard 70%-20%-10% split for training, validation, and testing, respectively. This ensures that the normalization parameters are derived solely from the training data. During inference, the predicted V/C values are inverse-transformed back to their original scale before evaluating the model’s performance.

For the baseline HetGAT implementation, node features are obtained directly from the OD matrix, and therefore depend on the size of the underlying transportation network (TAZs). To enable experiments involving multiple network topologies, the baseline node feature vectors were zero-padded to a common dimensionality of 950 nodes. This dimension includes a small buffer over the largest considered network (Chicago) to ensure flexibility for potential minor topological modifications without requiring other architectural changes. This homogenization was applied exclusively to the baseline implementation; in contrast,

the proposed GUIDED-HetGAT models do not require any input dimensionality adjustments as they rely on the network-agnostic GUIDED initialization process.

4.2.2. Optimization Strategy and Implementation Details

The models were optimized using the Adam optimizer (Kingma & Ba, 2014) with an initial learning rate of 10^{-3} . To refine the weights near convergence, we also applied a LR scheduler based on validation set performance, halving the learning rate as validation improvements stalled.

The maximum number of epochs was set to 700 for intra-network tasks, and 400 for inter-network transfer learning and fine-tuning experiments. The batch size was set to 16 for intra-network tasks, and 8 for inter-network and reduced size dataset tasks. Early Stopping was enabled across all runs, monitoring the validation loss to prevent overfitting and ensure the preservation of the most generalizable model weights.

To balance the gradient magnitudes during backpropagation, the weights for the composite loss function (Section 3.4) components were empirically set to $\lambda_v = 1.0$, $\lambda_f = 0.003$, and $\lambda_c = 0.003$ after a preliminary manual tuning phase. This scaling is mathematically necessary because the target variables operate in different domains: the V/C predictions are bounded within a small range (as the target is normalized to $[0, 1]$), while the flow predictions and node conservation violations can span a much wider range of values, depending on the link capacities and demand levels.

Early testing showed that the simultaneous optimization of the purely supervised V/C loss and the stringent flow conservation constraint from the very first epoch often led to unstable training dynamics, particularly in the early phases when the model’s predictions are still far from accurate. To mitigate this issue, we implemented an epoch-based curriculum learning strategy, where the conservation loss is gradually introduced during training. This allows the model to first learn to approximate the V/C values without being penalized for flow conservation violations, and then progressively encourages the model to internalize the physical constraint as its predictions become more accurate.

Both models were implemented in Python using the PyTorch and PyTorch Geometric libraries, which provide efficient implementations of graph neural network layers and operations (Ansel et al., 2024; Fey et al., 2025). The computations were performed on a workstation equipped with an NVIDIA RTX 4090 GPU (24GB VRAM) and an Intel i7-13700K CPU.

4.3. Evaluation Metrics

To comprehensively assess the predictive accuracy and physical consistency of the tested models, we evaluate both standard statistical regression metrics and domain-specific transportation metrics.

4.3.1. Statistical Evaluation Metrics

These metrics evaluate the point-wise and global regression performance of the neural network architectures, quantifying the magnitude and variance of the prediction errors. They are computed on the predicted flows $\hat{f}_r$ for the real edges $r \in \mathcal{E}_r$, compared against the ground-truth flows f_r obtained from a traditional UE solver.

The choice of the metrics is motivated by their widespread use in regression tasks and their ability to provide insights into different aspects of model performance: Mean Absolute Error (MAE) captures the typical size of the errors, Normalized Root Mean Square Error (RMSN) accounts for the scale of the flows, and the coefficient of determination (R^2) assesses the overall goodness-of-fit of the model to the data. These metrics together provide a comprehensive picture of how well the model is able to predict traffic flows across the network from a purely statistical and regression perspective.

4.3.2. Physical and Transportation Metrics

Domain-specific metrics, as commonly used in traffic modeling and transportation engineering, are employed to validate the physical realism of the predicted routing patterns. These metrics assess not only the accuracy of the flow predictions but also their adherence to fundamental traffic principles and their practical acceptability for real-world applications.

Two main metrics are utilized in this context: the percentage of links with a GEH statistic less than 5, which serves as a practical engineering acceptability criterion (Dowling et al., 2004), and the Normalized

Flow Conservation Error (FCN), which evaluates the degree to which the predicted flows adhere to the principle of flow conservation at the network nodes (Liu & Meidani, 2024).

The FCN metric quantifies the conservation loss across all nodes in the graph, normalized by the total demand in the network. This metric is particularly important for assessing the physical consistency of the predicted flows, as it directly measures whether the model’s predictions respect the fundamental principle that the total inflow and outflow at each node must balance with the net demand generated or attracted at that node. It is computed as follows:

$$FCN = \frac{\sum_{i \in \mathcal{V}} \left| \sum_{r \in \mathcal{E}_r^{out,i}} \hat{f}_r - \sum_{r \in \mathcal{E}_r^{in,i}} \hat{f}_r - d_{net,i} \right|}{\sum_{i \in \mathcal{V}} |d_{net,i}|} \quad (15)$$

where $\mathcal{E}_r^{out,i}$ and $\mathcal{E}_r^{in,i}$ denote the sets of outgoing and incoming real edges incident to node i , respectively, and $d_{net,i}$ represents the net generated or attracted demand at node i , while $\hat{f}_r$ and f_r denote the model-predicted and ground-truth flows on physical link $r \in \mathcal{E}_r$, respectively. A lower FCN value indicates better adherence to flow conservation, with a value of zero indicating perfect conservation across the network.

4.4. Design of Experiments

To systematically evaluate the proposed GNN architectures and their capacity to learn generalized traffic physics, the experimental framework was structured into four distinct phases. Each phase introduces increasing levels of complexity, transitioning from strictly controlled intra-network conditions to transfer learning across structurally disparate networks, and finally to semi-supervised inference under partial observability. This progression allows for a comprehensive assessment of the models’ generalization capabilities, robustness to data scarcity, and adaptability to real-world deployment scenarios.

A high-level overview of the complete experimental framework, detailing the data setup and primary research objectives for each phase, is provided in Table 3. The datasets generated for the Anaheim and Chicago networks, as described in Section 4.1, serve as the basis for all experiments. The specific configurations and objectives of each experimental phase are detailed in the subsequent sections.

4.4.1. Experiment A: Intra-Network Generalization

The primary objective of this baseline experiment is to establish the performance ceiling of the models and verify that the proposed architecture remains strictly competitive with the state-of-the-art on standard tasks. Before assessing complex cross-network transferability, it is crucial to ensure that the introduction of the high-dimensional virtual edge initialization does not compromise the model’s fundamental ability to accurately map demand to UE flows within the same topological domain.

Exp.	Focus	Data Setup	Primary Objective
A	Intra-Network Generalization	Full training set (700 scenarios) trained and evaluated on the same network topology.	Establish the performance ceiling and verify that the proposed model is strictly competitive with the state-of-the-art on standard tasks.
B	Sample Efficiency	Severely restricted training set (200 scenarios) trained and evaluated on the same network topology.	Assess model robustness to data scarcity and evaluate if structural inductive biases prevent overfitting compared to the baseline.
C	Semi-Supervised Inference	Partial observability: models trained and evaluated with a masked percentage of physical link flows.	Determine the models’ capacity to reconstruct unobserved macroscopic network states and maintain flow conservation from sparse data.
D	Inter-Network Transferability	Bi-directional transfer: trained on source network (full dataset), zero-shot and fine-tuned (200 scenarios) on target network.	Evaluate spatial generalizability across disparate topologies and isolate transferable physical priors via layer-wise ablation.

Table 3: Summary of the experimental framework, detailing the training setup and primary research objectives for each phase.

To achieve this, both the baseline HetGAT and the proposed GUIDED-HetGAT models are trained from scratch on all datasets [Anaheim Dataset A (AN-A), Anaheim Dataset B (AN-B), Chicago Sketch Dataset A (CH-A), Chicago Sketch Dataset B (CH-B)], and evaluated on unseen demand distributions from the same respective networks.

4.4.2. Experiment B: Sample Efficiency under Data Scarcity

Data availability is a critical concern in real-world applications of deep learning frameworks. Gathering high-quality traffic data or generating macroscopic UE solutions for a large number of scenarios is computationally expensive and time-consuming. Therefore, this experiment tests the models’ practical applicability under real-world data scarcity, and verifies whether the additional parameter complexity introduced by the proposed GUIDED initialization hinders its sample efficiency compared to the simpler baseline.

To assess this, the training data is severely restricted to a subset of only 200 scenarios for each dataset [AN-A, AN-B, CH-A, CH-B], resulting in exactly 140 training, 40 validation, and 20 testing samples following the established 70-10-20 split. By analyzing the degradation in evaluation metrics relative to the fully-trained models in Experiment A, this phase explicitly benchmarks whether the richer node embeddings of the proposed architecture provide a competitive advantage over the state-of-the-art under constrained training conditions, or if the increased parameter complexity leads to overfitting and reduced generalization when data is scarce.

4.4.3. Experiment C: Semi-Supervised Inference with Partial Observability

In real-world traffic management systems, it is often the case that ground-truth flow data is not available for every physical link in the network. Instead, traffic data is typically collected through a sparse network of sensors, such as induction loops or camera-based traffic monitoring systems, which only provide partial observability of the overall traffic state. This experiment simulates such a semi-supervised deployment scenario to evaluate the models’ ability to reconstruct unobserved network states based on limited information. During training, a masking function is applied to the physical edges $\mathcal{E}_r$, hiding a defined percentage (50%) of the ground-truth link flows.

The objective is to determine if the combination of the custom virtual-edge architecture and the physics-informed flow conservation loss ($\mathcal{L}_c$) is sufficient to accurately reconstruct the unobserved network states based solely on partial link information, and to quantify the performance advantage provided by the richer embeddings of the proposed GUIDED layer.

4.4.4. Experiment D: Inter-Network Transfer Learning and Layer Sensitivity Analysis

This phase constitutes the core contribution regarding spatial transferability. The objective is to evaluate whether a model trained on a specific urban topology can successfully map demand to UE flows on a completely unseen, structurally disparate network. To rigorously assess this, the transfer learning evaluation is conducted bi-directionally: models are trained on the Anaheim datasets [AN-A, AN-B] and transferred to the Chicago topology, as well as trained on the Chicago datasets [CH-A, CH-B] and transferred to the Anaheim topology.

For all inter-network tasks, the baseline HetGAT model utilizes zero-padding to standardize the input dimensions across both networks, as established in [Section 4.2.1](#). The pre-trained weights from the source network are transferred to the target topology, where the model’s performance is evaluated under two paradigms: Zero-Shot Inference (direct prediction on the target network without any weight updates) and Fine-Tuning (retraining on a limited subset of 200 scenarios from the target domain’s dataset).

To further dissect the internal representations learned by the models and isolate how they encode topological features versus generalized flow physics, a layer-wise sensitivity analysis is conducted during the fine-tuning phase. By selectively freezing and fine-tuning specific components of the GNN, we aim to isolate which learned representations are responsible for adapting to the new graph features, and which encode the underlying flow physics that can be transferred across topologies. This analysis provides insights into the internal mechanisms of the models and identifies which architectural components to prioritize for transfer learning in future applications and real-world deployment.

5. Experimental Results and Discussion

This section presents the empirical evaluation of the proposed GNN architectures for solving the macroscopic TAP. Following the experimental design formulated in Section 4, the performance of the baseline HetGAT is systematically compared against the GUIDED-Enhanced formulations (GUIDED-HetGAT-lin and GUIDED-HetGAT-rbf) across multiple urban network topologies.

The results for Experiments A, B, and C are presented in Table 4, which summarizes the performance metrics for each model under the respective experimental conditions. Results for Experiment D are presented in Table 5 and Table 6. The empirical results of each experiment and their interpretation are presented in tandem, with a critical discussion of the observed performance differences.

5.1. Experiment A: Intra-Network Generalization

The results of Experiment A, which evaluates the performance of the baseline and proposed GNN models on Datasets A and B for the Anaheim and Chicago networks, are presented in the first section of Table 4.

Under the random uniform scaling of Dataset A, the baseline model already demonstrates high predictive accuracy. However, both GUIDED-HetGAT variants outperform it on all metrics on both networks, showing substantial improvements especially in terms of the FCN metric (e.g. 0.935 vs 0.416 on AN-A, 0.607 vs 0.339 on CH-A for GUIDED-HetGAT-lin).

Experiment	Dataset	Network	Model	↓ MAE	↓ RMSN	↑ R^2	↑ % GEH < 5	↓ FCN
Experiment A: <i>Intra-network Generalization</i>	Dataset A	Anaheim	HetGAT	23.14	0.256	0.955	93.92	0.935
			GUIDED-HetGAT-lin	16.61	0.138	0.987	95.78	0.416
			GUIDED-HetGAT-rbf	16.74	0.140	0.986	95.53	0.416
		Chicago	HetGAT	17.52	0.122	0.987	98.59	0.607
			GUIDED-HetGAT-lin	14.09	0.104	0.991	98.77	0.339
			GUIDED-HetGAT-rbf	13.38	0.098	0.992	98.95	0.334
	Dataset B	Anaheim	HetGAT	51.22	0.380	0.814	66.07	1.206
			GUIDED-HetGAT-lin	38.81	0.297	0.887	75.95	0.882
			GUIDED-HetGAT-rbf	38.97	0.294	0.886	76.04	0.893
		Chicago	HetGAT	93.46	0.184	0.950	74.89	2.417
			GUIDED-HetGAT-lin	64.23	0.146	0.968	87.09	1.251
			GUIDED-HetGAT-rbf	63.91	0.146	0.968	87.26	1.252
Experiment B: <i>Sample Efficiency under Data Scarcity</i>	Dataset A	Anaheim	HetGAT	24.15	0.265	0.951	93.00	1.038
			GUIDED-HetGAT-lin	17.95	0.154	0.984	95.40	0.619
			GUIDED-HetGAT-rbf	17.85	0.148	0.985	94.97	0.571
		Chicago	HetGAT	18.19	0.127	0.986	98.29	0.693
			GUIDED-HetGAT-lin	18.18	0.121	0.988	97.78	0.554
			GUIDED-HetGAT-rbf	16.35	0.117	0.988	98.12	0.543
	Dataset B	Anaheim	HetGAT	50.71	0.368	0.823	66.91	1.679
			GUIDED-HetGAT-lin	41.05	0.305	0.881	74.92	1.503
			GUIDED-HetGAT-rbf	41.29	0.305	0.875	74.28	1.335
		Chicago	HetGAT	96.54	0.187	0.947	74.73	2.583
			GUIDED-HetGAT-lin	85.34	0.183	0.950	79.98	1.866
			GUIDED-HetGAT-rbf	72.71	0.168	0.959	83.58	1.801
Experiment C: <i>Semi-Supervised Learning under Partial Observability</i>	Dataset A	Anaheim	HetGAT	44.96	0.456	0.872	69.17	1.334
			GUIDED-HetGAT-lin	31.23	0.250	0.961	75.73	0.540
			GUIDED-HetGAT-rbf	29.71	0.241	0.964	76.56	0.422
		Chicago	HetGAT	55.13	0.397	0.857	74.54	0.490
			GUIDED-HetGAT-lin	46.50	0.360	0.883	78.91	0.295
			GUIDED-HetGAT-rbf	39.64	0.302	0.917	81.58	0.242
	Dataset B	Anaheim	HetGAT	60.19	0.459	0.723	56.45	1.319
			GUIDED-HetGAT-lin	48.53	0.380	0.811	65.08	0.790
			GUIDED-HetGAT-rbf	46.29	0.363	0.828	67.28	0.826
		Chicago	HetGAT	188.08	0.743	0.176	54.78	1.809
			GUIDED-HetGAT-lin	167.40	0.435	0.717	62.29	1.693
			GUIDED-HetGAT-rbf	162.25	0.413	0.745	62.38	1.724

Notes:

Arrows indicate the desired direction of improvement for each metric; Dataset A refers to the Random Uniform Scaling Dataset; Dataset B refers to the Distribution Shift Dataset.

Bold values denote the best overall performance for a specific metric within each combination.

Highlighted rows indicate configurations where the proposed architecture outperforms the baseline across all evaluation metrics, for the specific Experiment / Dataset combination.

Table 4: Results and statistics from Experiments A, B, and C.

On Dataset B, the performance gap between HetGAT and the proposed models widens significantly, with the baseline’s predictive accuracy deteriorating substantially (e.g. R^2 drops from 0.955 to 0.814 on AN-B, and only 66% of predictions fall within the $\text{GEH} < 5$ threshold). The proposed GUIDED-HetGAT models, again, outperform it on all metrics on both networks, and maintain a much stronger performance, with an R^2 of around 0.886-0.887 and 76% of predictions within the GEH threshold for AN-B. The FCN metric also indicates a substantial enhancement in flow consistency, with the error decreasing from 1.206 to around 0.882-0.893 for AN-B.

Interpretation. As both the baseline and proposed architectures operate on the same underlying heterogeneous graphs, the observed performance differences can be attributed to an enhanced representational capacity introduced by the rich, high-dimensional node features of the GUIDED-HetGAT models.

The proposed GUIDED initialization process results in a more informative feature space, with node embeddings derived from a directional aggregation of the expanded input demand. Thus, the nodes inherently possess a holistic, localized representation of their role as trip generators or attractors, which is crucial for accurately modeling traffic flows and which is lost in the baseline HetGAT’s simpler initialization.

Overall, this richer feature space allows the GUIDED-HetGAT models to learn more complex, non-linear relationships and routing behaviors between nodes, which is particularly beneficial under the more challenging conditions of the distribution shift in Dataset B. The consistent improvement across all metrics and datasets suggests that the proposed initialization strategy provides a more robust foundation for learning the underlying traffic flow dynamics, leading to superior predictive performance and better adherence to physical flow conservation principles.

5.2. Experiment B: Sample Efficiency under Data Scarcity

The results of Experiment B, which evaluates the performance of the baseline and proposed GNN models on smaller subsets of Datasets A and B for the Anaheim and Chicago networks, are presented in the second section of Table 4. The goal is to determine how robust the models are to data scarcity and whether the proposed high-dimensional initialization accelerates or hinders convergence under limited training samples.

Comparing these results to the fully trained models in Experiment A reveals distinct behavioral differences between the architectures. On Dataset A, all models still maintain high predictive accuracy, with only slight degradations in performance compared to their Experiment A counterparts. The baseline HetGAT exhibits surprising stability to the distribution shift of Dataset B: its performance on CH-B remains largely unchanged, with its R^2 dropping only slightly from 0.950 to 0.947, and its $\text{GEH} < 5$ compliance maintaining a near-constant 74.73% compared to its previous 74.89%.

Conversely, the proposed GUIDED-HetGAT architectures experience a noticeable degradation in performance compared to the Experiment A results. On CH-B, the GUIDED-HetGAT-lin model sees its MAE increase from 64.23 to 85.34, and its $\text{GEH} < 5$ compliance drops from 87.09% to 79.98%. However, despite this degradation, both GUIDED-HetGAT models still comfortably outperform the baseline across all metrics on Dataset B for both networks.

Interpretation. The contrasting responses to data scarcity highlight a fundamental trade-off between model capacity and sample efficiency. The baseline model’s relatively static performance between Experiment A and B suggests that its simpler, transductive initialization limits its representational capacity; it effectively hits a performance ceiling that additional data (as in Experiment A) cannot overcome.

In contrast, the proposed GUIDED initialization introduces a richer, high-dimensional parameter space via the virtual edge expansions. While this increased capacity allows the GUIDED-HetGAT models to achieve vastly superior accuracy when fully supplied with data (Experiment A), these additional parameters seem to be inherently more sensitive to data scarcity. When restricted to only 200 scenarios, they lack the samples required to fully optimize their expanded latent space, resulting in the observed performance drop. Crucially, however, the fact that their degraded performance still surpasses the baseline’s performance ceiling confirms that the structural inductive bias provided by the virtual demand embeddings remains superior, allowing them to better generalize even under limited data conditions.

5.3. Experiment C: Semi-Supervised Learning under Partial Observability

The results of Experiment C, which evaluates the models’ ability to reconstruct unobserved macroscopic network states from limited sensor data, are presented in the last section of Table 4. In this semi-supervised deployment scenario, half of the physical link flows are masked during training: the objective is to determine if the models can leverage their respective demand representations and the physics-informed loss component to accurately deduce the unobserved traffic volumes. The reported metrics are then computed only on the unobserved subset of edges, which are the ones relevant for this specific task.

When compared to the performance of the models in Section 5.1, the results of Experiment C reveal a significant performance degradation across all models and metrics, which is expected given the increased difficulty of the task.

While the proposed models still maintain moderate levels of predictive accuracy on the daily variations scenarios of Dataset A (e.g. GEH < 5 compliance of around 75% on AN-A and around 80% on CH-A), the demand distribution shift of Dataset B leads to a significant performance drop for all models, with the baseline HetGAT struggling to provide acceptable predictions (e.g. GEH < 5 compliance of around 55% on both networks). In contrast, the proposed GUIDED-HetGAT models still manage to maintain a significantly better performance across all metrics, with GEH < 5 compliance rates of around 65% on AN-B and around 62% on CH-B, which is a significant result given the difficulty of the task.

Interpretation. The outcomes of this experiment, suggest once again that the proposed GUIDED-HetGAT models, with their richer, high-dimensional demand representations, provide a more robust foundation for learning the underlying traffic flow dynamics, which is crucial for maintaining performance under conditions of partial observability.

Ultimately, these results, and especially the poor performance of both models on the challenging conditions of Dataset B, suggest that learning to approximate UE flows from limited sensor data on large, dense networks with challenging demand patterns (such as those proposed by CH-B) remains an open challenge. While the proposed GUIDED-HetGAT architectures demonstrate significant improvements over the baseline model across all scenarios, the complex interactions between partial observability, network density, and high-dimensional demand representations warrant much deeper investigation. Extensive future testing, involving varying degrees of sensor sparsity, alternative edge-masking strategies, and diverse real-world topologies, is strictly necessary to fully investigate the potential and limits of the GUIDED layer integration in this specific field.

5.4. Experiment D: Inter-Network Transfer Learning and Layer Sensitivity Analysis

The results of Experiment D, which evaluates the transferability of the baseline and proposed GNN models across different datasets and network topologies, are presented in Table 5 and Table 6. The evaluation is structured as a layer sensitivity study, where different subsets of model parameters Θ are unfrozen for fine-tuning on the target network. This allows us to isolate the contributions of demand initialization versus topological routing components to the overall transferability of the models.

In the following discussion, the different subsets of adapted parameters are defined as follows:

- $\Theta_{preproc}$: the parameters of the initial node feature construction layers, responsible for processing the input demand and generating the initial node embeddings. To maintain notational brevity, this term denotes both the MLP-based preprocessor in the baseline model, and the proposed initialization layers in the GUIDED-HetGAT models.
- Θ_{V_L} : the parameters of the final layer of the V-Encoder.
- Θ_{R_L} : the parameters of the final local topological routing layer of the R-Encoder.
- Θ_{pred} : the parameters of the edge-level flow predictor, which maps the final latent node and edge representations to scalar flow predictions.

Network	Model	Adapted Parameters	MAE ↓	RMSN ↓	R^2 ↑	% GEH < 5 ↑	FCN ↓
Anaheim	HetGAT	None	309.39	1.933	-2.201	21.77	6.922
	HetGAT	Θ_{pred}	65.68	0.456	0.822	65.81	1.461
	HetGAT	$\Theta_{preproc}$	84.16	0.594	0.698	56.32	1.990
	HetGAT	$\Theta_{R_L}, \Theta_{pred}$	23.63	0.155	0.980	94.97	0.862
	HetGAT	$\Theta_{V_L}, \Theta_{pred}$	54.29	0.358	0.890	73.46	1.282
	HetGAT	$\Theta_{preproc}, \Theta_{pred}$	50.46	0.330	0.907	76.24	1.208
	HetGAT	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	22.30	0.147	0.982	96.03	0.819
	HetGAT	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	22.56	0.148	0.981	95.84	0.829
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	43.21	0.281	0.933	81.80	1.172
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	21.39	0.141	0.983	96.95	0.816
	HetGAT	All	19.58	0.134	0.985	97.70	0.735
	GUIDED-HetGAT-lin	None	170.82	1.106	-0.050	26.33	6.924
	GUIDED-HetGAT-lin	Θ_{pred}	46.63	0.325	0.909	78.91	1.283
	GUIDED-HetGAT-lin	$\Theta_{preproc}$	59.31	0.423	0.846	69.32	1.392
	GUIDED-HetGAT-lin	$\Theta_{R_L}, \Theta_{pred}$	25.22	0.161	0.978	94.59	0.962
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{pred}$	36.53	0.250	0.946	86.64	1.044
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{pred}$	35.55	0.250	0.946	85.95	0.881
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	23.30	0.149	0.981	95.91	0.851
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	20.86	0.141	0.983	95.92	0.691
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	27.43	0.188	0.970	91.56	0.783
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	20.73	0.138	0.984	96.24	0.685
	GUIDED-HetGAT-lin	All	16.59	0.116	0.988	98.25	0.528
	GUIDED-HetGAT-rbf	None	215.96	1.489	-0.895	23.56	10.677
	GUIDED-HetGAT-rbf	Θ_{pred}	41.05	0.296	0.925	82.84	1.023
	GUIDED-HetGAT-rbf	$\Theta_{preproc}$	57.06	0.402	0.862	70.59	1.281
	GUIDED-HetGAT-rbf	$\Theta_{R_L}, \Theta_{pred}$	21.40	0.143	0.982	96.52	0.776
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{pred}$	32.10	0.227	0.956	89.62	0.818
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{pred}$	33.80	0.239	0.951	86.72	0.784
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	20.83	0.140	0.983	96.79	0.701
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	20.07	0.139	0.984	96.65	0.674
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	25.74	0.181	0.972	92.92	0.677
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	18.47	0.129	0.986	97.42	0.592
	GUIDED-HetGAT-rbf	All	16.85	0.120	0.988	97.94	0.557
Chicago	HetGAT	None	162.54	1.313	-0.203	23.74	11.305
	HetGAT	Θ_{pred}	46.15	0.446	0.861	77.95	4.356
	HetGAT	$\Theta_{preproc}$	126.53	1.059	0.217	36.67	5.221
	HetGAT	$\Theta_{R_L}, \Theta_{pred}$	26.12	0.287	0.942	92.40	1.748
	HetGAT	$\Theta_{V_L}, \Theta_{pred}$	41.04	0.410	0.883	81.62	3.719
	HetGAT	$\Theta_{preproc}, \Theta_{pred}$	39.92	0.396	0.891	82.17	3.654
	HetGAT	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	26.02	0.288	0.942	92.47	1.881
	HetGAT	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	25.50	0.273	0.948	92.52	1.907
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	39.95	0.392	0.893	82.04	3.657
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	25.29	0.270	0.949	92.78	1.778
	HetGAT	All	23.83	0.264	0.951	93.70	1.360
	GUIDED-HetGAT-lin	None	171.73	1.276	-0.130	22.08	13.919
	GUIDED-HetGAT-lin	Θ_{pred}	37.83	0.340	0.920	80.43	3.792
	GUIDED-HetGAT-lin	$\Theta_{preproc}$	105.15	0.895	0.445	48.68	5.437
	GUIDED-HetGAT-lin	$\Theta_{R_L}, \Theta_{pred}$	20.65	0.175	0.979	93.69	1.337
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{pred}$	29.49	0.278	0.946	87.45	2.641
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{pred}$	28.92	0.261	0.953	87.51	2.593
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	19.80	0.170	0.980	94.06	1.151
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	19.87	0.169	0.980	94.04	1.109
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	27.77	0.254	0.955	88.56	2.408
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	19.66	0.172	0.980	94.14	0.984
	GUIDED-HetGAT-lin	All	17.96	0.149	0.985	95.03	0.688
	GUIDED-HetGAT-rbf	None	165.66	1.333	-0.239	26.70	14.374
	GUIDED-HetGAT-rbf	Θ_{pred}	44.17	0.389	0.894	75.41	4.634
	GUIDED-HetGAT-rbf	$\Theta_{preproc}$	103.39	0.891	0.446	47.55	4.906
	GUIDED-HetGAT-rbf	$\Theta_{R_L}, \Theta_{pred}$	20.45	0.176	0.978	93.97	1.566
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{pred}$	30.66	0.280	0.945	86.21	2.790
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{pred}$	28.46	0.261	0.952	87.56	2.549
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	18.55	0.157	0.983	95.34	1.150
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	18.75	0.159	0.982	95.11	1.175
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	29.04	0.271	0.949	87.19	2.673
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	18.77	0.161	0.982	95.10	1.182
	GUIDED-HetGAT-rbf	All	17.31	0.149	0.984	95.79	0.788

Notes:

Arrows indicate the desired direction of improvement for each metric.

Bold values denote the best overall performance for a specific metric within each combination.

Highlighted rows indicate configurations where the proposed architecture outperforms the baseline across all evaluation metrics, for the specific Experiment / Dataset combination.

Table 5: Results and statistics from Experiment D (Dataset A, Random Uniform Scaling). Following a catastrophic failure in zero-shot transfer for all models, the GUIDED-HetGAT architectures consistently outperform the baseline across most fine-tuning configurations.

Network	Model	Adapted Parameters	↓ MAE	↓ RMSN	↑ R^2	↑ % GEH < 5	↓ FCN
Anaheim	HetGAT	None	608.72	1.070	-0.721	16.69	8.122
	HetGAT	Θ_{pred}	189.83	0.393	0.768	51.01	3.506
	HetGAT	$\Theta_{preproc}$	244.47	0.550	0.546	43.61	4.809
	HetGAT	$\Theta_{R_L}, \Theta_{pred}$	126.60	0.244	0.911	63.13	2.592
	HetGAT	$\Theta_{V_L}, \Theta_{pred}$	181.76	0.377	0.787	52.94	3.327
	HetGAT	$\Theta_{preproc}, \Theta_{pred}$	166.01	0.336	0.830	55.36	3.952
	HetGAT	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	113.70	0.218	0.929	67.77	2.613
	HetGAT	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	110.54	0.213	0.932	69.04	2.792
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	168.35	0.344	0.822	55.10	3.584
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	104.89	0.200	0.940	71.08	2.604
	HetGAT	All	97.38	0.188	0.947	74.30	2.689
	GUIDED-HetGAT-lin	None	957.59	2.194	-6.264	23.70	41.739
	GUIDED-HetGAT-lin	Θ_{pred}	181.58	0.405	0.752	58.13	2.835
	GUIDED-HetGAT-lin	$\Theta_{preproc}$	223.88	0.522	0.589	51.63	4.196
	GUIDED-HetGAT-lin	$\Theta_{R_L}, \Theta_{pred}$	104.69	0.226	0.923	73.31	2.284
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{pred}$	169.01	0.377	0.785	60.13	2.677
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{pred}$	167.84	0.370	0.793	60.03	2.457
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	93.92	0.197	0.942	76.79	2.274
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	96.35	0.207	0.935	75.95	2.196
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	164.26	0.366	0.798	61.13	2.434
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	93.71	0.200	0.939	76.56	2.216
	GUIDED-HetGAT-lin	All	79.49	0.171	0.956	82.23	1.986
	GUIDED-HetGAT-rbf	None	1110.24	2.494	-8.358	22.48	36.777
	GUIDED-HetGAT-rbf	Θ_{pred}	185.64	0.413	0.744	57.55	3.022
	GUIDED-HetGAT-rbf	$\Theta_{preproc}$	228.14	0.518	0.596	50.64	4.390
	GUIDED-HetGAT-rbf	$\Theta_{R_L}, \Theta_{pred}$	104.74	0.219	0.928	72.94	2.501
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{pred}$	174.70	0.383	0.779	59.13	2.695
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{pred}$	171.92	0.380	0.783	59.58	2.553
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	92.50	0.192	0.944	76.61	2.314
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	96.08	0.202	0.938	75.72	2.143
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	171.64	0.379	0.784	59.56	2.453
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	94.83	0.201	0.939	76.51	2.125
	GUIDED-HetGAT-rbf	All	81.49	0.174	0.954	81.43	1.943
Chicago	HetGAT	None	164.29	1.226	-0.950	16.94	6.554
	HetGAT	Θ_{pred}	65.72	0.488	0.691	54.03	4.065
	HetGAT	$\Theta_{preproc}$	114.56	0.883	-0.011	33.09	4.616
	HetGAT	$\Theta_{R_L}, \Theta_{pred}$	54.26	0.402	0.791	63.01	2.405
	HetGAT	$\Theta_{V_L}, \Theta_{pred}$	62.54	0.462	0.723	56.27	3.407
	HetGAT	$\Theta_{preproc}, \Theta_{pred}$	61.90	0.458	0.728	56.96	3.615
	HetGAT	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	53.67	0.397	0.795	63.59	2.078
	HetGAT	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	53.73	0.397	0.796	63.78	2.049
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	62.05	0.459	0.726	56.94	3.322
	HetGAT	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	53.66	0.397	0.796	63.61	2.078
	HetGAT	All	52.61	0.390	0.802	64.44	1.877
	GUIDED-HetGAT-lin	None	181.45	1.315	-1.232	10.81	1.853
	GUIDED-HetGAT-lin	Θ_{pred}	68.56	0.535	0.631	54.71	4.435
	GUIDED-HetGAT-lin	$\Theta_{preproc}$	103.88	0.827	0.118	39.89	4.870
	GUIDED-HetGAT-lin	$\Theta_{R_L}, \Theta_{pred}$	43.83	0.329	0.860	71.21	2.449
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{pred}$	56.12	0.427	0.764	62.00	3.539
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{pred}$	56.98	0.431	0.760	60.63	3.652
	GUIDED-HetGAT-lin	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	42.13	0.319	0.869	73.23	2.001
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	41.99	0.319	0.869	72.55	1.872
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	53.90	0.408	0.786	63.12	3.245
	GUIDED-HetGAT-lin	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	41.79	0.316	0.871	73.06	1.942
	GUIDED-HetGAT-lin	All	39.60	0.301	0.883	75.66	1.682
	GUIDED-HetGAT-rbf	None	185.16	1.271	-1.163	13.00	3.710
	GUIDED-HetGAT-rbf	Θ_{pred}	64.60	0.457	0.721	57.08	3.566
	GUIDED-HetGAT-rbf	$\Theta_{preproc}$	111.61	0.831	0.075	37.53	4.739
	GUIDED-HetGAT-rbf	$\Theta_{R_L}, \Theta_{pred}$	46.23	0.324	0.859	70.30	1.911
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{pred}$	58.13	0.409	0.776	60.81	3.271
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{pred}$	56.70	0.399	0.787	61.94	2.765
	GUIDED-HetGAT-rbf	$\Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	45.07	0.317	0.866	71.19	1.745
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{R_L}, \Theta_{pred}$	44.78	0.316	0.866	71.70	1.698
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{pred}$	56.98	0.402	0.784	61.52	3.019
	GUIDED-HetGAT-rbf	$\Theta_{preproc}, \Theta_{V_L}, \Theta_{R_L}, \Theta_{pred}$	44.96	0.318	0.865	71.59	1.901
	GUIDED-HetGAT-rbf	All	42.74	0.303	0.877	73.64	1.531

Notes:

Arrows indicate the desired direction of improvement for each metric.

Bold values denote the best overall performance for a specific metric within each combination.

Highlighted rows indicate configurations where the proposed architecture outperforms the baseline across all evaluation metrics, for the specific Experiment / Dataset combination.

Table 6: Results and statistics from Experiment D (Dataset B, Distribution Shift). Even when transferring across disparate networks under the challenging conditions of Dataset B, the GUIDED-HetGAT architectures consistently match and outperform the baseline across most fine-tuning configurations.

The transferability under the random uniform scaling scenarios of Dataset A reveals the necessity of domain adaptation: zero-shot transfer fails completely, with negative R^2 values and severe physical flow violations. However, both the baseline and the proposed GUIDED-HetGAT models demonstrate strong recovery under highly restricted parameter-efficient domain adaptation. Unfreezing the final layer of the real-edge message passing and the edge-level predictor ($\Theta_{RL}, \Theta_{pred}$) already restores near-native predictive functionality. The GUIDED-HetGAT models generally outperform the baseline in this restricted adaptation regime, only marginally underperforming the baseline in specific configurations (e.g. when unfreezing $\Theta_{RL}, \Theta_{pred}$ on AN-A for GUIDED-HetGAT-lin).

The same trend can be observed under the distribution shift scenarios from Dataset B, where again the GUIDED-HetGAT models generally outperform the baseline across most transfer configurations, with improvements in both predictive accuracy and physical consistency. However, specific configurations show that the proposed models outperform the baseline model in some metrics, while performing slightly worse in others (e.g. GUIDED-HetGAT-lin outperforming the baseline on all metrics except the FCN metric on CH-B when unfreezing $\Theta_{RL}, \Theta_{pred}$, with 2.449 vs 2.405).

Interpretation. The results of this sensitivity analysis provide valuable insights into the internal mechanics of how the tested architectures encode the TAP and the relative importance of different components for transferability across domains.

Our first findings highlight that zero-shot transfer fails catastrophically for both models. This confirms that the learned representations of traffic flow dynamics are highly specific to the structure of the training domain, and that without adaptation, the tested models cannot generalize to new network topologies. However, the GUIDED-HetGAT architectures consistently demonstrate stronger or equal capacity for domain adaptation compared to the baseline model across all tested frozen parameter configurations.

Further analysis reveals that fine-tuning only the prediction heads (Θ_{pred}) provides a significant improvement over zero-shot, but remains insufficient to achieve acceptable predictive accuracy or physical consistency. This suggests that while the prediction heads map latent representations to scalar flows, the underlying feature extraction layers must also be calibrated to capture the unique characteristics of the target network.

On both datasets, we observe that the critical performance breakthrough exclusively occurs when the local topological routing layers (Θ_{RL}) are adapted alongside the predictor layers (Θ_{pred}). Furthermore, unfreezing the initialization layer in addition to the local routing layer and the predictor ($\Theta_{preproc}, \Theta_{RL}, \Theta_{pred}$) does not yield significant performance improvements for any of the tested models. This suggests that the bottleneck in transfer learning performance does not lie in the demand projection itself, but rather in the downstream message-passing layers, which must be adapted to capture the unique topological geometries of the target network.

Even when computational constraints prevent full encoder fine-tuning, which is shown to provide the best adaptation to the target domain, the models equipped with the proposed GUIDED layer demonstrate a significant performance benefit over the baseline model across the majority of the tested configurations. In particular, fine-tuning just the final local receptive field prior to the scalar flow prediction, in the form of the last R-Encoder layer and the prediction heads ($\Theta_{RL}, \Theta_{pred}$), is sufficient to surpass 70% GEH compliance across AN-B and CH-B for both GUIDED-HetGAT variants, a meaningful improvement over the baseline model which only reaches 63% compliance in the same conditions. This highlights the increased parameter-efficiency deriving from the proposed initialization framework, which allows the models to achieve significant performance improvements with minimal fine-tuning of a small subset of parameters.

5.5. Computational Efficiency

The computational efficiency of the proposed GUIDED-HetGAT models is evaluated in terms of training time per epoch, and compared against the baseline HetGAT on both datasets and networks for Experiment A, which is the most computationally demanding. Fig. 5 shows the average training time per epoch for each model and dataset.

Both GUIDED-HetGAT variants achieve a significant reduction in training time per epoch compared to the baseline HetGAT, with reductions of around 50% across all datasets and networks (ranging from

44.4% to 54.6%). This improvement can be attributed to the more efficient feature initialization process introduced by the GUIDED layer, which leverages highly optimized scatter operations for the node feature construction, as opposed to the more computationally intensive MLP-based preprocessing of the baseline model. The consistent reduction in training time across all scenarios highlights the computational efficiency of the proposed initialization framework, which can provide significant speedups even in large-scale, complex traffic assignment tasks.

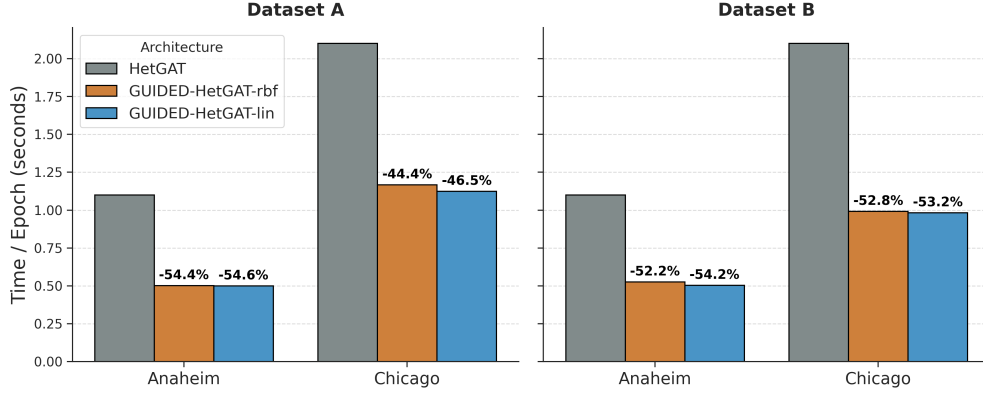


Figure 5: Comparison of the computational efficiency of the proposed GUIDED-HetGAT models against the baseline HetGAT on Dataset A (left) and Dataset B (right) in Experiment A.

6. Conclusions

This research set out to address a critical bottleneck in the application of deep learning to transportation engineering: the spatial transferability of data-driven surrogate models for the macroscopic TAP. By developing and rigorously evaluating a novel procedure for the initialization of node features from demand data, this work demonstrated how to successfully decouple travel demand representation from specific network topologies, enabling the development of truly inductive surrogate GNN models for the TAP.

By shifting the initial demand representation from a fixed-dimension node feature matrix to a scalar edge attribute, the proposed initialization paradigm renders the downstream architecture completely agnostic to the size of the network. This contrasts with previous architectures, where enabling transductive architectures in cross-network scenarios requires homogenizing the input features of the networks via zero-padding to match the same dimensionality on all tested datasets, limiting their applicability to networks of a predefined maximum size. The proposed framework elegantly bypasses this step, allowing the message-passing layers to rely on uniform, rich, high-dimensional embeddings without artificial dimensionality constraints.

The initialization procedure was integrated into a state-of-the-art heterogeneous graph attention architecture (HetGAT), and systematically benchmarked against the original HetGAT across multiple urban topologies and demand conditions. The experimental framework was designed to evaluate not only raw predictive accuracy, but also sample efficiency, robustness to spatially uncorrelated demand patterns, adherence to physical flow conservation, and inter-network transferability. The results of this evaluation can be summarized into four core findings:

1. **Structural advantage under out-of-distribution demand patterns and data scarcity:** The tested GUIDED-HetGAT model variants consistently outperformed the baseline model across most tested scenarios, showing particular resilience when confronted with the challenging conditions of Dataset B (Distribution Shift).
2. **Initialization strategy performance:** While both GUIDED initialization strategies performed comparably across most scenarios, achieving state-of-the-art predictive accuracy and physical consistency,

empirical results indicate a slight but consistent performance edge for RBF-based variant. The RBF expansion likely provides a richer, linearly separable initial embedding space for the demand information, granting the downstream layers a superior representational foundation.

3. **Domain-agnostic transferability:** While zero-shot transfer failed across all model-dataset combinations, the model integrated with the proposed initialization method exhibited a greater capacity for parameter-efficient domain adaptation, allowing for seamless transitions between networks of vastly different sizes without the need for artificial input modifications.
4. **Higher computational efficiency:** The proposed initialization layer achieved significant reductions in training time per epoch compared to the baseline approach, with improvements of around 50% across all tested datasets and networks, highlighting the computational efficiency of the proposed initialization procedure.

While the proposed GUIDED layer successfully addresses the spatial transferability gap in data-driven traffic assignment, the findings of this study must be contextualized within the boundaries of several foundational assumptions and methodological limitations. These same limitations also highlight promising avenues for future research, spanning from algorithmic scalability to the integration of more complex traffic dynamics.

Scalability boundaries. From an architectural and computational perspective, the study faces specific boundaries, primarily driven by the inherent scalability limits of heterogeneous graphs. While the inclusion of a dedicated virtual link for every active OD pair allows our framework to successfully decouple demand from the nodes, it also causes the spatial complexity of the graph to scale quadratically with the number of TAZs ($\mathcal{O}(|\mathcal{Z}|^2)$). This is a structural limitation, shared with similar heterogeneous GNN frameworks. Although effective for medium-to-large topologies like Anaheim and Chicago Sketch, extending this paradigm to massive, detailed city-scale networks would introduce a significant memory bottleneck, requiring advanced graph sampling or edge-pruning techniques to remain computationally efficient.

Future research should explore heuristic or learned virtual edge pruning, such as discarding OD connections with negligible demand prior to message passing, to drastically reduce the memory footprint of the initialization module without sacrificing the physical accuracy of the macroscopic flow predictions. Additionally, exploring hierarchical GNN representations, where local neighborhood demands are aggregated into regional super-nodes before virtual edge projection, could provide a computationally tractable pathway to enable further architecture scaling.

Extension to multi-modal, spatio-temporal Graph Neural Networks. The experimental framework fundamentally relies on the deterministic TAP solved via the BFW algorithm to generate ground-truth data. Consequently, the methodology inherently assumes a static network state where demand matrices and link capacities remain constant over the analysis period. By targeting an aggregated, time-independent equilibrium, the models abstract away complex temporal traffic dynamics, such as the formation and dissipation of transient shockwaves, queue spillbacks, and time-varying departure choices. Furthermore, this approach relies on Wardrop’s First Principle, implicitly assuming that all network users belong to a homogeneous vehicle fleet, possess perfect information regarding network conditions, and behave perfectly rationally to minimize their individual travel times. The effects of multi-modal interactions, public transit schedules, and the distinct routing behaviors of heavy goods vehicles are not incorporated into the underlying link capacity or travel time functions.

While GNN models have already been successfully extended to multi-modal and spatio-temporal settings in previous work (e.g. Liu & Meidani, 2025; Wu et al., 2019; Jiang et al., 2025), the proposed network-agnostic initialization procedure has not yet been adapted to these more complex settings. Future research should explore how to extend the proposed framework to multi-modal and spatio-temporal GNNs, incorporating time-varying demand and mode-specific features, allowing the model to capture the complex interactions between different transportation modes and their impact on overall network performance, while simultaneously accounting for non-static demand fluctuations and transient traffic dynamics.

Adaptation for empirical traffic observations. Relying on synthetic, algorithmically generated ground-truth flow data allowed for a controlled evaluation of the proposed architecture, ensuring that the models were trained and tested on mathematically consistent equilibrium solutions. However, this approach abstracts away real-world complexities such as measurement noise, incomplete network observability, and non-equilibrium traffic conditions. Future research should validate the proposed architecture against empirical traffic data from GPS trajectories, induction loops, and camera-based sensors to assess its robustness and predictive accuracy in real-world scenarios.

Leveraging the virtual embeddings. While the proposed architecture successfully decouples demand representation from the network topology, the current implementation only utilizes the virtual edge embeddings during the initialization phase, and does not leverage them in the subsequent message-passing layers, as detailed in [Section 3.3](#).

Future research should explore how to effectively integrate these demand-informed virtual edge features into the message-passing process, allowing the model to dynamically incorporate demand information at each layer of the network, potentially enhancing its ability to capture complex demand-flow interactions and further improving predictive accuracy and physical consistency. In the specific case of the application to the HetGAT architecture, the virtual edge features could be used to modulate the attention weights during message passing in the V-Encoder, allowing the model to dynamically adjust the influence of different nodes and edges based on the underlying demand patterns.

Extension to other domains. Finally, while the proposed architecture is demonstrated in the context of vehicular traffic assignment, its fundamental design principles are not inherently tied to this specific application. By decoupling spatial topologies from demand matrices, the framework offers a versatile blueprint for surrogate modeling of any spatial interaction problem driven by OD matrices and other similar features, such as freight logistics and multimodal network optimization.

Future research should explore the application of this network-agnostic architecture to other domains, assessing its adaptability and performance in different contexts and with different types of spatial interaction data.

Acknowledgements

This research has been supported by European Union’s Horizon Europe programme under grant agreement No. 101138449 [project MI-TRAP (Mitigating Transport-Related Air Pollution)], and by the TUM School of Social Sciences and Technology and the TUM Think Tank through the Friedrich Schiedel Fellowship under grant agreement No. FSF309 [project FAIR-NET (Fairness in Metropolitan Transport Networks)].

References

- Agriesti, S., Cantelmo, G., & Pereira, F. C. (2026). Metalearning traffic assignment for network disruptions with graph convolutional neural networks. *arXiv preprint arXiv:2603.06763*, . [arXiv:2603.06763](#).
- Ameli, M., Shams, S., Le, V. A., & Skabardonis, A. (2026). From optimization to prediction: Transformer-based path-flow estimation to the traffic assignment problem. *Transportation Research Part C: Emerging Technologies*, 190, 105808. URL: <https://www.sciencedirect.com/science/article/pii/S0968090X26002962>. doi:10.1016/j.trc.2026.105808.
- Ansel, J., Yang, E., He, H., Gimelshein, N., Jain, A., Voznesensky, M., Bao, B., Bell, P., Berard, D., Burovski, E., Chauhan, G., Chourdia, A., Constable, W., Desmaison, A., DeVito, Z., Ellison, E., Feng, W., Gong, J., Gschwind, M., Hirsh, B., Huang, S., Kalambarkar, K., Kirsch, L., Lazos, M., Lezcano, M., Liang, Y., Liang, J., Lu, Y., Luk, CK., Maher, B., Pan, Y., Puhersch, C., Reso, M., Saroufim, M., Siraichi, M. Y., Suk, H., Suo, M., Tillet, P., Wang, E., Wang, X., Wen, W., Zhang, S., Zhao, X., Zhou, K., Zou, R., Mathews, A., Chanan, G., Wu, P., & Chintala, S. (2024). PyTorch 2: Faster machine learning through

- dynamic python bytecode transformation and graph compilation. In *29th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, Volume 2 (ASPLOS '24)*. ACM. doi:[10.1145/3620665.3640366](https://doi.org/10.1145/3620665.3640366).
- Beckmann, M., McGuire, C. B., & Winsten, C. B. (1956). *Studies in the Economics of Transportation*. Technical Report.
- Bishop, C. M., & Nasrabadi, N. M. (2006). *Pattern Recognition and Machine Learning* volume 4. Springer.
- Borde, H. S. d. O., & Bronstein, M. (2025). Mathematical foundations of geometric deep learning. *arXiv preprint arXiv:2508.02723*, . [arXiv:2508.02723](https://arxiv.org/abs/2508.02723).
- Boyce, D., Ralevic-Dekic, B., & Bar-Gera, H. (2004). Convergence of traffic assignments: How much is enough? *Journal of Transportation Engineering*, *130*, 49–55.
- Bresson, X., & Laurent, T. (2017). Residual gated graph convnets. *arXiv preprint arXiv:1711.07553*, . [arXiv:1711.07553](https://arxiv.org/abs/1711.07553).
- Brody, S., Alon, U., & Yahav, E. (2021). How attentive are graph attention networks? *arXiv preprint arXiv:2105.14491*, . [arXiv:2105.14491](https://arxiv.org/abs/2105.14491).
- Bruna, J., Zaremba, W., Szlam, A., & LeCun, Y. (2013). Spectral networks and locally connected networks on graphs. *arXiv preprint arXiv:1312.6203*, . [arXiv:1312.6203](https://arxiv.org/abs/1312.6203).
- Camargo, P. (2015). Aequilbrae: a free qgis add-on for transportation modeling. *Foss4g North America*, .
- Correa, J. R., & Stier-Moses, N. E. (2011). Wardrop equilibria. *Encyclopedia of Operations Research and Management Science*. Wiley, .
- de Dios Ortúzar, J., & Willumsen, L. G. (2024). *Modelling Transport*. John wiley & sons.
- Dowling, R., Skabardonis, A., & Alexiadis, V. (2004). Traffic analysis toolbox, volume III: Guidelines for applying traffic microsimulation modeling software, .
- Dwivedi, V. P., & Bresson, X. (2020). A generalization of transformer networks to graphs. *arXiv preprint arXiv:2012.09699*, . [arXiv:2012.09699](https://arxiv.org/abs/2012.09699).
- Erdol, H., Klar, R., Angelakis, V., Pope, J., Piechocki, R., Tryfonas, T., & Oikonomou, G. (2025). City-agnostic demand prediction: A graph attention approach for urban transfer learning. In *2025 IEEE International Smart Cities Conference (ISC2)* (pp. 1–6). IEEE.
- Fey, M., Sunil, J., Nitta, A., Puri, R., Shah, M., z Stojanovi c, B., Bendias, R., Barghi, A., Kocijan, V., Zhang, Z., He, X., Lenssen, J. E., & Leskovec, J. (2025). PyG 2.0: Scalable learning on real world graphs. *Temporal Graph Learning Workshop @ KDD*, .
- Gilmer, J., Schoenholz, S. S., Riley, P. F., Vinyals, O., & Dahl, G. E. (2017). Neural message passing for quantum chemistry. In *International Conference on Machine Learning* (pp. 1263–1272). Pmlr.
- Gilmer, J., Schoenholz, S. S., Riley, P. F., Vinyals, O., & Dahl, G. E. (2020). Message passing neural networks. In *Machine Learning Meets Quantum Physics* (pp. 199–214). Springer.
- Hu, X., & Xie, C. (2025). Use of graph attention networks for traffic assignment in a large number of network scenarios. *Transportation Research Part C: Emerging Technologies*, *171*, 104997. URL: <https://www.sciencedirect.com/science/article/pii/S0968090X25000014>. doi:[10.1016/j.trc.2025.104997](https://doi.org/10.1016/j.trc.2025.104997).
- Jiang, L., Liu, B., Jiang, Y., Chen, S., Wang, H., & Liang, W. (2025). A deep graph convolution spatial-temporal attention learning model for traffic flow prediction. *Measurement Science and Technology*, *36*, 066114.

- Ju, L., Yang, X., Li, Q., & Wang, X. (2025). Graphbridge: Towards arbitrary transfer learning in gnns. *arXiv preprint arXiv:2502.19252*, . [arXiv:2502.19252](#).
- Kingma, D. P., & Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, . [arXiv:1412.6980](#).
- Kipf, T. N., & Welling, M. (2016). Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907*, . [arXiv:1609.02907](#).
- Lassen, O. B., Agriesti, S., Eldafrawi, M., Gammelli, D., Cantelmo, G., Gentile, G., & Pereira, F. C. (2025). Learning traffic flows: Graph neural networks for metamodeling traffic assignment. In *2025 9th International Conference on Models and Technologies for Intelligent Transportation Systems (MT-ITS)* (pp. 1–8). IEEE.
- Liu, T., & Meidani, H. (2024). End-to-end heterogeneous graph neural networks for traffic assignment. *Transportation Research Part C: Emerging Technologies*, *165*, 104695.
- Liu, T., & Meidani, H. (2025). Multi-class traffic assignment using multi-view heterogeneous graph attention networks. *Expert Systems with Applications*, *286*, 128072.
- Liu, X., Zhang, Y., Zhang, K., Cheng, Q., Xing, J., & Liu, Z. (2025). A scalable learning approach for user equilibrium traffic assignment problem using graph convolutional networks. *Electronic Research Archive*, *33*, 3246.
- Liu, Z., & Yin, Y. (2025). End-to-end learning of user equilibrium: Expressivity, generalization, and optimization. *Transportation Science*, *59*, 853–882.
- Makarov, N., Narayanan, S., & Antoniou, C. (2024). Development of a graph neural network surrogate for travel demand modelling. *arXiv preprint arXiv:2408.07726*, . [arXiv:2408.07726](#).
- Narayanan, S., Makarov, N., & Antoniou, C. (2024). Graph neural networks as strategic transport modelling alternative-A proof of concept for a surrogate. *IET Intelligent Transport Systems*, *18*, 2059–2077.
- Patriksson, M. (2015). *The Traffic Assignment Problem: Models and Methods*. Courier Dover Publications.
- Rahman, R., & Hasan, S. (2023). Data-driven traffic assignment: A novel approach for learning traffic flow patterns using graph convolutional neural network. *Data Science for Transportation*, *5*, 11.
- Rahmani, S., Baghbani, A., Bouguila, N., & Patterson, Z. (2023). Graph neural networks for intelligent transportation systems: A survey. *IEEE Transactions on Intelligent Transportation Systems*, *24*, 8846–8885.
- Rampášek, L., Galkin, M., Dwivedi, V. P., Luu, A. T., Wolf, G., & Beaini, D. (2022). Recipe for a general, powerful, scalable graph transformer. *Advances in Neural Information Processing Systems*, *35*, 14501–14515.
- Schütt, K., Kindermans, P.-J., Saucedo Felix, H. E., Chmiela, S., Tkatchenko, A., & Müller, K.-R. (2017). Schnet: A continuous-filter convolutional neural network for modeling quantum interactions. *Advances in neural information processing systems*, *30*.
- Stabler, B., Bar-Gera, H., & Sall, E. (2024). Transportation networks for research.
- Tancik, M., Srinivasan, P., Mildenhall, B., Fridovich-Keil, S., Raghavan, N., Singhal, U., Ramamoorthi, R., Barron, J., & Ng, R. (2020). Fourier features let networks learn high frequency functions in low dimensional domains. *Advances in neural information processing systems*, *33*, 7537–7547.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. *Advances in neural information processing systems*, *30*.

- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Lio, P., & Bengio, Y. (2017). Graph attention networks. *arXiv preprint arXiv:1710.10903*, . [arXiv:1710.10903](https://arxiv.org/abs/1710.10903).
- Wardrop, J. G. (1952). Road paper. some theoretical aspects of road traffic research. *Proceedings of the institution of civil engineers*, 1, 325–362.
- Wu, Z., Pan, S., Long, G., Jiang, J., & Zhang, C. (2019). Graph wavenet for deep spatial-temporal graph modeling. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, IJCAI-19* (pp. 1907–1913). International Joint Conferences on Artificial Intelligence Organization. URL: <https://doi.org/10.24963/ijcai.2019/264>. doi:10.24963/ijcai.2019/264.