

Natural Sit-to-Stand Motion Synthesis For Humanoids via Guided Assistance Curricula and Staged Rewards

Meet Pal Singh¹, Vyankatesh Ashtekar^{1*}, and Ashish Dutta¹

Department of Mechanical Engineering, Indian Institute of Technology Kanpur,
Kanpur, Uttar Pradesh, India
{meetpal22, vyankatesh20, adutta}@iitk.ac.in

Abstract. A humanoid has infinitely many ways to stand up from sitting while maintaining balance, making sit-to-stand (STS) a challenging control problem. We synthesise natural humanoid STS motion from scratch using reinforcement learning, without demonstrations or reference trajectories. A single Proximal Policy Optimisation policy learns smooth, human-like rising driven by three complementary components. (i) A coupled force/chair-height curriculum is used. A vertical pelvis-assist force aids early trajectory exploration and decays over training. Taller chairs are unlocked with decaying assisting force. This ensures that the policy masters a viable STS trajectory at each chair height before being exposed to harder ones, avoiding the premature distribution shift that otherwise collapses generalisation. (ii) Motion robustness is achieved by randomly sampling from a large number of inverse kinematics-generated initial and target poses spanning over eight chair heights. (iii) A set of rewards is defined inspired from biomechanics and optimal control studies. They shape the robot’s angular momentum for seat-off, and enable support-region transition via centre of pressure attraction function to ensure smooth low-effort actuation. On a deterministic force-free evaluator, the policy attains more than 97% balanced-standing success across eight chair heights. The policy generalises smooth motion across chair heights and enables the robot to rise from substantially deep-seated postures as compared to the state of the art.

Keywords: Sit to stand · Humanoid robot · Reinforcement learning.

1 Introduction

Humanoid robots are increasingly being integrated into human environments, making contact-rich whole-body transitions like the sit-to-stand (STS) essential. This paper synthesises the STS motion for a humanoid robot using reinforcement learning (RL) from scratch, without imitation or reference-motion tracking.

Collectively, the following four categories encompass the existing approaches to STS in the literature: (a) pure optimisation [1,15,10,2,5,16], (b) optimisation

* Corresponding author.

with a reference trajectory [9,4], (c) pure RL [7,6], and (d) RL with a reference motion [8,3]. The formulation of the STS problem for exoskeletons, see e.g. [10], closely resembles that of humanoid robots.

Optimisation-based synthesis spans forward-dynamics shooting [5,2], inverse-dynamics [1,15], and direct collocation [10] methods. The STS problem has to be usually split into two [2] or more [1] domains due to contact discontinuities. Algorithms from MuJoCo MPC [5] demonstrated real-time motion synthesis but yielded spasmodic humanoid STS. It remains a prominent yet under-explored alternative to RL. A reference trajectory shrinks this search space, but kinematic and dynamic disparity means the recorded motion must be retargeted to the robot. Mistry et al. [9] guided a planar STS using human centre of mass (COM) and centre of pressure (COP) trajectories, mapping motion to a scaled skeleton and solving joints by inverse kinematics (IK). González-Fierro et al. [4] fitted a Gaussian zero-moment-point (ZMP)/effort reward by differential evolution and later surpassed the human baseline through skill innovation.

Optimisation based methods require smooth gradient of objective function, unavailable in contact-rich motions. The motion resulting from RL policy, say Proximal Policy Optimisation (PPO), is based on a large number of sampled returns, avoiding the need for analytical derivatives of contact dynamics. Huang et al. [6] demonstrated a learning-based approach for humanoid stand-up in a wide range of scenarios. They used a multi-critic architecture with separate task, style, regularisation, and post-task reward groups, a vertical pull-force exploration curriculum, an action-bound rescaler that limits motion speed, and smoothness regularisation. However, the resulting STS motion still involved abrupt movements. Jiang et al. [7] formulated STS and stand-to-sit using RL from scratch, and demonstrated a shallow STS motion on a physical robot. They had to ensure a favourable sitting zone to ensure good standing up success, otherwise the success rate dropped by 40-60% [7]. Imitation learning mimics contact-rich human motions, inheriting their physical consistency. Allshire et al. [3] showed shallow STS among many skills, but the motions were abrupt, lacking smooth human-like transitions.

State-of-the art methods using RL to solve STS have two clear shortcomings. First, the demonstrated initial seated postures (see e.g., [7,3]) are shallow in the sense that the pelvis rests on the seat edge with inclined thigh links, such that the majority of the robot’s weight is already on its feet. Second, learned movements are typically abrupt if the robot sits deep in a chair (e.g. [6]). A smooth, controlled, energy-efficient transition like humans is desired to ensure the safety of the robot and its surroundings.

The main contributions of this work are as follows. We design a pure RL-based STS motion synthesis method that uses physics-based rewards inspired from the optimal control literature to obtain a human-like stand-up. For sample-efficient and physically consistent learning, we systematically randomise the initial seated and target standing configurations with whole-body IK over a large pose library spanning eight chair heights. A dimensionless rise-fraction unifies staged rewards across varying chair geometries, while a coupled curriculum link-

ing pelvis assistance force decay to progressive chair-height unlocking drives robust motion discovery and refinement. The result is a smooth, balanced motion amenable to physical implementation.

2 Methodology

In traditional optimisation frameworks, the STS problem is set up as follows. The robot’s initial and final configurations are usually predefined. The cost function aggregates quantities integrated over the motion, such as the magnitude of actuator efforts, the rate of change of effort, mechanical work done by the actuators, equal distribution of ground reaction forces between the two feet [1], and attractors pulling the ZMP [14] or the COP toward a desired support location. The constraints include joint angle, velocity, acceleration and torque limits, contact constraints at the foot–ground and seat interfaces, a requirement that the net COP lie within a preferred zone of the support region, and STS stage durations [1]. A robot is balanced only if its ZMP/COP lies strictly inside the support polygon at all times. Depending on whether forward-dynamics shooting, inverse dynamics, or direct collocation is used, the actuator efforts, joint trajectories, or both are parametrised as smooth splines.

2.1 STS Formulation using RL

We cast STS as a finite-horizon Markov decision process (MDP) $\langle S, A, T, R, \gamma \rangle$ and solve it with PPO [12]. The chosen robot is the 29 degree-of-freedom (DOF) Unitree G1 modelled in MuJoCo [13]. The policy acts at 50 Hz (frame-skip 10 over a 2 ms integrator step) and each episode runs up to 40 s (2000 steps), ending early on a safety termination (the COM dropping below a floor, or trunk roll/pitch beyond limits).

Observation and action spaces. The policy is proprioceptive. At step t it observes the 97-dimensional vector

$$\mathbf{o}_t = [\mathbf{g}_b, \boldsymbol{\omega}_b, \mathbf{a}_b, \mathbf{q}, \dot{\mathbf{q}}, \mathbf{a}_{t-1}, \beta_{\max}], \quad (1)$$

where $\mathbf{g}_b \in \mathcal{R}^3$ is the gravity vector projected into the torso frame, $\boldsymbol{\omega}_b \in \mathcal{R}^3$ and $\mathbf{a}_b \in \mathcal{R}^3$ are the torso angular velocity and linear acceleration from the inertial measurement unit (IMU), $\mathbf{q}, \dot{\mathbf{q}} \in \mathcal{R}^{29}$ are the joint positions and velocities, $\mathbf{a}_{t-1}$ is the previous action, and $\beta_{\max}$ is the scalar action-bound multiplier (Sec. 2.2). The action $\mathbf{a}_t \in [-1, 1]^{29}$ is an incremental (delta) joint command, mapped to a proportional-derivative (PD) target and the applied joint torque by the global action rescaler $\beta_{\max}$,

$$\mathbf{u}_t = \text{clip}(\mathbf{q}_t + \mathbf{a}_t \odot \beta_{\max}, \mathbf{q}_{\min}, \mathbf{q}_{\max}), \quad (2)$$

$$\boldsymbol{\tau}_t = \mathbf{K}_p (\mathbf{u}_t - \mathbf{q}_t) - \mathbf{K}_d \dot{\mathbf{q}}_t, \quad (3)$$

where $\odot$ is the element-wise product and $\mathbf{K}_p, \mathbf{K}_d$ are the servo gains. The rescaler $\beta_{\max} \leq 1$ shrinks the admissible per-step excursion. Training uses vectorised environments with observation and reward normalisation.

Table 1: Assist-force and chair-height curriculum. Each *lane* is a discrete seat height (lane 0 lowest). New lanes are progressively unlocked as $F_{\max}$ decays.

Assist force range	Unlocked chair lanes
$F_{\max} > 100$ N	$\{0\}$
$80 < F_{\max} \leq 100$ N	$\{0,1\}$
$60 < F_{\max} \leq 80$ N	$\{0,1,2,3\}$
$40 < F_{\max} \leq 60$ N	$\{0,1,2,3,4,5\}$
$20 < F_{\max} \leq 40$ N	$\{0,1,2,3,4,5,6,7\}$
$F_{\max} \leq 20$ N	$\{1,2,3,4,5,6,7\}$

2.2 Randomisation, Rewards, and Curriculum

In RL literature, adding joint-space noise for initial pose randomisation is common, but in contact-rich tasks it either produces invalid poses, e.g., bodies clipping through the environment, or requires severely restricting the noise. To ensure physically consistent state randomisation, we employ IK, an approach scarcely utilised in RL literature. The following DOFs are randomised: the seat height/final stance height, the torso’s position along the seat plane and its pitch orientation, as well as the planar position of the feet, as depicted in Fig. 1b. The arm DOFs are randomised in joint space. To maintain run-time efficiency, a large number of poses are generated beforehand and chosen at random at the start of episodes. The resulting library of poses holds 29,260 seated states over eight chair heights, paired with a standing-reference pool, so that the policy never memorises a single trajectory. From the seated pose to full standing the head must rise by 0.24–0.34 m which is largest for the lowest (default) chair and decreasing as the seat is raised.

Rewards. A common term applies every step; exactly one of three rise-stage terms is then added based on ρ (Table 2).

Rise-fraction. Different chairs place the seated head at different heights, so absolute thresholds would misclassify postures. At reset we record the seated head height h_0 and use $\rho = (h_{\text{head}} - h_0) / \max(h_{\text{stand}} - h_0, \epsilon) \in [0, 1]$ ($h_{\text{stand}} = 1.3236$ m), giving stage boundaries (rise-low $\rho < 0.1$, rise-mid $\rho < 0.8$, standing $\rho \geq 0.8$) that are identical across chairs.

COP shaping. The COP is the force-weighted mean of nine contact sensors (four per foot, one at the pelvis/seat), with a foot-midpoint fallback in flight. Rising terms pull the COP from seat toward feet; standing adds a ZMP-style pull to the foot-support-hull centroid for a centred, tip-free stance. This relies only on measured contact forces rather than privileged balance signals [11].

Angular momentum shaping. A signed bonus $\omega_y |\omega_y|$ in rise-low rewards forward pitch rate for seat-off; a standing term $\exp(-5 \omega_y^2)$ damps it; a roll/yaw-rate penalty acts throughout for lateral stability.

Anti-parking. The penalty $-n_b$ counts contacts between the environment (ground or seat) and any non-foot body (calf, thigh, pelvis). Further Gaussian

Table 2: Rewards and their weights. Notation: $h_s=1.3236$ m, c : COP, $\bar{c}_{\text{hull}}$: support-hull centroid, τ_f : foot tilt, n_b : non-foot brace contacts, e_{sym} : mirror error, $\Delta a=a_t-a_{t-1}$, $\Delta^2 a=a_t-2a_{t-1}+a_{t-2}$, other symbols as in the text). † rise-low ($\rho < 0.1$) only, with $c_{\text{ref}}=\frac{1}{2}(c_b + \bar{c}_{\text{feet}})$ there and the hull centroid otherwise.

Term	Expression	Weight
<i>Common</i> (applied every step)		
roll	$\exp(-10\phi^2)$	1
waist yaw	$\exp(-10q_w^2)$	1
foot contact	$\exp(-50(d_\ell + d_r))$	1
spin	$\exp(-0.5(\omega_x^2 + \omega_z^2))$	1
symmetry	$\exp(-5\ e_{\text{sym}}\ ^2)$	1
ankle flat	$\exp(-10\tau_f)$	1
survival	1	1
smoothness	$-0.1\ \Delta a\ - 0.1\ \Delta^2 a\ - 10^{-3}\ \dot{q}\ - 2.5 \times 10^{-4}\ \tau \odot \dot{q}\ $	1
anti-brace	n_b	-1
<i>Rising</i> ($\rho < 0.8$)		
progress	$\text{clip}(300 \Delta h, -1, 5)$	2
head height	$\exp(-20(h - h_s)^2)$	6
COP centring	$\exp(-15\ c - c_{\text{ref}}\ ^2)$	2
pitch-rate †	$\omega_y \omega_y $	0.5
<i>Standing</i> ($\rho \geq 0.8$)		
head height	$\exp(-30(h - h_s)^2)$	6
torso pitch	$\exp(-20\theta^2)$	4
ZMP	$\exp(-15\ c - \bar{c}_{\text{hull}}\ ^2)$	4
pose	$\exp(-10\ q - q^{\text{ref}}\ ^2)$	2
pitch damp	$\exp(-5\omega_y^2)$	1
COM velocity	$\exp(-5\ v_{xy}\ ^2)$	1

terms reward uprightness, flat feet, symmetry, and a per-episode standing reference, with smoothness penalties on action rate, acceleration, joint speed, and power [6,11]. These terms are inspired by the physics of human STS in classical biomechanics—forward angular momentum to break seat contact, support-region regulation through the COP/ZMP, and smooth low-effort actuation.

Curriculum and training. Two curricula run together. *Assist decay:* the pelvis helper force F_{max} and the action bound β_{max} start at 200 N and 1.0 and decay on each pass of a behavioural gate. The gate uses two levels of averaging: per episode we take the mean head height over the final 50 steps of an episode (a sustained, end-of-episode height, not a peak), and the gate passes once at least 60% of the last 35 completed episodes exceed the fixed head-height gate which is 85% of the base-chair rise. Each pass lowers F_{max} by 20 N and β_{max} by 0.02. *Chair unlocking:* as F_{max} decays, taller chairs are added per Table 1, so a new height band appears only after the robot reliably stands at the current difficulty thus avoiding the abrupt distribution shift that otherwise collapses generalisation.

Table 3: Ablation study: each ablation omits one system component. All policies are evaluated deterministically (force-free, 8 lanes, 50 resets per lane).

Run	Removed component	Success (%)	Fall (%)	Act. jit.	DoF jit.	S_τ	S_q	Energy (Joules)	t_{stand} (s)
Full	none (reference)	97.8	2.2	1.535	0.105	1.00	0.963	115.6	3.54
Rise-frac-off	rise-fraction staging	0.0	59.3	2.522	0.059	1.00	0.187	94.80	N/A
COP-off	measured-COP shaping	97.0	3.0	3.35	0.103	1.00	0.990	115.2	3.60
Schedule-off	progressive chair unlock	85.0	15.0	1.393	0.073	1.00	0.807	116.9	3.50
Omega-off	sagittal pitch-momentum	88.0	11.8	0.64	0.045	1.00	0.882	115.5	3.66

3 Results and Discussion

We evaluate the trained policy in simulation across all eight chair heights, reporting success, smoothness, safety, balance, and single-component ablations. The results are compiled in a video¹ and code to be open sourced on GitHub².

All policies are scored with one deterministic, force-free evaluator over the eight chair lanes (50 resets per lane), following [7,6]. *Action jitter* and *DoF jitter* are the mean per-step changes $\frac{1}{T} \sum_t \|a_t - a_{t-1}\|$ (dimensionless) and $\frac{1}{T} \sum_t \|q_t - q_{t-1}\|$ (rad); the safety coefficients S_τ and S_q are the fractions of steps with all joint torques and all joint angles respectively within their limits. A trial is a *balanced success* only if, over the final second, the head stays above the gate, horizontal COM speed < 0.15 m/s, and trunk tilt < 0.4 rad; a fall before timeout is a failure. Success/fall use all $50 \times 8 = 400$ trials; other means exclude early-terminated trials.

On the deterministic, force-free evaluation the full policy attains **97.8%** balanced-standing success across the eight chair lanes, with mean ascent time $t_{\text{stand}} = 3.54$ s and energy consumption 115.6 J (Table 3). Figure 1a depicts a few frames from a representative rollout which shows the robot rising up naturally from a deep-seated posture. Figure 2a indicates joint torque activity (within actuator bounds and consistent with the perfect torque-safety score ($S_\tau = 1.00$)) to produce enough angular momentum rate that results in smooth sagittal-plane joint trajectories (Fig. 2b). It can be observed in the video that the arm movements, though not explicitly commanded, synergistically contribute to the angular momentum rate required for the transition. Figure 3 adds the contact view which depicts the COP begins near the pelvis-seat contact (indicating a deep seating posture), moves into the foot-only support polygon, and settles at the centroid of the same, as the weight transfers from seat to feet.

Ablation Study : The ablations show that chair-height generalisation needs both reward normalisation and gradual widening of the start-state distribution. Without rise-fraction staging, absolute-height phases do not transfer across seats. In the schedule-off run, all chair lanes are sampled from the start while the assist-force/action-bound curriculum still decays; the reduced success indicates that progressive unlocking helps the policy retain stable base-chair behaviour while

¹ <https://youtu.be/SgSlgJRrlcE>

² <https://github.com/meetpal644/>

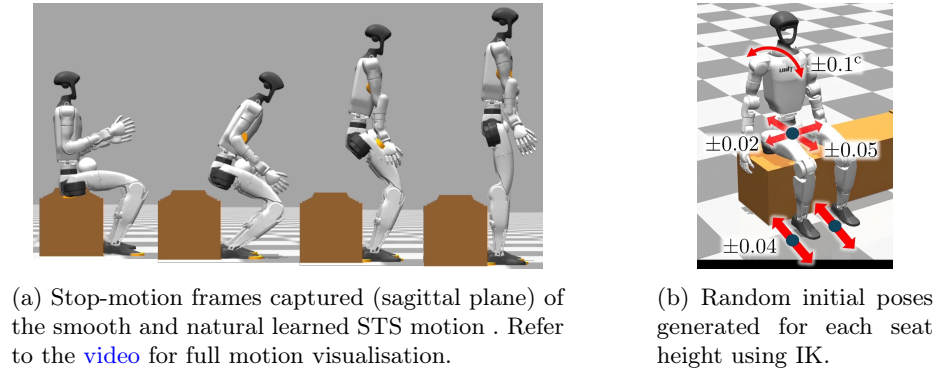


Fig. 1: Learned STS motion and randomized initial poses.

adding taller seats. Removing sagittal pitch-momentum lowers success, while removing COP shaping preserves headline success but more than doubles action jitter, indicating that measured-COP terms mainly regularise load transfer and

Limitations : Two limitations remain. When heels start close to the seat edge (2–3 cm clearance), the policy occasionally braces against the seat to balance, yielding a less natural rise. The STS motion slows down towards the end: the bulk of the rise ($\approx 90\%$) completes in 3–4 s, with full settling taking up to 5 s.

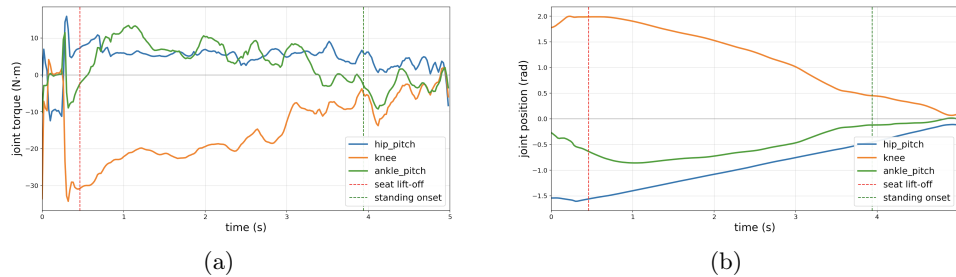


Fig. 2: Temporal variation of (a) pitch joint torques and (b) angles during the rising phase. The red vertical line (≈ 0.5 s) indicates seat-off while the green dashed vertical line (≈ 3.9 s) marks 90% rise completion

4 Conclusion

Results demonstrate that a smooth and human-like deep-seated humanoid STS motion can be learned by pure reward-shaped RL. An IK-generated multi-seat-height pose library, rise-fraction staging, COP and angular momentum shaping,

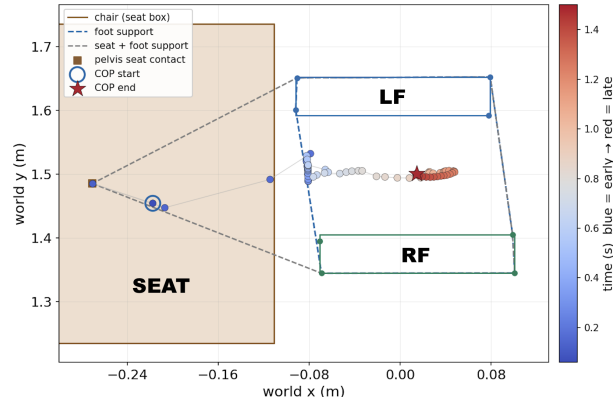


Fig. 3: The robot transfers its balance (quantified via its COP location) from the chair (encircled point) to the centroid of the foot-only support region.

and coupled force/action-bound chair curriculum produce a single proprioceptive PPO policy with more than 97% deterministic success over various chair heights. Ablations identify rise-fraction and progressive unlocking of chair heights as key generalisation drivers. Future work will target sim-to-real validation.

Acknowledgements

The support and the resources provided by PARAM Sanganak under the National Supercomputing Mission, Government of India at the Indian Institute of Technology, Kanpur are gratefully acknowledged.

References

1. Simulation-Based Unassisted Sit-to-Stand Motion Prediction for Healthy Young Individuals, vol. Volume 6: 10th International Conference on Multibody Systems, Nonlinear Dynamics, and Control (08 2014). <https://doi.org/10.1115/DETC2014-34231>
2. Aller, F., Harant, M., Mombaur, K.: Optimization of dynamic sit-to-stand trajectories to assess whole-body motion performance of the humanoid robot reem-c. *Frontiers in Robotics and AI* **9** (2022). <https://doi.org/10.3389/frobt.2022.898696>
3. Allshire, A., Choi, H., Zhang, J., McAllister, D., Zhang, A., Kim, C.M., Darrell, T., Abbeel, P., Malik, J., Kanazawa, A.: Visual imitation enables contextual humanoid control (2025), <https://arxiv.org/abs/2505.03729>
4. González-Fierro, M., Balaguer, C., Swann, N., Nanayakkara, T.: Full-body postural control of a humanoid robot with both imitation learning and skill innovation. *International Journal of Humanoid Robotics* **11**(02), 1450012 (2014). <https://doi.org/10.1142/S0219843614500121>
5. Howell, T., Gileadi, N., Tunyasuvunakool, S., Zakka, K., Erez, T., Tassa, Y.: Predictive Sampling: Real-time Behaviour Synthesis with MuJoCo (dec 2022). <https://doi.org/10.48550/arXiv.2212.00541>, <https://arxiv.org/abs/2212.00541>

6. Huang, T., Ren, J., Wang, H., Wang, Z., Ben, Q., Wen, M., Chen, X., Li, J., Pang, J.: Learning humanoid standing-up control across diverse postures. In: Proceedings of Robotics: Science and Systems (2025). <https://doi.org/10.15607/RSS.2025.XXI.064>
7. Jiang, X., Zhao, S., Zhu, Y., Li, Q., Zhang, J.: A two-stage reinforcement learning framework for humanoid robot sitting and standing-up. *Biomimetics* **10**(11) (2025). <https://doi.org/10.3390/biomimetics10110783>
8. Liao, Q., Truong, T.E., Huang, X., Gao, Y., Tevet, G., Sreenath, K., Liu, C.K.: Beyondmimic: From motion tracking to versatile humanoid control via guided diffusion (2025), <https://arxiv.org/abs/2508.08241>
9. Mistry, M., Murai, A., Yamane, K., Hodgins, J.: Sit-to-stand task on a humanoid robot from human demonstration. In: 2010 10th IEEE-RAS International Conference on Humanoid Robots. pp. 218–223 (2010). <https://doi.org/10.1109/ICHR.2010.5686270>
10. Mungai, M.E., Grizzle, J.W.: Feedback control design for robust comfortable sit-to-stand motions of 3d lower-limb exoskeletons. *IEEE Access* **9**, 122–161 (2021). <https://doi.org/10.1109/ACCESS.2020.3046446>
11. Poddar, N., McCrory, S., Penco, L., Clark, G., Sevil, H.E., Griffin, R.: Embedding classical balance control principles in reinforcement learning for humanoid recovery (2025), arXiv preprint
12. Schulman, J., Wolski, F., Dhariwal, P., Radford, A., Klimov, O.: Proximal policy optimization algorithms. arXiv preprint arXiv:1707.06347 (2017)
13. Todorov, E., Erez, T., Tassa, Y.: MuJoCo: A physics engine for model-based control. In: 2012 IEEE/RSJ International Conference on Intelligent Robots and Systems. pp. 5026–5033 (2012). <https://doi.org/10.1109/IR08.2012.6386109>
14. Vukobratović, M., Borovac, B.: Zero-moment point — thirty five years of its life. *Int. J. Hum. Robot.* **01**(01), 157–173 (2004). <https://doi.org/10.1142/S0219843604000083>
15. Yang, J., Ozsoy, B.: Three dimensional unassisted sit-to-stand prediction for virtual healthy young and elderly individuals. *Multibody System Dynamics* **49**(1), 33–52 (May 2020). <https://doi.org/10.1007/s11044-019-09699-9>
16. Zambella, G., Schuller, R., Mesesan, G., Bicchi, A., Ott, C., Lee, J.: Agile and dynamic standing-up control for humanoids using 3d divergent component of motion in multi-contact scenario. *IEEE Robotics and Automation Letters* **8**(9), 5624–5631 (2023). <https://doi.org/10.1109/LRA.2023.3297060>