

X-ACTA: eXtended Analytic Center Tension distribution Algorithm for fixed and mobile cable-driven-parallel-robot

Domenico Dona', Vincenzo Di Paola, Alberto Trevisani and Matteo Zoppi

Abstract—Steering Cable-Driven Parallel Robots (CDPRs) beyond their Wrench-Feasible Workspace (FWF) augments their capabilities in challenging scenarios such as during aggressive maneuvers or following a cable failure. In this context, although the determination of cable tensions is a well-studied topic, only a few approaches address these scenarios. Therefore, this paper introduces an extended version of the Analytic Center method as a criterion for selecting cable tensions outside the FWF while maintaining differentiability and including non-linear constraints. Notably, the proposed method maintains continuous and differentiable tension profiles, ensures fast real-time convergence to a unique solution, and, in contrast to other slack-based formulations, relegates wrench errors to a negligible area of the FWF. Its superiority in terms of smoothness and wrench error is confirmed via Pareto dominance with respect to the leading state-of-the-art method. Lastly, the effectiveness of the method is demonstrated through numerical experiments.

Index Terms—Parallel, Cable Robots, Wrench Feasible Workspace, Tension Distribution Algorithm, Analytic Center, Continuous, Differentiable, Non-linear Constraints.

I. INTRODUCTION

Cable-Driven Parallel Robots (CDPRs) are typically composed of a moving platform, namely a rigid body, actuated by cables exerting forces on it. The selection of cable tensions in CDPRs has been a core research topic since their birth [1].

In particular, overconstrained CDPRs, where the number of cables exceeds the payload's Degrees of Freedom (DoFs), require the selection of a tension set among infinitely many feasible ones. This choice is typically made by solving an optimization problem known as the Tension Distribution Algorithm (TDA). The existing approaches differ in the choice of optimization objective, constraints, and solution method, typically tailored to the task requirements [2].

Generally, p -norm-based metrics have been widely adopted as objectives for TDAs [3]. The 1-norm, for example, is key to several studies [4]–[6]. Such problems are typically solved using Linear Programming (LP) approaches due to fast convergence; however, the jump between the vertices of the feasible polyhedron, resulting from the 1-norm minimization, often results in discontinuous tension profiles. Similarly, discontinuities can occur when using the ∞ -norm [3]. Because

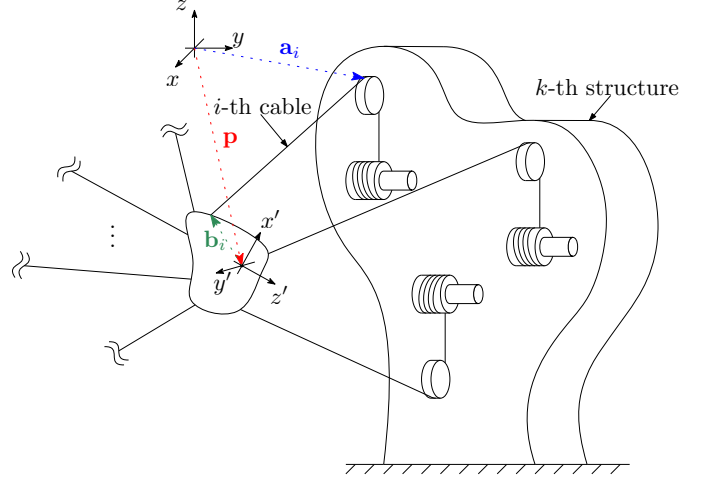


Fig. 1. Scheme of a generic cable-driven parallel robot.

continuity is a must to ensure precision while executing tasks, the criteria have been reformulated employing p -norms where $1 < p < \infty$ [7].

Consequently, a widely adopted objective is the 2-norm of the tension vector [8]–[10] or its distance with respect to a reference tension, usually taken as the mean between the minimum and maximum ones [3], [11], [12]. The popularity of these methods relies on the possibility of efficiently solving the associated optimization problem, using either closed-form solutions [9], [11] or specialized quadratic programming (QP) solvers [12]. The former approaches are traditionally valued for their computational efficiency, albeit at the expense of limited workspace coverage. However, this advantage has become less significant as modern iterative methods have achieved real-time performance while maintaining full workspace coverage [12]–[14].

Beyond p -norm-based methods, other relevant approaches include the Dijkstra alternating-projection algorithm proposed in [15], [16]. Additionally, in [17], the barycenter of the feasible tension polyhedron is selected as the optimal solution, thereby guaranteeing continuity.

However, the aforementioned methods are unable to produce differentiable tension profiles, and some are further constrained by the limited number of cables that can be employed. Remarkably, the Analytic Center (AC) method [18] and the method proposed in [13] (hereafter referred to as the NTNU method) exhibit this feature by incorporating tension bound constraints into the objective function via barrier functions, e.g., logarithmic functions.

Interestingly, the latter also operates beyond the Wrench-

Domenico Dona' is with the Faculty of Engineering, Free University of Bozen-Bolzano, Via Bruno Buozi 1, Bozen 39100, Italy (e-mail: domenico.dona@unibz.it).

Vincenzo Di Paola and Matteo Zoppi are with Department of Mechanical, Energy, Management and Transportation Engineering (DIME), University of Genova, Via alla Opera Pia 15, Genova 16143, Italy (e-mail: vincenzo.dipaola@edu.unige.it; matteo.zoppi@unige.it).

Alberto Trevisani is with the Department of Management and Engineering (DTG), University of Padua, Stradella San Nicola 3, Vicenza 36100, Italy (e-mail: alberto.trevisani@unipd.it).

Corresponding author: Domenico Dona'

Feasible Workspace (WFW) by introducing slack variables, at the cost of inducing a wrench error even within the WFW. Although this capability is shared with other existing methods [19]–[21], these rely on heuristic approaches, thus avoiding wrench errors inside the WFW at the cost of suboptimality beyond it. Moreover, none of them provides differentiable tension profiles when transitioning across WFW boundaries, despite this being crucial for haptic tasks [12] or cable breakage management [22].

To the best of the authors' knowledge, no method in the literature simultaneously (i) ensures differentiable tension profiles, (ii) operates beyond the WFW avoiding wrench errors inside it, and lastly, (iii) allows for the inclusion of non-linear constraints.

In this paper, a TDA that meets all the aforementioned requirements is proposed. The method relies on a two-stage formulation: first, a relaxed version of the AC method is solved, and secondly, when the solution falls outside the (relaxed) tension bounds, a subsequent slacked optimization problem is solved. Notice that the switching does not affect the TDA solutions. Indeed, the tension profiles are proven to remain differentiable while switching, even in the presence of non-linear constraints.

The proposed TDA is validated through simulated experiments against the NTNU method [13], which represents the existing state-of-the-art for ensuring differentiable tension profiles while operating beyond the WFW. The results demonstrate reduced convergence times and Pareto dominance regarding the trade-off between high-frequency content and wrench tracking error.

The remainder of this paper is organized as follows. Section II details the kinematic and dynamic modeling equations for CDPRs. Subsequently, a motivating example comparing state-of-the-art approaches is discussed in Section III, while the proposed method is presented in Section IV. Section V presents simulation results that demonstrate the effectiveness of the proposed method, while Section VI closes the paper and highlights future works.

II. CDPR MODELLING

When working with CDPRs, the platform dynamics is typically described as [1]

$$\mathbf{M}(\mathbf{q})\ddot{\mathbf{q}} + \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + \mathbf{g}(\mathbf{q}) = \mathbf{W}(\mathbf{q})\boldsymbol{\tau} + \mathbf{w}_{\text{ext}}, \quad (1)$$

where $\mathbf{q} = [\mathbf{p}^\top, \boldsymbol{\psi}^\top]^\top$ denotes the generalized coordinate vector, which includes both the position $\mathbf{p}$ and the orientation $\boldsymbol{\psi}$ of the end-effector. The matrices $\mathbf{M}$ and $\mathbf{C}$ represent the mass and Coriolis terms, respectively; $\mathbf{g}$ accounts for the gravitational effects, while $\mathbf{w}_{\text{ext}}$ stands for the external wrench. The vector $\boldsymbol{\tau} \in \mathbb{R}^m$ collects the tensions of the m cables, and $\mathbf{W}$ is the so-called wrench matrix, defined as

$$\mathbf{W} = \begin{bmatrix} \mathbf{u}_1 & \dots & \mathbf{u}_m \\ \mathbf{b}_1 \times \mathbf{u}_1 & \dots & \mathbf{b}_m \times \mathbf{u}_m \end{bmatrix}, \quad (2)$$

where $\mathbf{u}_i \in \mathbb{R}^d$ is the unit vector along the i -th cable and $\mathbf{b}_i \in \mathbb{R}^d$ is the corresponding attachment point on the platform¹. The wrench required for the equilibrium of the platform is then

$$\mathbf{w}_e = \mathbf{M}(\mathbf{q})\ddot{\mathbf{q}} + \mathbf{C}(\mathbf{q}, \dot{\mathbf{q}})\dot{\mathbf{q}} + \mathbf{g}(\mathbf{q}) - \mathbf{w}_{\text{ext}} \in \mathbb{R}^n, \quad (3)$$

where n is the number of DoF of the platform. Thus, at a fixed time, for a given kinematic triplet $\{\mathbf{q}, \dot{\mathbf{q}}, \ddot{\mathbf{q}}\}$, the inverse dynamics problem in (1) reduces to

$$\Sigma = \{\boldsymbol{\tau} \mid \mathbf{W}\boldsymbol{\tau} = \mathbf{w}_e\}, \quad (4)$$

where the dependence on $\{\mathbf{q}, \dot{\mathbf{q}}, \ddot{\mathbf{q}}\}$ is omitted for brevity. Clearly, if the Degree of Redundancy ($\text{DoR} = m - n$) is strictly positive, Σ forms an affine subspace.

Furthermore, to ensure cable tautness while avoiding breakage, the tensions $\boldsymbol{\tau}$ must be bounded above and below. Therefore, an m -dimensional convex hypercube Π defining the domain of *feasible* tensions is introduced as

$$\Pi = \{\boldsymbol{\tau} \mid \mathbf{0} \prec \underline{\boldsymbol{\tau}} \preceq \boldsymbol{\tau} \preceq \overline{\boldsymbol{\tau}}\}, \quad (5)$$

where $\underline{\boldsymbol{\tau}}, \overline{\boldsymbol{\tau}} \in \mathbb{R}^{m,+}$ denote the lower and upper tension limits, respectively. Without loss of generality, these limits are assumed to be identical across all cables. Consequently, the set of feasible solutions Γ satisfying both Eq. (1) and Eq. (5) is given by

$$\Gamma = \Sigma \cap \Pi. \quad (6)$$

In what follows, the condition $\Gamma \neq \emptyset$ represents the nominal condition for a TDA to operate, and the focus of this work is to extend the TDA's capability to generate approximate solutions when $\Gamma = \emptyset$.

Remark 1. Notice that an approximate solution implies that the desired wrench can only be partially generated within the constraints of Π . Thus, the resulting discrepancy is here defined as the wrench error or constraints violation introduced by the TDA.

III. MOTIVATING EXAMPLE

A. State-of-the-art methods

This section reviews existing state-of-the-art methods for computing tension solutions even outside the WFW. We do not consider LP-based methods as they do not ensure continuity of the solution [3].

Hence, one class of the considered methods relies on the Improved Closed Form method (ICF) [11]. Here, the tension components lying outside Π are set to the nearest tension bound. However, the ICF can manage a maximum of DoR components exceeding the tension limits before failing. Two stratagems have been proposed to overcome these limitations. The first is the so-called Improved Puncture (IP) method [19], while the other is the Nearest Corner (NC) method [20].

The former constructs a ray between the ICF solution and the center of Π , denoted as $\hat{\boldsymbol{\tau}}$. The algorithm then selects the intersection point between this ray and the boundary of Π , as depicted in Fig. III-A. Although this method ensures

¹ d is the dimension of the physical space of the robot, e.g. $d = 2$ for a planar robot and $d = 3$ for a spatial one. With abuse of notation, the cross product of 2D vectors is intended as the third component of the 3D product.

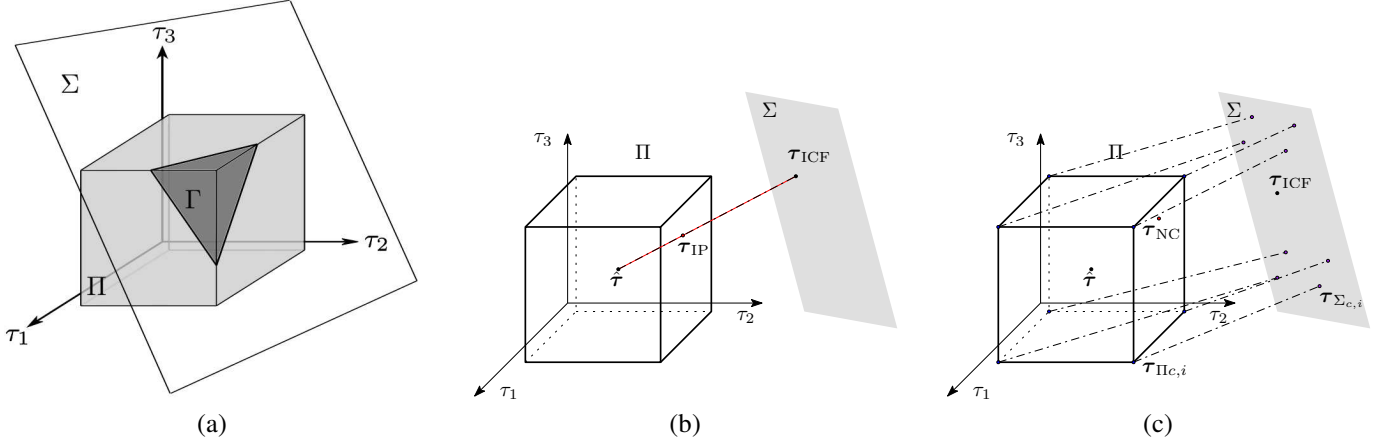


Fig. 2. (a) Geometric representation of the feasible solution space defined by Π, Σ , and Γ ($m = 3, n = 2$). (b) Conceptual illustration of the Improved Puncture (IP) method. (c) Conceptual illustration of the Nearest Corner (NC) method.

rapid computation, the resulting tension profiles are non-differentiable, and the solution lacks guaranteed optimality regarding minimal wrench error.

On the other hand, the NC method is based on geometric considerations. The algorithm projects the vertices of the hypercube Π onto the affine space Σ . Then, it computes a weighted sum of these projections—where the weights are inversely proportional to the projection distances—to determine the final tension vector (see Fig. III-A). Mathematically, the method computes

$$d_i = \|\tau_{\Pi c, i} - \tau_{\Sigma c, i}\|_2, \quad g_i = \left(\frac{L}{d_i}\right)^p, \quad (7)$$

where d_i is the Euclidean distance between the i -th vertex of the tension box, $\tau_{\Pi c, i}$, and its projection onto the affine space, $\tau_{\Sigma c, i}$. The weighting factors g_i are calculated as the p -th power of the ratio between the sum of all distances $L = \sum_{i=1}^{2m} d_i$ and the individual distance d_i . Therefore, the tension vector is given by

$$\tau_{NC} = \sum_{i=1}^{2m} \left(\tau_{\Sigma c, i} \frac{g_i}{G} \right), \quad (8)$$

where $G = \sum_{i=1}^{2m} g_i$. Note that if Σ intersects Π exactly at a vertex $\tau_{\Pi c, i}$, the corresponding distance d_i becomes zero. This causes $g_i \rightarrow \infty$, rendering the mathematical formulation singular and resulting in an unbounded tension calculation. Furthermore, the resulting tension profiles can exhibit discontinuities when Σ is parallel to the faces of Π , as discussed in [22].

Another relevant approach, here denoted as the Laval method [12], introduces a slack variable to relax the equality constraint in Eq. (4), thereby extending it to work when $\Gamma = \emptyset$. The QP formulation proposed there reads as

$$\begin{aligned} \tau_{Laval} = \operatorname{argmin} \quad & s_1^T \mathbf{D}_1 \mathbf{s}_1 + (\tau - \hat{\tau})^T \mathbf{D}_2 (\tau - \hat{\tau}) \\ \text{s.t.} \quad & \mathbf{W} \tau + \mathbf{s}_1 = \mathbf{w}_e, \\ & \tau \in \Pi, \end{aligned} \quad (9)$$

where $\mathbf{s}_1$ is the slack variable, and $\mathbf{D}_1, \mathbf{D}_2$ are weighting matrices (typically diagonal). Note that the elements of $\mathbf{D}_1$

must be heavily penalized relative to $\mathbf{D}_2$ to minimize wrench violations inside the WFW. However, this method inherently introduces (small) wrench errors even under nominal conditions $\Gamma \neq \emptyset$ and yields non-differentiable tension profiles.

On the contrary, the NTNU method [13] in his slacked formulation ensures differentiable tension profiles even beyond the WFW. Specifically, this is obtained by combining a barrier function with a slack formulation by splitting the objective function into two terms

$$\begin{aligned} \tau_{NTNU} = \operatorname{argmin} \quad & g(\tau) + g_s(\mathbf{s}) \\ \text{s.t.} \quad & \mathbf{W} \tau = \mathbf{w}_e + \mathbf{s}, \end{aligned} \quad (10)$$

with

$$\begin{aligned} g(\tau) = & c_0 \|\tau - \hat{\tau}\|_p^p + \\ & - \sum_{i=1}^m (c_{1,i} \log(\tau_i - \underline{\tau}) + c_{2,i} \log(\bar{\tau} - \tau_i)) \end{aligned} \quad (11a)$$

$$g_s(\mathbf{s}) = \sum_{j=1}^d \left(b_j \sqrt{s_j^2 + \epsilon_j} + s_j^2 \right) \quad (11b)$$

where $c_0 = 2^p / (\bar{\tau} - \underline{\tau})^p$, $c_{1,i}$, and $c_{2,i}$ are weighting parameters, and b_j and ϵ_j are tuning parameters governing the error and smoothness of the solution. Practically, $g(\tau)$ dominates the optimization under nominal conditions, while $g_s(\mathbf{s})$ takes weight when $\Gamma = \emptyset$ has non-zero influence even when $\Gamma \neq \emptyset$. Furthermore, $g_s(\mathbf{s})$ is intentionally constructed as an approximate 1-norm, ensuring differentiable tension profiles.

B. Numerical example

In this section, a specific benchmark trajectory is considered to illustrate the strengths and weaknesses of the aforementioned methods, with a preview of the performance of the proposed TDA.

A simple 2-DoF, 3-cable robot with tension limits of [10, 110] N serves as the testbed. The test trajectory comprises two phases. In the first phase, shown in blue in Fig. 3a, the wrench matrix

$$\mathbf{W}_0 = \begin{bmatrix} -1/6 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad (12)$$

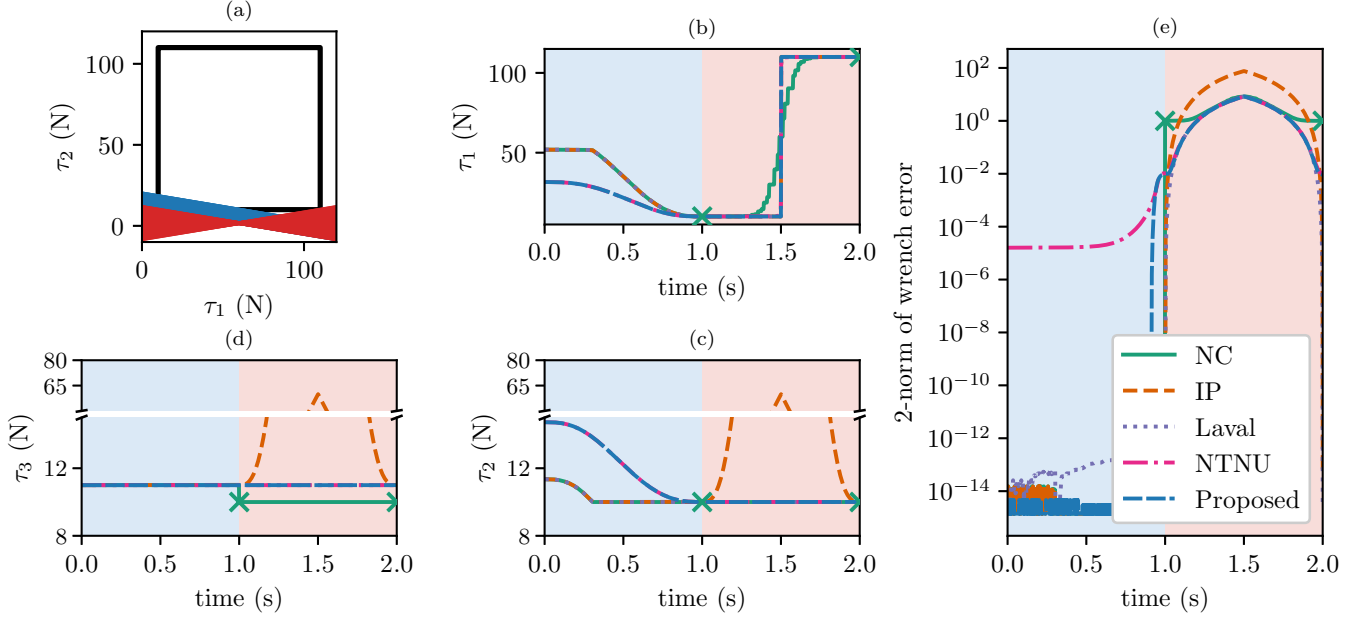


Fig. 3. A comparison of the Nearest Corner, Puncture, Laval and NTNU methods. The cross marks indicate where the NC method fails.

is kept constant while the required wrench is increased until the upper-left boundary of the feasible region is reached. Specifically, the required wrench is defined as $\mathbf{w}_e = \mathbf{w}_{e,0} + \mathbf{w}(t)$, where $\mathbf{w}_{e,0} = [110, 11]^\top$ N, and $\mathbf{w}(t) = [w(t), 0]^\top$, with $w(t)$ being a quintic polynomial spanning from 0 to $25/3$ N and having zero velocity and acceleration at the boundaries. The second phase (shown in red in Fig. 3a) rotates the affine space Σ around the midpoint of the first cable's tension range, $\tau_1 = (10 + 110)/2$, until it reaches the opposite slope. This has been built on purpose, so that the entire first phase consists of feasible points (thus $\Gamma \neq \emptyset$), while for the second phase, only the initial and final points are feasible.

The resulting tension profiles for the evaluated methods are depicted in Fig. 3b. As expected, only the NTNU ensures differentiable tension profiles. On the other hand, the Nearest Corner Method exhibits two critical flaws; one can be seen where tensions are discontinuous at $t = 1.5$ s, while the second is revealed at the domain corners, where $d_i = 0$ and the solver fails due to the singularity. Both of them are indicated by cross symbols in Fig. 3b.

Another comparison metric is given by the wrench violation inside and outside the WFW. Figure 3c reports that methods relying on a slack variable formulation (e.g., Laval and NTNU) inherently introduce a wrench error even when operating safely inside the WFW. Eventually, although the NTNU produces differentiable tensions, it produces non zero errors even in nominal conditions.

IV. PROPOSED METHOD

Section III highlighted that existing methods either rely on heuristic projections onto the WFW or employ slack-based formulations. The former lacks optimality guaranties, while the latter introduces non-zero error even within the WFW. Therefore, this section presents a method that overcomes both

limitations while ensuring differentiable tension profiles and enabling the inclusion of nonlinear inequality constraints.

To formalize the problem and reach the intended aim, a practical yet fundamental assumption regarding the imposed trajectory and its consequences is formulated as follows.

Assumption A1. *Given a k_1 -differentiable trajectory, the maps $t \mapsto \mathbf{w}_e(t)$ and $t \mapsto \mathbf{W}(t)$ are assumed to be k_1 times differentiable, with $\mathbf{W}$ full rank.*

Below we recall the Analytic Center (AC) method [18]

$$\begin{aligned} \tau_{AC} = \underset{\tau}{\operatorname{argmin}} \quad & f(\tau) = \sum_{i=1}^m -\underline{c}_i \log(\tau_i - \underline{\tau}_i) - \bar{c}_i \log(\bar{\tau}_i - \tau_i) \\ \text{s.t.} \quad & \mathbf{W} \tau = \mathbf{w}_e. \end{aligned} \quad (13)$$

where τ_i is the i -th component of τ , while $\underline{c}_i$ and $\bar{c}_i$ are weighting parameters that can either be fixed or tuned during motion [23].

Remark 2. *Problem (13) admits a solution if and only if $\Sigma \cap \Pi \neq \emptyset$; thus, no solution exists outside the WFW.*

Now, to extend the AC method, a two-step approach is proposed. First, we relax the AC formulation to allow violation of Π and subsequently, we include the slack variable only when needed.

Let $\delta > 0$ be small and define the *relaxed* tension box

$$\Pi_\delta = \{\tau \mid \mathbf{0} \prec \underline{\tau} + \delta \mathbf{1} \preceq \tau \preceq \bar{\tau} - \delta \mathbf{1}\}. \quad (14)$$

Then, a smooth relaxation of the logarithmic barrier is

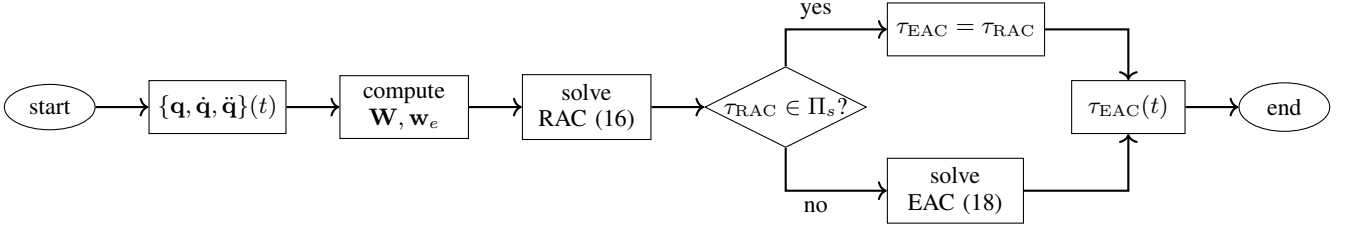


Fig. 4. Flow chart of the proposed method.

considered

$$\beta_\delta(\Delta\tau) = \begin{cases} -\log(\Delta\tau), & \Delta\tau \geq \delta, \\ -\log(\delta) + \sum_{j=1}^{k_2+1} \frac{(-1)^j}{j \delta^j} (\Delta\tau - \delta)^j, & \Delta\tau < \delta. \end{cases} \quad (15)$$

where δ specifies the distances of τ from the bounds and k_2+1 is the order of the Taylor expansion.

By definition, $\beta_\delta(\Delta\tau)$ is (k_2+1) -times differentiable, and thus casting it into the AC objective returns the Relaxed Analytic Center (RAC) problem

$$\begin{aligned} \tau_{\text{RAC}} = \operatorname{argmin}_{\tau} \quad & \tilde{f}(\tau) = \sum_{i=1}^m \beta_\delta(\tau_i - \underline{\tau}_i) + \beta_\delta(\bar{\tau}_i - \tau_i) \\ \text{s.t.} \quad & \mathbf{W} \tau = \mathbf{w}_e. \end{aligned} \quad (16)$$

Lemma 1. *The problem (16) admits a unique solution as the objective is strictly convex, and the constraints are affine. Moreover, the solution $\tau_{\text{RAC}}(t)$ is $\min\{k_1, k_2\}$ -times differentiable.*

Proof. The proof follows the same steps as Thm. 1 in [18]. $\square$

Remark 3. *Essentially, the introduction of $\Pi_\delta \subset \Pi$ and τ_{RAC} avoids the wrench errors within the WFW, while providing a measure of proximity to the boundaries, indicating when the slack variable must be included in the formulation. Additionally, since δ is small, the subset of tension solutions that lie outside the relaxed box $\in \Pi \setminus \Pi_\delta$ is negligible and has no consequence for practical purposes.*

Now, the second step necessary to extend the AC consists of accepting the violation of the desired wrench $\mathbf{w}_e$ for any solution outside Π_δ . This can be done through the introduction of slack variables.

Hence, one can consider a k_3 -differentiable function $\mu = \mu(\tau_{\text{RAC}})$ that is zero if $\tau_{\text{RAC}} \in \Pi_\delta$ and > 0 otherwise, for example

$$\mu(\tau_{\text{RAC}}) = \begin{cases} 0 & \text{if } \tau_{\text{RAC}} \in \Pi_\delta, \\ \tanh\left(\sum_{i=1}^m \left| \frac{\tau_{\text{RAC},i} - c_{\Pi_\delta}(\tau_{\text{RAC},i})}{c_{\Pi_\delta}(\tau_{\text{RAC},i})} \right|^{k_3+1}\right) & \text{otherwise.} \end{cases} \quad (17)$$

where c_{Π_δ} clips the tension components on the boundary of Π_δ .

Lemma 2. *The function $\mu(t)$ is $\min\{k_1, k_2, k_3\}$ -times differentiable.*

Proof. Note that μ is the composition of the mappings defined in (16) and (17). By Lemma 1, these constituents possess regularity C^{k_3} and $C^{\min\{k_1, k_2\}}$, respectively. The assertion then follows immediately from the Faà di Bruno formula. $\square$

Finally, with this notion, one can define the Extended Analytic Center (EAC) as

$$\begin{aligned} \tau_{\text{EAC}} = \operatorname{argmin}_{\tau, \mathbf{s}} \quad & f(\tau) + \eta \|\mathbf{s}\|_2^2 + \gamma \|\mu \mathbf{s}\|_2^2 \\ \text{s.t.} \quad & \mathbf{W} \tau + \mu \mathbf{s} = \mathbf{w}_e, \end{aligned} \quad (18)$$

where $\eta, \gamma > 0$ are weighting coefficients and $\mathbf{s} \in \mathbb{R}^n$ are the slack variables.

To summarize the link between the problems defined so far, a schematic of the proposed algorithm is presented in Fig. 4.

Notice that the computational effort required to solve problem (16) is not lost: when transitioning from a feasible to an unfeasible region along a trajectory, the solution τ_{RAC} (with $\mathbf{s} = \mathbf{0}$) provides an effective warm start for problem (18).

Now, the main results of this section can be stated.

Theorem 1. *Given A1, the problem (18) admits a unique solution as the objective is strictly convex and the constraints are affine. Moreover, the solution $\tau_{\text{EAC}}(t)$ is $\min\{k_1, k_2, k_3\}$ -times differentiable.*

Proof. Consider the Lagrangian of the problem (18)

$$\mathcal{L}(\tau, \mathbf{s}, \boldsymbol{\lambda}) = f(\tau) + \eta \|\mathbf{s}\|_2^2 + \gamma \|\mu \mathbf{s}\|_2^2 + \boldsymbol{\lambda}^\top (\mathbf{W} \tau + \mu \mathbf{s} - \mathbf{w}_e), \quad (19)$$

then the Karush-Kuhn-Tucker (KKT) conditions [24] that return the optimal point for this problem are

$$\mathbf{r}(t, \mathbf{y}) = \begin{cases} \nabla_\tau \mathcal{L} = \nabla_\tau f + \mathbf{W}^\top \boldsymbol{\lambda} = \mathbf{0} \\ \nabla_{\mathbf{s}} \mathcal{L} = 2(\gamma \mu^2 + \eta) \mathbf{s} + \mu \boldsymbol{\lambda} = \mathbf{0} \\ \nabla_{\boldsymbol{\lambda}} \mathcal{L} = \mathbf{W} \tau + \mu \mathbf{s} - \mathbf{w}_e = \mathbf{0}, \end{cases} \quad (20)$$

where $\mathbf{y} = [\tau^\top, \mathbf{s}^\top, \boldsymbol{\lambda}^\top]^\top$ optimization variables and time-dependence is made through the parameters $\mathbf{W}(t)$, $\mathbf{w}_e(t)$, and $\mu(t)$. Now, take its unique solution $(t^*, \mathbf{y}^*)$ and assume that the Jacobian $\mathbf{J}_{\mathbf{r}} = \partial \mathbf{r} / \partial \mathbf{y}|_{t^*, \mathbf{y}^*}$ is full rank. Under Assumption A1 and Lemma 2, the mapping $\mathbf{r}(t, \mathbf{y})$ is $\min\{k_1, k_2, k_3\}$ -times differentiable in $(t, \mathbf{y})$. Then, according to the Implicit Function Theorem (IFT), there exists a neighborhood U of t^* and a unique function ξ , $\min\{k_1, k_2, k_3\}$ -times differentiable, such that $\xi(t^*) = \mathbf{y}^*$ and $\mathbf{r}(t, \xi(t)) = \mathbf{0}$ for all $t \in U$.

The proof conclude showing that $\mathbf{J}_r$ is full-rank for both values $\mu > 0$ and $\mu = 0$. When $\mu > 0$, one has

$$\mathbf{J}_r = \begin{bmatrix} \nabla_{\tau}^2 f & \mathbf{0} & \mathbf{W}^\top \\ \mathbf{0} & 2(\mu^2\gamma + \eta)\mathbb{1}_n & \mu\mathbb{1}_n \\ \mathbf{W} & \mu\mathbb{1}_n & \mathbf{0} \end{bmatrix} = \begin{bmatrix} \mathbf{A}' & \mathbf{B}' \\ \mathbf{B}'^\top & \mathbf{0} \end{bmatrix}, \quad (21)$$

with $\mathbf{A}'$ invertible and positive definite, as $\nabla_{\tau}^2 f$ and $2(\mu^2\gamma + \eta)\mathbb{1}_n$ both are, while $\mathbf{B}'$ is full-rank by A1. The nonsingularity can be concluded by Schur complement analysis.

In the case where $\mu = 0$, considering the rearranged version of the KKT matrix

$$\mathbf{J}_{r'} = \begin{bmatrix} 2\eta\mathbb{1}_n & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \nabla_{\tau}^2 f & \mathbf{W}^\top \\ \mathbf{0} & \mathbf{W} & \mathbf{0} \end{bmatrix} = \begin{bmatrix} \mathbf{A}'' & \mathbf{0} \\ \mathbf{0} & \mathbf{B}'' \end{bmatrix}, \quad (22)$$

is clear that is nonsingular as its diagonal contains $\mathbf{A}''$ nonsingular for $\eta > 0$ while $\mathbf{B}''$ is the KKT matrix of the AC method. $\square$

Remark 4. The differentiability of the tension profiles for the EAC is then limited by the functions introduced to extend the original AC. Indeed, when $\mu = 0$, the differentiability depends on the smoothness of the input trajectory only. Notice, as for the AC, the inclusion of non-linear constraints, provided that they are convex, would automatically introduce a k_4 condition to consider for the smoothness of the tension profiles.

V. SIMULATIONS

To demonstrate the performance of the proposed approach, numerical experiments are conducted and compared to the other state-of-the-art methods. Firstly, a Monte Carlo analysis on the tuning parameters is reported to show their influence (Section V-A) when using the TDAs. After that, the performance of the method for a feasible (Section V-B) and an unfeasible (Section V-C) trajectory is studied. Finally, the ability to include nonlinear constraints is shown in Section V-D.

Unless otherwise stated, the robot and trajectory are the same as those in [13]. The corresponding trajectory parameters are reported in Tab. II, while the robot parameters are reported in Tab. I.

The code used to generate the results is available in the repository associated with this article. Timing results were obtained by executing C++ compiled code from Python on a laptop equipped with an AMD R9 8945HS CPU and 32 GB of RAM, running Ubuntu 24.04.

For both methods, the Newton method with unfeasible start and Armijo backtracking is employed, as described in [24]. In addition to standard backtracking, a safety check is added during the damped phase to ensure that the solutions remain within II.

A. Effect of tuning parameters

As anticipated, the EAC requires tuning δ , γ , η parameters and for them we suggest using $\delta = 0.1$ N, $\gamma = 5 \cdot 10^2$, and $\eta = 10^{-5}$. However, the sensitivity analysis is needed to prove this choice is possibly an optimal trade-off over a wide range of values. At the same time, we do compare the sensitivity

TABLE I
CDPR SYSTEM PARAMETERS AND GEOMETRIC CONFIGURATION, AS IN [13].

Parameter	Symbol	Value	Unit
Degrees of freedom	DoF	6	–
Number of cables	m	8	–
Inertias	$I_{xx} = I_{yy} = I_{zz}$	0.1	kg m ²
Payload mass	m_L	1.0	kg
Maximum cable tension	$\bar{\tau}$	40.0	N
Minimum cable tension	$\underline{\tau}$	5.0	N

Cable i	$\mathbf{a}_i = [x, y, z]^T$ [m]			$\mathbf{b}'_i = [x, y, z]^T$ [m]		
1	−0.415	−0.315	−0.500	−0.0525	−0.0760	0.0
2	−0.415	−0.315	0.500	−0.0525	−0.0760	0.0
3	0.415	−0.315	0.500	0.0525	−0.0760	0.0
4	0.415	−0.315	−0.500	0.0525	−0.0760	0.0
5	0.415	0.315	−0.500	0.0	0.1240	0.0
6	−0.415	0.315	0.500	0.0	0.1240	0.0
7	−0.415	0.315	−0.500	0.0	0.1240	0.0
8	0.415	0.315	0.500	0.0	0.1240	0.0

TABLE II
REFERENCE TRAJECTORY PARAMETERS. THE ANGLES ϕ , θ AND ψ ARE ROTATION ANGLES USING EULER CONVENTION. THE POSITION OF THE END-EFFECTOR IS DEFINED AS $\mathbf{p} = [x, y, z]$ WHILE ITS ORIENTATION WITH $\psi = [\phi, \theta, \psi]$. TRAJECTORY IS THE SAME AS IN [13].

Item	Definition
Total time	$T = 10$ s
Physical time	$t \in [0, T]$
Scaled path parameter	$s \in [0, 1]$, quintic polynomial law
$x(s)$	$0.1 \sin(\pi s)$
$y(s)$	$0.1 \cos(\pi s)$
$z(s)$	$0.34 \sin(\pi s) \cos(2\pi s) - 0.052$
$\phi(s)$	$-0.2 s \cos(\pi s)$
$\theta(s)$	0
$\psi(s)$	$-0.17 \sin(\pi s) \cos(2\pi s)$

of the EAC against the NTNU method. To reduce the search space, $c_{1,i} = c_{2,i} = 0.1$ are fixed as suggested in [13], leaving only ϵ and b to be tuned.

From a wrench-error standpoint, the two methods reach similar performances, with minimum values that are practically identical. In Fig. 5a-b, the maximum error during the trajectory is displayed for both methods while varying the tuning parameters. It is clear that both methods have a large domain in which the error is minimal, thus not imposing strict constraints on their values.

Another metric to evaluate the TDAs performances, in addition to wrench error, is the smoothness of the tension profiles. Smoothness is necessary to avoid exciting high-frequency components of the cables, leading to possible vibrations of the load. For this reason, Fig. 5c-d reports the ratio of the power spectral density (PSD) above a certain threshold, here chosen as $f_t = 10$ Hz for both methods.

By comparing Fig. 5a-b with Fig. 5c-d, it is clear that the region of minimal wrench error for the NTNU method corresponds to higher frequency content, while the EAC method shows lower frequency content in the area with minimal wrench error. This phenomenon is further confirmed by observing the Pareto front for the two methods in terms of

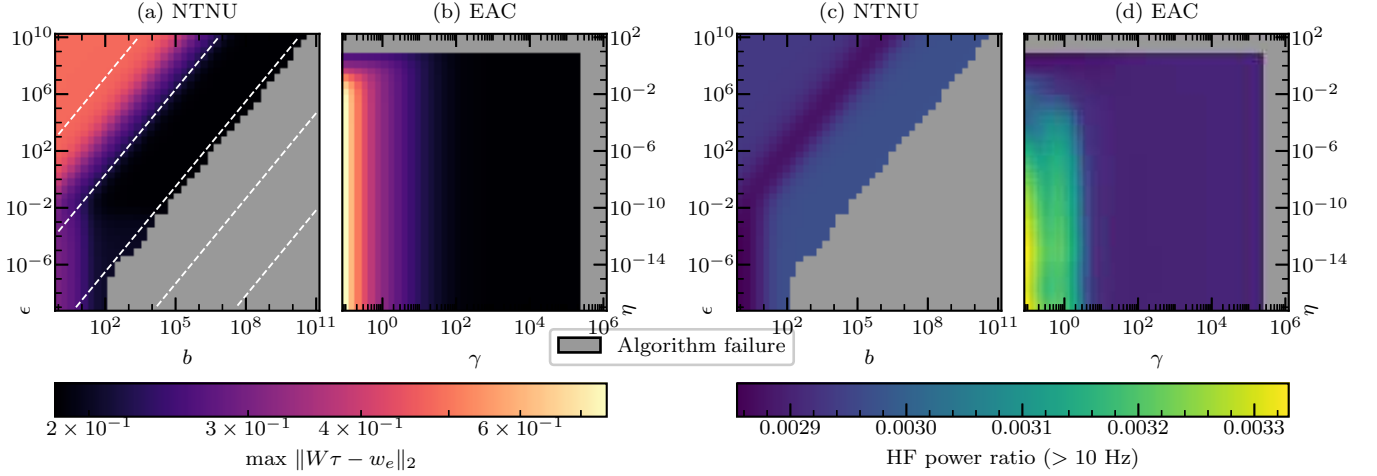


Fig. 5. Max 2-norm error of converged solution for (a) NTNU method and (b) the proposed method. In the NTNU plot, white dashed lines represent the equation $\sqrt{\epsilon}/b = \text{const.}$ Conversely, (c) and (d) depict the fraction of frequency content above 10 Hz for the NTNU and proposed methods, respectively. Not converged solutions are displayed in grey.

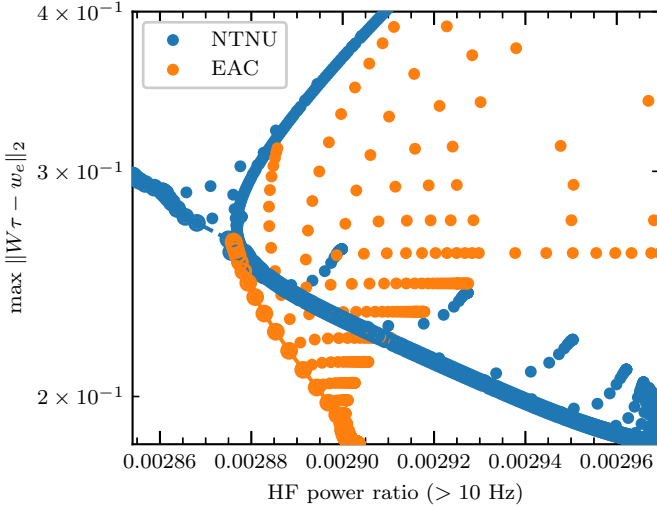


Fig. 6. Pareto fronts for the two methods, PSD content above 10 Hz vs 2-norm wrench error.

error and smoothness, provided in Fig. 6.

Lastly, the tuning parameters affect the convergence speed of both methods, as they affect the conditioning of the KKT matrix. This effect is studied in Fig. 7a-b, where the maximum time to converge is reported for both methods while varying their tuning parameters; notably, the worst time to converge is comparable for the two methods, with the EAC slightly outperforming the NTNU one. Apart from the maximum time to converge, used for real-time operation, other control methods require computing the reference tension profiles in advance. In this setting, the mean time is typically used [25], and thus the convergence time is depicted in Fig. 7c-d for both methods. It is evident that the EAC achieves faster convergence.

B. Example inside WFW

In the following, we fix the tuning parameters to $\gamma = 10^4$ and $\eta = 10^{-5}$ for the proposed method, while choosing $b = 10^6$ and $\epsilon = 10^3$ for the NTNU method. These values are selected to minimize the wrench error while being far from the non-convergence area.

Instead of the base trajectory used in the previous study, we now consider a circular path, with a radius $r = 0.1$ m, centered at $C = [0, 0, -0.05]^T$ m, with a total execution time $T = 1.4$ s, planned using a quintic polynomial.

A comparison of the two methods is reported in Fig. 8. Notably, Fig. 8a-b show that both trajectories approach the tension limits smoothly. Interestingly, Fig. 8c shows that, unlike the NTNU method, the proposed method does not introduce errors in the wrench apart from numerical noise. Lastly, Fig. 8d shows the 99th percentile of the execution time over 5000 runs. Such a metric has been chosen to reduce the impact of non-deterministic OS scheduling effects while preserving representative worst-case behavior. Given that the control law is deterministic and evaluated at identical states, the observed variability is ascribed to exogenous system-level factors rather than to the algorithm itself.

The worst time to converge, in the 99th percentile sense, was $20.46 \mu\text{s}$ for the NTNU method, while the proposed method required $18.71 \mu\text{s}$, thus resulting in a 9% reduction.

C. Example outside WFW

An additional test has been conducted to assess the performance of the proposed method, by pushing it outside the WFW. The same setting of Section V-B is adopted, with the only modification being an increased radius of the trajectory, namely $r = 0.12$ m. The increased accelerations and the modified configuration lead to unfeasible conditions. The comparison of the two methods is reported in Fig. 9. Notably, both methods approach the tension limits smoothly, as shown in Fig. 9a-b. The wrench error is depicted in Fig. 9c, where it can be noted that for unfeasible points it is comparable,

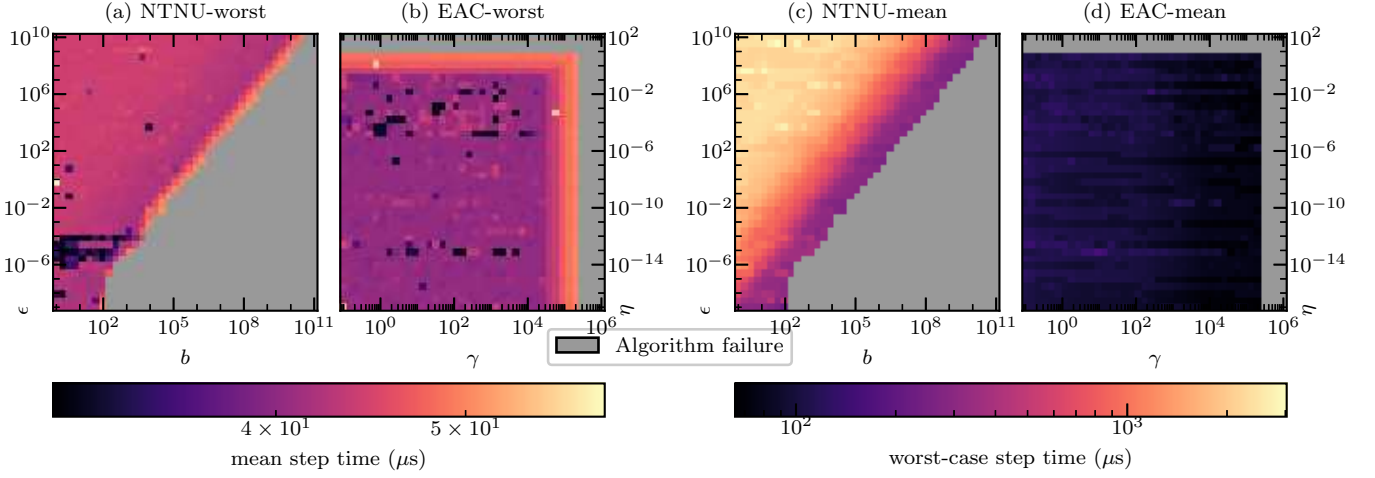


Fig. 7. Worst time to converge for (a) the NTNU method and (b) for the proposed method, alongside the mean times for (c) the NTNU method and (d) for the proposed method.

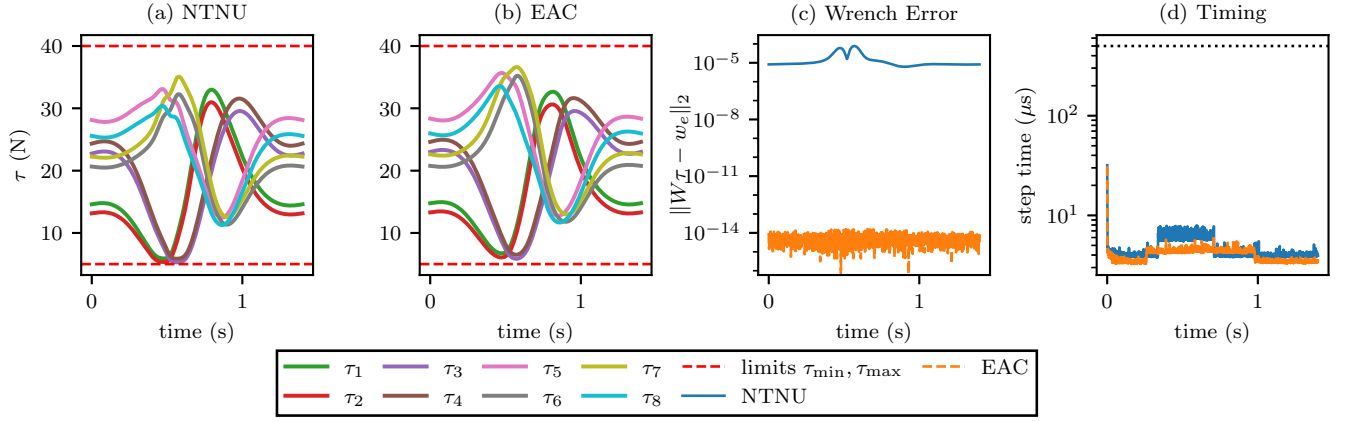


Fig. 8. Feasible trajectory: (a) depicts the tension profiles for the NTNU method while (b) the ones for the proposed method. In (c) wrench errors are compared alongside the 99th percentile of time to converge in (d). For convenience, the 500 μ s timing level is highlighted with a black dotted line.

while for feasible points the EAC outperforms the NTNU. Moreover, the computational time is significantly lower and never exceeds 500 μ s. Accordingly, the worst time to converge, in the 99th percentile sense, was 511 μ s for the NTNU method, while the proposed method required 244 μ s, thus resulting in a 52% reduction.

D. Inclusion of non-linear constraints

One of the advantages of the log-barrier formulation is the inclusion of non-linear inequality constraints. This feature is not available in ICF-based or QP-based methods. Therefore, a test is conducted to show the EAC capabilities, assuming the cables are attached to four different structures (see, for example, Fig. 1), which are secured by means of static friction. Specifically, in the k -th structure, the equilibrium in the z -direction is

$$n_k - m_s g - \sum_i^{\mathcal{I}_k} u_{z,i} \tau_i = 0, \quad (23)$$

where n_k is the ground reaction force, m_s is the mass of the structure (in this example $m_s = 4$ kg), and $\mathcal{I}_k$ are the indices

of the cables attached for the k -th structure. The equilibrium in the x and y directions reads

$$f_{x,k} - \sum_i^{\mathcal{I}_k} u_{x,i} \tau_i = 0 \quad \text{and} \quad f_{y,k} - \sum_i^{\mathcal{I}_k} u_{y,i} \tau_i = 0. \quad (24)$$

Thus, the no-slip condition reads as

$$h_k(\tau) = f_c^2 n_k^2 - f_{x,k}^2 - f_{y,k}^2 > 0. \quad (25)$$

where f_c is the dry friction coefficient, in this work set equal to 0.5. The conditions (25) are included in the objective of both (16) and (18) either as $\beta_\delta(h_k(\tau))$ for the former or $-\log(h_k(\tau))$.

The results reported in Fig. 10 show the influence of the friction constraints on cable tensions. In particular, their presence leads to lower tension values along the trajectory, thus avoiding critical crashes of the CDPR. Notice that in the middle of the simulations, the slack variable is active. This provides evidence of the EAC' abilities to manage both non-linear constraints while going outside the WFW.

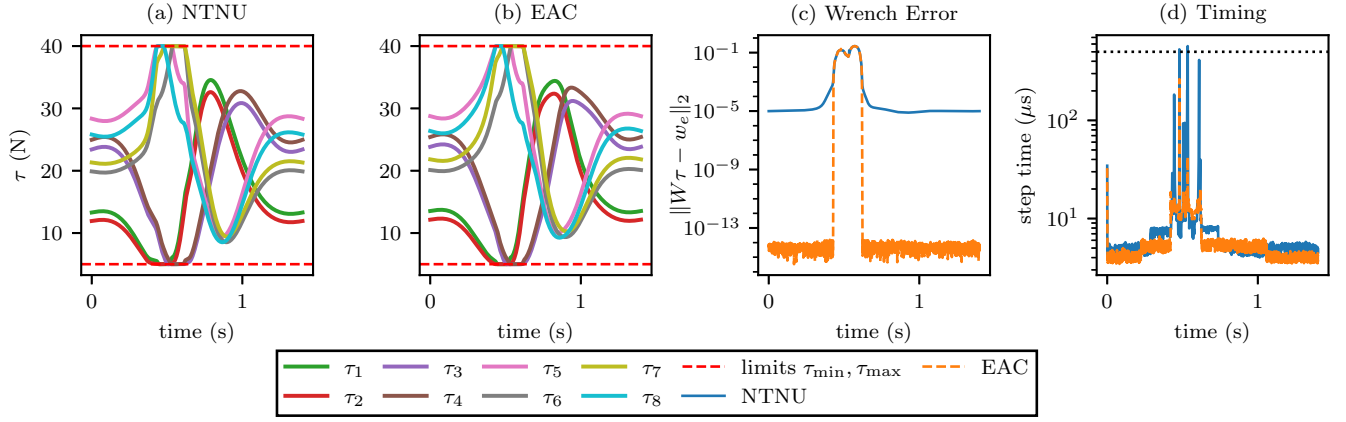


Fig. 9. Unfeasible trajectory: (a) depicts the tension profiles for the NTNU method while (b) the ones for the proposed method. In (c) wrench errors are compared alongside the 99th percentile of time to converge in (d). For convenience, the 500 μ s timing level is highlighted with a black dotted line.

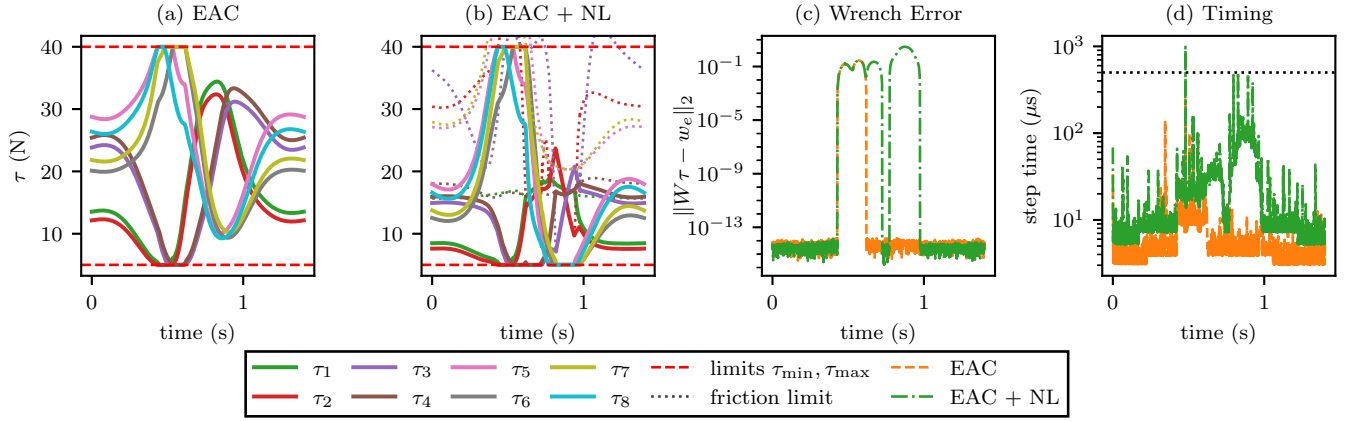


Fig. 10. Unfeasible trajectory+NL constraints: (a) depicts the tension profiles without NL constraints (b) the ones with the the NL constraints alongside the NL limits in dotted line. In (c) wrench errors are compared alongside the 99th percentile of time to converge in (d). For convenience, the 500 μ s timing level is highlighted with a black dotted line.

VI. CONCLUSION

In this paper, the problem of generating smooth tension profiles for CDRs, while guaranteeing zero wrench error inside the WFW has been addressed.

First, the limitations of existing approaches have been discussed. In particular, QP-based methods inherently introduce non-differentiable points and are not naturally suited to handle nonlinear constraints, while heuristic approaches generally do not guarantee continuity and may lead to significant wrench errors. Moreover, the existing NTNU barrier-function-based formulations have been shown to exhibit either reduced accuracy inside the WFW or slower convergence.

To overcome these limitations, a formulation capable of combining these features has been proposed. The method is based on a two-step approach: a relaxed barrier-function formulation is first employed as the nominal solution, while a slack-based formulation is activated whenever the solution exits a reduced tension box.

Future work will focus on the experimental validation of the proposed approach in real-world control scenarios.

REFERENCES

- [1] A. Pott, *Cable-Driven Parallel Robots: Theory and Application*. Springer Tracts in Advanced Robotics, Springer International Publishing, 2018.
- [2] M. Gouttefarde, J. Lamaury, C. Reichert, and T. Bruckmann, "A versatile tension distribution algorithm for n -dof parallel robots driven by $n + 2$ cables," *IEEE Transactions on Robotics*, vol. 31, no. 6, pp. 1444–1457, 2015.
- [3] C. Gosselin and M. Grenier, "On the determination of the force distribution in overconstrained cable-driven parallel mechanisms," *Meccanica*, vol. 46, pp. 3–15, Nov 2011.
- [4] W.-J. Shiang, D. Cannon, and J. Gorman, "Optimal force distribution applied to a robotic crane with flexible cables," *IEEE International Conference on Robotics and Automation*, vol. 2, pp. 1948–1954, 2000.
- [5] S.-R. Oh and S. K. Agrawal, "Cable-suspended planar parallel robots with redundant cables: controllers with positive cable tensions," *IEEE International Conference on Robotics and Automation*, vol. 3, pp. 3023–3028, 2003.
- [6] P. H. Borgstrom, B. L. Jordan, G. S. Sukhatme, M. A. Batalin, and W. J. Kaiser, "Rapid computation of optimally safe tension distributions for parallel cable-driven robots," *IEEE Transactions on Robotics*, vol. 25, pp. 1271–1281, Dec 2009.
- [7] R. Verhoeven and M. Hiller, "Tension distribution in tendon-based stewart platforms," *Lenarčič, J., Thomas, F. (eds) Advances in Robot Kinematics*, pp. 117–124, 2002.
- [8] M. Agahi and L. Notash, "Redundancy resolution of wire-actuated parallel manipulators," *Transactions of the Canadian Society for Mechanical Engineering*, vol. 33, pp. 561–573, Dec 2009.

- [9] A. Pott, T. Bruckmann, and L. Mikelsons, "Closed-form force distribution for parallel wire robots," *Kecskeméthy, A., Müller, A. Computational Kinematics. Springer, Berlin, Heidelberg*, pp. 25–34, 2009.
- [10] H. D. Taghirad and Y. B. Bedoustani, "An analytic-iterative redundancy resolution scheme for cable-driven redundant parallel manipulators," *IEEE Transactions on Robotics*, vol. 27, pp. 1137–1143, Dec 2011.
- [11] A. Pott, "An improved force distribution algorithm for over-constrained cable-driven parallel robots," *6th International Workshop on Computational Kinematics (CK)*, pp. 139–146, Oct 2013.
- [12] A. Coté, P. Cardou, and C. Gosselin, "A tension distribution algorithm for cable-driven parallel robots operating beyond their wrench-feasible workspace," *16th International Conference on Control, Automation and Systems (ICCAS)*, pp. 68–73, Oct 2016.
- [13] E. Ueland, T. Sauder, and R. Skjetne, "Optimal force allocation for overconstrained cable-driven parallel robots: Continuously differentiable solutions with assessment of computational efficiency," *IEEE Transactions on Robotics*, vol. 37, pp. 659–666, Apr 2020.
- [14] D. Berretta, V. Di Paola, S. Caro, and M. Zoppi, "Experimental validation of the analytic-centre based tension distribution algorithm for cable driven parallel robots," *Meccanica*, vol. 60, pp. 3069–3081, Sept 2025.
- [15] M. Hassan and A. Khajepour, "Optimization of actuator forces in cable-based parallel manipulators using convex analysis," *IEEE Transactions on Robotics*, vol. 24, pp. 736–740, June 2008.
- [16] M. Hassan and A. Khajepour, "Analysis of bounded cable tensions in cable-actuated parallel manipulators," *IEEE Transactions on Robotics*, vol. 27, pp. 891–900, Oct 2011.
- [17] L. Mikelsons, T. Bruckmann, M. Hiller, and D. Schramm, "A real-time capable force calculation algorithm for redundant tendon-based parallel manipulators," *2008 IEEE International Conference on Robotics and Automation*, pp. 3869–3874, May 2008.
- [18] V. Di Paola, A. Goldsztejn, M. Zoppi, and S. Caro, "Analytic center-based tension distribution for cable-driven platforms," *J. Mechanisms Robotics*, vol. 16, p. 081018, Apr 2024.
- [19] K. Müller, C. Reichert, and T. Bruckmann, "Analysis of a real-time capable cable force computation method," in *Cable-driven Parallel Robots: Proceedings of the Second International Conference on Cable-Driven Parallel Robots*, pp. 227–238, Springer, 2014.
- [20] R. Boumann and T. Bruckmann, "Real-time cable force calculation beyond the wrench-feasible workspace," *Robotics*, vol. 9, p. 41, May 2020.
- [21] R. Boumann and T. Bruckmann, "Computationally efficient cable force calculation outside the wrench-feasible workspace," *Robotics and Mechatronics, Springer International Publishing*, pp. 177–188, Sept 2020.
- [22] V. Di Paola, S. Caro, and M. Zoppi, "Design and performance investigation of a sliding-mode adaptive proportional–integral–derivative control for cable-breakage scenario," *Meccanica*, vol. 59, pp. 1927–1937, Sept 2024.
- [23] D. Dona', V. Di Paola, M. Zoppi, and A. Trevisani, "Stiffness-based analytic centre method for cable-driven parallel robots," in *International Conference on Cable-Driven Parallel Robots*, pp. 119–129, Springer, 2025.
- [24] S. Boyd and L. Vandenberghe, *Convex optimization*. Cambridge university press, 2004.
- [25] Z. Liang, Z. Chen, S. Tang, L. Kong, H. Wang, and G. Chen, "An offline path planning framework for reconfigurable cable-driven parallel mechanisms via lie algebra interpolation," *Mechanism and Machine Theory*, vol. 220, p. 106349, Apr 2026.
- [26] S. Bouchard, C. Gosselin, and B. Moore, "On the ability of a cable-driven robot to generate a prescribed set of wrenches," *Journal of Mechanisms and Robotics*, vol. 2, p. 011010, Dec 2010.
- [27] M. Métillon, C. Charron, K. Subrin, and S. Caro, "Performance and interaction quality variations of a collaborative cable-driven parallel robot," *Mechatronics*, vol. 86, p. 102839, Oct 2022.
- [28] H. Gao, C. Chevallereau, and S. Caro, "Detection and management of human-cable collision in cable-driven parallel robots," *IEEE Robotics and Automation Letters*, vol. 9, pp. 11698–11705, Dec 2024.
- [29] H. J. Ferreau, C. Kirches, A. Potschka, H. G. Bock, and M. Diehl, "qpOASES: A parametric active-set algorithm for quadratic programming," *Mathematical Programming Computation*, vol. 6, no. 4, pp. 327–363, 2014.
- [30] J. C. Santos, M. Gouttefarde, and A. Chemori, "A nonlinear model predictive control for the position tracking of cable-driven parallel robots," *IEEE Transactions on Robotics*, vol. 38, no. 4, pp. 2597–2616, 2022.