

MIRA: A Modular Open-Source Micro-UAV for Indoor Research

Lucas K. de Oliveira^{†,*}, Felipe A. G. Tommaselli^{*}, João Aires Marsicano^{*}, Marco S. Tayar, Pedro A. R. Saraiva, Ricardo V. Godoy, Marcelo Becker

University of São Paulo (USP), São Carlos, Brazil

^{*}These authors contributed equally to this work.

[†]Corresponding author: kido.lucas0413@usp.br

ABSTRACT

Indoor robotics research increasingly relies on micro-UAVs whose airframe, electronics, and control software are fully open to modification. Off-the-shelf platforms rarely expose the low-level access required for such modifications, while building a custom alternative typically requires substantial engineering effort before flight testing can begin, leaving many laboratories to work within constraints that limit the scope of their research. We present MIRA (Modular Indoor Research Architecture)¹, a low-cost, open-source micro-UAV for indoor research built around a replicable 3D-printed PLA airframe and a containerized low-level software package managing the companion-to-autopilot communication bridge via Micro XRCE-DDS. Designed as a white-box architecture, core subsystems are individually replaceable without firmware refactoring, supporting local fabrication and component substitution from existing lab inventory. We characterize MIRA through manual flight in position-control mode within an optical motion-capture volume, where the communication pipeline sustains a median companion-to-autopilot latency of 0.02 ms and power spectral density analysis confirms the structural vibration energy stays concentrated in a narrow 90 to 110 Hz band, isolated from the sub-20 Hz control bandwidth and within the autopilot safety thresholds.

1 INTRODUCTION

Indoor aerial robotics research faces a persistent infrastructure bottleneck. Affordable commercial drones feature closed ecosystems and payload constraints that restrict custom hardware integration, while open academic platforms often mandate rigid hardware configurations that escalate replication costs and limit component substitution from existing

¹All hardware design files and software configurations are available at <https://github.com/Lucas-Kido/mira-imav2026.git>



Figure 1: 3D rendered model of MIRA (quadrotor platform).

lab inventory. This collective engineering and financial overhead scales poorly with fleet size, creating a barrier to entry for laboratories requiring replicable indoor testing baselines.

Although open-source flight stacks and ROS 2 middleware have lowered software barriers, the hardware modularity gap persists [1, 2]. The Crazyflie 2.1 is a reference swarm vehicle, but its 27 g mass limits onboard processing and payload [3, 4]. Conversely, larger academic platforms like Agilicious treat sensing, control, and compute as a jointly optimized, custom-PCB architecture [5]. Similarly, advanced platforms such as OmniNext [6] and AgiPIX [7] remain bound to specific, co-developed hardware configurations or costly active sensing suites. A clear gap remains for a transparent, standard-component baseline that can be fabricated, repaired, and provisioned rapidly using common workshop tools.

This paper introduces a system, shown in Figure 1, that addresses this practical bottleneck by focusing entirely on providing accessible physical and digital infrastructure rather than optimizing for extreme agility or specific perception suites. The platform is simultaneously (i) optimized for indoor, GPS-denied environments, (ii) easily replicable on standard desktop FDM printers using PLA, (iii) modular at the component level to allow component substitution from existing lab inventory, and (iv) supported by a containerized low-level software stack.

Local manufacturability and hardware interchangeability operate as strict design constraints throughout the system. The airframe utilizes a detachable-arm topology to localize

crash damage, while the avionics interface relies on a robust, firmware-independent serial connection. On the software side, a streamlined, containerized ROS 2 package manages the low-level uXRCE-DDS communication bridge instead of a complex, monolithic autonomy framework. This setup handles the critical task of ingesting external motion-capture pose streams and translating them into the autopilot’s internal filter. The result is a clean white-box baseline that eliminates prohibitive engineering overhead, leaving onboard computational resources free for user-defined algorithms.

The primary contributions of this work are:

- **Open modular airframe.** A 3D-printed PLA quadrotor structure with a detachable interface, supporting low-cost local fabrication, rapid crash-localized repair, and fleet replication.
- **Hardware-agnostic communication bridge.** A containerized ROS 2 package over a serial Micro XRCE-DDS link that decouples low-level flight execution from high-level compute, allowing hardware substitution without firmware refactoring.
- **Streamlined state-estimation pipeline.** An out-of-the-box software architecture deployed on a Jetson Orin NX, optimized to ingest real-time external pose streams and map them transparently to the PX4 EKF2 estimator.
- **Targeted physical validation.** Experimental flight characterization in manual Position control mode within an optical motion-capture environment, evaluating communication pipeline latency and structural vibration via Power Spectral Density (PSD) analysis.

The rest of the paper is organized as follows: section 2 presents an overview of the related works; section 3 describes the platform’s mechanical, electrical, and software design; section 4 reports the experimental pipeline latency and structural results; section 5 discusses the inherent engineering trade-offs; and section 6 concludes the paper.

2 RELATED WORKS

The majority of recent open-source flight stacks [12, 1] and robotics middleware [2] have lowered the barrier to building research UAVs, yet scaling a fleet reveals a persistent issue: platforms optimized for single objectives are difficult to replicate, repair, or adapt. At the commercial end, the Crazyflie 2.1 offers open firmware, but its 40 g payload limits onboard processing, forcing reliance on external infrastructure [3, 4]. Conversely, the DJI Tello EDU provides more thrust but imposes a closed firmware, confining research to software layers operating entirely above the flight controller ecosystem [13].

Academic platforms recover firmware transparency but introduce rigid hardware constraints. Agilicious [5] provides

a compelling open baseline for agile flight but treats sensing, control, and compute as a jointly optimized, custom-PCB whole, rendering component substitution difficult. OmniNext [6] enables omnidirectional perception, yet its companion computer and firmware form a fixed, co-developed configuration. AgiPIX [7] improves software reproducibility via containerized ROS 2 stacks but remains bound to hardware-synchronized active sensing and specific GPU modules. Consequently, while various open-source state estimation pipelines are widely accessible, their adoption on custom platforms is constrained by the lack of an adaptable low-level communication framework that can ingest and transparently map external pose data to the autopilot.

Thus, existing systems optimize openness along a single axis, such as firmware, perception, or software, while hardware-level interchangeability and local manufacturability remain secondary. This work addresses this gap by proposing an indoor-oriented platform that is simultaneously: (i) locally manufacturable via common desktop FDM printers, (ii) modular at the component level to allow inventory-driven substitution of flight controllers and companion computers, and (iii) supported by a containerized low-level bridge designed for seamless external state estimation ingest.

To illustrate the platform’s focus, a feature matrix comparing these existing systems with the proposed MIRA architecture is summarized in Figure 2, highlighting how MIRA bridges the gap between hardware openness and low-cost local manufacturability.

3 SYSTEM DESIGN


3.1 Architecture Overview

The platform follows a modular three-layer architecture designed for hardware agnosticism, allowing individual layers to be maintained or entirely substituted based on user requirements. The **real-time control layer** runs the PX4 autopilot on a flight controller to handle low-level control loops and sensor fusion, while the **perception and offboard layer** is hosted on a companion computer running ROS 2 for high-level processing. Connecting these layers, the **communication bridge** utilizes the Micro XRCE-DDS protocol over a serial link, completely decoupling flight execution from compute processes to enable hardware swaps without refactoring the core software stack. An overview of this hardware baseline and low-level software architecture is illustrated in Figure 3.

3.2 Mechanical Design

The 3D-printed airframe consists of a central avionics deck and four detachable arms. This modular interface acts as a crash-mitigation mechanism, enabling damaged arms to be rapidly replaced with standard fasteners without disrupting internal electronics or the wiring harness.

PLA was selected to enable low-cost, on-demand replication using standard desktop FDM printers. To compensate for

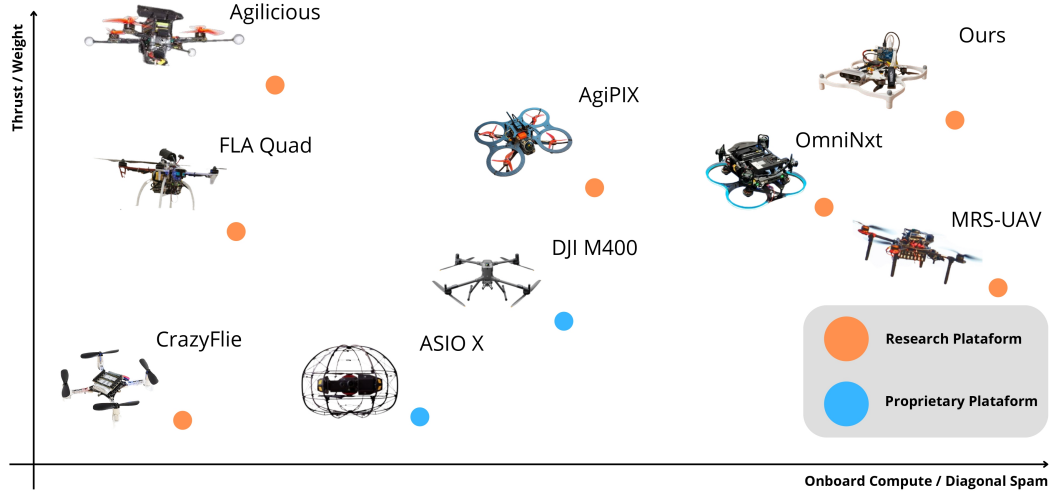

framework	open-source	ROS 2	simulation	low-level controller	CPU mark (higher is better)	GPU	3D LIDAR	DDS	collision guard	thrust / weight	diagonal span (mm)
DJI M400 [8]	-	✓	✗	proprietary	-	✓	✓	✗	✗	-	≈ 1240
Flybotix ASIO X [9]	-	✗	✗	proprietary	-	✗	✓	✗	✗	-	-
Crazyflie [4]	SW and HW	✓	✓	custom	-	✗	✗	✗	✗	≈ 2.26	≈ 92
FLA-Quad [10]	SW and HW	✗	✓	PX4	3,383	✗	✓	✗	✗	≈ 2.38	-
MRS UAV [11]	SW and HW	✓	✓	PX4	9,264	✗	✓	✗	✗	≈ 2.5	≈ 792
Agilicious [5]	SW and HW*	✗	✓✓	custom	1,343	✓	✗	✗	✗	≈ 5	≈ 382
OmniNxt [6]	SW and HW	✓	✗	PX4	2,418	✓	✗	✗	✓	≈ 4.24	≈ 250
AgiPIX [7]	SW and HW	✓	✓✓	PX4	2,418	✓	✓	✓	✓	≈ 3.5	≈ 495
Ours	SW and HW	✓	✓	PX4	2,418	✓	□ ²	✓	✓	≈ 5	≈ 229

Figure 2: Comparison of consumer and research platforms by computational density (onboard computing power divided by diagonal span) and agility (thrust-to-weight ratio). Additional metrics include openness, ROS 2 support, simulation capabilities (double ticks denote photorealism), user interface, CPU performance, and GPU availability. (*conditionally open-source)

material flexibility, structural components are printed with a 15 % honeycomb infill and four perimeter walls. This specific configuration shifts structural resonance frequencies outside the operational bandwidth of the attitude control loops, minimizing high-frequency vibration transmission to the inertial measurement units.

3.3 Electronics and Power

The electronics layer is structured around the principle of strict component interchangeability, ensuring that alternative hardware form factors can be integrated seamlessly. The power and data distribution topology accommodates various flight controllers and companion computers. Modifications to the physical setup, such as swapping microcontrollers or computing boards, only require basic software reconfiguration of the uXRCE-DDS bridge parameters, preserving the overriding system architecture. Table 1 presents a reference instantiation of the platform components.

²Extensible architecture; the platform’s hardware interface is designed to support 3D LiDAR integration, though it is not implemented in this baseline configuration.

3.4 Software and Communication

The high-level software stack is deployment-agnostic, running containerized environments via Docker to guarantee reproducibility across diverse computing hardware. A centralized automation script provisions the operating system dependencies, ROS 2 workspace, and communication interfaces in a unified pipeline, streamlining system scalability.

State Estimation Interface. To maintain strict hardware independence, the software architecture does not depend on a fixed localization sensor or specific vision pipeline, exposing instead a generalized interface for external state estimation. Any tracking system, such as visual-inertial odometry (VIO), LiDAR, or motion-capture infrastructure, can feed spatial data into the system by publishing standard ROS 2 odometry topics.

These messages are automatically mapped to the standard `VehicleOdometry` uORB topics via the uXRCE-DDS bridge, allowing the internal PX4 EKF2 estimator to handle fusion transparently.

Offboard Control Node. Command arbitration and safety are managed by a dedicated ROS 2 C++ node. To

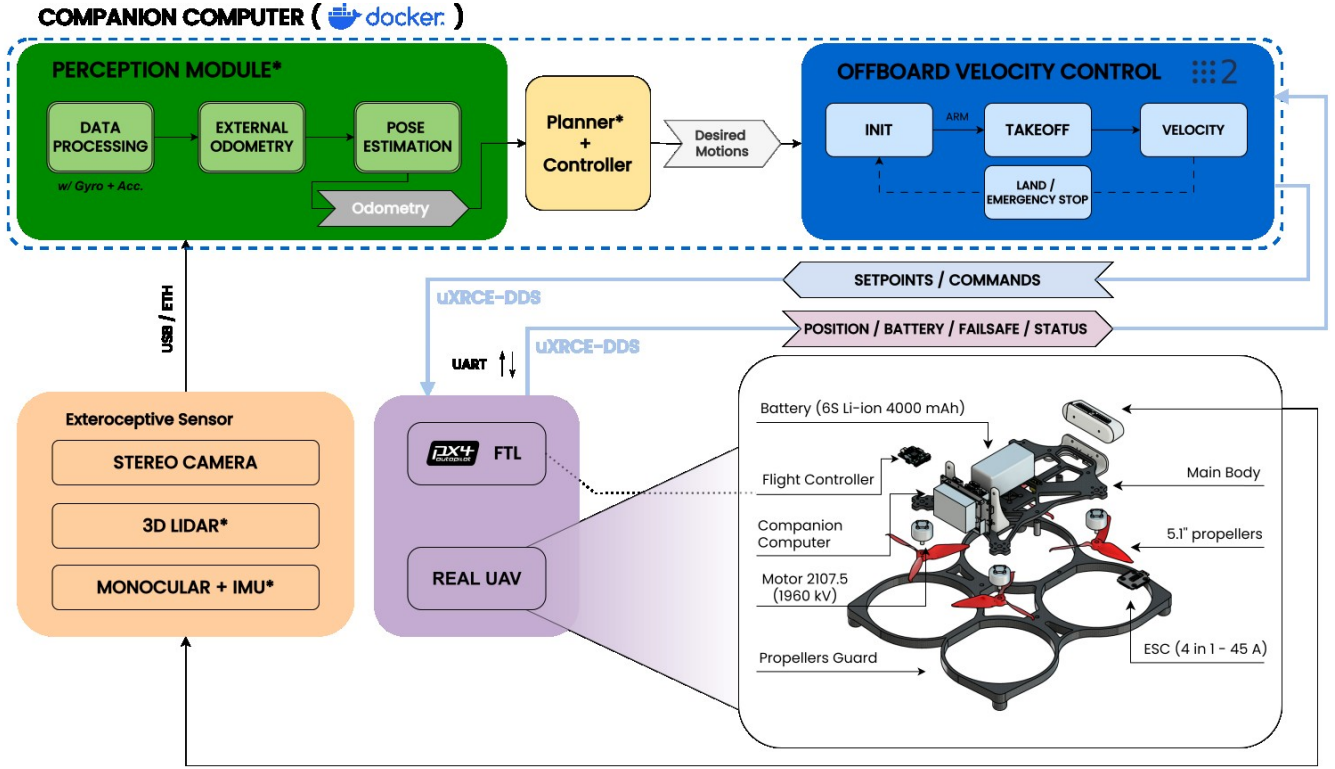


Figure 3: Breakdown of the UAV system, illustrating the functional layers from the containerized software communication bridge to the exploded hardware assembly. This white-box layout allows independent modification of individual components. Software modules marked with an asterisk (*) and the listed exteroceptive sensors are not directly implemented in this paper, serving instead as illustrative examples of the platform expansion capabilities for customized indoor navigation.

satisfy autopilot heartbeat requirements, it publishes control mode and trajectory setpoints at a stable 10 Hz (`arm`, `takeoff`, `set_velocity`, `land`, `estop`), dynamically rotating body-frame velocity commands to the absolute NED frame before transmission a latency watchdog, and an emer-

gency stop service locks subsequent inputs and commands a safe landing routine (`NAV_LAND`) via MAVLink directly through the autopilot

4 RESULTS

4.1 Experimental Setup

Experiments are conducted in an indoor GPS-denied environment equipped with an OptiTrack PrimeX optical motion-capture system. This infrastructure serves a dual purpose: it provides millimeter-level ground-truth trajectories for validation and streams real-time pose estimates to feed the vehicle’s EKF2 estimator. To evaluate the platform under realistic handling and operational conditions, the vehicle is operated in Position control mode via a manual remote controller. Two core metrics are utilized to evaluate distinct and complementary dimensions of the platform: communication pipeline latency and structural vibration characteristics.

4.2 Communication Pipeline Latency

A 112.5 s flight log with 123 495 messages was analyzed to evaluate communication timing (Table 2). The motion-capture input reached the FMU at 254.3 Hz, while the EKF2 published `vehicle.odometry` at 86.5 Hz, a decimation

Table 1: Bill of Materials outlining the baseline utilized during experimental flight. All components remain replaceable.

Component	Product	Specification
Frame	PLA (FDM)	15% infill
Motor (×4)	SpeedX2 2107.5	1960 KV
Propeller (×4)	T-Motor 5136	2× CW / CCW
Battery	iFlight FULLSEND Li-ion	6S, 4000 mAh
ESC	Hobbywing XRotor G2 45A 4-in-1	DShot600, 45A×4, 3–6S
Flight Controller	Pixhawk 6C Mini	STM32H743
Compute Unit	Jetson Orin NX	16 GB, 100 TOPS

factor of ≈ 3 , consistent with the standard PX4 EKF2 architecture.

The median cross-latency of 0.02 ms between VIO input and EKF2 output is a rosbag timestamp artifact rather than true processing delay. Instead, the P95 (5.34 ms) and P99 (39.12 ms) values are more representative of the uXRCE-DDS transport overhead. While jitter exceeded $CV = 500\%$ across all EKF2 topics, a synchronized 2137 ms gap at $t \approx 78$ s indicates a single estimator reset rather than pervasive scheduling noise. The pipeline reconverged within 3.2 s, causing a 5.4 s pose blackout and 95.2 % availability.

A critical bottleneck appeared in the motion-capture pipeline: `/drone/pose` exhibited a median recording latency of 554 ms (P95 = 3045 ms, peak = 4786 ms), where a -8 ms minimum exposed a clock misalignment between the NatNet/ROS bridge and the host. Conversely, ROS-native odometry showed a 1.41 ms median latency, and RealSense streams incurred 65–68 ms from USB 3.0 driver processing.

Table 2: ROS 2 topic statistics from the position-hold flight log. CV (%) denotes temporal jitter; the shared ≈ 2137 ms maximum gap across four FMU topics identifies a single EKF2 reset event.

Topic	Freq. (Hz)	CV (%)	Max gap (ms)
OptiTrack Odometry (in)	254.3	269.7	—
Sensor Combined (IMU)	137.0	668.9	2136.9
Vehicle Attitude	136.6	669.4	2137.0
FMU Odometry (out)	86.5	533.5	2136.9
Vehicle Local Position	—	530.8	2137.1
Drone Pose	—	1329.6	5369.0

4.3 Structural Vibration Analysis

To validate the 3D-printed PLA airframe and its 15 % honeycomb infill, a dual-domain analysis combining time-domain metrics and frequency-domain Power Spectral Density (PSD) was conducted on flight-test inertial and actuator logs. This evaluation ensures structural resonance does not cause state estimator aliasing or control loop degradation.

Actuator outputs display strong symmetry across all channels during steady-state conditions, tracking a baseline hover throttle of $\approx 20\%$. This confirms a high thrust-to-weight ratio and the absence of structural warping. Concurrently, time-domain metrics (Figure 4) show stable mean vibration levels of approximately 3.5 m/s^2 (primary) and 8.0 m/s^2 (secondary) accelerometers. Both channels remain safely below autopilot thresholds, ensuring overall flight stability.

In the frequency domain, the acceleration PSD (Figure 5) indicates that motor-induced energy is concentrated within a narrow harmonic band between 90 Hz and 110 Hz, leaving frequencies below 60 Hz highly attenuated. This isolation is supported by the angular velocity FFT, which shows

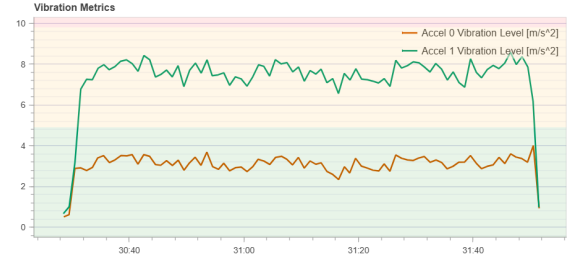


Figure 4: Time-domain vibration levels of the onboard accelerometers during flight.

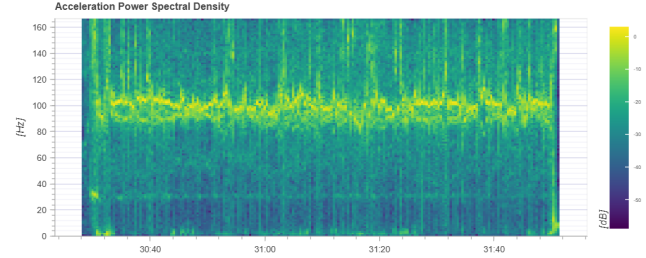


Figure 5: Acceleration Power Spectral Density (PSD) spectrogram during flight.

standard control responses below 20 Hz. A minor yaw-rate peak appears near 43 Hz, but high-frequency noise is successfully suppressed by PLA material damping and a 100 Hz low-pass software filter (`IMU_GYRO_CUTOFF`), reducing the mean noise amplitude above 40 Hz to 0.00.

5 DISCUSSION

The platform prioritizes local manufacturability and modular component reuse over specialized sensing or extreme agility. This design choice provides a transparent, easily repairable, and fleet-scalable baseline vehicle for indoor robotics research.

Trade-offs. Printing the airframe in PLA trades structural stiffness for rapid, low-cost fabrication using standard desktop FDM printers. Similarly, while a serial uXRCE-DDS bridge offers less bandwidth than USB or PCIe interconnects, the representative transport delay (P95 = 5.34 ms) is well within acceptable limits for stable state fusion. This trade-off successfully preserves a stateless, firmware-independent interface without compromising real-time control.

Limitations. Evaluation is currently confined to controlled indoor environments. The experiments revealed a significant external bottleneck: the network-level motion-capture bridge introduced a median delay of 554 ms and clock misalignments, dominating the latency budget over the drone’s internal pipelines. Additionally, formal closed-loop tracking benchmarks, such as calculating absolute trajectory error during autonomous flights, have not yet been performed.

Future work. Immediate next steps include fixing the ex-

ternal clock alignment and conducting multi-agent fleet deployments. Crucially, future work will focus on migrating state estimation entirely onboard via a VIO pipeline utilizing the RealSense stream. Since the camera processing incurred a stable 65–68 ms overhead, onboard estimation will bypass external infrastructure delays. Finally, we plan to implement higher-level planning layers using the platform’s modular framework.

6 CONCLUSION

We presented MIRA, an open-source modular micro-UAV architecture for GPS-denied indoor research. By combining a locally manufacturable PLA airframe with a hardware-agnostic PX4, ROS 2, and uXRCE-DDS low-level communication bridge, the platform offers a transparent, white-box baseline that is straightforward to repair, replicate, and extend using existing laboratory inventory. Experimental results within an optical motion-capture environment confirm stable flight characteristics, excellent structural vibration isolation via tailored infill geometries, and a dependable high-rate data pipeline. All design files, software configurations, and documentation are released openly to support reproducible indoor aerial robotics research.

REFERENCES

- [1] Lorenz Meier, Dominik Honegger, and Marc Pollefeys. Px4: A node-based multithreaded open source robotics framework for deeply embedded platforms. In *2015 IEEE International Conference on Robotics and Automation (ICRA)*, pages 6235–6240, 2015.
- [2] Steven Macenski, Tully Foote, Brian Gerkey, Chris Lalancette, and William Woodall. Robot operating system 2: Design, architecture, and uses in the wild. *Science Robotics*, 7(66):eabm6074, 2022.
- [3] James A. Preiss, Wolfgang Honig, Gaurav S. Sukhatme, and Nora Ayanian. CrazySwarm: A large nano-quadcopter swarm. In *2017 IEEE International Conference on Robotics and Automation (ICRA)*, pages 3299–3304, 2017.
- [4] Wojciech Giernacki, Mateusz Skwierczyński, Wojciech Witwicki, Paweł Wroński, and Piotr Kozierski. Crazyflie 2.0 quadrotor as a platform for research and education in robotics and control engineering. In *2017 22nd International Conference on Methods and Models in Automation and Robotics (MMAR)*, pages 37–42, 2017.
- [5] Philipp Foehn, Elia Kaufmann, Angel Romero, Robert Penicka, Sihao Sun, Leonard Bauersfeld, Thomas Laengle, Giovanni Cioffi, Yunlong Song, Antonio Loquercio, and Davide Scaramuzza. Agilicious: Open-source and open-hardware agile quadrotor for vision-based flight. *Science Robotics*, 7(67):eabl6259, 2022.
- [6] Peize Liu, Chen Feng, Yang Xu, Yan Ning, Hao Xu, and Shaojie Shen. Omninx: A fully open-source and compact aerial robot with omnidirectional visual perception. In *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 10605–10612. IEEE, 2024.
- [7] Sasanka Kuruppu Arachchige, Juan Jose Garcia, Changda Tian, Lauri Suomela, Panos Trahanias, Adriana Tapus, and Joni-Kristian Kämäräinen. Agipix: Bridging simulation and reality in indoor aerial inspection. *arXiv preprint arXiv:2604.08009*, 2026.
- [8] DJI. Matrice 400 technical specifications. <https://enterprise.dji.com/matrice-400/specs>, 2026. Accessed: 2026-02-03.
- [9] Flybotix. ASIO X Drone. <https://www.flybotix.com/asio-x/>, 2026. Accessed: 2026-06-15.
- [10] Kartik Mohta, Michael Watterson, Yash Mulgaonkar, Sikang Liu, Chao Qu, Anurag Makineni, Kelsey Saulnier, Ke Sun, Alex Zhu, Jeffrey Delmerico, Konstantinos Karydis, Nikolay Atanasov, Giuseppe Loianno, Davide Scaramuzza, Kostas Daniilidis, Camillo Jose Taylor, and Vijay Kumar. Fast, autonomous flight in gps-denied and cluttered environments. *Journal of Field Robotics*, 35(1):101–120, 2018.
- [11] Tomas Baca, Matej Petrlik, Matous Vrba, Vojtech Spurny, Robert Penicka, Daniel Hert, and Martin Saska. The mrs uav system: Pushing the frontiers of reproducible research, real-world deployment, and education with autonomous unmanned aerial vehicles. *Journal of Intelligent & Robotic Systems*, 102(1):26, 2021.
- [12] PX4 Autopilot Project. PX4 open source autopilot. <https://px4.io/>, 2025.
- [13] Xiaowei Li, Kuan Xu, Fen Liu, Ruofei Bai, Shenghai Yuan, and Lihua Xie. Airswarm: Enabling cost-effective multi-uav research with cots drones. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 21487–21494, 2025.