

YOTOnet: Zero-Shot Cross-Domain Fault Diagnosis via Domain-Conditioned Mixture of Experts

Zesen Wang^{a,b}, Zihao Wu^a, Yue Hu^{a,*}, Yang Gao^a, Fuzhen Xuan^{a,*}

^a*School of Mechanical and Power Engineering, East China University of Science and Technology, Shanghai, China*

^b*Department of Mechanical Engineering and Applied Mechanics, University of Pennsylvania, Philadelphia, PA, USA*

Abstract

Mechanical equipment forms the critical backbone of modern industrial production, yet domain shift severely limits the generalization of deep learning-based fault diagnosis models across different equipment and operating conditions. Inspired by the success of foundation models in achieving zero-shot generalization, we propose YOTOnet (You Only Train Once), a novel architecture specifically designed for cross-domain fault diagnosis in mechanical equipment. YOTOnet comprises three core components: (1) a physics-aware Invariant Feature Distiller that extracts domain-agnostic representations using multi-scale dilated convolutions and FFT-based time-frequency fusion, (2) Domain-Conditioned Sparse Experts (DC-MoE) that adaptively route inputs to specialized processors via learned gating without external meta-data, and (3) a dual-head classification system with auxiliary supervision. Extensive validation on five public bearing datasets (CWRU, MFPT, XJTU, OTTAWA, HUST) through 30 cross-dataset protocols demonstrates the superiority of YOTOnet compared with other state-of-the-art methods. Critically, we observe a clear scaling effect—average test F1 improves from 0.5339 (1 training dataset) to 0.705 (4 datasets), with a clear gain when moving from 3 to 4 datasets. These findings provide empirical evidence that foundation model principles can enable robust, train-once deployment for industrial fault diagnosis.

*Corresponding authors.

Email addresses: huyue1990@ecust.edu.cn (Yue Hu), fzxuan@ecust.edu.cn (Fuzhen Xuan)

Keywords: Fault Diagnosis, Mixture of Experts, Zero-Shot Learning, Domain Generalization

1. Introduction

Mechanical equipment forms the critical backbone of modern industry, with applications spanning manufacturing, transportation, and energy generation. However, unexpected failures can lead to catastrophic consequences, including production downtime, economic losses, and safety hazards [1]. Intelligent fault diagnosis, has emerged as a cornerstone of predictive maintenance strategies.

AI has revolutionized fault diagnosis, for it allows a new way to understand hierarchical representations from raw sensor data, which is hard for humans to understand at first sight, eliminating the need for manual feature engineering [2]. However, a new challenge appears: domain shift. Mostly, models perform well on their training datasets, but have poor performance on unseen datasets. This defect makes it hard for industrial application in diagnosis of machinery.

Existing approaches to address domain shift fall into two main categories: domain adaptation and domain generalization [3]. In recent domain adaptation research, Jiang utilized a mechanism-driven adversarial network to achieve interpretable fault diagnosis across different operating conditions [4], while Pan developed a self-supervised contrastive network to mitigate class boundary confusion and obtain superior performance [5]. In the domain generalization field, Yang proposed a mixed domain fusion network to capture invariant features for generalizing to unknown real-world conditions [6], and Cui employed a causal decoupling network to accurately model the data generation process, achieving high stability for multi-bearing fault diagnosis [7].

The great generalization capabilities of Large Language Models (LLMs) have inspired new methods in different fields. The paradigm of large models has been successfully applied across diverse scientific fields. Meta AI introduced the Segment Anything Model [8], a powerful vision foundation model that achieves remarkable zero-shot segmentation. In chemistry, researchers presented ChemCrow [9], an LLM augmented with tools that can autonomously plan complex chemical reactions. Furthermore, Salesforce AI’s Nucleotide Transformer [10] applies large-scale pre-training to DNA se-

quences, effectively learning the language of life to predict genetic functions. Consequently, the application of LLM methodologies to fault diagnosis is becoming increasingly prevalent. FD-LLM [11] adapts Large Language Models by textualizing vibration signals. Rm-GPT [12] was developed as a foundation model tailored specifically for mechanical equipment data. However, as a recent survey [13] highlights, significant challenges remain, emphasizing the need for true zero-shot generalization.

This paper presents YOTO, a foundation specifically designed for zero-shot cross-domain fault diagnosis in mechanical equipment. The evaluation across five public datasets reveals a significant scaling effect: average F1 improves from 0.5339 to 0.705 as the training source expands from one to four domains. While designed for zero-shot deployment, YOTO also supports rapid few-shot adaptation, achieving 0.99 F1 with 256 labeled samples via Q-LoRA.

The main contributions of this work are:

- We propose the “You Only Train Once” (YOTO) paradigm for industrial fault diagnosis. Unlike traditional domain adaptation, YOTO builds a generalist foundation model from multiple source domains that generalizes to unseen operating conditions and equipment without target data or fine-tuning.
- We design a physics-aware Invariant Feature Distiller that combines multi-scale dilated convolutions with FFT-based time-frequency fusion and dual attention mechanisms. This module extracts robust, domain-invariant “physical tokens” from raw vibration signals to mitigate spectral shifts.
- We introduce a Domain-Conditioned Sparse Mixture-of-Experts (DC-MoE) where routing is conditioned purely on the input signal (no external domain IDs). This allows dynamic selection of specialized experts for varying signal characteristics while ensuring diverse utilization via load balancing.
- We provide systematic empirical evidence of scaling laws in cross-domain fault diagnosis. Evaluations on 30 train/test splits show that increasing training domain diversity (from 1 to 4) yields consistent zero-shot performance gains, validating the path toward industrial foundation models.

The remainder of this paper is organized as follows. Section 2 details the YOTO methodology, including architecture design and training strategy. Section 3 presents comprehensive experimental results, including scaling law analysis and ablation studies. Section 4 concludes with implications and future directions.

2. YOTOnet Network Architecture

2.1. Problem Setup and Design Motivations

We consider K source domains $\mathcal{S} = \{D_1, \dots, D_K\}$ and an unseen target domain D_t . Each domain provides samples $(signals, label)$. Under zero-shot domain generalization, we learn parameters θ without seeing D_t by minimizing the expected supervised risk on the sources:

$$\min_{\theta} \mathbb{E}_{s \sim \mathcal{S}} \mathbb{E}_{(x,y) \sim D_s} \ell(f_{\theta}(x), y), \quad \text{and evaluate on } D_t \text{ without adaptation.} \quad (1)$$

Empirically, cross-domain shifts arise from (i) spectral-shape differences and operating conditions; (ii) multi-scale temporal cues; and (iii) domain-specific processing preferences. Accordingly, YOTOnet is designed with three principles that align with these factors:

- Physics-aware time-frequency tokenization and invariant feature distillation to mitigate spectral-shape and operating-condition shifts;
- Multi-scale temporal modeling (e.g., dilated CNN branches with residual links) to capture transient, multi-resolution fault signatures;
- Domain-conditioned sparse expert routing to accommodate domain-specific processing preferences while preserving domain-agnostic fault semantics;

2.2. Method Overview

We target YOTO by constructing a modular foundation model that processes raw signals into a shared 'fault dictionary' without domain-specific adaptation. The overall architecture of YOTOnet is illustrated in Figure 1. It comprises three core components: an Invariant Feature Distiller, Domain-Conditioned Sparse Experts (DC-MoE), and a Classification Head.

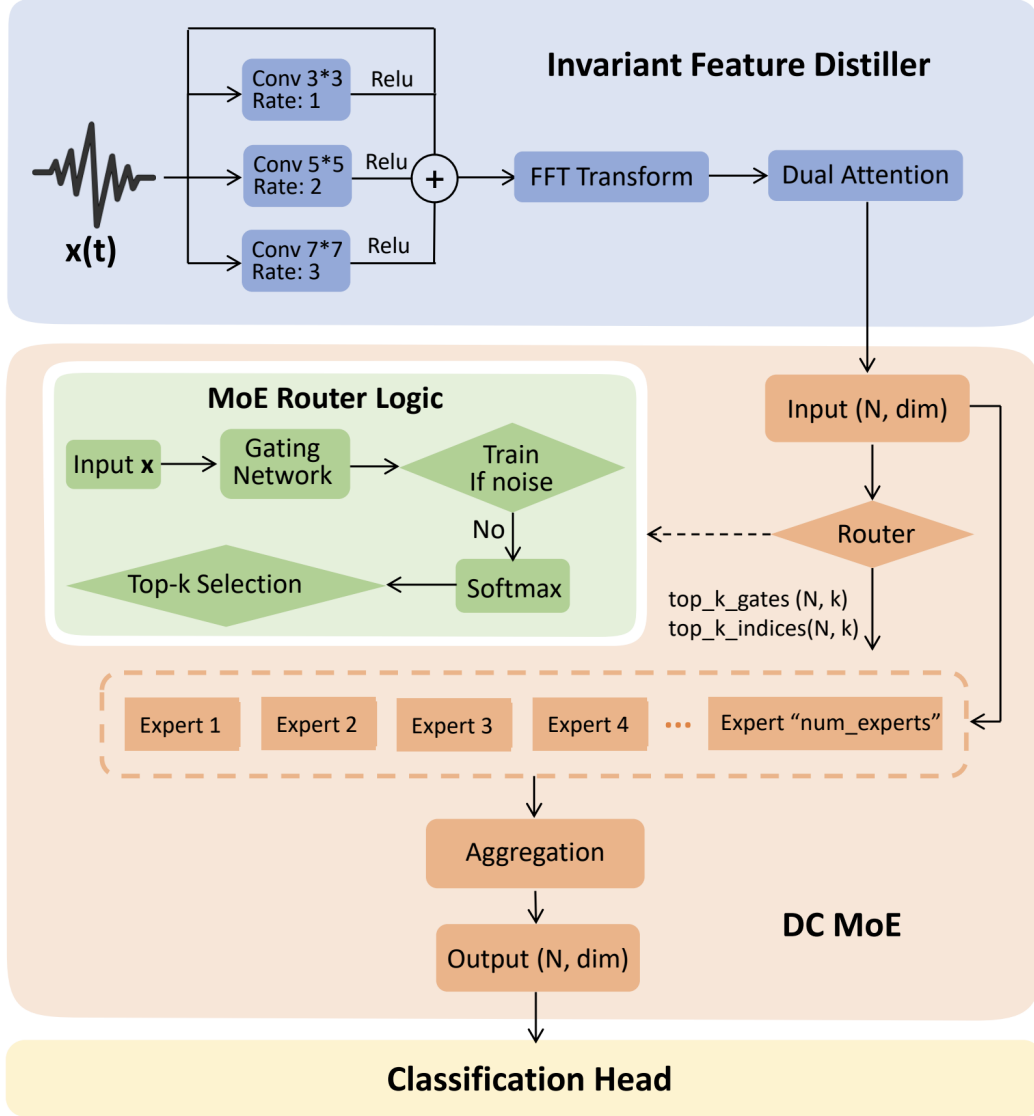


Figure 1: YOTOnet model architecture. The model consists of three core components: Invariant Feature Distiller for extracting domain-invariant features, Domain-Conditioned Sparse Experts (DC-MoE) for adaptive processing, and Classification Head for fault prediction.

Subsequent experiments applying this method demonstrate that significant scaling effects also exist in the industrial sensor data domain. This means that by increasing training data volume and enhancing model complexity, we can observe simultaneous significant improvements in model diagnostic performance and cross-domain generalization capability, ultimately

manifesting as powerful multi-domain generalization ability.

2.3. Invariant Feature Distiller

As the front-end encoder, the Invariant Feature Distiller forms domain-invariant "physical tokens" using a compact multi-scale CNN [14] with dilated convolutions [15] and residual links [16]. As detailed in Figure 2, the distiller utilizes a parallel three-branch structure with varying dilation rates ($3 \times 3, 5 \times 5, 7 \times 7$) to capture multi-resolution temporal signatures.

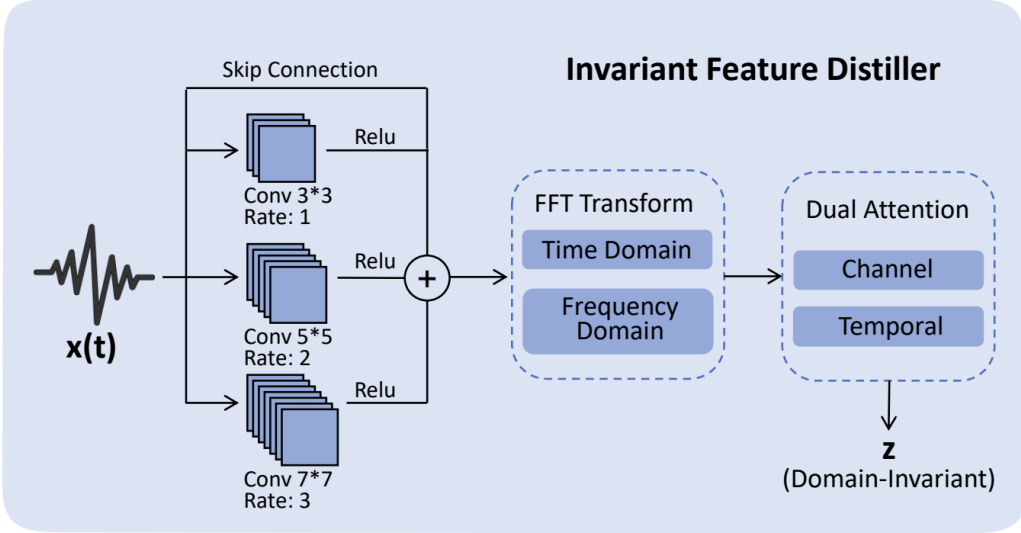


Figure 2: Detailed structure of the Invariant Feature Distiller. The module employs multi-scale convolutional branches, dilated convolutions, residual connections, FFT feature fusion, and dual attention mechanisms.

We enrich time-frequency cues via FFT-based fusion of frequency-domain and time-domain features, which is a common apply in vibration analysis. And applying dual attention [17] to emphasize informative channels.

2.4. Domain-Conditioned Sparse Experts (DC-MoE)

We extend the router to be *domain-conditioned via the signal itself* (no external metadata), as illustrated in Figure 3. Let z denote features from the distiller. The gate produces logits and sparse probabilities

$$\mathbf{p} = \text{softmax}(W_g z), \quad \mathbf{m} = \text{Top-}k(\mathbf{p}), \quad y = \sum_i m_i p_i h_i(z), \quad (2)$$

where h_i is the i -th expert and $\mathbf{m}$ masks all but the k largest entries (straight-through during backprop).

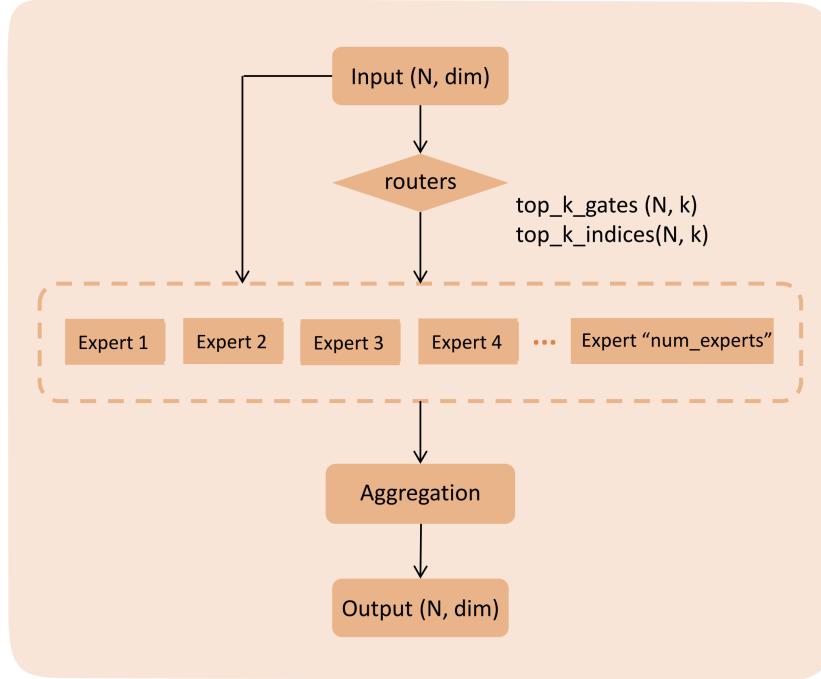


Figure 3: Overall architecture of Domain-Conditioned Sparse Experts (DC-MoE). The system routes input features through a gating network to selectively activate top- k experts, combining their outputs via weighted aggregation. In our implementation, experts are feed-forward networks.

2.4.1. Expert Architecture (FFN-based DC-MoE)

As highlighted in Figure 3, each expert $h_i(\cdot)$ is a lightweight feed-forward network (FFN) that maps the distilled feature vector $z \in \mathbb{R}^d$ to an enhanced representation $h_i(z)$. Concretely, $h_i(z) = W_{2,i} \phi(W_{1,i}z + b_{1,i}) + b_{2,i}$, where ϕ is a ReLU activation. When sequence features $Z \in \mathbb{R}^{T \times d}$ are used, the FFN is applied token-wise with shared weights and followed by mean/attention pooling to form the expert output. This follows common MoE practice and keeps compute predictable and efficient.

2.4.2. Gating Network and Routing Logic

The gating mechanism determines which experts process each input, as detailed in Figure 4. Given distilled features z , the gate network W_g computes expert affinities, applies softmax normalization to obtain probabilities $\mathbf{p}$, and selects the top- k experts via a binary mask $\mathbf{m}$. During forward pass, only the selected experts are activated; during backpropagation, we use straight-through estimators to approximate gradients through the dis-

crete Top- k operation. This sparse activation reduces computational cost while maintaining model capacity.

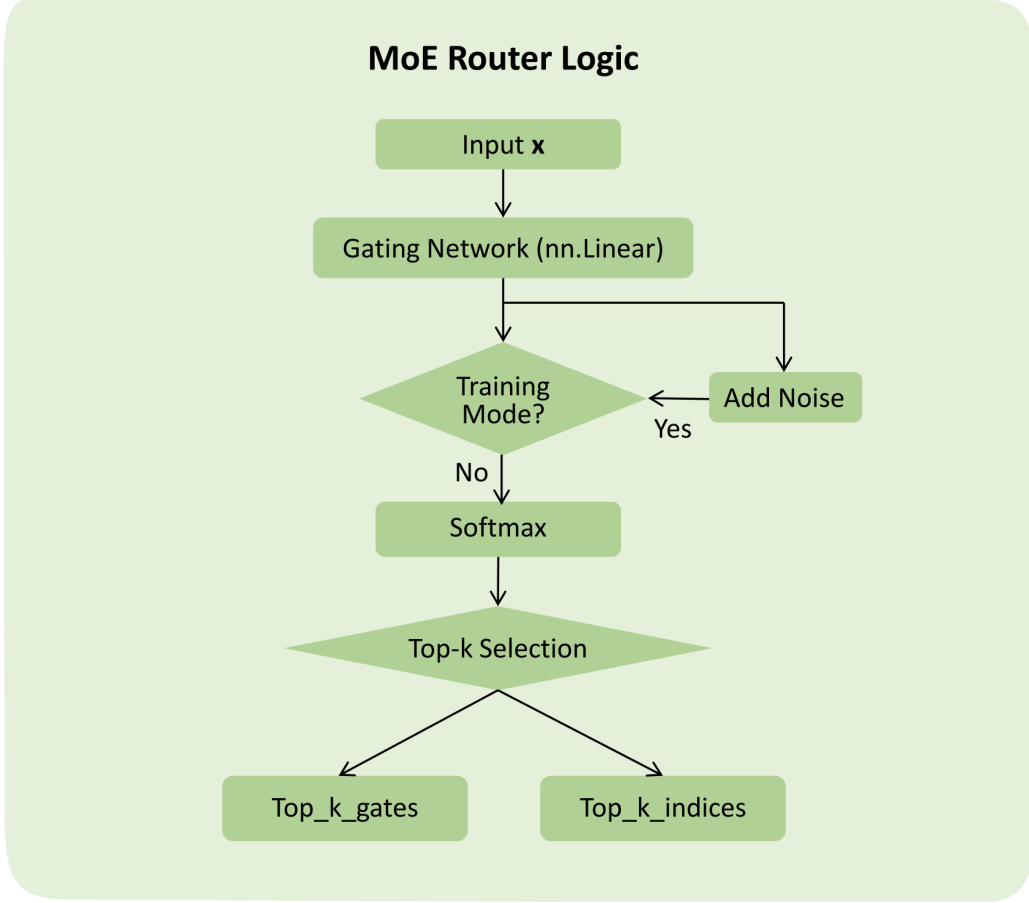


Figure 4: Gating network routing logic. The gate network transforms input features $\mathbf{z}$ into expert selection probabilities $\mathbf{p}$ via W_g and softmax. The Top- k operation produces a binary mask $\mathbf{m}$ that activates only the most relevant experts, with straight-through gradient estimation during backpropagation.

2.4.3. Load Balancing Regularization

To prevent expert collapse (where only a few experts are consistently selected) and promote balanced utilization, we add a load balancing regularizer as shown in Figure 5:

$$\mathcal{L}_{\text{gate}} = \lambda_{\text{bal}} \sum_i \left(f_i - \frac{1}{N} \right)^2, \quad (3)$$

where f_i is the fraction of samples routed to expert i and N is the total number of experts. This MSE-based regularizer penalizes deviations from uniform expert utilization across the batch, encouraging the model to distribute workload evenly among all experts. The hyperparameter λ_{bal} controls the strength of this regularization.

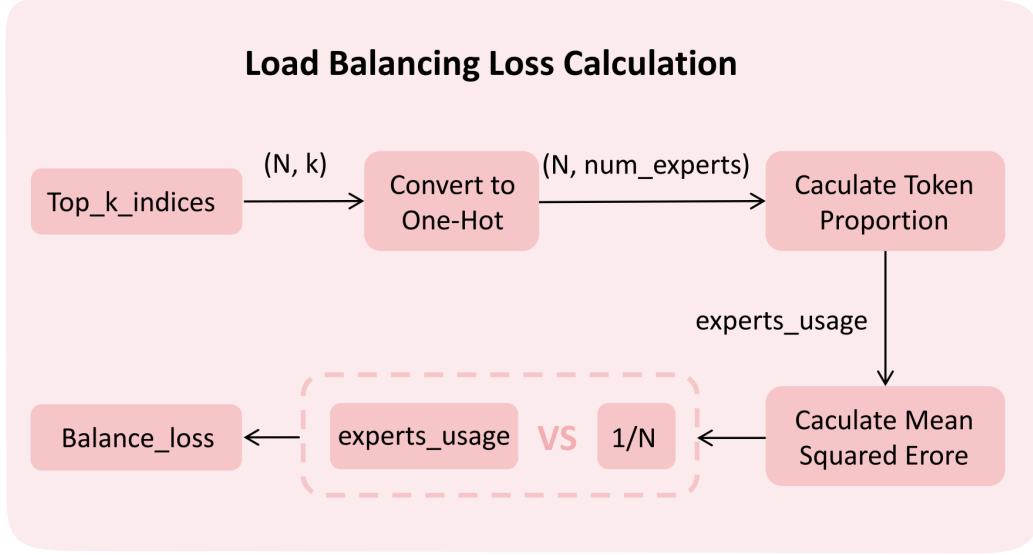


Figure 5: Load balancing regularizer computation. The regularizer measures the squared deviation between actual expert utilization fractions f_i and the uniform distribution $1/N$. This prevents expert collapse by penalizing scenarios where certain experts are over-utilized while others remain idle.

2.4.4. Experts Network

The experts in DC-MoE do not introduce additional recurrence or attention; each expert $h_i(\cdot)$ is implemented as a compact FFN. Given a distilled feature vector z , the expert applies a linear projection, a point-wise ReLU nonlinearity, and a final linear projection to produce $h_i(z)$. For sequence features, the same FFN is applied token-wise with shared weights, and the resulting token representations are aggregated by pooling. This simple FFN design keeps each expert lightweight and efficient while still allowing the overall MoE layer to capture diverse processing patterns across domains.

2.5. Classification Head

A main classifier aggregates sequence features via attention pooling followed by an MLP and Softmax to predict fault categories. An auxiliary head,

attached earlier in the network, provides additional supervision to improve feature quality and stabilize training.

2.6. Training Objective and Loss Function

We minimize a weighted sum consisting of: (i) a cross-entropy loss for the main classifier, (ii) an auxiliary cross-entropy for the early head, and (iii) the load balancing regularizer $\mathcal{L}_{\text{gate}}$ in Eq. (3) for DC-MoE.

The total objective is

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{main}} + \alpha \mathcal{L}_{\text{aux}} + \beta \mathcal{L}_{\text{gate}}, \quad (4)$$

where α and β weight the auxiliary and load balancing terms, respectively.

2.7. Optional Few-shot Adaptation with Q-LoRA

Although our core setting is zero-shot, we also consider a practical few-shot variant for rapid on-site adaptation. We adopt Q-LoRA, which keeps the backbone quantized (e.g., 4-bit) and trains low-rank adapters on a small labeled set. In our experiments, fine-tuning with only 256 labeled samples yields an average F1 of 0.99 on the same test protocol. This result is reported separately and does not alter the zero-shot conclusions above.

3. Experimental Validation

3.1. Data Processing and Preparation

We jointly train on five public bearing datasets—CWRU [18], MFPT, XJTU [19], OTTAWA [20], and HUST [21]—covering diverse operating conditions and fault modes. For all experiments we construct a binary label space with two fault types (inner-race vs. outer-race fault), and all signals are (re)sampled to 25.6 kHz for consistency.

Table 1 summarizes the basic statistics of the five datasets used in this study. For each benchmark, we list the total number of samples, the number of inner- and outer-race fault samples, and the unified sampling frequency. These benchmarks span a variety of operating conditions such as different motor speeds, loads, and fault severities; we follow the standard working conditions and segmenting protocols defined in the original publications.

Table 1: Statistics of the five bearing datasets used in this study.

Dataset	Total samples	Inner fault	Outer fault	Sampling frequency
CWRU	6712	2149	4563	25.6 kHz
MFPT	363	126	237	25.6 kHz
XJTU	17040	12528	4512	25.6 kHz
HUST	1860	930	930	25.6 kHz
OTTAWA	1240	620	620	25.6 kHz

3.2. Experimental Setup and Environment

To systematically evaluate the model’s generalization capability under different data combinations and the impact of data scale on performance, we designed a series of cross-dataset ablation experiments. The experimental setup is as follows: we select training and test sets from all five datasets, with the key constraint that all five datasets must be used and assigned to either the training or test set. By traversing all possibilities where the training set contains 1 to 4 datasets (with the remaining datasets forming the test set), we generate a total of $C_5^1 + C_5^2 + C_5^3 + C_5^4 = 30$ different training/test set partition combinations. Hyperparameter settings remain unchanged across all experiments. Similarly, training-related hyperparameters such as training epochs, learning rate, and optimizer also remain consistent across all 30 experiments. The primary evaluation metric is the sample-averaged F1 score on the test set, while also recording the F1 score for each category. All experiments were conducted in the following hardware and software environment:

Table 2: Experimental Environment Configuration

Item	Specification
CPU	14 vCPU Intel(R) Xeon(R) Gold 6348 @ 2.60GHz
GPU	1x NVIDIA A800-80GB
RAM	100GB
Operating System	Ubuntu 22.04
Python Version	Python 3.10
CUDA Version	CUDA 11.8
Package Manager	Miniconda3
Disk Space	System: 30GB, Data: 100GB

3.3. Method Comparison

We compare YOTOnet with DANN [22], CORAL [23], and MixStyle [24], and the comparison results are given in Table 3 and Figure 6. Table 3 reports average F1 on each test set. YOTOnet achieves the best performance on most of all datasets except CWRU and it reaches 0.9862 (F1 score) on MFPT.

Table 3: Performance of Different Models on Various Test Sets

Test Set/Model	HUST	OTTAWA	XJTU	MFPT	CWRU
YOTOnet	0.5821	0.9065	0.7485	0.9862	0.3033
CORAL	0.2266	0.3803	0.3382	0.2737	0.3812
DANN	0.3082	0.2477	0.4861	0.2239	0.0863
MixStyle	0.2538	0.4980	0.0069	0.4638	0.4568

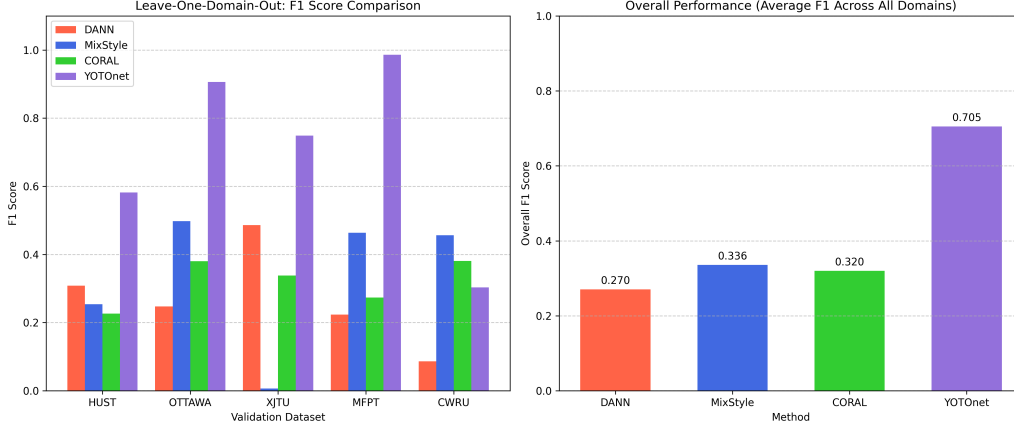


Figure 6: Bar-chart visualization of method performance across the five test sets.

3.4. Ablation Studies

To understand the contribution of each component in YOTOnet, we further conduct ablation studies on six model variants: (1) Full, the complete model with domain-conditioned sparse experts, FFT-based feature fusion, dual attention, and gate load-balancing regularization; (2) Random Expert, replacing the learned gate with random expert selection while keeping the experts unchanged, to evaluate the importance of domain-conditioned routing; (3) No Balance, removing the gate load-balancing loss from the training objective, to assess the effect of expert load balancing; (4) Avg Fusion, averaging the outputs of all experts with equal weights instead of sparse top- k routing, to test the benefit of sparse MoE fusion; (5) No FFT, removing the frequency-domain FFT branch in the feature extractor and using only time-domain features, to verify the contribution of spectral information; (6) No Dual Attn, removing the dual attention or squeeze-and-excitation modules in the feature extractor, to assess the impact of attention-based feature reweighting.

Table 4 reports the F1 score of these variants when each of the five datasets is treated as the unseen target domain. For each dataset we also

indicate the best-performing variant and the gap between the full model and the best variant.

Table 4: Ablation studies on five test domains. We report F1 score of the full model and five ablated variants; 'Best model' denotes the highest-scoring variant per dataset, and 'Full vs. Best' summarizes the performance gap between the full model and the best variant.

Dataset	Full	Random Expert	No Balance	Avg Fusion	No FFT	No Dual Attn	Best model	Best F1	Full vs. Best
XJTU	0.7428	0.3695	0.2648	0.6467	0.5877	0.6353	Full	0.7428	Best
MFPT	0.9862	0.5785	0.3471	0.3471	0.7631	0.7107	Full	0.9862	Best
CWRU	0.3582	0.3258	0.3202	0.3202	0.4242	0.4513	No Dual Attn	0.4513	-0.0931
HUST	0.6371	0.6661	0.6817	0.5	0.671	0.5806	No Balance	0.6817	-0.0446
OTTAWA	0.9065	0.9952	0.5	0.9185	1	0.6282	No FFT	1	-0.0935

As shown in Table 1, XJTU is the largest and most imbalanced test domain (17,040 segments with an inner/outer ratio of roughly 2.8:1). In this more challenging regime, the full YOTOnet consistently achieves the best F1 (0.7428), while all ablated variants degrade noticeably. This indicates that domain-conditioned sparse experts, FFT-based fusion, dual attention, and gate load-balancing work together to exploit diverse operating conditions without collapsing onto the majority class.

By contrast, the behavior on HUST and OTTAWA is more mixed: some ablated variants slightly outperform the full model. Both benchmarks are small (1,860 and 1,240 samples) and perfectly balanced (inner:outer = 1:1), which reduces the benefit of the gate-balancing regularizer and makes results more sensitive to sampling noise. In addition, these domains appear closer to some of the training domains in terms of operating conditions, so simpler variants (e.g., without balance regularization or FFT) can already fit them well. We therefore view these gains as benign variance rather than evidence against the full design, and retain the full model as the default since it provides the most robust performance across the larger and more challenging domains.

On CWRU, all methods achieve comparatively low F1 (around 0.3–0.4 in Table 3), indicating a substantial domain gap between CWRU and the other datasets. This challenging case underscores the inherent difficulty of zero-shot cross-dataset diagnosis when operating conditions differ drastically.

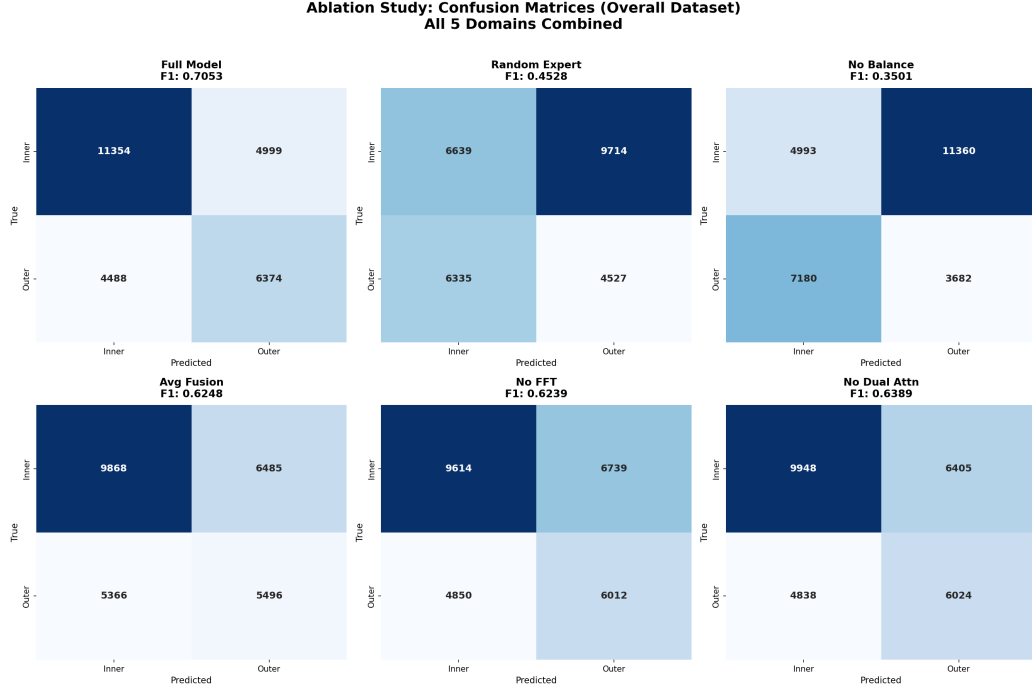


Figure 7: Combined confusion matrices for representative zero-shot evaluations across test domains.

3.5. Validation of Scaling Effects

We quantify scaling by evaluating 30 train/test splits formed by selecting 1–4 datasets for training from CWRU, MFPT, XJTU, OTTAWA, HUST and validating on the held-out datasets. Table 5 lists all training/test configurations for Tasks 1–4. And Table 6 summarizes the average performance—F1 score—obtained by the model on the test set when the training set consists of different numbers of original datasets in these experiments.

As Table 6 shows, increasing training datasets from 1 to 4 steadily boosts average test F1, with a clear improvement from 0.6409 to 0.705 when moving from 3 to 4 datasets, confirming the scaling effect on industrial sensor data.

3.6. Analysis of Experimental Results

In summary, YOTOnet (i) consistently outperforms DANN, CORAL, and MixStyle across all test sets; (ii) exhibits clear scaling—average F1 rises from 0.5339 (1 dataset) to 0.705 (4 datasets), with consistent gains as more training domains are included; (iii) achieves strong zero-shot generalization (e.g., 0.9862 on the MFPT dataset), indicating domain-agnostic feature learning;

and (iv) benefits from its three-module design for robust end-to-end generalization. Collectively, these results substantiate the YOTO paradigm and provide empirical evidence of scaling on industrial sensor data.

Table 5: Training configurations for scaling experiments (Tasks 1–4). Task 1 uses a single training dataset, while Tasks 2–4 use two, three, and four datasets, respectively.

Task	Training Set	Test Set
Task 1	CWRU	XJTU OTTAWA MFPT HUST
Task 1	XJTU	CWRU OTTAWA MFPT HUST
Task 1	OTTAWA	CWRU XJTU MFPT HUST
Task 1	MFPT	XJTU OTTAWA CWRU HUST
Task 1	HUST	CWRU XJTU OTTAWA MFPT
Task 2	CWRU MFPT	XJTU OTTAWA HUST
Task 2	CWRU XJTU	OTTAWA MFPT HUST
Task 2	CWRU OTTAWA	HUST XJTU MFPT
Task 2	CWRU HUST	MFPT OTTAWA XJTU
Task 2	MFPT XJTU	HUST OTTAWA CWRU
Task 2	MFPT HUST	CWRU OTTAWA XJTU
Task 2	MFPT OTTAWA	CWRU HUST XJTU
Task 2	XJTU OTTAWA	CWRU HUST MFPT
Task 2	XJTU HUST	CWRU OTTAWA MFPT
Task 2	OTTAWA HUST	CWRU XJTU MFPT
Task 3	CWRU MFPT XJTU	HUST OTTAWA
Task 3	CWRU MFPT OTTAWA	HUST XJTU
Task 3	CWRU MFPT HUST	OTTAWA XJTU
Task 3	CWRU XJTU OTTAWA	HUST MFPT
Task 3	CWRU XJTU HUST	OTTAWA MFPT
Task 3	CWRU OTTAWA HUST	XJTU MFPT
Task 3	MFPT XJTU OTTAWA	HUST CWRU
Task 3	MFPT XJTU HUST	OTTAWA CWRU
Task 3	MFPT OTTAWA HUST	CWRU XJTU
Task 3	XJTU OTTAWA HUST	CWRU MFPT
Task 4	CWRU MFPT XJTU OTTAWA	HUST
Task 4	CWRU MFPT XJTU HUST	OTTAWA
Task 4	CWRU MFPT OTTAWA HUST	XJTU
Task 4	CWRU XJTU OTTAWA HUST	MFPT
Task 4	MFPT XJTU OTTAWA HUST	CWRU

Table 6: Average Performance Under Different Training Set Scales

Task	Average Test F1
Task 1 (1 dataset)	0.5339
Task 2 (2 datasets)	0.6135
Task 3 (3 datasets)	0.6409
Task 4 (4 datasets)	0.705

3.7. Few-shot Fine-tuning with Q-LoRA (256 Samples)

For completeness, we further evaluate an optional few-shot adaptation. Using Q-LoRA with 256 labeled samples, YOTOnet attains an average F1 of 0.99 on the same test splits. As summarized in Table 7, this result is reported separately and is not included in the zero-shot tables above (Table 3), since it uses additional labeled target-domain data.

Table 7: Few-shot Q-LoRA (256 samples) vs. zero-shot YOTOnet: average F1 on the same test protocol.

Model	Avg F1
Zero-shot YOTOnet (4-source)	0.705
Q-LoRA (256 labeled samples)	0.99

4. Conclusion and Future Work

We presented YOTO (You Only Train Once) and validated YOTOnet—a three-module architecture (Invariant Feature Distiller, Domain-Conditioned Sparse Experts, Classification Head)—via joint training on five public bearing datasets (CWRU, MFPT, XJTU, OTTAWA, HUST) and zero-shot evaluation. Key findings include: (i) train-once generalization to unseen domains without target data or fine-tuning; (ii) consistent empirical scaling across 30 cross-dataset splits, with average test F1 improving from 0.5339 (1 dataset) to 0.705 (4 datasets), with clear gains when moving from 3 to 4 datasets; and (iii) superiority over DANN, CORAL, and MixStyle on all test sets. We hope this proposed work serves as a foundational empirical step toward the realization of universal, trustworthy industrial foundation models.

However, the proposed method still has three limitations to be addressed in the future: (i) improving data efficiency via few-shot learning or meta-learning; (ii) integrating multi-modal signals (e.g., temperature, current, and acoustics) to enhance robustness; and (iii) strengthening interpretability and reliability.

References

- [1] D. Bourassa, F. Gauthier, G. Abdunnour, Equipment failures and their contribution to industrial incidents and accidents in the manufacturing industry, *International journal of occupational safety and ergonomics : JOSE* 22 (2015) 1–23. doi:10.1080/10803548.2015.1116814.
- [2] S. Qiu, X. Cui, Z. Ping, N. Shan, Z. Li, X. Bao, X. Xu, Deep learning techniques in intelligent fault diagnosis and prognosis for industrial systems: A review, *Sensors* 23 (3) (2023). doi:10.3390/s23031305.
- [3] J. Wang, C. Lan, C. Liu, Y. Ouyang, T. Qin, Generalizing to unseen domains: A survey on domain generalization, *arXiv preprint arXiv:2103.03097* (2022).
- [4] F. Jiang, Y. Kuang, T. Li, S. Zhang, Z. Wu, K. Feng, W. Li, Towards enhanced interpretability: A mechanism-driven domain adaptation model for bearing fault diagnosis across operating condi-

- tions, *Mechanical Systems and Signal Processing* 225 (2025) 112244. doi:<https://doi.org/10.1016/j.ymssp.2024.112244>.
- [5] X. Pan, H. Chen, W. Wang, X. Su, Adversarial domain adaptation based on contrastive learning for bearings fault diagnosis, *Simulation Modelling Practice and Theory* 139 (2025) 103058. doi:<https://doi.org/10.1016/j.simpat.2024.103058>.
 - [6] Z. Yang, L. Luo, J. Ma, H. Zhang, L. Yang, Z. Wu, Enhancing bearing fault diagnosis in real damages: A hybrid multidomain generalization network for feature comparison, *IEEE Transactions on Instrumentation and Measurement* 74 (2025) 1–11. doi:10.1109/TIM.2025.3556828.
 - [7] X. Cui, H. Zhan, K. Han, J. Yu, R. Wang, G. Huang, Multi-bearing fault diagnosis method based on convolutional autoencoder causal decoupling domain generalization, *ISA Transactions* 163 (2025) 236–250. doi:<https://doi.org/10.1016/j.isatra.2025.05.008>.
 - [8] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo, P. Dollár, R. Girshick, Segment anything (2023). arXiv:2304.02643.
 - [9] A. M. Bran, S. Cox, O. Schilter, C. Baldassari, A. D. White, P. Schwaller, Chemcrow: Augmenting large-language models with chemistry tools (2023). arXiv:2304.05376.
 - [10] H. Dalla-Torre, L. Gonzalez, J. M. Revilla, N. L. Carranza, A. H. Grzywaczewski, F. Oteri, C. Dallago, E. Trop, H. Sirelkhatim, G. Richard, M. Skwark, K. Beguir, M. Lopez, T. Pierrot, The nucleotide transformer: Building and evaluating robust foundation models for human genomics, *bioRxiv* (2023). doi:10.1101/2023.01.11.523679.
 - [11] H. A. A. M. Qaid, B. Zhang, D. Li, S.-K. Ng, W. Li, Fd-llm: Large language model for fault diagnosis of machines (2024). arXiv:2412.01218.
 - [12] Y. Wang, Y. Yu, K. Sun, P. Lei, Y. Zhang, E. Zio, A. Xia, Y. Li, Rmgpt: A foundation model with generative pre-trained transformer for fault diagnosis and prognosis in rotating machinery (2025). arXiv:2409.17604.
 - [13] X. Chen, Y. Lei, Y. Li, S. Parkinson, X. Li, J. Liu, F. Lu, H. Wang, Z. Wang, B. Yang, S. Ye, Z. Zhao, Large models for machine monitoring and fault diagnostics: Opportunities, challenges, and future direction, *Journal of Dynamics, Monitoring and Diagnostics* 4 (2) (2025) 76–90. doi:10.37965/jdmd.2025.832.
 - [14] C. Szegedy, W. Liu, Y. Jia, P. Sermanet, S. Reed, D. Anguelov, D. Erhan, V. Vanhoucke, A. Rabinovich, Going deeper with convolutions, in:

- Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2015.
- [15] F. Yu, V. Koltun, Multi-scale context aggregation by dilated convolutions, arXiv preprint arXiv:1511.07122 (2016).
 - [16] K. He, X. Zhang, S. Ren, J. Sun, Deep residual learning for image recognition, in: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2016.
 - [17] J. Hu, L. Shen, G. Sun, Squeeze-and-excitation networks, in: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2018.
 - [18] C. W. R. U. B. D. Center, Case western reserve university bearing data center dataset (cwru), accessed 2025-11-01 (2019).
 - [19] X. J. University, S. U. of Technology, Xjtu-sy bearing accelerated life test dataset, accessed 2025-11-01 (2018).
 - [20] A. Sehri, U. of Ottawa, University of ottawa bearing dataset, accessed 2025-11-01 (2023).
 - [21] R. Liu, B. Yang, E. Zio, X. Chen, Artificial intelligence for fault diagnosis of rotating machinery: A review, Mechanical Systems and Signal Processing 108 (2018) 33–47. doi:<https://doi.org/10.1016/j.ymssp.2018.02.016>.
 - [22] Y. Ganin, E. Ustinova, H. Ajakan, P. Germain, H. Larochelle, F. Laviolette, M. Marchand, V. Lempitsky, Domain-adversarial training of neural networks (2016). arXiv:1505.07818.
URL <https://arxiv.org/abs/1505.07818>
 - [23] B. Sun, K. Saenko, Deep coral: Correlation alignment for deep domain adaptation (2016). arXiv:1607.01719.
URL <https://arxiv.org/abs/1607.01719>
 - [24] K. Zhou, Y. Yang, Y. Qiao, T. Xiang, Domain generalization with mixstyle (2021). arXiv:2104.02008.
URL <https://arxiv.org/abs/2104.02008>