

Backward Layout Search for Sequence-Constrained Robotic Assembly

Xi Zhang^{1,*}, Jiancong Dai^{1,*}, Hao Chen^{1,†}, Zhengtao Hu², Changcai Yang¹, and Weiwei Wan³

Abstract—Robotic assembly layout planning must determine the assembly site and the initial pose of each part while ensuring collision-free execution of a prescribed assembly sequence. This problem is challenging because the obstacle environment changes after each assembly step, and unassembled parts remaining in the workspace may block robot motions. We observe that the feasibility of each assembly step depends only on the initial poses of the current and later-assembled parts. Based on this dependency, we propose Backward Layout Search (BLS), which assigns initial part poses in reverse assembly order. Each expansion performs geometric, kinematic, grasp, and prescribed-motion checks, while collision masks and candidate-set filtering remove infeasible initial part pose candidates. Promising partial layouts are retained through beam selection, and complete layouts are validated by full motion planning in forward assembly order. Experiments on five assembly models show that BLS produces collision-free executable layouts and reduces step evaluations and search time compared with a matched forward search.

I. INTRODUCTION

Robotic assembly planning must consider both robot motion and workcell layout. Research on assembly sequence planning has focused on determining how a product should be assembled [1], [2], [3], [4], but has paid less attention to where unassembled parts should initially be placed. These initial poses directly affect assembly feasibility and motion cost because the robot must pick, transfer, and assemble each part. This paper addresses the following problem: given a prescribed assembly order and a set of candidate grasps, select the assembly site and the initial pose of each part such that the complete sequential assembly motion is collision-free and has a low motion cost.

This problem is challenging because the obstacle environment evolves during assembly. Before each pick, the obstacles include the fixed workcell, the partial assembly, and all remaining unassembled parts at their initial poses. Picking the current part frees the space at its initial pose; after insertion, the part joins the partial assembly. Therefore, each assembly step has a different obstacle environment, and the initial pose of a later part may block several earlier motions.

Prior work on robotic workcell layout optimization has considered prescribed task sequences, reachability, collision avoidance, travel distance, and manipulability [5], as well as product information and grasp-aware constraints [6], [7].

¹College of Computer and Information Sciences, Fujian Agriculture and Forestry University, Fuzhou 350002, China.

²School of Mechatronic Engineering and Automation, Shanghai University, Shanghai, China.

³Department of System Innovation, Graduate School of Engineering Science, Osaka University, Toyonaka, Osaka, Japan.

*Xi Zhang and Jiancong Dai contributed equally.

†Corresponding author: Hao Chen. chenhaox@outlook.com.

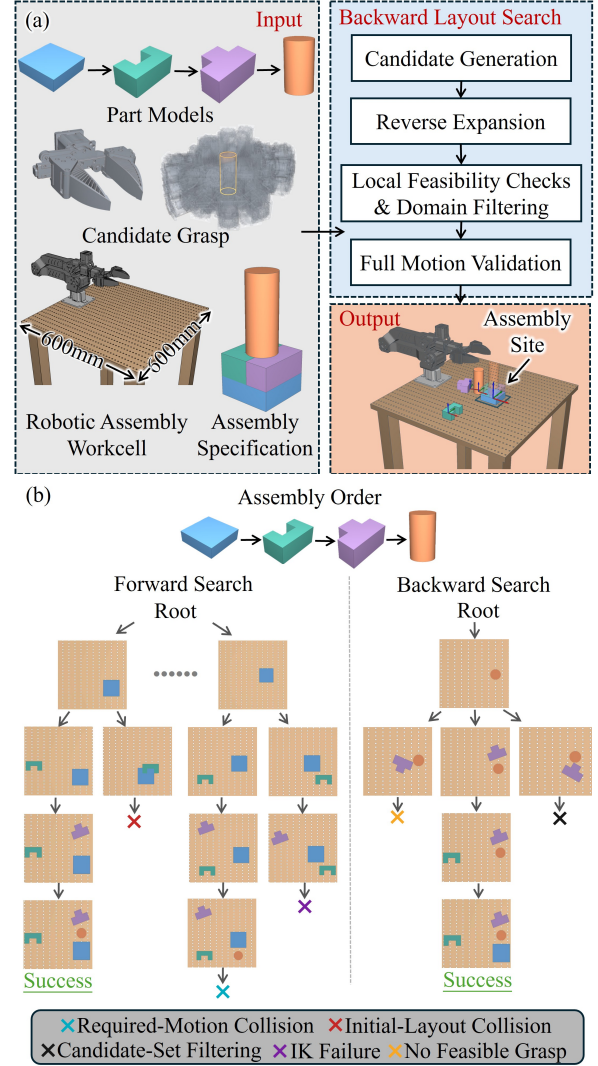


Fig. 1. Overview of the proposed Backward Layout Search (BLS). (a) BLS planning pipeline. (b) Illustration of forward and backward layout search using top-view. Part colors correspond to the assembly order shown above.

Motion-aware methods further couple layout decisions with trajectory, energy, or execution-time objectives [8], [9], [10], and surrogate models have been introduced to reduce repeated motion-planning cost [11]. However, these methods generally evaluate each complete layout as a single candidate and do not explicitly exploit the assembly-order structure of the evolving obstacle environment. Consequently, an incompatible placement of a later-assembled part may be detected only after many earlier poses have been assigned, and similar layouts may require repeated inverse-kinematics, collision,

and motion-planning evaluations.

To address these limitations, we propose Backward Layout Search (BLS), as illustrated in Fig. 1. For a fixed assembly site, the execution feasibility of step k depends only on the initial poses of part k and the later-assembled parts. BLS therefore assigns poses in reverse assembly order, so each assignment determines one new step without changing the later steps already checked. During expansion, local feasibility checks reject infeasible candidates, while required-motion collision masks and candidate-set filtering remove incompatible initial-pose candidates. Beam selection retains the partial layouts with the lowest scores based on nominal geometric costs. Complete layouts are then validated in forward order by full motion planning.

The main contributions of this paper are as follows:

- We formulate initial part layout planning for sequence-constrained robotic assembly. The formulation explicitly models the evolving obstacle environment and identifies the assembly-order dependency of step feasibility.
- We propose BLS, which combines reverse-order assignment, local feasibility checks, required-motion collision masks, candidate-set filtering, and beam selection to efficiently search the discrete layout space.

II. RELATED WORK

A. Task-Aware Robotic Workcell Layout Optimization

Task-aware workcell layout optimization extends geometric arrangement by incorporating task requirements into layout evaluation. Bachmann et al. [5] optimized component placements for prescribed task sequences using way-point reachability, collision constraints, inter-task distance, and manipulability. Other studies considered task positioning in multi-robot cells [12] and workcell design based on hierarchical manipulability maximization [13]. Beck [6] combined layout and product-model assembly information for automated 3D assembly-cell generation and validation. Other studies integrated optimization, simulation, and digital-twin technologies for reconfigurable and dynamic layout design [14], [15], learning-based online layout planning and scheduling [16], and 3D workcell layout planning under grasp and motion constraints [7].

These studies establish task feasibility as a key layout criterion, but they typically evaluate the complete workcell configuration as a single candidate.

B. Motion-Aware Layout Optimization

Motion-aware methods incorporate robot motion feasibility and execution cost into layout optimization. Qiu et al. [8] jointly optimized workcell layout and robot trajectories with collision and energy objectives. Kawabe et al. [9] coupled motion planning with layout design in robotic cellular manufacturing systems. They later introduced surrogate-assisted optimization to reduce the computational cost of simultaneous motion and layout design [11]. Baumgärtner et al. [10] showed that geometric and joint-motion proxies may not accurately represent cycle time and therefore evaluated layouts using time-optimal trajectory duration. Trajectory planning

has also been incorporated into robot base-placement optimization for industrial pick-and-place sequences [17].

These methods model robot execution more directly, but evaluating many layout candidates requires repeated inverse kinematics, collision checking, and motion planning.

C. Assembly Sequence and Motion Planning

Assembly planning complements layout optimization by explicitly reasoning about precedence constraints, partial assemblies, and intermediate states. Tian et al. [1] used disassembly reasoning to generate assembly plans, illustrating backward reasoning for physical assembly constraints. Their subsequent ASAP framework [2] searches physically feasible assembly sequences while accounting for gravity and partial-assembly stability. Nagpal and Mehr [3] formulated assembly sequence planning as a sequential decision-making problem and used precedence constraints to prune the search space. Kiyokawa et al. [18] combined simulation-based feasibility and stability constraints with many-objective optimization for semi-automated disassembly sequence planning. Chen et al. [4] planned block assembly with unstable intermediate states using two manipulators, computing assembly orders, candidate grasps, assembly directions, and supporting grasps.

These methods mainly optimize sequences and manipulation choices rather than the initial spatial configuration of the parts. The interaction among initial part poses, a prescribed assembly sequence, and the evolving obstacle environment remains comparatively underexplored.

III. PROBLEM FORMULATION

A. Assembly Model and Layout Variables

We consider n rigid parts assembled by one robot in a prescribed order. We index the parts by this order, so part k is assembled at step k . We assume direct manipulation: each part is transferred from its initial pose to its assembly pose in a single grasp.

Let $\mathcal{M}_i$ denote the geometry of part i in its body frame. Let $\mathcal{E}$ denote the fixed workcell environment, including the table and the robot base. Let $\mathcal{C}$ be a finite set of candidate assembly sites. A candidate $a \in \mathcal{C}$ defines the world pose $T_A(a) \in \text{SE}(3)$ of the product frame.

The product model provides the final pose of part i relative to the product frame, denoted by ${}^A T_i^f \in \text{SE}(3)$. The final world pose of part i is

$$T_i^f(a) = T_A(a) {}^A T_i^f. \quad (1)$$

For each part, the assembly model also specifies an insertion motion that ends at this final pose.

For each part i , let $\mathcal{P}_i$ be the finite set of candidate initial positions. Let Σ_i be the set of stable support orientations, computed by the method in [19]. Let Θ_i be the set of sampled in-plane rotations. The initial layout decision for part i is

$$x_i = (p_i, \sigma_i, \theta_i) \in \mathcal{X}_i, \quad \mathcal{X}_i = \mathcal{P}_i \times \Sigma_i \times \Theta_i, \quad (2)$$

where $p_i \in \mathcal{P}_i$ is an initial position. The support orientation $\sigma_i \in \Sigma_i$ determines which part face contacts the table, and

$\theta_i \in \Theta_i$ rotates the supported part about the table normal. Together, x_i defines the initial part pose $T_i^0(x_i) \in \text{SE}(3)$.

Each part has a finite set of object-relative candidate grasps $\mathcal{G}_i = \{g_{i,1}, \dots, g_{i,N_i^g}\}$. Each grasp specifies a fixed object-to-end-effector transform. A grasp is not an independent layout variable: for each initial layout candidate, the planner selects a grasp from $\mathcal{G}_i$ and rejects the candidate if no grasp satisfies the required kinematic, collision, and motion constraints.

We use $x_{k:n} = (x_k, \dots, x_n)$ to denote the suffix of initial layout decisions from part k to part n .

B. Evolving Assembly State

After steps $1, \dots, k$, the geometry of the partial assembly is

$$\mathcal{B}_k(a) = \bigcup_{i=1}^k T_i^f(a) \mathcal{M}_i. \quad (3)$$

We define $\mathcal{B}_0(a) = \emptyset$. The obstacle geometry changes within each assembly step. Before part k is picked, the obstacle set is

$$\mathcal{O}_k^{\text{init}} = \mathcal{E} \cup \mathcal{B}_{k-1}(a) \cup \bigcup_{j=k}^n T_j^0(x_j) \mathcal{M}_j. \quad (4)$$

After the pick, part k is attached to the end effector and included in the robot collision model during transfer and insertion instead of acting as a fixed obstacle. After release, it becomes part of the assembly. The retreat obstacle set is

$$\mathcal{O}_k^{\text{post}} = \mathcal{E} \cup \mathcal{B}_k(a) \cup \bigcup_{j=k+1}^n T_j^0(x_j) \mathcal{M}_j. \quad (5)$$

C. Local and Full Step Feasibility

We first define a local feasibility check for efficient pruning. It applies deterministic geometric and kinematic tests without sampling-based path planning.

For step k , let

$$\mathcal{G}_k^{\text{loc}}(a, x_{k:n}) \subseteq \mathcal{G}_k \quad (6)$$

denote the grasps that satisfy all local conditions. A grasp $g \in \mathcal{G}_k$ belongs to $\mathcal{G}_k^{\text{loc}}(a, x_{k:n})$ if it admits collision-free IK solutions at both the initial and final part poses. The same grasp must also allow a collision-free post-grasp retreat, prescribed insertion, and post-release retreat.

The local feasibility indicator is

$$\psi_k(a, x_{k:n}) = \begin{cases} 1, & \mathcal{G}_k^{\text{loc}}(a, x_{k:n}) \neq \emptyset, \\ 0, & \text{otherwise.} \end{cases} \quad (7)$$

The local check is necessary but not sufficient for complete execution. It does not verify the transfer path from the initial pose to the pre-insertion pose.

Let q_H be a fixed collision-free home configuration. Full step feasibility requires a complete robot motion sequence:

$$\begin{aligned} q_H &\rightarrow \text{pick} \rightarrow \text{post-grasp retreat} \rightarrow \text{transfer} \\ &\rightarrow \text{insertion} \rightarrow \text{release} \rightarrow \text{post-release retreat} \rightarrow q_H. \end{aligned}$$

Define ϕ_k to indicate whether there exist a grasp $g \in \mathcal{G}_k^{\text{loc}}(a, x_{k:n})$ and collision-free trajectories for all segments of this sequence:

$$\phi_k(a, x_{k:n}) = \begin{cases} 1, & \text{if such a grasp and trajectories exist,} \\ 0, & \text{otherwise.} \end{cases} \quad (8)$$

Every fully feasible step must pass the local check:

$$\phi_k(a, x_{k:n}) \leq \psi_k(a, x_{k:n}). \quad (9)$$

Let $\Gamma(x_{1:n}) \in \{0, 1\}$ denote initial-layout feasibility. The value $\Gamma(x_{1:n}) = 1$ requires every initial part pose to lie inside the tabletop region, avoid collision with $\mathcal{E}$, and be collision-free with all other initial parts. A complete layout is feasible if

$$\Phi(a, x_{1:n}) = \Gamma(x_{1:n}) \wedge \bigwedge_{k=1}^n \phi_k(a, x_{k:n}) = 1. \quad (10)$$

D. Assembly-Order Dependency

During forward execution of step k , parts $1, \dots, k-1$ no longer occupy their initial poses and appear only in the fixed partial assembly $\mathcal{B}_{k-1}(a)$. In contrast, parts $k, \dots, n$ remain at their initial poses before the pick. Therefore, ψ_k and ϕ_k depend on the assembly site a and suffix $x_{k:n}$, but not on $x_{1:k-1}$. This yields the safe pruning rule

$$\psi_k(a, x_{k:n}) = 0 \implies \Phi(a, x_{1:n}) = 0, \quad \forall x_{1:k-1}. \quad (11)$$

Hence, an infeasible suffix can be discarded before earlier poses are generated. Moreover, once $x_{k:n}$ has been evaluated, assigning x_{k-1} does not require reevaluating steps $k, \dots, n$, which motivates the reverse search order.

E. Optimization Objective

The layout search problem treats full feasibility as a hard constraint. During BLS, local feasibility checks provide necessary pruning conditions, and full feasibility is evaluated after a complete layout is generated.

Let $\mathbf{p}_H \in \mathbb{R}^3$ be the tool-center point at q_H . Let $\mathbf{p}_i^0(x_i)$ and $\mathbf{p}_i^f(a)$ be the world positions of the same part-fixed reference point at the initial and final poses, respectively.

Let $\bar{\mathbf{p}}_i^0(x_i)$ and $\bar{\mathbf{p}}_i^f(a)$ be fixed-height points above these two poses. The nominal geometric cost of part i is

$$\begin{aligned} c_i^{\text{nom}}(a, x_i) = & \|\mathbf{p}_H - \bar{\mathbf{p}}_i^0\|_2 + \|\bar{\mathbf{p}}_i^0 - \mathbf{p}_i^0\|_2 \\ & + \|\bar{\mathbf{p}}_i^0 - \bar{\mathbf{p}}_i^f\|_2 + \|\bar{\mathbf{p}}_i^f - \mathbf{p}_i^f\|_2 \\ & + \|\bar{\mathbf{p}}_i^f - \mathbf{p}_H\|_2. \end{aligned} \quad (12)$$

The five terms respectively approximate the home-to-approach, pickup, transfer, insertion, and return segments. This cost is deterministic and inexpensive to evaluate but does not represent the final joint-space trajectory length. The total nominal cost is

$$J_{\text{nom}}(a, x_{1:n}) = \sum_{i=1}^n c_i^{\text{nom}}(a, x_i). \quad (13)$$

The layout problem is

$$\begin{aligned}
(a^*, x_{1:n}^*) &= \arg \min_{a, x_{1:n}} J_{\text{nom}}(a, x_{1:n}) \\
\text{s.t. } & a \in \mathcal{C}, \\
& x_i \in \mathcal{X}_i, \quad i = 1, \dots, n, \\
& \Gamma(x_{1:n}) = 1, \\
& \phi_k(a, x_{k:n}) = 1, \quad k = 1, \dots, n.
\end{aligned} \tag{14}$$

IV. BACKWARD LAYOUT SEARCH

A. Overview

Backward Layout Search (BLS) assigns initial poses in reverse assembly order, $(x_n, x_{n-1}, \dots, x_1)$. At reverse depth k , node N_k stores: 1) the assigned suffix $x_{k:n}$; 2) its feasible grasps; 3) the candidate sets $\mathcal{X}_i(N_k)$ for unassigned parts $i < k$; and 4) the accumulated nominal cost. The root N_{n+1} has no assigned pose and is first expanded by assigning x_n .

B. Candidate Set Generation

The allowed assembly region is discretized into a finite set of assembly sites $\mathcal{C}$. All optimality statements therefore refer to this discrete domain. For each site a , the initial-pose sets $\mathcal{X}_i$ in Eq. (2) are filtered by tabletop and environment collision constraints, robot-base clearance, initial-pose IK, insertion, and post-release retreat feasibility. Each part is checked independently at this stage without other unassembled parts in the scene. Inter-part constraints are introduced during reverse expansion.

The surviving poses form the root candidate sets

$$\mathcal{X}_i(N_{n+1}) \subseteq \mathcal{X}_i. \tag{15}$$

The assembly site is rejected if any root candidate set is empty.

C. Reverse Expansion and Local Feasibility Checks

Assume that node N_{k+1} contains the assigned suffix $x_{k+1:n}$. BLS expands this node by selecting $x_k \in \mathcal{X}_k(N_{k+1})$, which forms the new suffix $x_{k:n}$. BLS then computes the locally feasible grasp set $\mathcal{G}_k^{\text{loc}}(a, x_{k:n})$ defined in Section III.

The local check includes initial-layout collision, end-point IK, common grasp feasibility, post-grasp retreat, insertion, and post-release retreat. The child is rejected if $\mathcal{G}_k^{\text{loc}}(a, x_{k:n}) = \emptyset$. Sampling-based path planning is not used for partial-node pruning. It is applied only during the final validation of complete initial layouts.

D. Required-Motion Collision Masks

For a candidate initial placement x_k , assembly site a , and grasp g , let

$$\mathcal{W}_k^{\text{req}}(a, x_k, g) \tag{16}$$

denote the swept volume of the required local motions.

The swept volume covers the post-grasp retreat, prescribed insertion, and post-release retreat motions.

For a later part $j > k$, define the forbidden initial-pose set

$$\mathcal{F}_{k,j}(a, x_k, g) = \{x_j \in \mathcal{X}_j \mid T_j^0(x_j)\mathcal{M}_j \cap \mathcal{W}_k^{\text{req}}(a, x_k, g) \neq \emptyset\} \tag{17}$$

If the assigned decision $x_j \in \mathcal{F}_{k,j}(a, x_k, g)$, then grasp g cannot execute the required local motions for step k and is removed. If no grasp remains, the candidate x_k is rejected.

After assigning x_k , the child initializes $\mathcal{X}_i(N_k)$ from the parent sets $\mathcal{X}_i(N_{k+1})$ for all $i < k$. BLS filters the candidate sets of all earlier parts using initial-pose collision, tabletop, local-feasibility, and grasp constraints. The child is rejected if $\mathcal{X}_i(N_k) = \emptyset$ for any $i < k$.

E. Beam Selection

For node N_k , the beam score combines the nominal cost of the assigned suffix with an optimistic completion estimate for the unassigned parts:

$$S(N_k) = \sum_{j=k}^n c_j^{\text{nom}}(a, x_j) + \sum_{i=1}^{k-1} \min_{x_i \in \mathcal{X}_i(N_k)} c_i^{\text{nom}}(a, x_i). \tag{18}$$

The first term is the nominal cost of the assigned suffix. For each unassigned part, the second term selects the least-cost pose remaining in its current candidate set. The estimate ignores interactions among those parts and is used only for beam ranking. At the complete depth $k = 1$, no unassigned part remains, so $S(N_1) = J_{\text{nom}}(a, x_{1:n})$.

At each reverse depth k , BLS scores all surviving children and uses the B lowest-scoring nodes as the next frontier. A smaller B reduces subsequent expansions and evaluations, whereas a larger B retains more alternative suffixes. Beam pruning makes BLS incomplete and therefore does not guarantee a global optimum over the discrete candidate sets. Regardless of its beam score, every reported layout must pass full motion validation.

F. Full Motion Validation

Sampling-based path planning is used only at this stage, not for partial-node pruning. Surviving complete layouts are validated in the prescribed forward assembly order using the full motion planner defined in Section III. The workcell state is updated after each successful step, and only layouts whose complete sequence succeeds are accepted. A planning timeout is treated as failure under the assigned budget but does not establish mathematical infeasibility.

V. EXPERIMENTS

A. Experimental Platform and Assembly Models

All experiments use our custom-designed six-degree-of-freedom manipulator and run on a workstation equipped with an AMD Ryzen 7 9800X3D CPU. The implementation is in Python and uses CPU computation only. Fig. 2 shows the pyramid, hammer, chair, frame, and tower models, which provide different part geometries, support orientations, assembly structures, and evolving obstacle conditions.

Every compared layout is evaluated with the same rule: a collision check at the home configuration q_H , the local feasibility checks of Section III, and full motion validation. For a layout that passes validation, we report the TCP travel that is the Cartesian path length of the TCP over the complete validated assembly sequence. **The attached video shows the execution of the returned layouts on the real robot.**

Algorithm 1: Backward Layout Search

Input: assembly sites $\mathcal{C}$, initial-pose sets $\mathcal{X}_i$, grasp sets $\mathcal{G}_i$, beam width B

Output: validated pair $(a, x_{1:n})$ with the lowest J_{nom} , or failure

```

1  $best \leftarrow \emptyset$ ,  $J_{\text{nom}}(\emptyset) \leftarrow \infty$ ;
2 foreach  $a \in \mathcal{C}$  do
3   Build the root candidate sets  $\mathcal{X}_i(N_{n+1})$ ,
      $i = 1, \dots, n$ ;
4   if  $\exists i : \mathcal{X}_i(N_{n+1}) = \emptyset$  then continue;
5    $frontier \leftarrow \{N_{n+1}\}$ ;
6   for  $k = n, n-1, \dots, 1$  do
7      $\mathcal{N}_k \leftarrow \emptyset$ ;
8     foreach  $N_{k+1} \in frontier$  and  $x_k \in \mathcal{X}_k(N_{k+1})$ 
       do
9       Compute  $\mathcal{G}_k^{\text{loc}}(a, x_{k:n})$  by the local checks
        and the required-motion masks;
10      if  $\mathcal{G}_k^{\text{loc}}(a, x_{k:n}) = \emptyset$  then continue;
11      Create child  $N_k$  and filter  $\mathcal{X}_i(N_k)$  from
         $\mathcal{X}_i(N_{k+1})$  for all  $i < k$ ;
12      if  $\exists i < k : \mathcal{X}_i(N_k) = \emptyset$  then continue;
13       $\mathcal{N}_k \leftarrow \mathcal{N}_k \cup \{N_k\}$  with score  $S(N_k)$ ;
14     $frontier \leftarrow$  at most  $B$  lowest-scoring nodes of
       $\mathcal{N}_k$ ;
15    if  $frontier = \emptyset$  then break;
16  foreach complete node  $N_1 \in frontier$  do
17    Validate  $(a, x_{1:n})$  in forward assembly order;
18    if validation succeeds and
       $S(N_1) < J_{\text{nom}}(best)$  then  $best \leftarrow (a, x_{1:n})$ ;
19 if  $best = \emptyset$  then return failure;
20 return  $best$ ;
```




Fig. 2. Assembly models used in the experiments: (a) pyramid, (b) hammer, (c) chair, (d) frame, and (e) tower.

B. BLS Initial Layouts and Spatial Interpretation

Fig. 3 shows the assembly sites and initial layouts returned by BLS. Several initial parts lie within the planar footprint of the translucent final assembly. This does not indicate a collision because the translucent geometry only visualizes the final product and is not a static obstacle. In every returned layout, the first part is placed directly at its final assembly pose. This placement is admissible because the partial assembly is still empty at step one, so the pose cannot block an earlier motion.

C. Backward Versus Forward Search

To assess the effect of initial-pose assignment order, BLS is compared with an iterative forward search, denoted Forward-Iter. Both methods use the same assembly-site set $\mathcal{C}$,

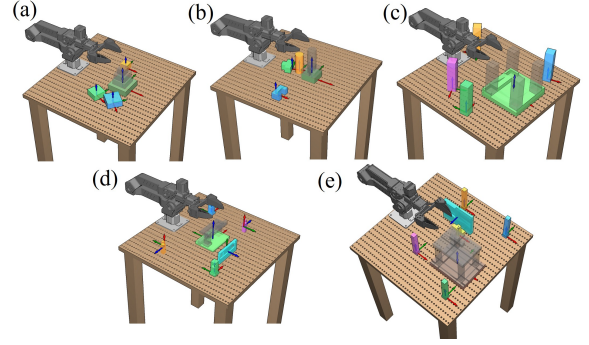


Fig. 3. Initial layouts and assembly sites returned by BLS for the five assembly models: (a) pyramid, (b) hammer, (c) chair, (d) frame, and (e) tower. Solid parts denote the initial part poses, whereas translucent parts visualize the eventual final assembly at the selected assembly site.

TABLE I
COMPARISON OF BLS AND FORWARD-ITER

Assembly	Method	Nominal cost	Step evaluations	Search time (s)
(a) Pyramid	BLS	2.156	336	109.50
	Forward-Iter	2.156	624	157.15
(b) Hammer	BLS	2.092	368	104.49
	Forward-Iter	2.073	608	139.96
(c) Chair	BLS	2.890	432	77.01
	Forward-Iter	3.067	400	98.02
(d) Frame	BLS	3.742	208	110.70
	Forward-Iter	4.018	336	140.00
(e) Tower	BLS	4.557	480	121.85
	Forward-Iter	4.964	816	204.41

initial-pose candidate sets $\mathcal{X}_i$, grasp sets $\mathcal{G}_i$, collision models, nominal geometric cost J_{nom} , local feasibility checks, and full motion validation procedure. BLS assigns poses in reverse assembly order and reuses suffix feasibility results, whereas Forward-Iter assigns poses in forward order and repeatedly evaluates the growing prefix.

As shown in Table I, BLS has lower search time for all five assembly models and requires fewer step evaluations in four of the five cases. The chair is the only exception in evaluation count, although BLS remains faster. Step evaluations count step-level feasibility checks rather than fixed-cost operations, so the runtime of each evaluation varies with the grasp, IK, collision, required-motion, and candidate-set filtering operations performed at each node. Therefore, search time need not scale linearly with the evaluation count. Nominal costs are comparable: BLS obtains lower values for the chair, frame, and tower, the same value for the pyramid, and a slightly higher value for the hammer.

D. Feasibility Comparison with Prior Layout Methods

We reproduce the layout methods of Bachmann et al. [5] and Ali et al. [7] in the same workcell and on the same five assembly models. Table II reports the outcome of each reproduced layout under the same evaluation rule. This comparison characterizes the reproduced layouts under our

TABLE II
FEASIBILITY AND VALIDATED TCP TRAVEL FOR THE FIVE ASSEMBLY MODELS.

Method / Metric	(a) Pyramid	(b) Hammer	(c) Chair	(d) Frame	(e) Tower
Bachmann et al. [5] TCP travel (m)	Fail (no feasible grasp) –	Fail (no feasible grasp) –	Fail (home collision) –	Fail (home collision) –	Fail (home collision) –
Ali et al. [7] TCP travel (m)	Pass 1.714	Pass 2.069	Fail (home collision) –	Fail (no feasible grasp) –	Fail (no feasible grasp) –
BLS (ours) TCP travel (m)	Pass 0.962	Pass 1.610	Pass 2.784	Pass 3.677	Pass 4.991

execution requirements rather than a general limitation of the original methods.

The reproduced Bachmann layouts fail on all five models. On the pyramid and the hammer, the placed parts leave insufficient clearance for any candidate grasp, whereas on the chair, frame, and tower the robot is already in collision at q_H , so no assembly step can start. The reproduced Ali layouts pass on the pyramid and the hammer. They fail on the chair by home collision and on the frame and tower by no feasible grasp. BLS passes full motion validation on all five models and is therefore the only compared method that produces an executable layout for the chair, frame, and tower. TCP travel can be compared only where both methods return a validated motion. In these two cases, BLS reduces it from 1.714 m to 0.962 m for the pyramid and from 2.069 m to 1.610 m for the hammer.

VI. CONCLUSION

This paper presented Backward Layout Search (BLS) for initial part layout planning under a prescribed assembly order. BLS exploits the assembly-order dependency of step feasibility to assign initial poses in reverse order, reuse previously evaluated suffix feasibility, and prune infeasible suffixes before earlier poses are generated. Candidate-set filtering and beam selection bound the search effort, and every surviving complete layout is accepted only after full motion validation.

Across five assembly models, BLS achieves lower search time than Forward-Iter in all cases and fewer step evaluations in four of them, with comparable nominal cost, and it passes full motion validation for all five models. Under the same evaluation rule, the reproduced prior layouts fail in several cases because of home-configuration collisions or insufficient grasp clearance.

REFERENCES

- [1] Y. Tian, J. Xu, Y. Li, J. Luo, S. Sueda, H. Li, K. D. D. Willis, and W. Matusik, "Assemble them all: Physics-based planning for generalizable assembly by disassembly," *ACM Transactions on Graphics*, vol. 41, no. 6, 2022.
- [2] Y. Tian, K. D. D. Willis, B. Al Omari, J. Luo, P. Ma, Y. Li, F. Javid, E. Gu, J. Jacob, S. Sueda, H. Li, S. Chitta, and W. Matusik, "ASAP: Automated sequence planning for complex robotic assembly with physical feasibility," in *2024 IEEE International Conference on Robotics and Automation (ICRA)*, 2024, pp. 4380–4386.
- [3] K. Nagpal and N. Mehr, "Optimal robotic assembly sequence planning (ORASP): A sequential decision-making approach," in *2024 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2024, pp. 9847–9854.
- [4] H. Chen, W. Wan, K. Koyama, and K. Harada, "Planning to build block structures with unstable intermediate states using two manipulators," *IEEE Transactions on Automation Science and Engineering*, vol. 19, no. 4, pp. 3777–3793, 2022.
- [5] T. Bachmann, K. Nottensteiner, and M. A. Roa, "Automated planning of workcell layouts considering task sequences," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*, 2021, pp. 12 662–12 668.
- [6] J. Beck, "Towards an automated system for robot assembly cell layout optimization," in *Advances in Automotive Production Technology – Towards Software-Defined Manufacturing and Resilient Supply Chains*, N. Kiefl, F. Wulle, C. Ackermann, and D. Holder, Eds. Cham: Springer, 2023, pp. 108–117.
- [7] R. Ali, Z. Hu, T. Kiyokawa, W. Wan, T. Nishi, and K. Harada, "Task and grasp constrained 3D robotic work-cell layout planning," in *2025 IEEE 21st International Conference on Automation Science and Engineering (CASE)*, 2025, pp. 2355–2362.
- [8] B. Qiu, S. Chen, Y. Gu, C. Zhang, and G. Yang, "Concurrent layout and trajectory optimization for robot workcell toward energy-efficient and collision-free automation," *The International Journal of Advanced Manufacturing Technology*, vol. 122, pp. 263–275, 2022.
- [9] T. Kawabe, Z. Liu, T. Nishi, M. M. Alam, and T. Fujiwara, "Optimal motion planning and layout design in robotic cellular manufacturing systems," in *2022 IEEE International Conference on Industrial Engineering and Engineering Management (IEEM)*, 2022, pp. 1541–1545.
- [10] J. Baumgärtner, A. Puchta, and J. Fleischer, "Beyond proxies: A direct time-optimal approach to robot cell layout optimization," *CIRP Annals*, vol. 74, no. 1, pp. 19–23, 2025.
- [11] T. Kawabe, T. Nishi, Z. Liu, and T. Fujiwara, "Surrogate-assisted motion planning and layout design of robotic cellular manufacturing systems," *Engineering Applications of Artificial Intelligence*, vol. 150, p. 110530, 2025.
- [12] S. Mutti, G. Nicola, M. Beschi, N. Pedrocchi, and L. Molinari Tosatti, "Towards optimal task positioning in multi-robot cells, using nested meta-heuristic swarm algorithms," *Robotics and Computer-Integrated Manufacturing*, vol. 71, p. 102131, 2021.
- [13] P. Franceschi, S. Mutti, and N. Pedrocchi, "Optimal design of robotic work-cell through hierarchical manipulability maximization," *Robotics and Computer-Integrated Manufacturing*, vol. 78, p. 102401, 2022.
- [14] H. Arnarson, H. Yu, M. M. Olavsbråten, B. A. Bremdal, and B. Solvang, "Towards smart layout design for a reconfigurable manufacturing system," *Journal of Manufacturing Systems*, vol. 68, pp. 354–367, 2023.
- [15] L. Wang, Z. Wang, K. Gumma, A. Turner, and S. Ratchev, "Multi-agent cooperative swarm learning for dynamic layout optimisation of reconfigurable robotic assembly cells based on digital twin," *Journal of Intelligent Manufacturing*, vol. 36, no. 5, pp. 2959–2982, 2025.
- [16] L. Kaven, P. Huke, A. Göppert, and R. H. Schmitt, "Multi agent reinforcement learning for online layout planning and scheduling in flexible assembly systems," *Journal of Intelligent Manufacturing*, vol. 35, pp. 3917–3936, 2024.
- [17] A. Wachter, C. Hartl-Nesic, and A. Kugi, "Robot base placement optimization for pick-and-place sequences in industrial environments," *IFAC-PapersOnLine*, vol. 58, no. 19, pp. 19–24, 2024.
- [18] T. Kiyokawa, K. Harada, W. Wan, T. Ishikura, N. Miyaji, and G. Matsuda, "Many-objective-optimized semi-automated robotic disassembly sequences," *Robotics and Autonomous Systems*, p. 105301, 2025.
- [19] W. Wan and K. Harada, "Reorientating objects with a gripping hand and a table surface," in *2015 IEEE-RAS 15th International Conference on Humanoid Robots*, 2015, pp. 101–106.